SUPERIOR WELL SERVICES

SUPERIOR
Black Lick, Pa.
Mercer, Pa.
Wooster, Oh.
Cleveland, Ok.
Trinidad, Co.

COMPENSATED DENSITY SINGLE INDUCTION LOG

Company	El Paso E&P Company, L.P.
Well	VPR"C"-139
Field	Purgatorie River
County	Las Animas
State	Colorado

Company El Paso E&P Company, L.P.
Well VPR"C"-139
Field Purgatorie River
County Las Animas State Colorado

Location: API # : 05-071-09060-00
1799' FSL & 477' FWL
SEC 1 TWP 35S RGE 67W

Other Services

Permanent Datum	Ground Level	Elevation 7979'
Log Measured From	Ground Level	
Drilling Measured From	Ground Level	

Elevation
K.B. _____
D.F. _____
G.L. 7979'

Date	1-26-07		
Run Number	One		
Depth Driller	2615'		
Depth Logger	2572'		
Bottom Logged Interval	2570'		
Top Log Interval	Surface Casing		
Casing Driller	8 5/8" @ 324'		
Casing Logger	324'		
Bit Size	7 7/8"		
Type Fluid in Hole	Water		
Density / Viscosity	////		
pH / Fluid Loss	////		
Source of Sample	////		
Rm @ Meas. Temp	////		
Rmf @ Meas. Temp	////		
Rmc @ Meas. Temp	////		
Source of Rmf / Rmc	////		
Rm @ BHT	////		
Time Circulation Stopped	12:30 PM		
Time Logger on Bottom	7:00PM		
Maximum Recorded Temperature	113 DEG F		
Equipment Number	T0700		
Location	Trinidad, Co		
Recorded By	J. Kerns	D. Denton	
Witnessed By	Mr. Carl Evenson		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Density Porosity Presented on Sandstone Matrix.

ABHV Calculated for 5 1/2" Casing.

Well Directions:
Lorencito Gate-At "Y" Stay Right-2nd Right- Drive to "T"-Turn Right-1st Right to Location.

SUPERIOR WELL SERVICES
SUPERIOR
Black Lick, Pa.
Mercer, Pa.
Wooster, Oh.
Cleveland, Ok.
Trinidad, Co.

Main Pass

Database File: elpasovprc139.db
Dataset Pathname: pass2.1
Presentation Format: combosil
Dataset Creation: Fri Jan 26 20:35:57 2007 by Calc Open-Cased 060407
Charted by: Depth in Feet scaled 1:240

SUPERIOR WELL SERVICES
SUPERIOR
Black Lick, Pa.
Mercer, Pa.
Wooster, Oh.
Cleveland, Ok.
Trinidad, Co.

Repeat Pass

Database File: elpasovprc139.db
Dataset Pathname: pass1
Presentation Format: combosil2
Dataset Creation: Fri Jan 26 19:03:05 2007 by Log Open-Cased 060407
Charted by: Depth in Feet scaled 1:240

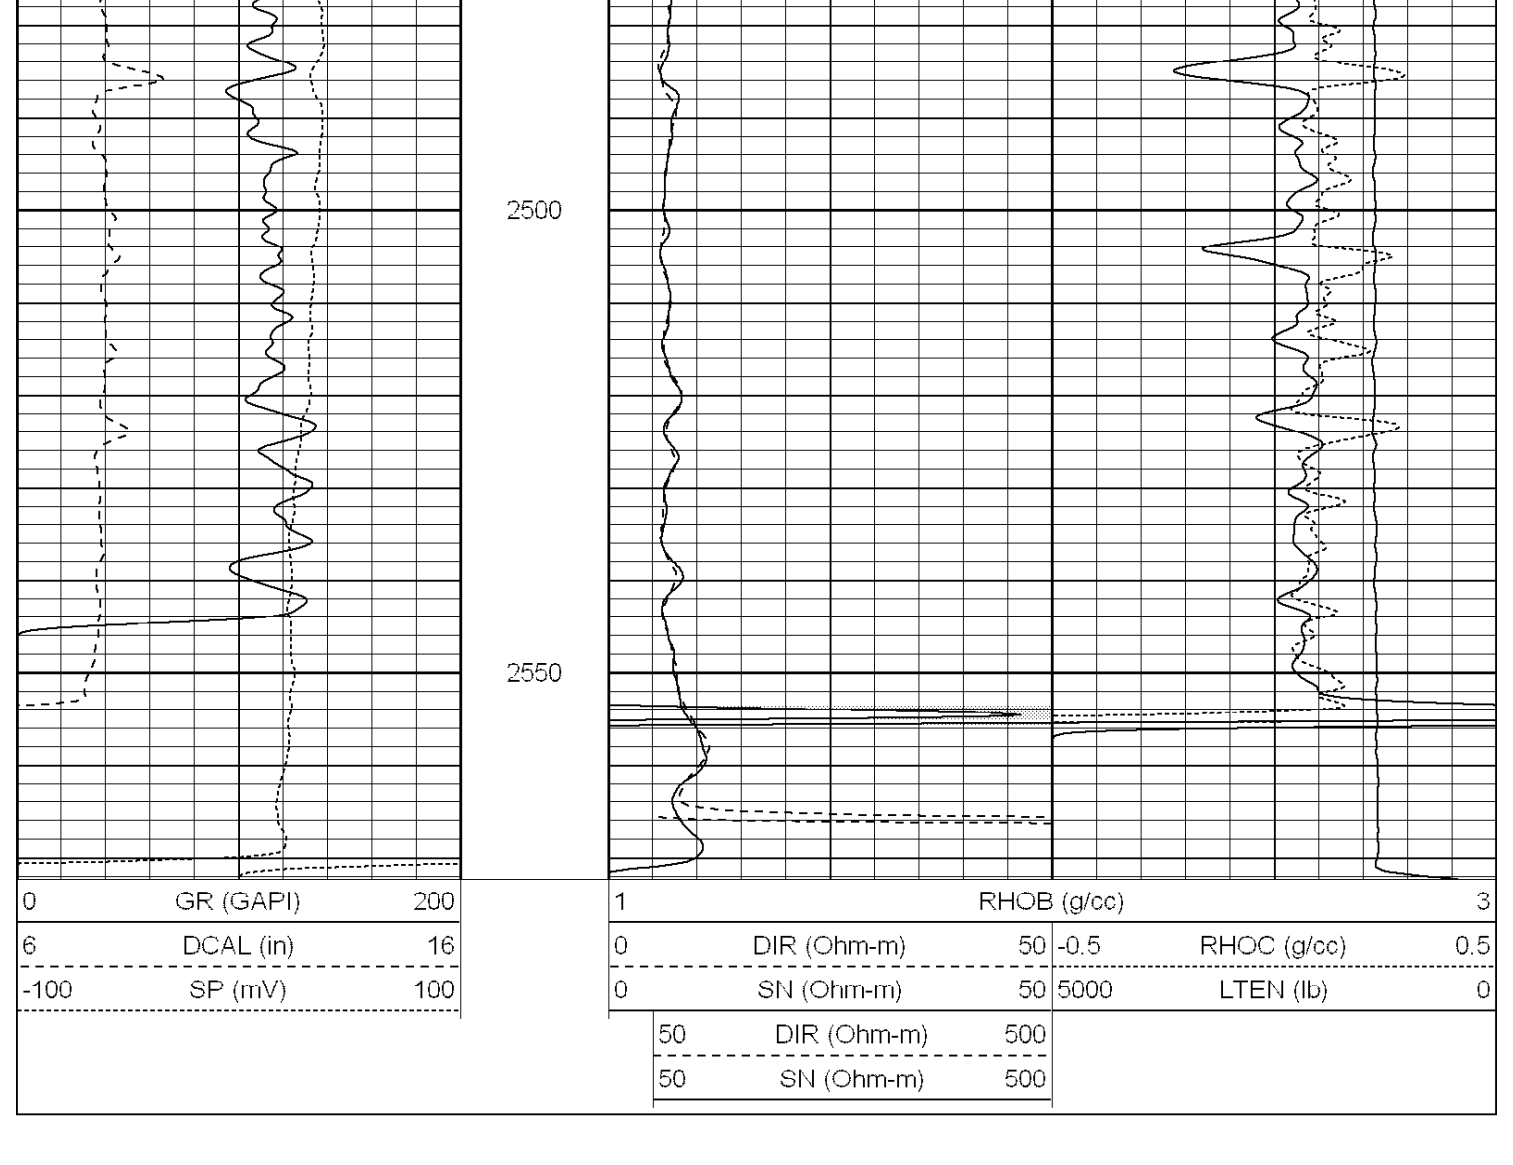

Calibration Report

Database File: elpasovprc139.db
Dataset Pathname: pass1
Dataset Creation: Fri Jan 26 19:03:05 2007 by Log Open-Cased 060407

Induction Tool Calibration Report

Serial Number: 121
Tool Model: G
Downhole Cal Performed: Sun Jan 21 01:18:31 2007
Surface Cal Performed: Wed Jan 10 10:49:07 2007

Surface Calibration:	Air	Loop	
Conductivity Reference:	0.000	450.000	mmho
Conductivity Reading:	0.010	0.632	V
Internal Reference:	Zero	Cal	
Conductivity Reference:	0.000	500.000	mmho
Conductivity Reading:	0.010	0.632	V
Downhole Calibration:	Internal Zero	Internal Cal	
Conductivity Reference:	-0.163	449.470	mmho
Conductivity Reading:	-4.579	459.654	V
Short Normal Reference:	0.000	17.000	Ohm-m
Short Normal Reading:	0.004	0.196	V
Results:	Gain	Offset	
Loop Conductivity:	723.526	-7.476	
Downhole Correction:	0.969	4.272	
Short Normal Resistivity:	68.655	-1.000	

Temperature Calibration Report

Serial Number: 2099T
Tool Model: CDLP
Performed: Wed Jan 10 11:11:13 2007

	Reference	Reading
Low Reference:	55.00 degF	3.17 V
High Reference:	160.00 degF	5.35 V

Gain: 48.17
Offset: -97.68
Delta Spacing 1

Compensated Density Calibration Report

Serial-Model: 2099-NG
Source / Verifier: csv-n20 / blocks
Master Calibration Performed: Wed Jan 10 08:44:26 2007

Master Calibration

	Density		Far Detector	Near Detector	
Magnesium	1.710	g/cc	1057.65	454.19	cps
Aluminum	2.590	g/cc	237.78	313.06	cps

Spine Angle = 76.00 Density/Spine Ratio = 0.572

	Size		Reading	
Small Ring	8.00	in	2.06	V
Large Ring	14.00	in	3.13	V

Gamma Ray Calibration Report

Serial Number: 2000
Tool Model: P2000
Performed: Wed Jan 10 10:45:30 2007

Calibrator Value: 200.0 GAPI

Background Reading: 54.0 cps
Calibrator Reading: 219.0 cps

Sensitivity: 0.2700 GAPI/cps

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
GR	27.45	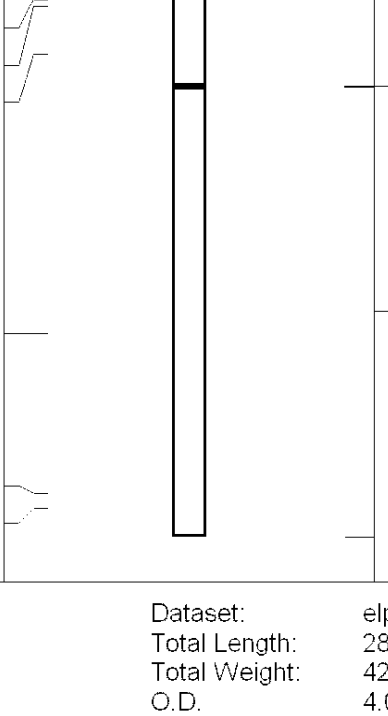	GR-P2000 (2000)	3.50	3.25	40.00
			CDL-NG (2099)	9.69	4.00	201.00
LSD DCAL SSD TEMP	18.47 18.18 17.93 16.33		TEMP-CDLP (2099T)	0.01	4.00	1.00
DIC	6.89		IEL-G (121)	15.25	4.00	178.00
SP SN	1.50 1.00					

Dataset: elpasovprc139.db: field/well/run1/pass1
Total Length: 28.45 ft
Total Weight: 420.00 lb
O.D. 4.00 in