


SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VFace	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1091.7	14.75	181.29	1086.3	-62.9	-1.4	3.00	181.29	62.9	
4	5463.2	14.75	181.29	5313.7	-1175.7	-26.4	0.00	0.00	1176.0	
5	5954.9	0.00	0.00	5800.0	-1238.6	-27.9	3.00	180.00	1238.9	
6	6954.9	0.00	0.00	6800.0	-1238.6	-27.9	0.00	0.00	1238.9	Antelope 22-17 PBHL



#### FORMATION TOP DETAILS


TVDPath	MDPath	Formation
6252.0	6406.9	Niobrara

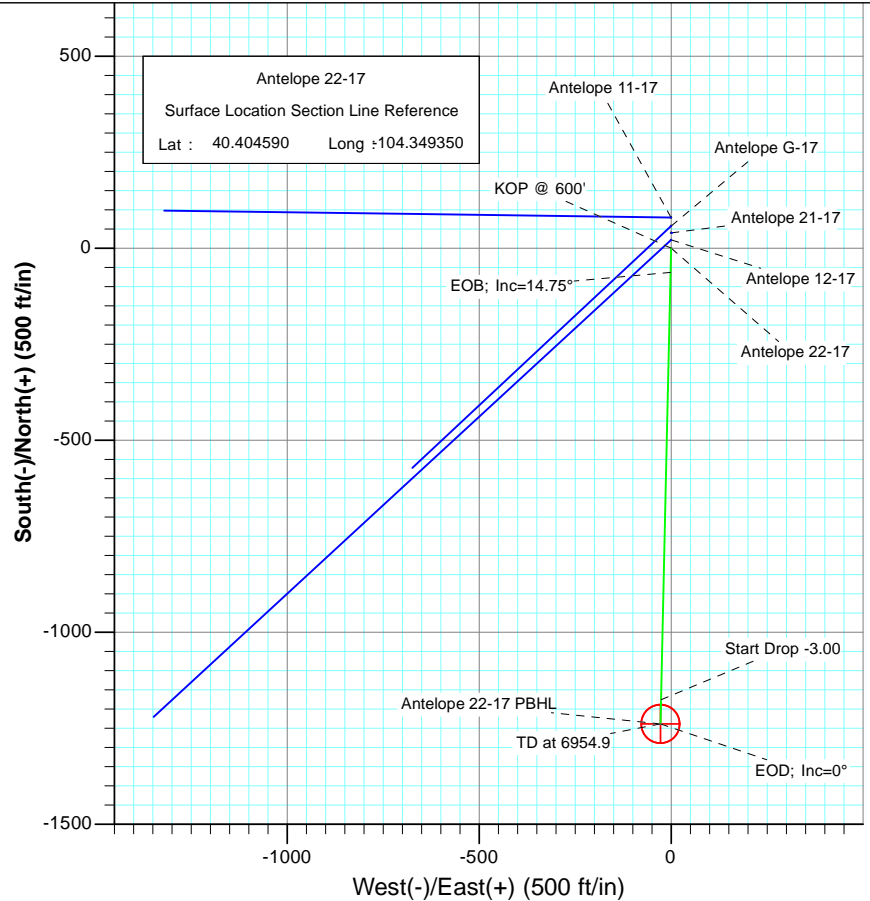


Azimuths to True North  
Magnetic North: 8.69°

Magnetic Field  
Strength: 53219.8nT  
Dip Angle: 67.14°  
Date: 1/27/2011  
Model: IGRF2010

Plan #1							
Antelope 22-17							
Type	TD	Target	No Target (Freehand)	Azimuth	181.29	Origin Type	Slot
Name	Antelope 22-17 PBHL	TVD	6800.0	+N/-S	-1238.6	+E/-W	-27.9
		Latitude	40.401190			Longitude	-104.349450

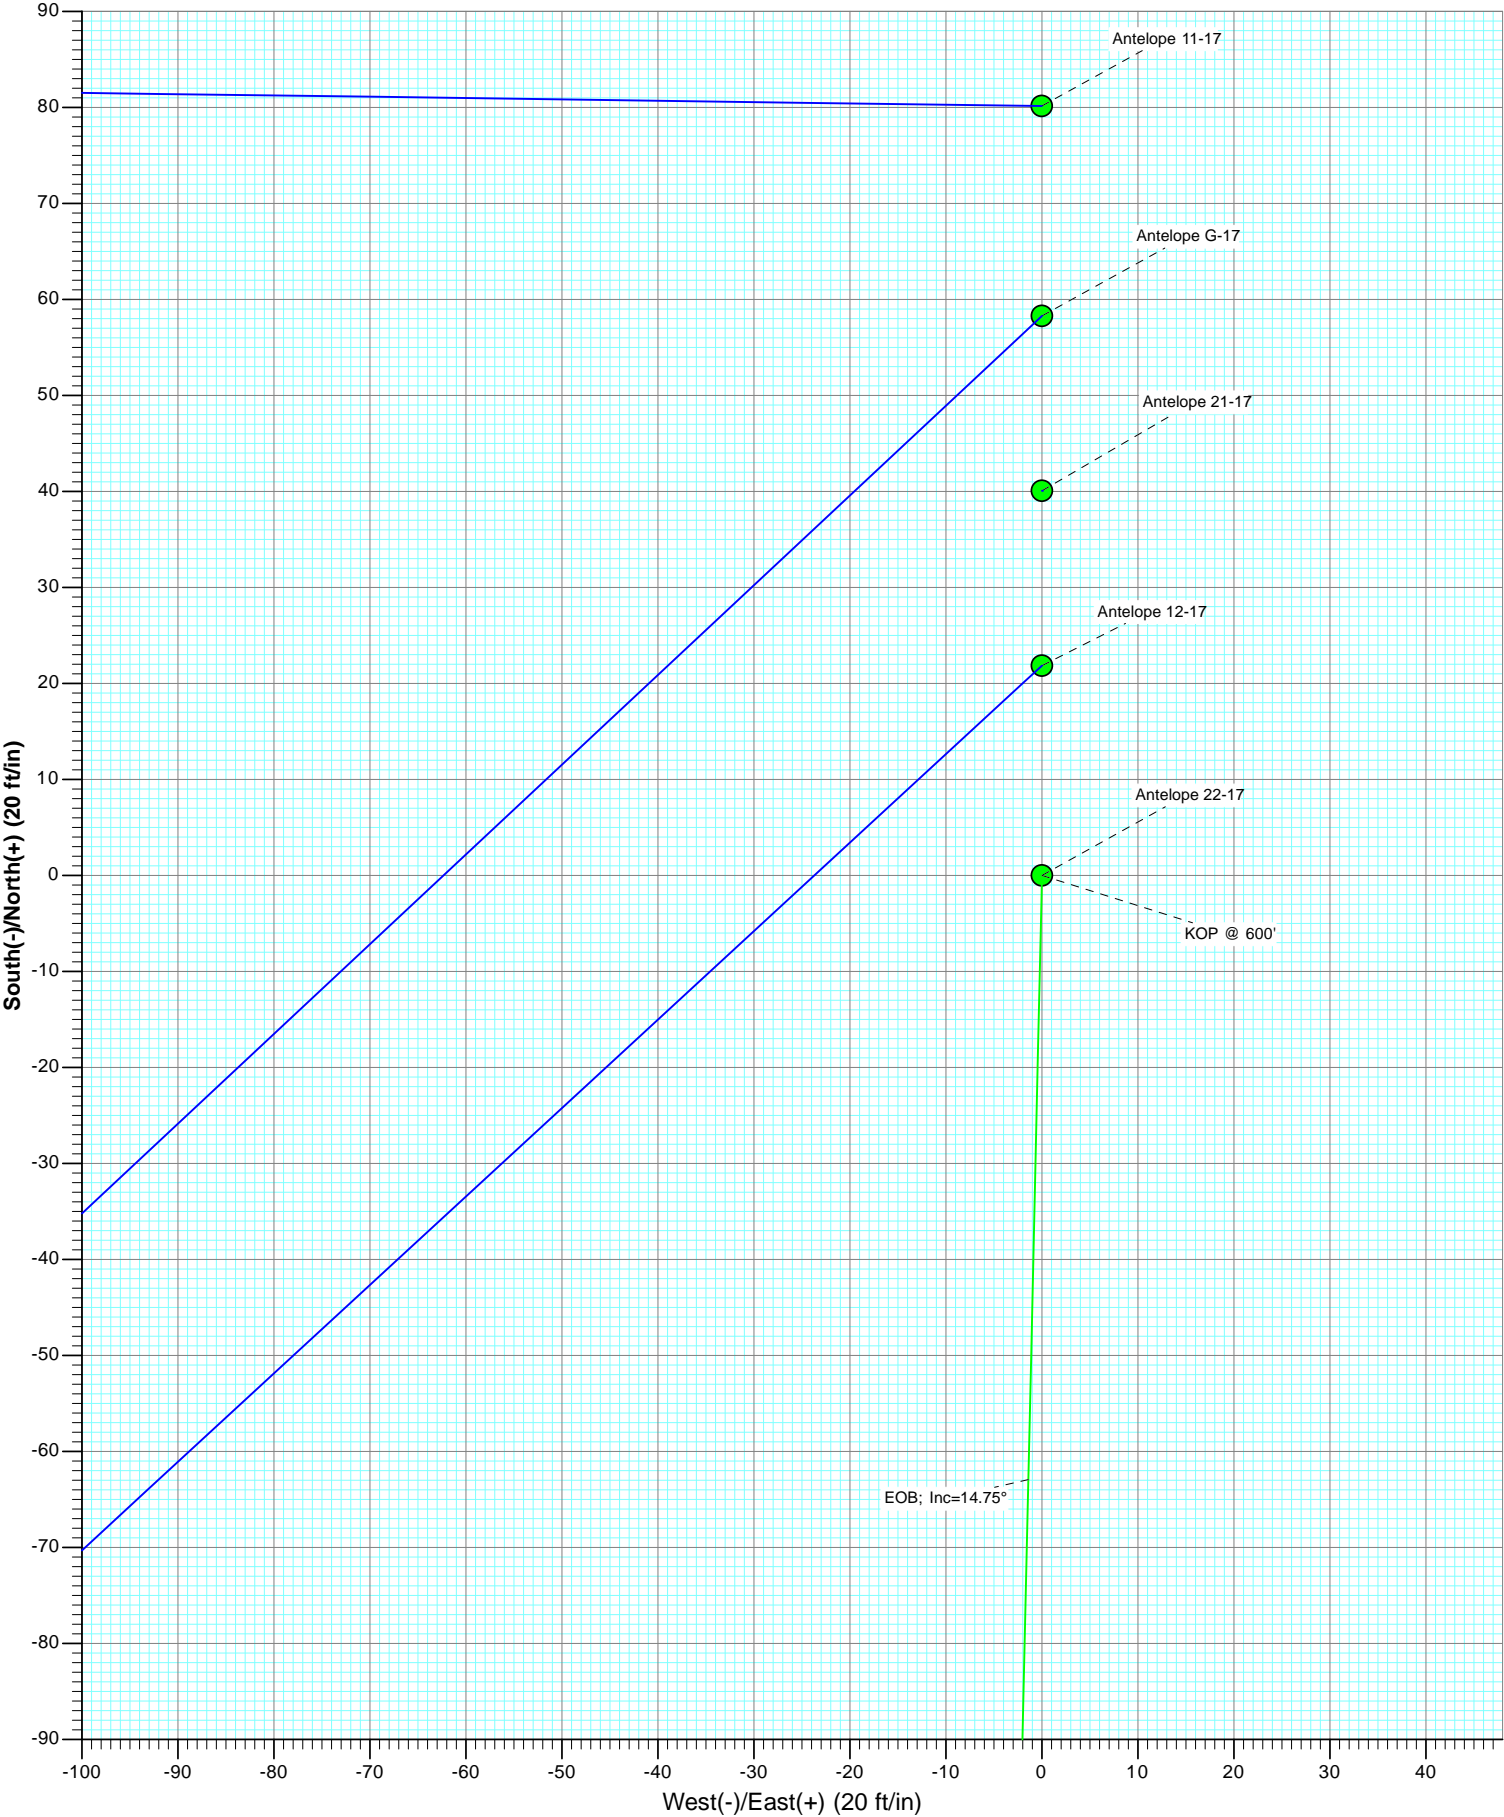

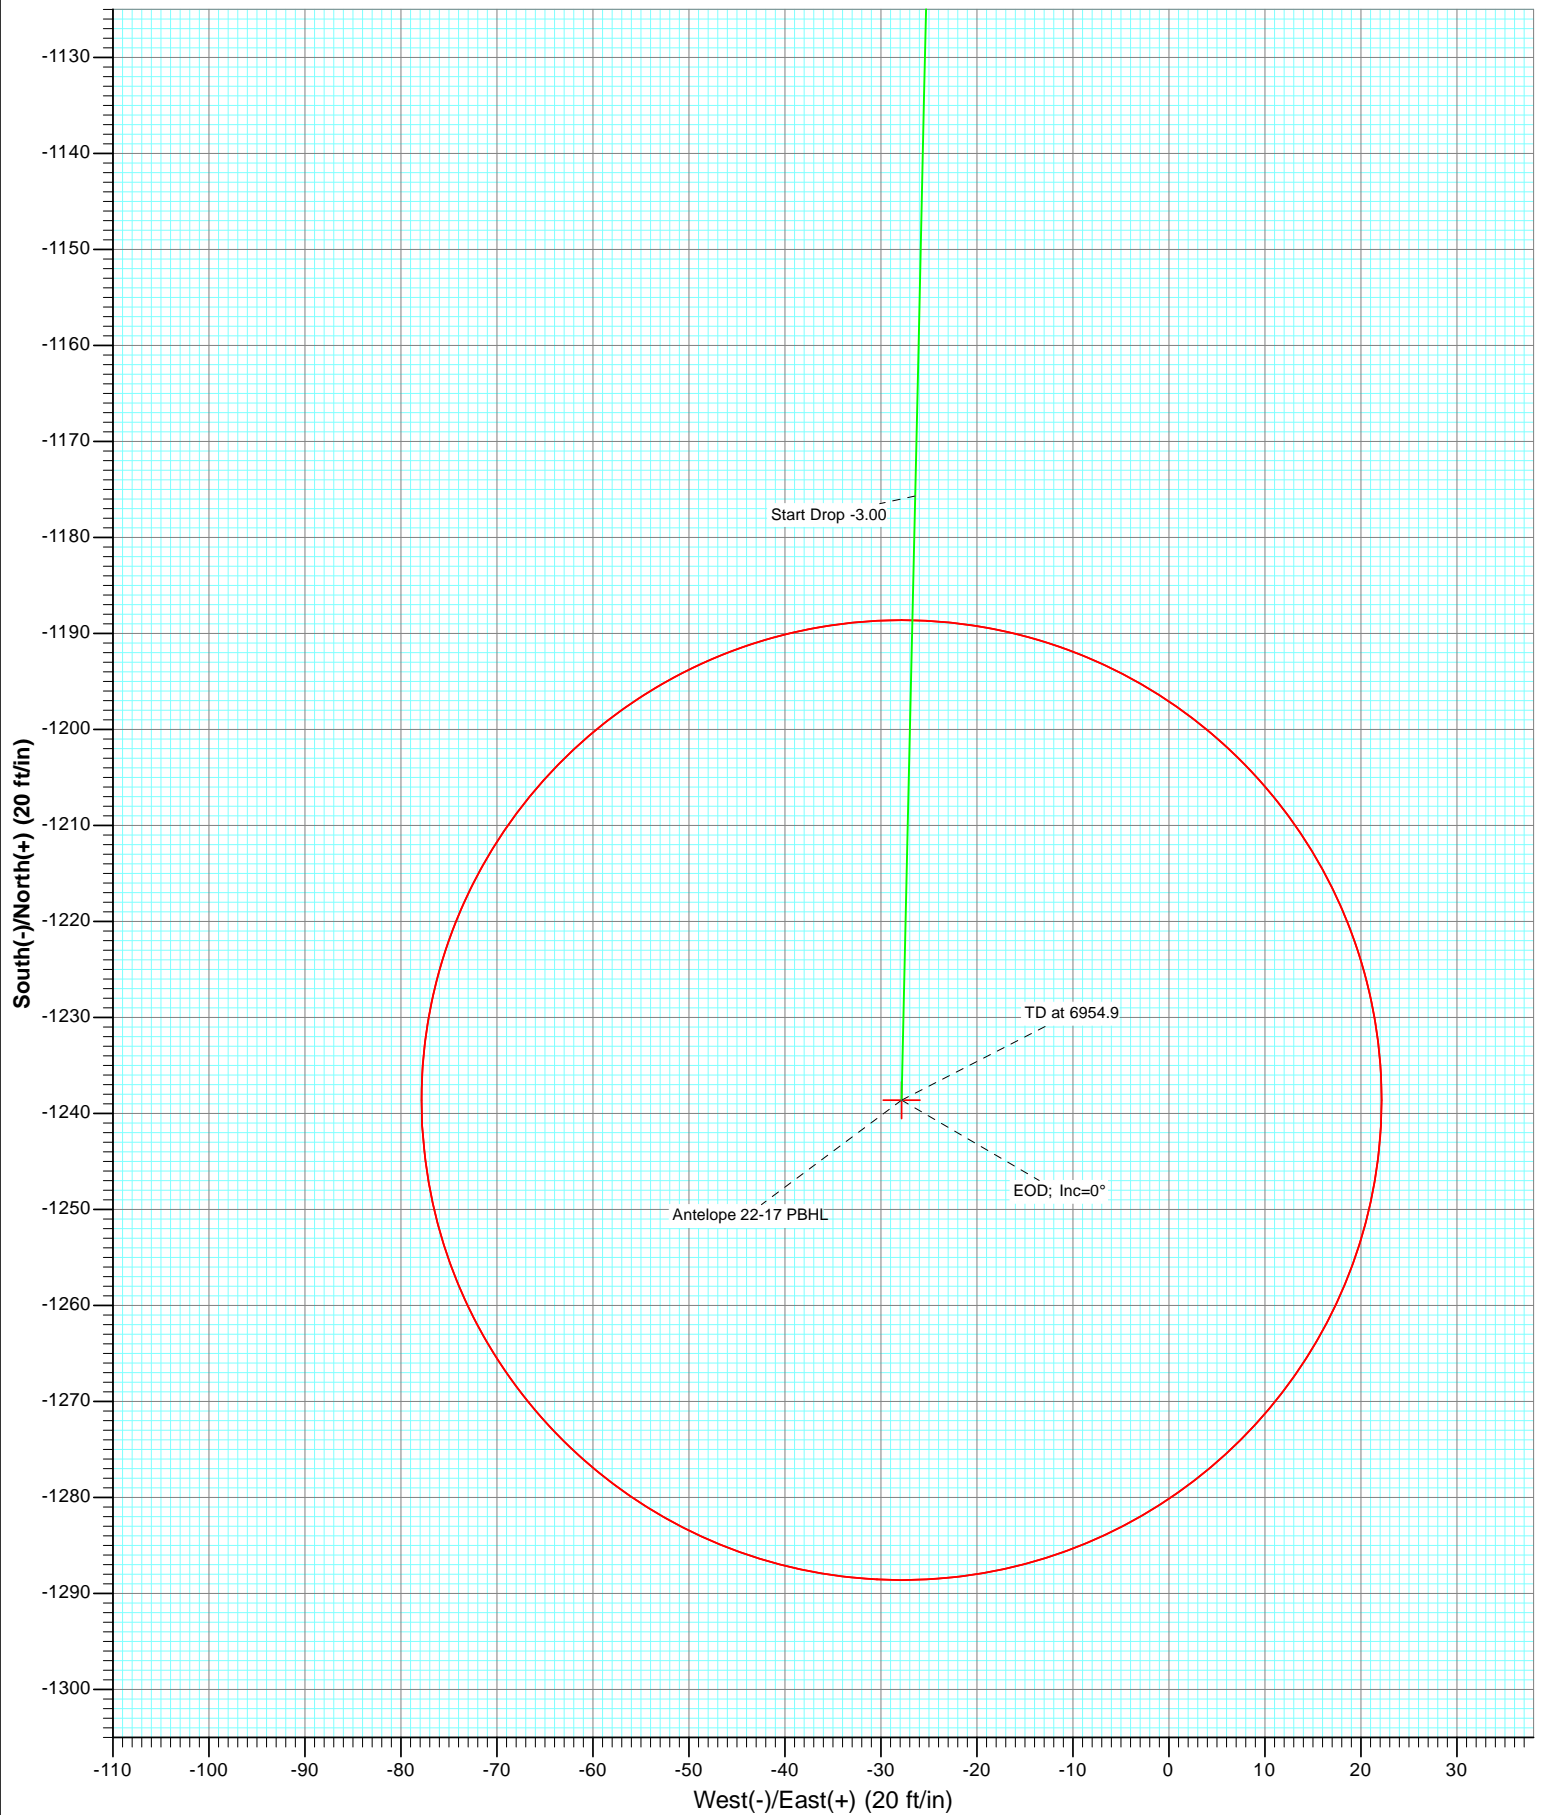

## Planning Report

<b>Database:</b>	EDM 5000.1 US Multi Users DB	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Project:</b>	Weld County	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site:</b>	Antelope 21-17 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	DD		
<b>Design:</b>	Plan #1		

<b>Project</b>	Weld County		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Colorado Northern Zone		

Site		Antelope 21-17 Pad			
Site Position:		Northing:	1,392,394.47 ft	Latitude:	40.404810
From:	Lat/Long	Easting:	3,320,442.85 ft	Longitude:	-104.349350
Position Uncertainty:	0.0 ft	Slot Radius:	13.200 in	Grid Convergence:	0.74 °

Well	Antelope 22-17					
Well Position	+N/-S	0.0 ft	Northing:	1,392,314.33 ft	Latitude:	40.404590
	+E/-W	0.0 ft	Easting:	3,320,443.89 ft	Longitude:	-104.349350
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	4,690.0 ft

<b>Wellbore</b>	DD				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination</b>	<b>Dip Angle</b>	<b>Field Strength</b>
			(°)	(°)	(nT)
	IGRF2010	1/27/2011	8.69	67.14	53,220

<b>Design</b>	Plan #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD)</b>	<b>+N/-S</b>	<b>+E/-W</b>	<b>Direction</b>
	(ft)	(ft)	(ft)	(°)
	0.0	0.0	0.0	181.29

<b>Plan Sections</b>										
<b>Measured</b>	<b>Inclination</b>	<b>Azimuth</b>	<b>Vertical</b>	<b>+N/-S</b>	<b>+E/-W</b>	<b>Dogleg</b>	<b>Build</b>	<b>Turn</b>	<b>TFO</b>	<b>Target</b>
<b>Depth</b>	(°)	(°)	<b>Depth</b>	(ft)	(ft)	<b>Rate</b>	<b>Rate</b>	<b>Rate</b>	(°)	
(ft)			(ft)			(°/100ft)	(°/100ft)	(°/100ft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,091.7	14.75	181.29	1,086.3	-62.9	-1.4	3.00	3.00	0.00	181.29	
5,463.2	14.75	181.29	5,313.7	-1,175.7	-26.4	0.00	0.00	0.00	0.00	
5,954.9	0.00	0.00	5,800.0	-1,238.6	-27.9	3.00	-3.00	0.00	180.00	
6,954.9	0.00	0.00	6,800.0	-1,238.6	-27.9	0.00	0.00	0.00	0.00	Antelope 22-17 PBHL

# Planning Report

<b>Database:</b>	EDM 5000.1 US Multi Users DB	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Project:</b>	Weld County	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site:</b>	Antelope 21-17 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	DD		
<b>Design:</b>	Plan #1		

## Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	KOP @ 600'
700.0	3.00	181.29	700.0	-2.6	-0.1	2.6	3.00	3.00	
800.0	6.00	181.29	799.6	-10.5	-0.2	10.5	3.00	3.00	
900.0	9.00	181.29	898.8	-23.5	-0.5	23.5	3.00	3.00	
1,000.0	12.00	181.29	997.1	-41.7	-0.9	41.7	3.00	3.00	
1,091.7	14.75	181.29	1,086.3	-62.9	-1.4	62.9	3.00	3.00	EOB; Inc=14.75°
1,100.0	14.75	181.29	1,094.3	-65.0	-1.5	65.1	0.00	0.00	
1,200.0	14.75	181.29	1,191.0	-90.5	-2.0	90.5	0.00	0.00	
1,300.0	14.75	181.29	1,287.7	-116.0	-2.6	116.0	0.00	0.00	
1,400.0	14.75	181.29	1,384.4	-141.4	-3.2	141.4	0.00	0.00	
1,500.0	14.75	181.29	1,481.1	-166.9	-3.8	166.9	0.00	0.00	
1,600.0	14.75	181.29	1,577.8	-192.3	-4.3	192.4	0.00	0.00	
1,700.0	14.75	181.29	1,674.5	-217.8	-4.9	217.8	0.00	0.00	
1,800.0	14.75	181.29	1,771.2	-243.2	-5.5	243.3	0.00	0.00	
1,900.0	14.75	181.29	1,867.9	-268.7	-6.0	268.7	0.00	0.00	
2,000.0	14.75	181.29	1,964.7	-294.1	-6.6	294.2	0.00	0.00	
2,100.0	14.75	181.29	2,061.4	-319.6	-7.2	319.7	0.00	0.00	
2,200.0	14.75	181.29	2,158.1	-345.0	-7.8	345.1	0.00	0.00	
2,300.0	14.75	181.29	2,254.8	-370.5	-8.3	370.6	0.00	0.00	
2,400.0	14.75	181.29	2,351.5	-396.0	-8.9	396.1	0.00	0.00	
2,500.0	14.75	181.29	2,448.2	-421.4	-9.5	421.5	0.00	0.00	
2,600.0	14.75	181.29	2,544.9	-446.9	-10.0	447.0	0.00	0.00	
2,700.0	14.75	181.29	2,641.6	-472.3	-10.6	472.4	0.00	0.00	
2,800.0	14.75	181.29	2,738.3	-497.8	-11.2	497.9	0.00	0.00	
2,900.0	14.75	181.29	2,835.0	-523.2	-11.8	523.4	0.00	0.00	
3,000.0	14.75	181.29	2,931.7	-548.7	-12.3	548.8	0.00	0.00	
3,100.0	14.75	181.29	3,028.4	-574.1	-12.9	574.3	0.00	0.00	
3,200.0	14.75	181.29	3,125.1	-599.6	-13.5	599.7	0.00	0.00	
3,300.0	14.75	181.29	3,221.8	-625.0	-14.1	625.2	0.00	0.00	
3,400.0	14.75	181.29	3,318.5	-650.5	-14.6	650.7	0.00	0.00	
3,500.0	14.75	181.29	3,415.2	-676.0	-15.2	676.1	0.00	0.00	
3,600.0	14.75	181.29	3,511.9	-701.4	-15.8	701.6	0.00	0.00	
3,700.0	14.75	181.29	3,608.6	-726.9	-16.3	727.0	0.00	0.00	
3,800.0	14.75	181.29	3,705.3	-752.3	-16.9	752.5	0.00	0.00	
3,900.0	14.75	181.29	3,802.0	-777.8	-17.5	778.0	0.00	0.00	
4,000.0	14.75	181.29	3,898.7	-803.2	-18.1	803.4	0.00	0.00	
4,100.0	14.75	181.29	3,995.4	-828.7	-18.6	828.9	0.00	0.00	
4,200.0	14.75	181.29	4,092.1	-854.1	-19.2	854.3	0.00	0.00	
4,300.0	14.75	181.29	4,188.9	-879.6	-19.8	879.8	0.00	0.00	
4,400.0	14.75	181.29	4,285.6	-905.0	-20.4	905.3	0.00	0.00	
4,500.0	14.75	181.29	4,382.3	-930.5	-20.9	930.7	0.00	0.00	
4,600.0	14.75	181.29	4,479.0	-956.0	-21.5	956.2	0.00	0.00	
4,700.0	14.75	181.29	4,575.7	-981.4	-22.1	981.7	0.00	0.00	
4,800.0	14.75	181.29	4,672.4	-1,006.9	-22.6	1,007.1	0.00	0.00	
4,900.0	14.75	181.29	4,769.1	-1,032.3	-23.2	1,032.6	0.00	0.00	
5,000.0	14.75	181.29	4,865.8	-1,057.8	-23.8	1,058.0	0.00	0.00	

# Planning Report

<b>Database:</b>	EDM 5000.1 US Multi Users DB	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Project:</b>	Weld County	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site:</b>	Antelope 21-17 Pad	<b>North Reference:</b>	True
<b>Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	DD		
<b>Design:</b>	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
5,100.0	14.75	181.29	4,962.5	-1,083.2	-24.4	1,083.5	0.00	0.00	
5,200.0	14.75	181.29	5,059.2	-1,108.7	-24.9	1,109.0	0.00	0.00	
5,300.0	14.75	181.29	5,155.9	-1,134.1	-25.5	1,134.4	0.00	0.00	
5,400.0	14.75	181.29	5,252.6	-1,159.6	-26.1	1,159.9	0.00	0.00	
5,463.2	14.75	181.29	5,313.7	-1,175.7	-26.4	1,176.0	0.00	0.00	Start Drop -3.00
5,500.0	13.65	181.29	5,349.4	-1,184.7	-26.6	1,185.0	3.00	-3.00	
5,600.0	10.65	181.29	5,447.1	-1,205.7	-27.1	1,206.0	3.00	-3.00	
5,700.0	7.65	181.29	5,545.9	-1,221.6	-27.5	1,221.9	3.00	-3.00	
5,800.0	4.65	181.29	5,645.3	-1,232.3	-27.7	1,232.6	3.00	-3.00	
5,900.0	1.65	181.29	5,745.1	-1,237.8	-27.8	1,238.1	3.00	-3.00	
5,954.9	0.00	0.00	5,800.0	-1,238.6	-27.9	1,238.9	3.00	-3.00	EOD; Inc=0°
6,000.0	0.00	0.00	5,845.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,100.0	0.00	0.00	5,945.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,200.0	0.00	0.00	6,045.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,300.0	0.00	0.00	6,145.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,400.0	0.00	0.00	6,245.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,406.9	0.00	0.00	6,252.0	-1,238.6	-27.9	1,238.9	0.00	0.00	Niobrara
6,500.0	0.00	0.00	6,345.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,600.0	0.00	0.00	6,445.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,700.0	0.00	0.00	6,545.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,800.0	0.00	0.00	6,645.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,900.0	0.00	0.00	6,745.1	-1,238.6	-27.9	1,238.9	0.00	0.00	
6,954.9	0.00	0.00	6,800.0	-1,238.6	-27.9	1,238.9	0.00	0.00	TD at 6954.9 - Antelope 22-17 PBHL

Targets									
Target Name	- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude Longitude
Antelope 22-17 PBHL	- plan hits target center - Circle (radius 50.0)	0.00	0.00	6,800.0	-1,238.6	-27.9	1,391,075.47	3,320,432.12	40.401190 -104.349450

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
6,406.9	6,252.0	Niobrara		0.00	

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Comment	
600.0	600.0	0.0	0.0	KOP @ 600'	
1,091.7	1,086.3	-62.9	-1.4	EOB; Inc=14.75°	
5,463.2	5,313.7	-1,175.7	-26.4	Start Drop -3.00	
5,954.9	5,800.0	-1,238.6	-27.9	EOD; Inc=0°	
6,954.9	6,800.0	-1,238.6	-27.9	TD at 6954.9	

# **Bonanza Creek Energy Operating Company, LLC**

**Weld County**

**Antelope 21-17 Pad**

**Antelope 22-17**

**DD**

**Plan #1**

## **Anticollision Report**

**27 January, 2011**

## Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Reference</b>	Plan #1		
<b>Filter type:</b>	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
<b>Interpolation Method:</b>	MD Interval 100.0ft	<b>Error Model:</b>	Systematic Ellipse
<b>Depth Range:</b>	Unlimited	<b>Scan Method:</b>	Closest Approach 3D
<b>Results Limited by:</b>	Maximum center-center distance of 100.0ft	<b>Error Surface:</b>	Elliptical Conic
<b>Warning Levels Evaluated at:</b>	2.00 Sigma		

<b>Survey Tool Program</b>	<b>Date</b>	1/27/2011		
<b>From (ft)</b>	<b>To (ft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>
0.0	6,954.9	Plan #1 (DD)	MWD	Geolink MWD

<b>Summary</b>						
<b>Site Name</b>	<b>Reference Measured Depth (ft)</b>	<b>Offset Measured Depth (ft)</b>	<b>Distance Between Centres (ft)</b>	<b>Distance Between Ellipses (ft)</b>	<b>Separation Factor</b>	<b>Warning</b>
<b>Offset Well - Wellbore - Design</b>						
Antelope 21-17 Pad						
Antelope 11-17 - DD - Plan #1	0.0	0.0	80.1			
Antelope 11-17 - DD - Plan #1	600.0	600.0	80.1	80.1	10,000.000	CC, ES
Antelope 12-17 - DD - Plan #1	0.0	0.0	21.9			
Antelope 12-17 - DD - Plan #1	600.0	600.0	21.9	21.9	10,000.000	CC, ES
Antelope 21-17 - VH - Plan #1	0.0	0.0	40.1			
Antelope 21-17 - VH - Plan #1	600.0	600.0	40.1	40.1	10,000.000	CC, ES
Antelope G-17 - DD - Plan #1	0.0	0.0	58.3			
Antelope G-17 - DD - Plan #1	500.0	500.0	58.3	58.3	10,000.000	CC, ES



# Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Offset Design</b> Antelope 21-17 Pad - Antelope 11-17 - DD - Plan #1													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance					Separation Factor	Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Total Uncertainty Axis			
0.0	0.0	0.0	0.0	0.0	0.0	0.00	80.1	0.0	80.1					
100.0	100.0	100.0	100.0	0.2	0.2	0.00	80.1	0.0	80.1	80.1	0.00	N/A		
200.0	200.0	200.0	200.0	0.3	0.3	0.00	80.1	0.0	80.1	80.1	0.00	N/A		
300.0	300.0	300.0	300.0	0.5	0.5	0.00	80.1	0.0	80.1	80.1	0.00	N/A		
400.0	400.0	400.0	400.0	0.7	0.7	0.00	80.1	0.0	80.1	80.1	0.00	N/A		
500.0	500.0	500.0	500.0	0.9	0.9	0.00	80.1	0.0	80.1	80.1	0.00	N/A		
600.0	600.0	600.0	600.0	1.0	1.0	0.00	80.1	0.0	80.1	80.1	0.00	N/A CC, ES		
700.0	700.0	699.8	699.8	1.2	1.2	176.94	80.2	-2.6	82.8	82.8	0.00	N/A		
800.0	799.6	798.8	798.4	1.4	1.4	172.31	80.3	-10.3	91.3	91.3	0.00	N/A		

# Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Offset Design</b> Antelope 21-17 Pad - Antelope 12-17 - DD - Plan #1													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Total Uncertainty Axis	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	0.00	21.9	0.0	21.9					
100.0	100.0	100.0	100.0	0.2	0.2	0.00	21.9	0.0	21.9	21.9	0.00	N/A		
200.0	200.0	200.0	200.0	0.3	0.3	0.00	21.9	0.0	21.9	21.9	0.00	N/A		
300.0	300.0	300.0	300.0	0.5	0.5	0.00	21.9	0.0	21.9	21.9	0.00	N/A		
400.0	400.0	400.0	400.0	0.7	0.7	0.00	21.9	0.0	21.9	21.9	0.00	N/A		
500.0	500.0	500.0	500.0	0.9	0.9	0.00	21.9	0.0	21.9	21.9	0.00	N/A		
600.0	600.0	600.0	600.0	1.0	1.0	0.00	21.9	0.0	21.9	21.9	0.00	N/A CC, ES		
700.0	700.0	700.7	700.7	1.2	1.2	173.94	20.1	-2.0	22.8	22.8	0.00	N/A		
800.0	799.6	801.2	800.8	1.4	1.4	161.98	14.7	-7.8	26.3	26.3	0.00	N/A		
900.0	898.8	901.2	899.9	1.6	1.7	148.59	5.8	-17.4	33.8	33.8	0.00	N/A		
1,000.0	997.1	1,000.4	997.5	2.0	2.0	137.92	-6.5	-30.8	46.2	46.2	0.00	N/A		
1,100.0	1,094.3	1,098.7	1,093.0	2.3	2.3	130.53	-22.0	-47.6	63.1	63.1	0.00	N/A		
1,200.0	1,191.0	1,195.9	1,186.3	2.7	2.8	124.27	-40.6	-67.8	82.7	82.7	0.00	N/A		

## Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Offset Design</b> Antelope 21-17 Pad - Antelope 21-17 - VH - Plan #1													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance						Warning	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Total Uncertainty Axis	Separation Factor		
0.0	0.0	0.0	0.0	0.0	0.0	0.00	40.1	0.0	40.1					
100.0	100.0	100.0	100.0	0.2	0.2	0.00	40.1	0.0	40.1	40.1	0.00	N/A		
200.0	200.0	200.0	200.0	0.3	0.3	0.00	40.1	0.0	40.1	40.1	0.00	N/A		
300.0	300.0	300.0	300.0	0.5	0.5	0.00	40.1	0.0	40.1	40.1	0.00	N/A		
400.0	400.0	400.0	400.0	0.7	0.7	0.00	40.1	0.0	40.1	40.1	0.00	N/A		
500.0	500.0	500.0	500.0	0.9	0.9	0.00	40.1	0.0	40.1	40.1	0.00	N/A		
600.0	600.0	600.0	600.0	1.0	1.0	0.00	40.1	0.0	40.1	40.1	0.00	N/A CC, ES		
700.0	700.0	700.0	700.0	1.2	1.2	178.79	40.1	0.0	42.7	42.7	0.00	N/A		
800.0	799.6	799.6	799.6	1.4	1.4	178.97	40.1	0.0	50.5	50.5	0.00	N/A		
900.0	898.8	898.8	898.8	1.6	1.6	179.18	40.1	0.0	63.6	63.6	0.00	N/A		
1,000.0	997.1	997.1	997.1	2.0	1.7	179.35	40.1	0.0	81.8	81.8	0.00	N/A		

# Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

<b>Offset Design</b> Antelope 21-17 Pad - Antelope G-17 - DD - Plan #1													Offset Site Error:	0.0 ft
Survey Program: 0-MWD													Offset Well Error:	0.0 ft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (ft)	+E/-W (ft)	Between Centres (ft)	Between Ellipses (ft)	Total Uncertainty Axis	Separation Factor	Warning	
0.0	0.0	0.0	0.0	0.0	0.0	0.00	58.3	0.0	58.3					
100.0	100.0	100.0	100.0	0.2	0.2	0.00	58.3	0.0	58.3	58.3	0.00	N/A		
200.0	200.0	200.0	200.0	0.3	0.3	0.00	58.3	0.0	58.3	58.3	0.00	N/A		
300.0	300.0	300.0	300.0	0.5	0.5	0.00	58.3	0.0	58.3	58.3	0.00	N/A		
400.0	400.0	400.0	400.0	0.7	0.7	0.00	58.3	0.0	58.3	58.3	0.00	N/A		
500.0	500.0	500.0	500.0	0.9	0.9	0.00	58.3	0.0	58.3	58.3	0.00	N/A CC, ES		
600.0	600.0	600.0	600.0	1.0	1.0	0.00	58.3	0.0	58.3	58.3	0.00	N/A		
700.0	700.0	702.1	702.0	1.2	1.2	176.84	56.4	-2.0	59.1	59.1	0.00	N/A		
800.0	799.6	803.9	803.5	1.4	1.4	171.56	50.9	-7.9	61.9	61.9	0.00	N/A		
900.0	898.8	905.2	903.9	1.6	1.7	163.89	41.7	-17.8	67.6	67.6	0.00	N/A		
1,000.0	997.1	1,005.1	1,002.2	2.0	2.0	155.74	29.4	-30.9	77.3	77.3	0.00	N/A		
1,100.0	1,094.3	1,103.7	1,099.0	2.3	2.3	150.60	16.8	-44.4	92.5	92.5	0.00	N/A		

## Anticollision Report

<b>Company:</b>	Bonanza Creek Energy Operating Company, LLC	<b>Local Co-ordinate Reference:</b>	Well Antelope 22-17
<b>Project:</b>	Weld County	<b>TVD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Reference Site:</b>	Antelope 21-17 Pad	<b>MD Reference:</b>	KBE @ 4700.0ft (Mid Con #1)
<b>Site Error:</b>	0.0ft	<b>North Reference:</b>	True
<b>Reference Well:</b>	Antelope 22-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Well Error:</b>	0.0ft	<b>Output errors are at</b>	2.00 sigma
<b>Reference Wellbore</b>	DD	<b>Database:</b>	EDM 5000.1 US Multi Users DB
<b>Reference Design:</b>	Plan #1	<b>Offset TVD Reference:</b>	Offset Datum

Reference Depths are relative to KBE @ 4700.0ft (Mid Con #1)

Offset Depths are relative to Offset Datum

Central Meridian is -105.500000 °

Coordinates are relative to: Antelope 22-17

Coordinate System is US State Plane 1983, Colorado Northern Zone

Grid Convergence at Surface is: 0.74°

