



CEMENT BOND LOG
GR CCL
VDL

Company MOUNTAIN PETROLEUM CORPORATION
Well PETERS 43-10
Field BEECHER ISLAND

County YUMA State COLORADO
Location: 1760' FSL & 678' FEL
NE SE
SEC 10 TWP 2S RGE 43W
Permant Datum G.L. Elevation 3551
Log Measured From K.B.
Drilling Measured From K.B.

APRIL 21, 2008
Run Number 1
Depth Driller 1710
Bottom Logger 1693
Bottom Logger Interval 4601
Open Hole Size 6.25
Type Fluid WATER
Density / Viscosity -
Max. Recorded Temp. -
Estimated Cement Top 570

Time Well Ready -
Time Logger on Bottom -
Equipment Number 480
Equipment YUMA
Recorded By BBAJ/TJ/LA
Witnessed By TIM PROBASCO
Run Number -
Borehole Record From - To -
Tubing Record From - To -
Casing Record -
Surface String -
Production String -
Liner -
Size 7
WAFt 10.5
Top -
Bottom -

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR CHOOSING JW WIRELINE
DEPTH REFERENCE TO DUAL INDUCTION DATED APRIL 7, 2008
PERF INTERVAL 1538-1556 AT 2 SPF

Database File: mountain pet peters.db
Dataset Pathname: pass2
Presentation Format: cbx
Dataset Creation: Mon Apr 21 07:56:33 2008 by Log Std Casedhole 07122
Charted by: Depth in Feet scaled 1.240

0 Gamma Ray (GAPI) 150
9 CCL -1
0 Amplitude (mV) 100 200 Variable Density 1200
0 Amplified Amplitude (mV) 30

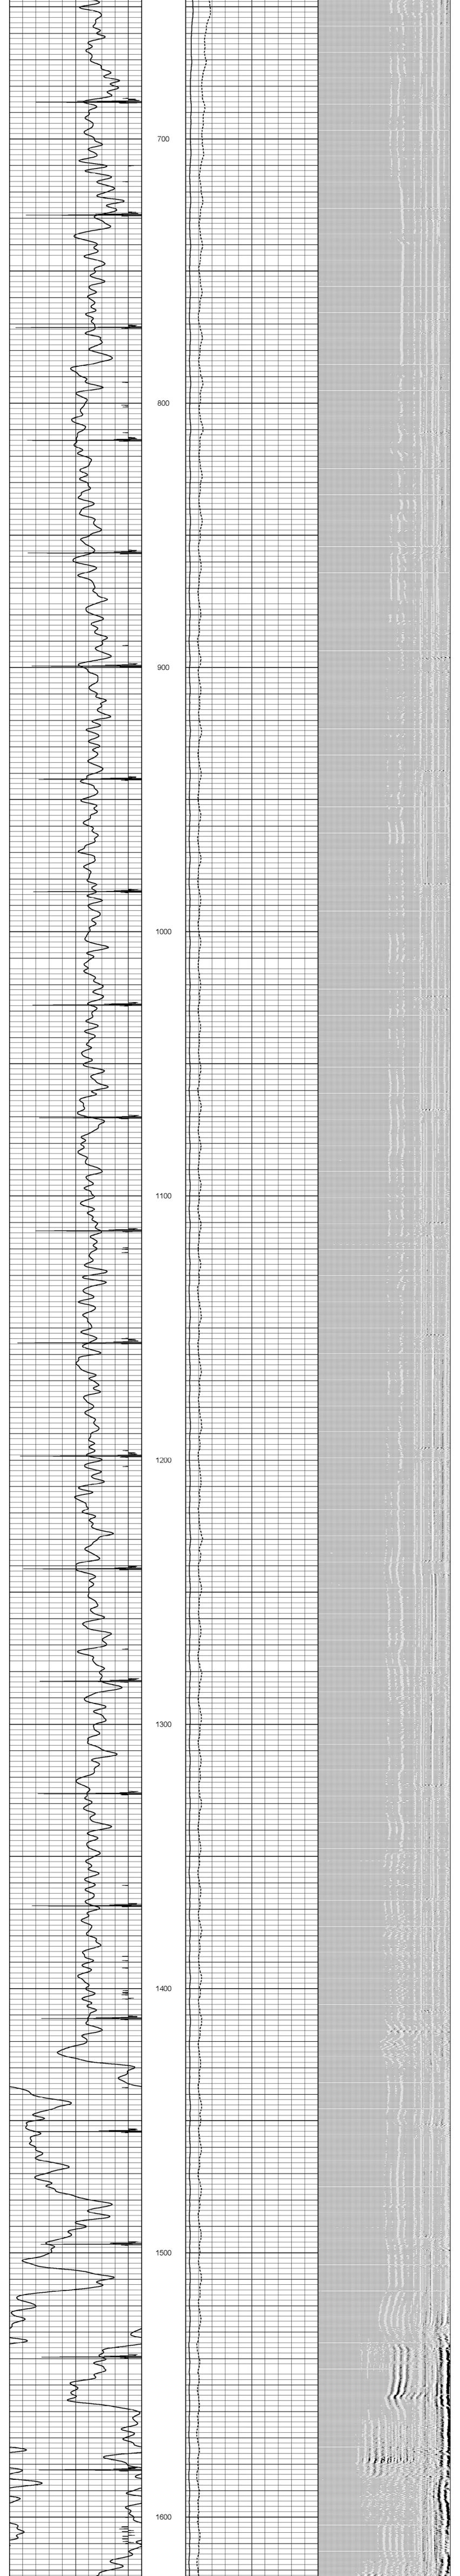

0 Gamma Ray (GAPI) 150
9 CCL -1
0 Amplitude (mV) 100 200 Variable Density 1200
0 Amplified Amplitude (mV) 30