HALLIBURTON

Cement Bond
Gamma Ray
CCL

Company EnCana Oil & Gas (USA) Inc
Well Ross 41-24
Field Wattenberg
County Boulder State CO

Company EnCana Oil & Gas (USA) Inc
Well Ross 41-24
Field Wattenberg
County Boulder State CO
API No.: 05-123-06567 Serv #: 6241753
Location: 720' FNL & 643' FEL
NENE
Other Services
Perf

Sec: 24 Twp: 2N Rge: 69W

Permanent Datum	G.L.	Elevation 5015	Elevation
Log Measured From	K.B. , 15 Ft. above perm. datum		K.B. 5030
Drilling Measured From	K.B.		D.F. 5029 G.L. 5015.
Date @ Time Logged	14-OCT-08	Type Fluid in Hole	2% KCl
Run No.	One	Density of Fluid	8.4
Depth - Driller	8150	Fluid Level	Surface
Depth - Logger	8082	Cement Top Est. Logged	3770
Bottom - Logged Interval	8079	Equipment / Location	/ Brighton
Top - Log Interval	3550	Recorded by	N. Pataluna
Max. Recorded Temp.	235	Witnessed by	Gary Cummins

CEMENTING DATA	Surface String	Protection String	Production String	Liner
Date / Time Cemented				
Primary / Squeeze				
Expected Compressive Strength	psi@ hrs	psi@ hrs	psi@ hrs	psi@ hrs
Cement Volume				
Cement Type / Weight	/	/	/	/
Formulation				
Mud Type / Mud Wgt.	/	/	/	/

Borehole Record			Casing & Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To
				4.5	11.6	Surface	TD

<<< Fold Here >>>

HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHCIH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.

Comments

Depth ref to PSI log dated "4-OCT-08"

Thank you for using Halliburton

Crew: Crawford, Pataluna, Benavides, Fonville

HALLIBURTON

Sussex Pass (1000 PSI)

5"=100'

Database File: encana ross 41-24 cbl.db
Dataset Pathname: pass7
Presentation Format: cbldig
Dataset Creation: Tue Oct 14 13:56:48 2008 by Log Halliburton Casedho
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

HALLIBURTON

Sussex Pass (1000 PSI)

5"=100'

HALLIBURTON

Database File: encana ross 41-24 cbl.db
Dataset Pathname: pass4
Presentation Format: cbldig
Dataset Creation: Tue Oct 14 13:38:27 2008 by Log Halliburton Casedho
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

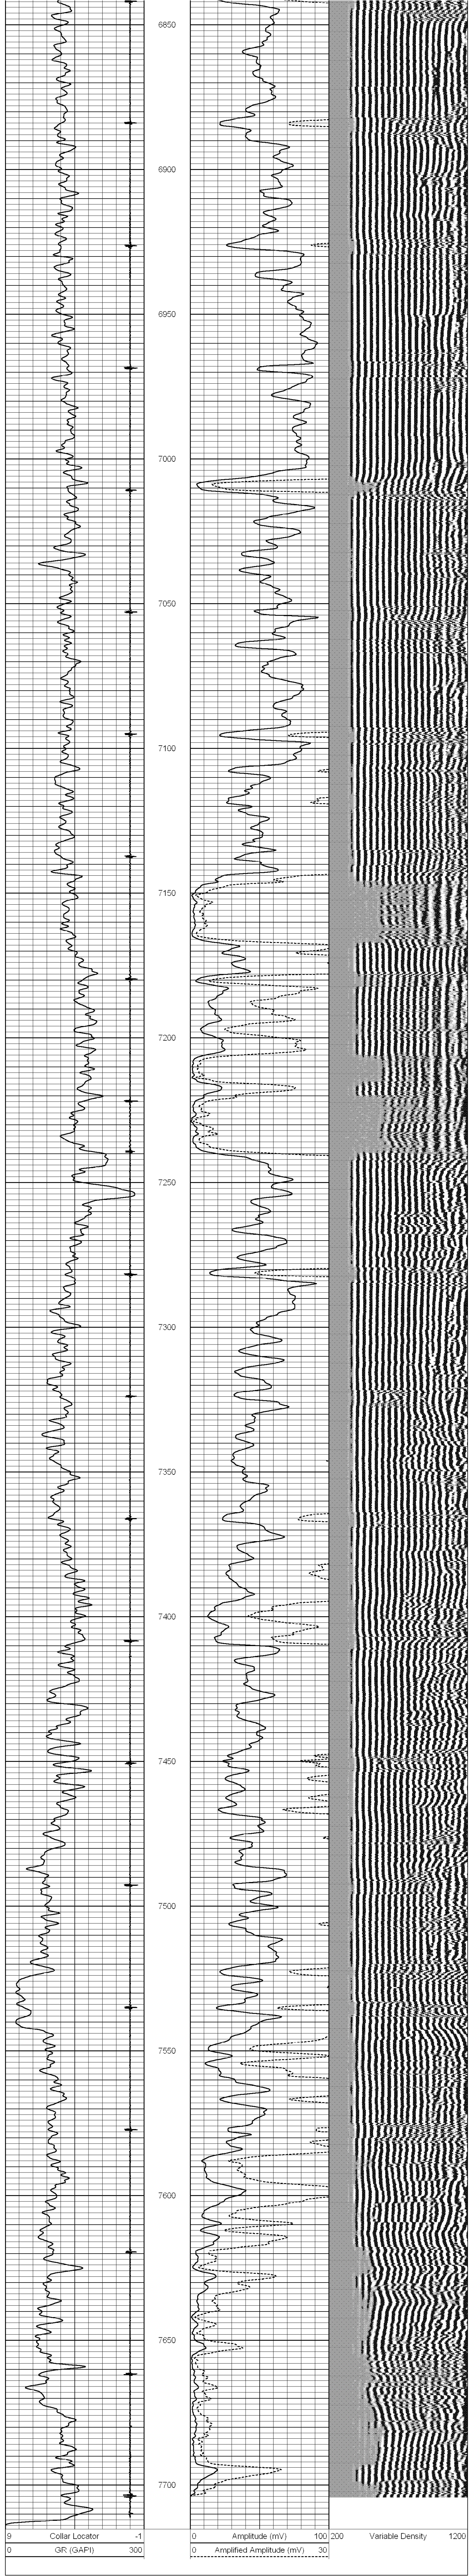

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

HALLIBURTON

Main Pass (1000 PSI)

5"=100'

HALLIBURTON

Database File: encana ross 41-24 cbl.db
Dataset Pathname: pass3
Presentation Format: cbldig
Dataset Creation: Tue Oct 14 13:30:21 2008 by Log Halliburton Casedho
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

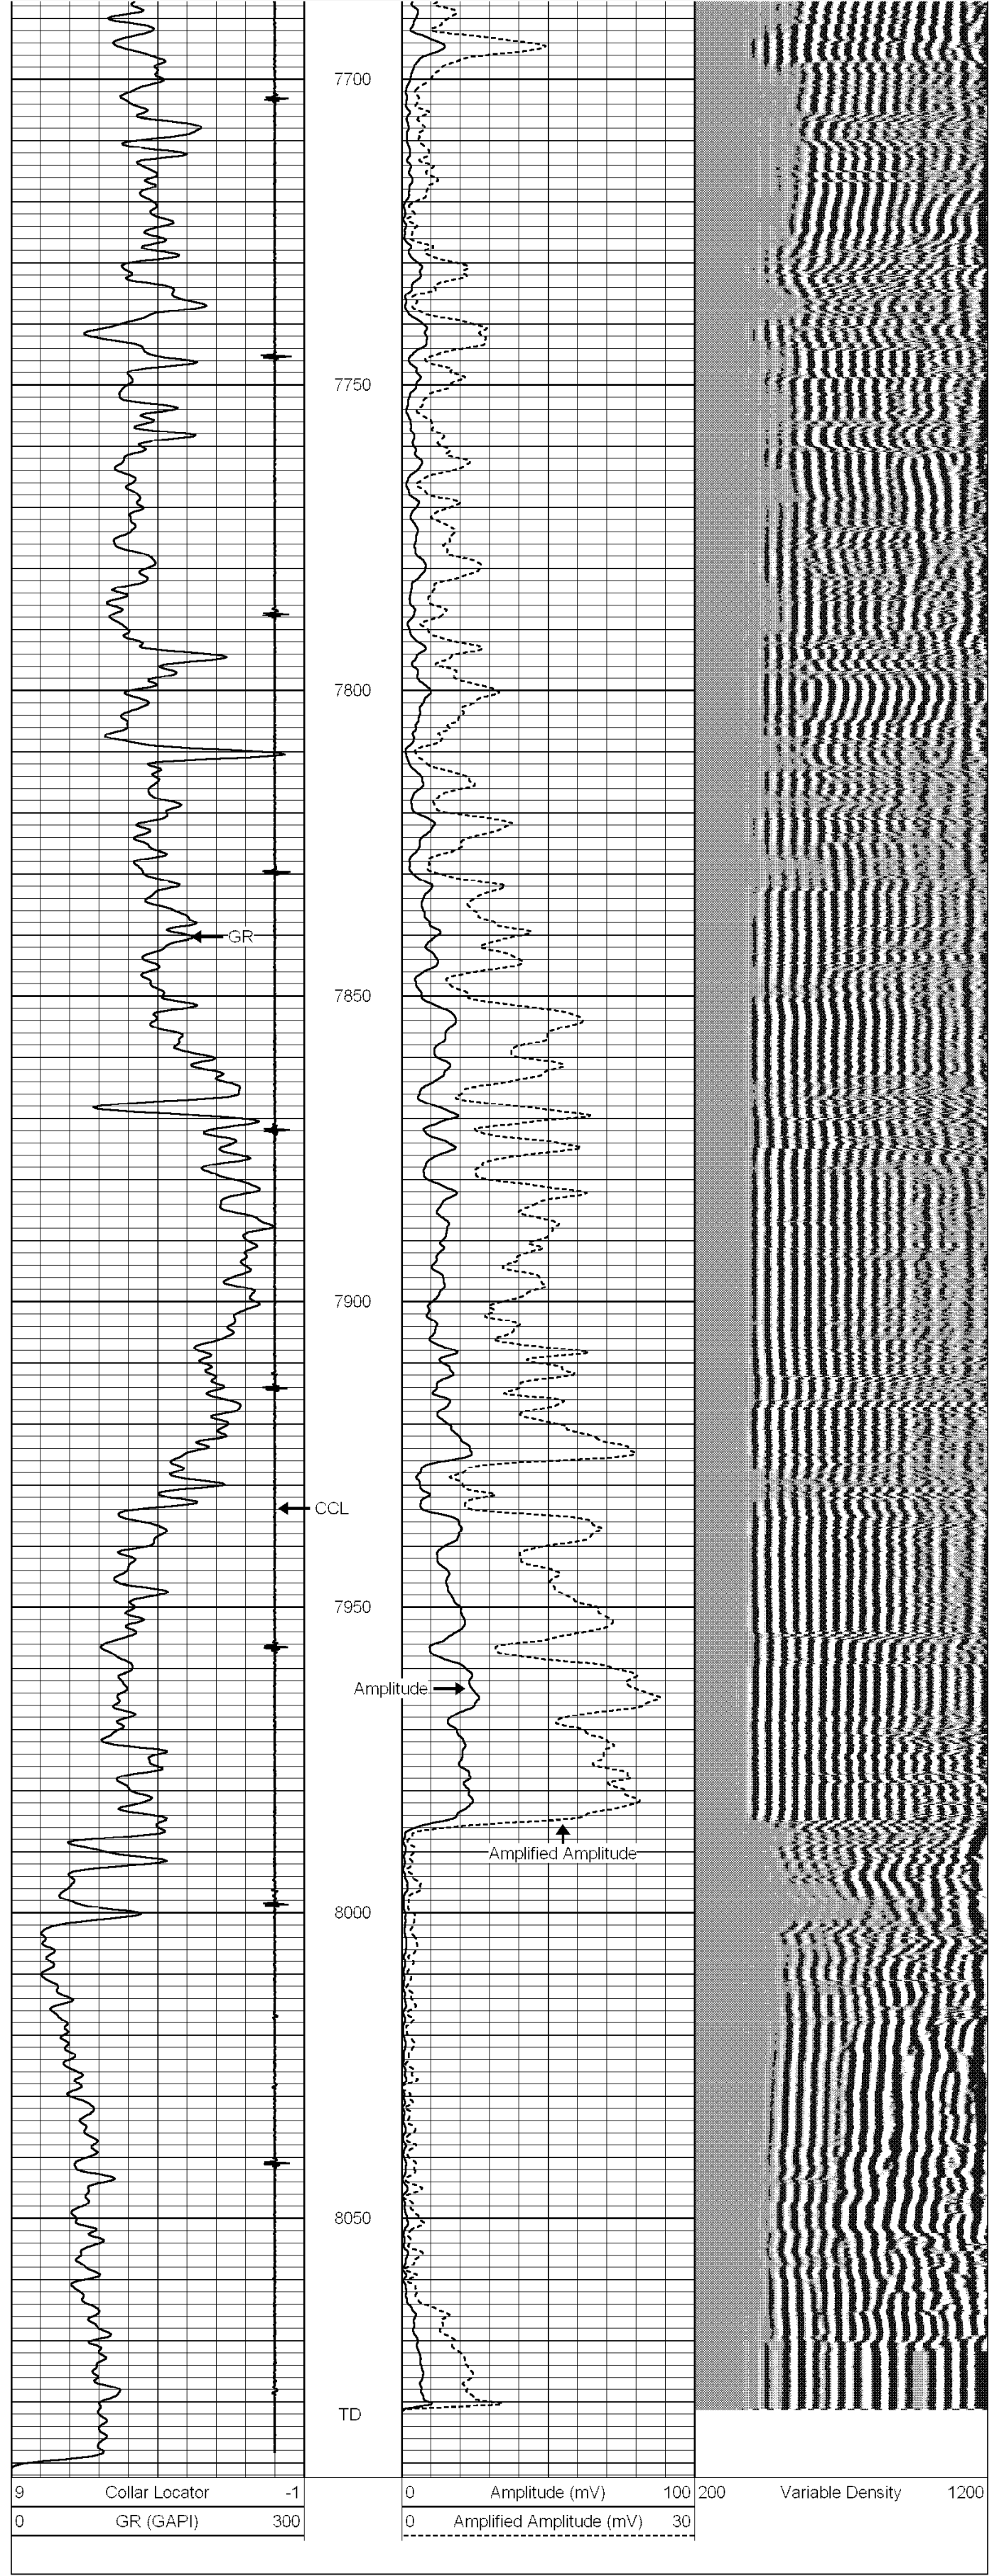

9	Collar Locator	-1	0	Amplitude (mV)	100	200	Variable Density	1200
0	GR (GAPI)	300	0	Amplified Amplitude (mV)	30			

HALLIBURTON

J Sand Pass (1000 PSI)

5"=100'

Company EnCana Oil & Gas (USA) Inc
Well Ross 41-24
Field Wattenberg
County Boulder State CO

HALLIBURTON

Cement Bond
Gamma Ray
CCL