


FLUKE CHIVINGTON GR ASSOC #1-31
FINAL WELL BORE CONFIGURATION
P&A OCTOBER 6, 2010
BRANDON FIELD
KIOWA COUNTY, COLORADO
NW NE SEC 31 182-45W

API No. 05-061-06179

CURRENT STATUS: P&A

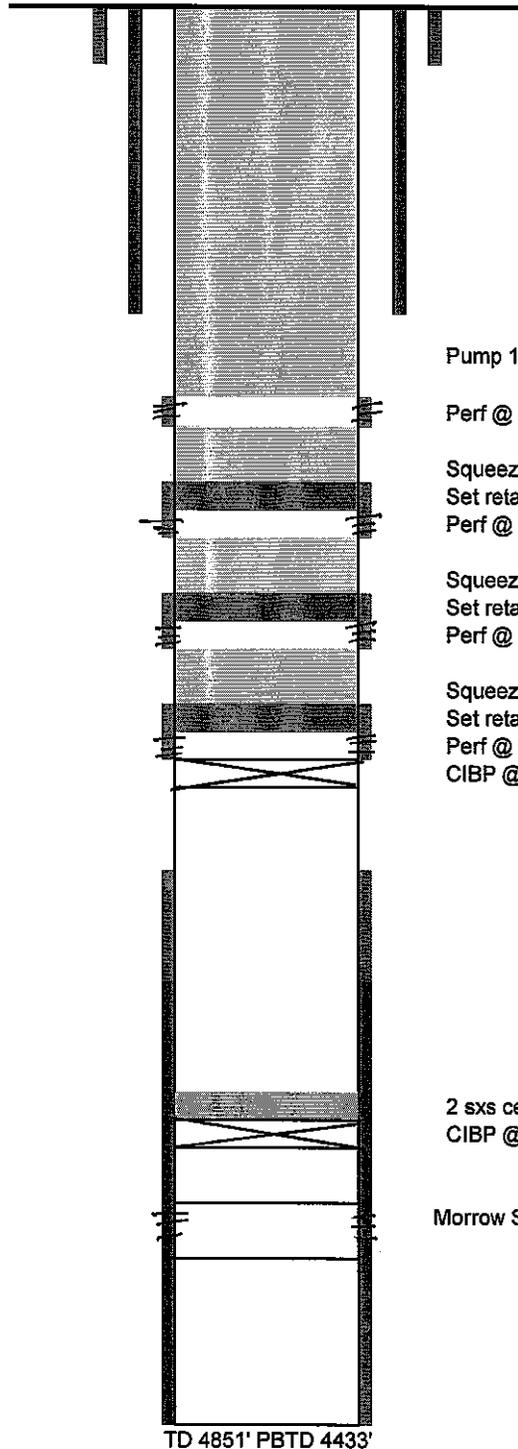

Pump 100 sxs cement down 4/12 csg and out to surface

Perf @ 261'

Squeeze with 40 sxs cement, leave 30' cement on top of retainer
Set retainer @ 659'

Perf @ 750'

Squeeze with 40 sxs cement

Set retainer @ 998'

Perf @ 1100'

Squeeze with 40 sxs cement, leave 30' cement on top of retainer
Set retainer @ 1300'

Perf @ 1400'

CIBP @ 1410'

2 sxs cement
CIBP @ 4340'

Morrow Sand perms: 4391'-4409'

TD 4851' PBTD 4433'