

REMARKS

MAIN PASS

DEPTH SCALE: 5":100'


VERSION: 80214133R"


MAIN PASS

132989 MAIN

FINISH DEPTH: 1072.0 Feet DIRECTION: UP DATE: 08/04/2008 TIME: 11:11 MODE: TRACE PLAYBACK



Collar Locator											
4000	Millivolts	-440									
Gamma Ray						AMPLITUDE 3FT X5			FREE PIPE GATE		
0	API	150				0	Millivolts	20	200	Microseconds	1200
TRAVEL TIME 3FT			Tension			AMPLITUDE 3FT			VARIABLE DENSITY 5FT		
305	Microseconds	205	0	2000	0	Millivolts	100	200	Microseconds	1200	

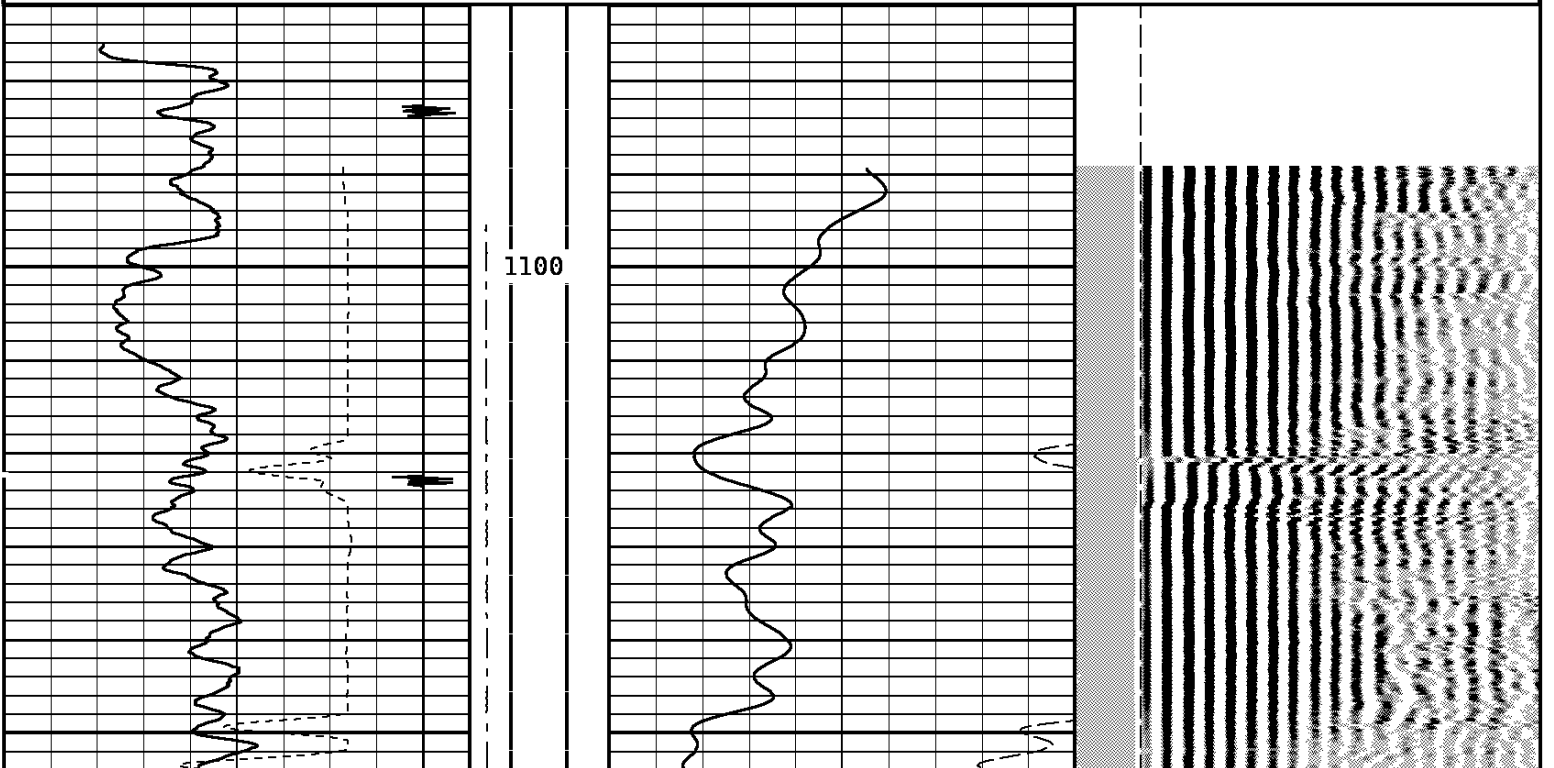


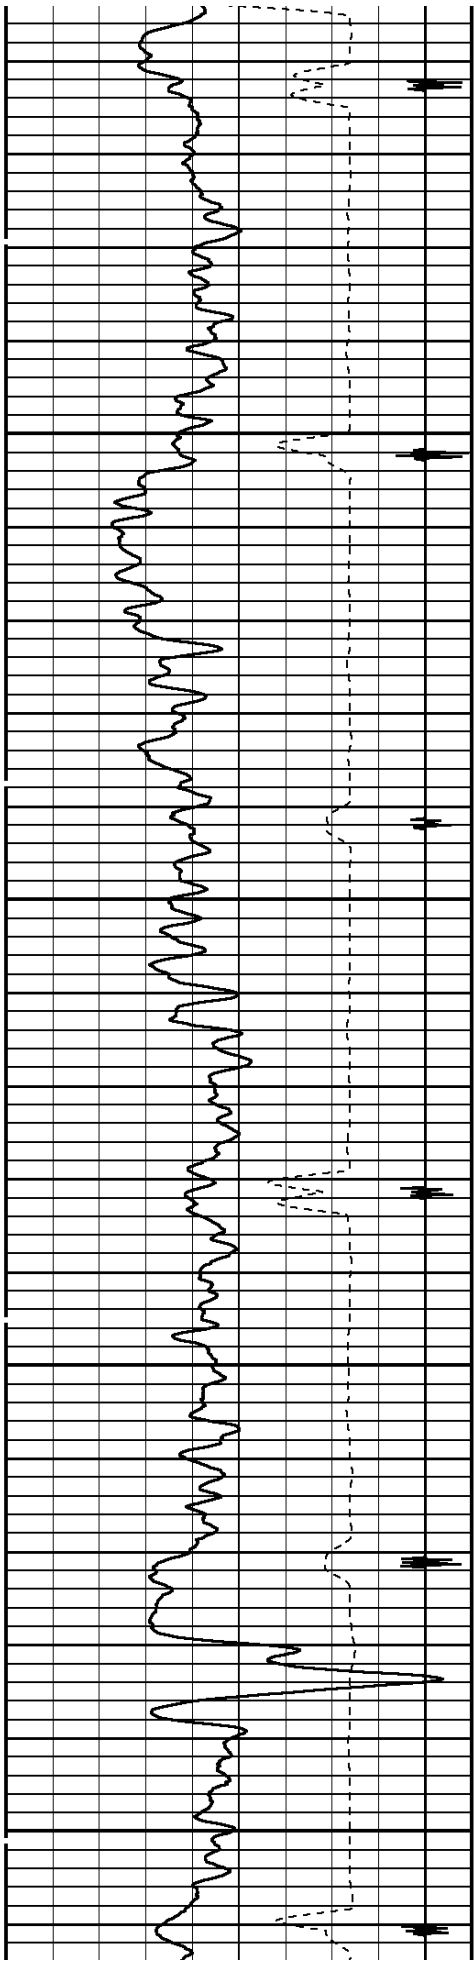

1200



1300

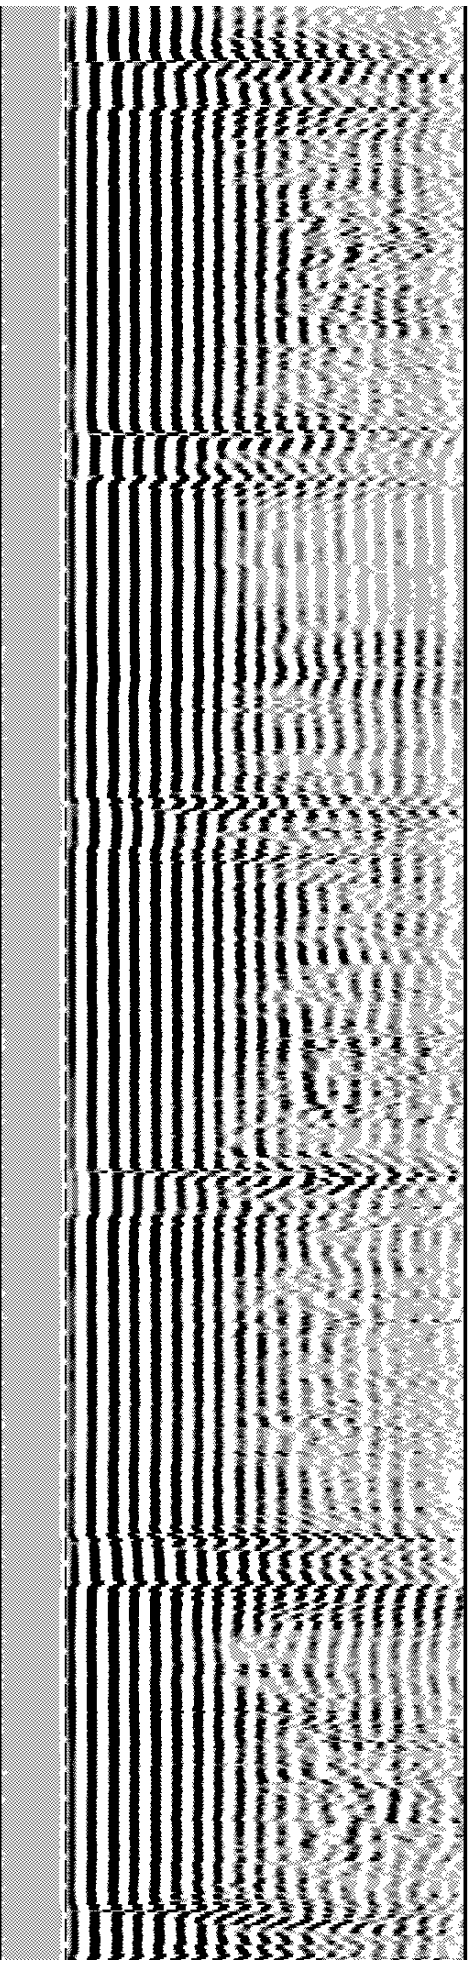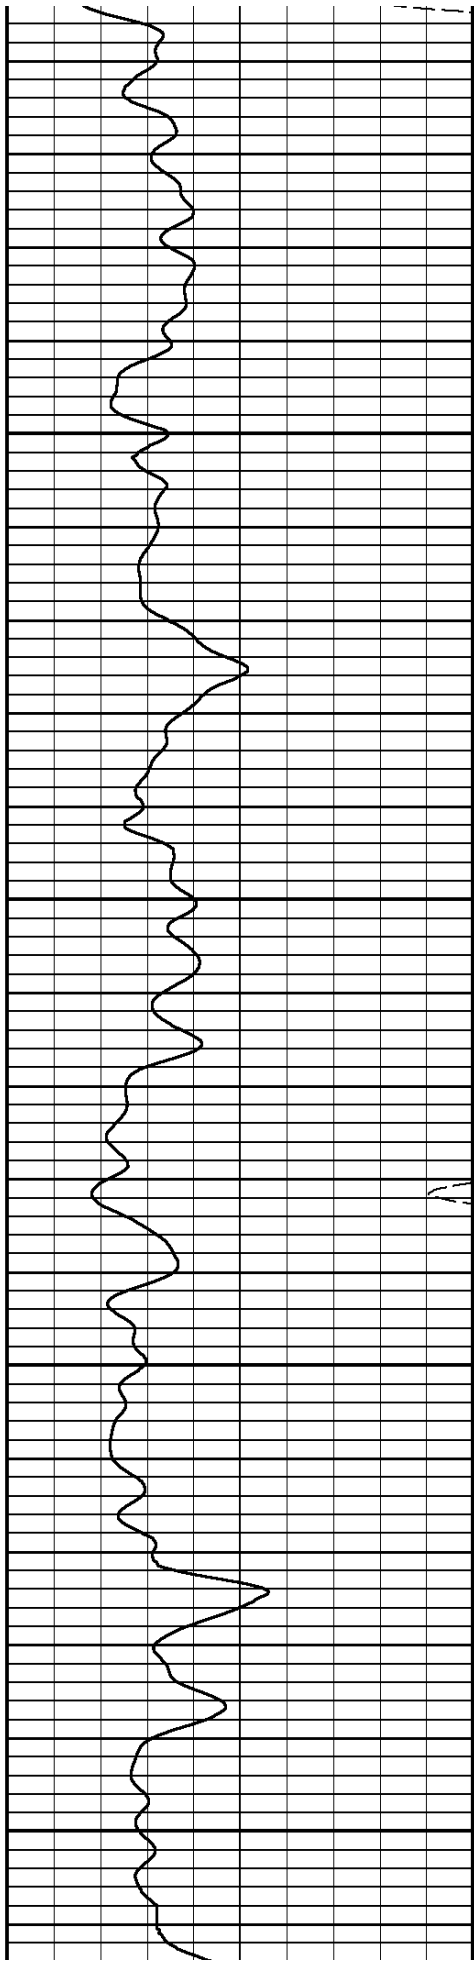


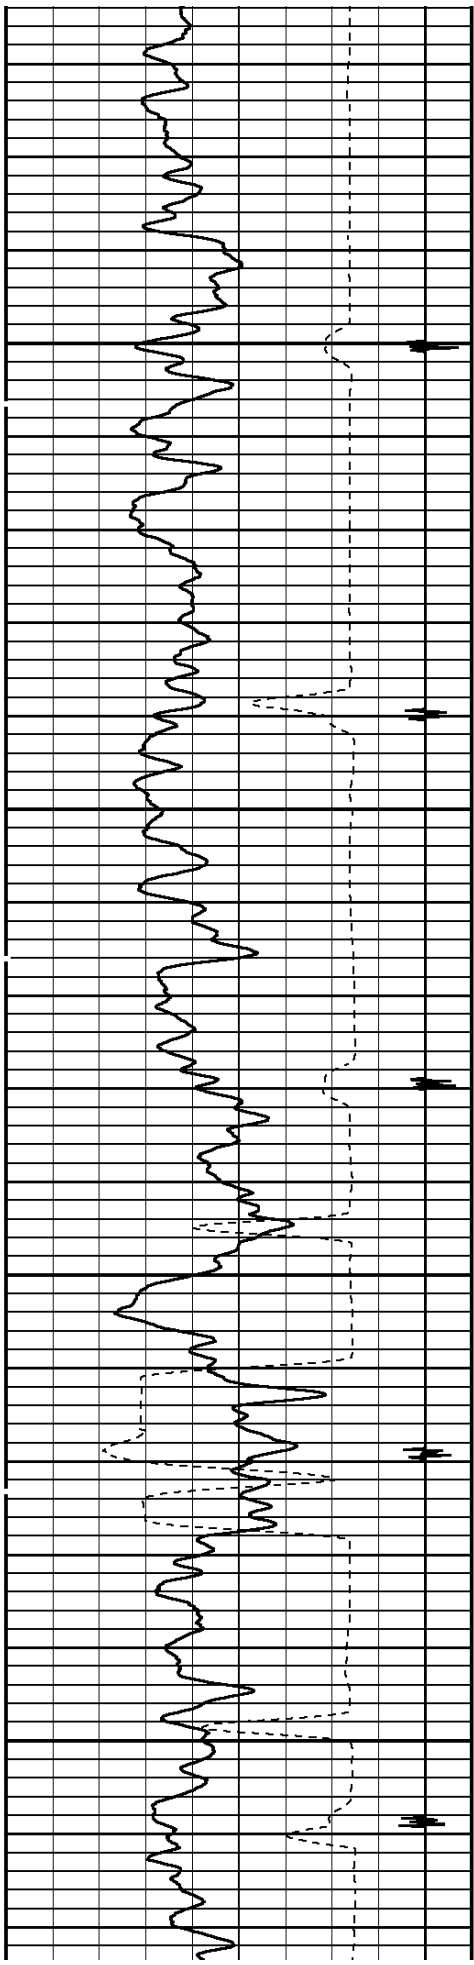

1400



1500

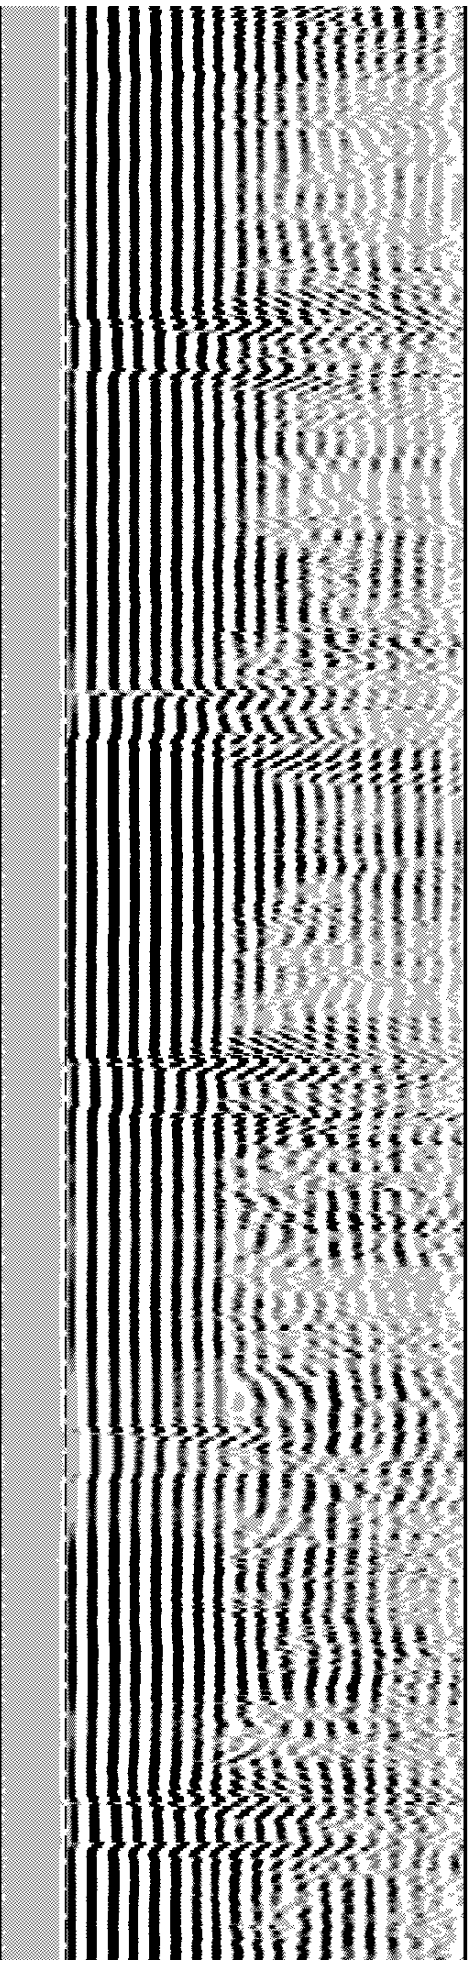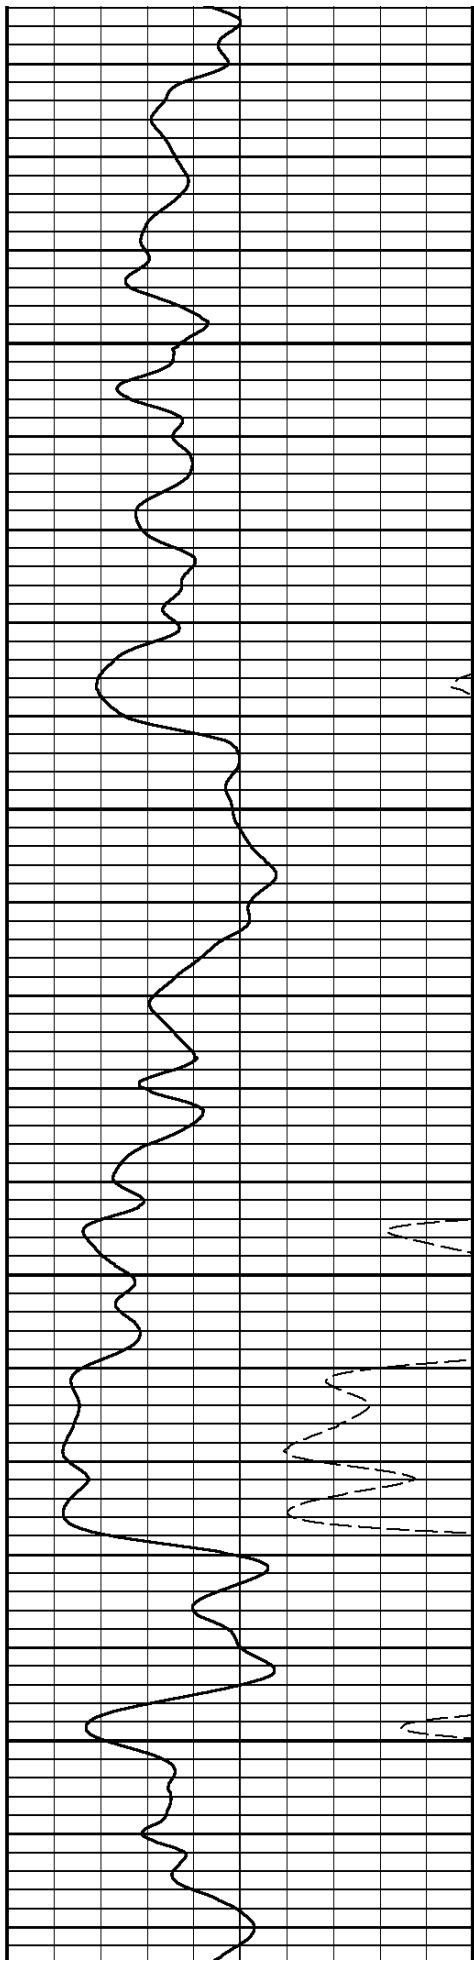


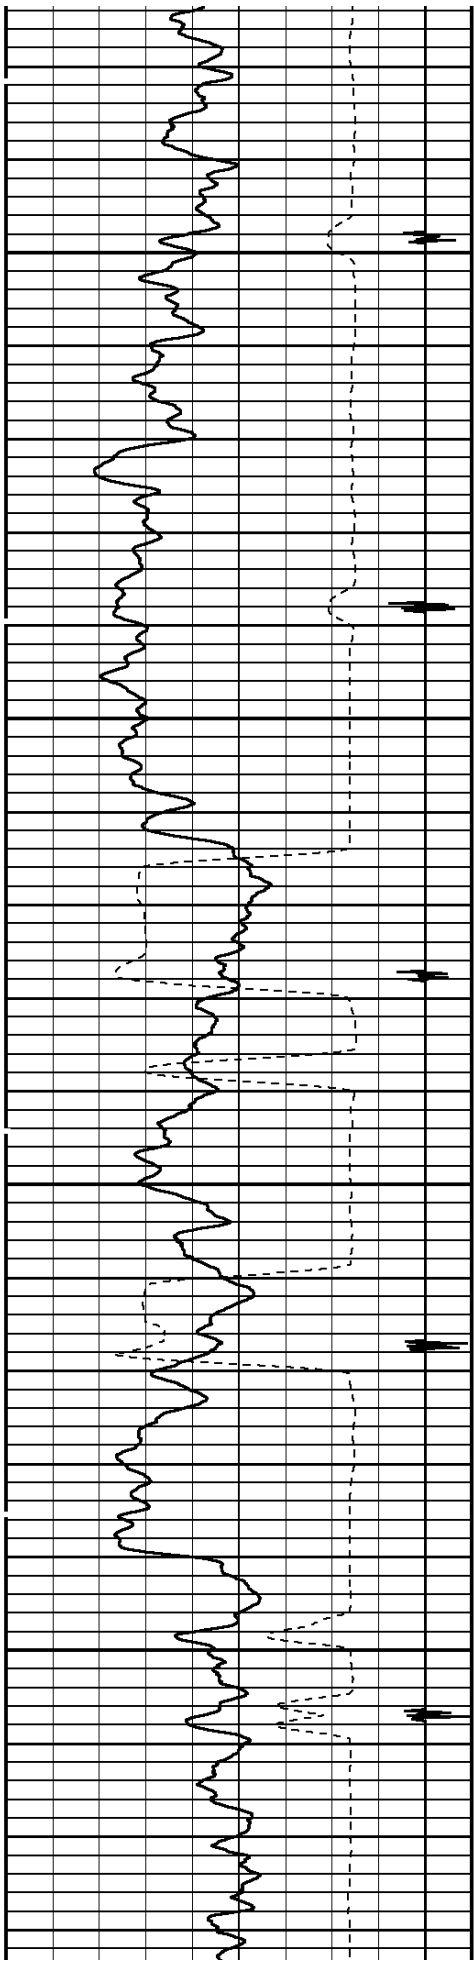



1600

1700


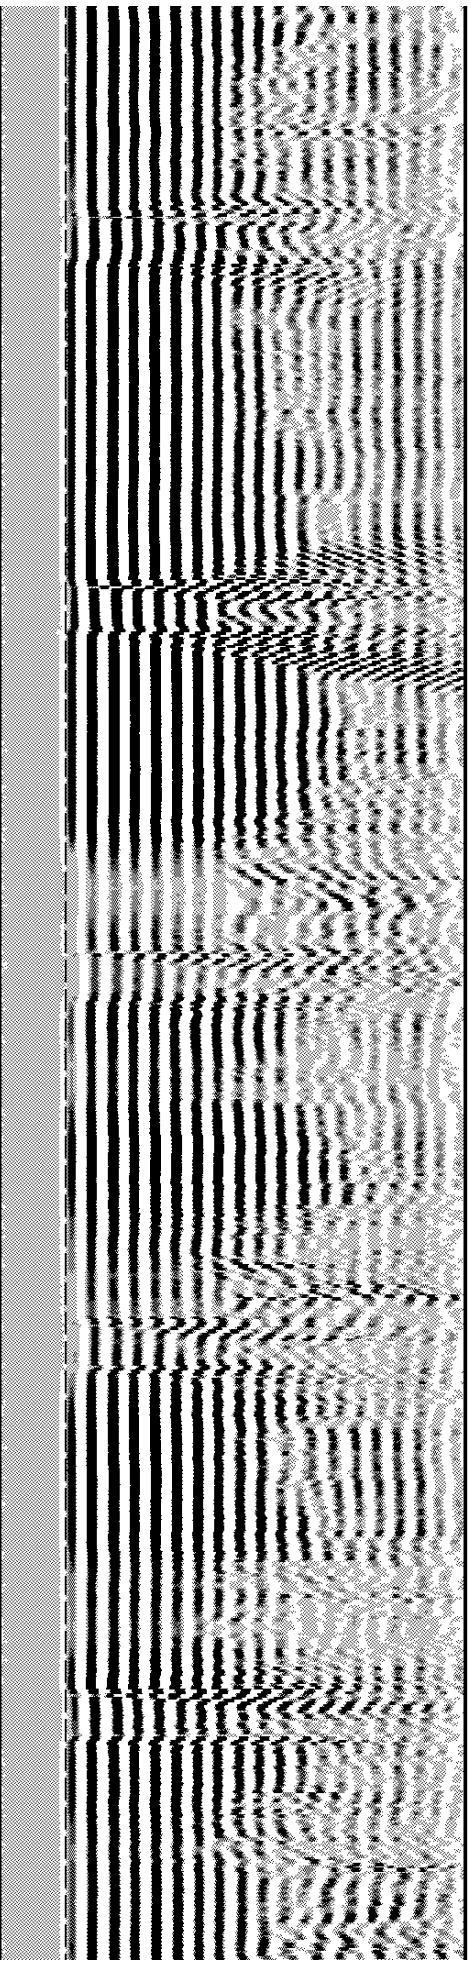
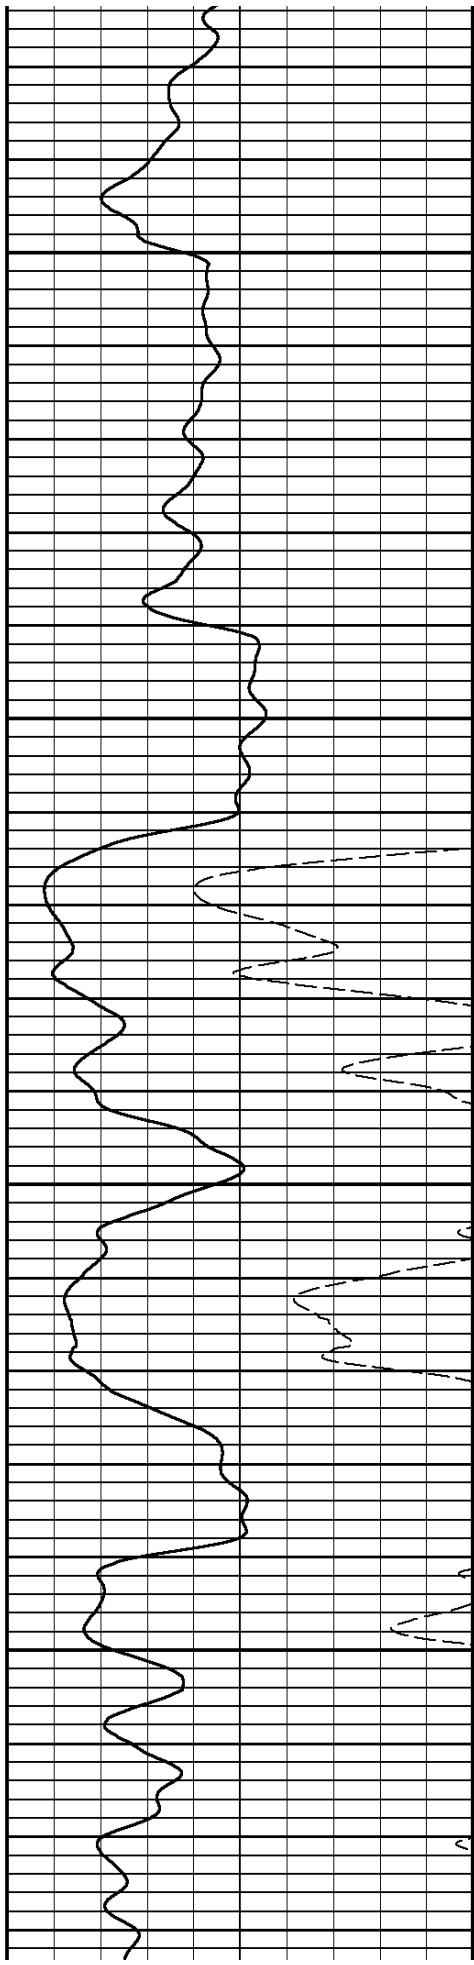


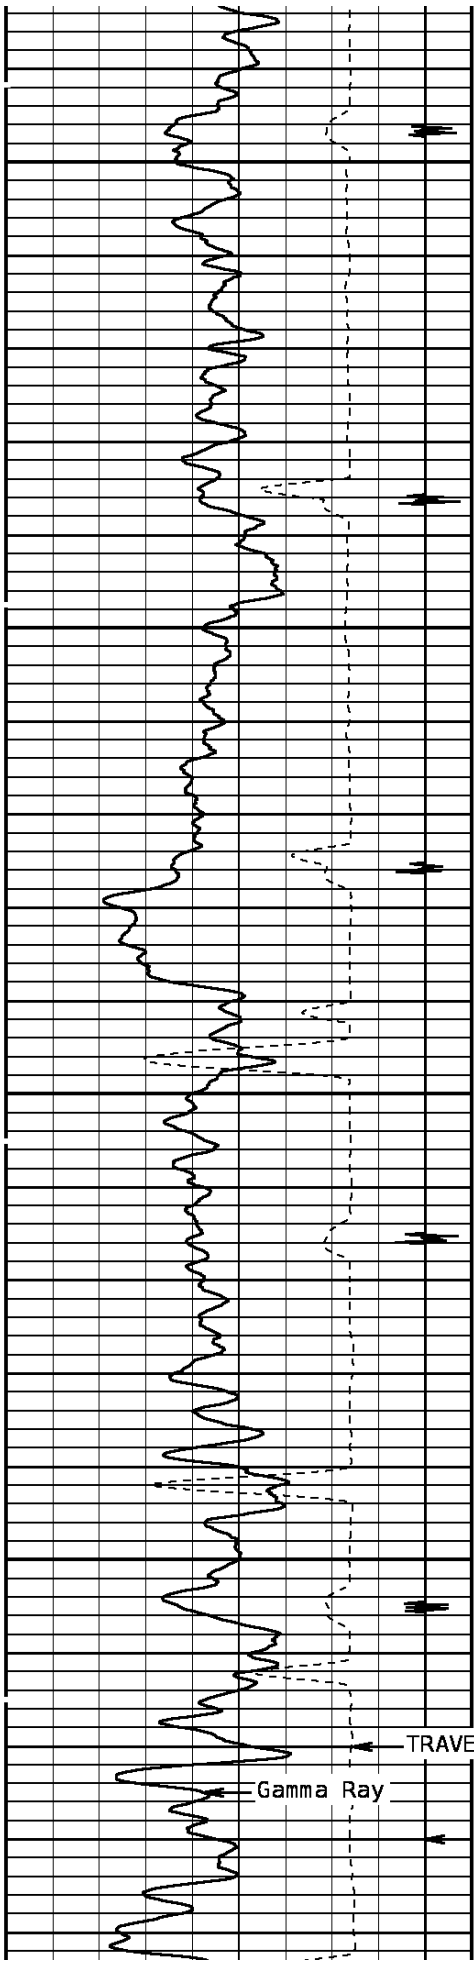


1800
1900
TRAVEL TIME 3FT
Collar Locator

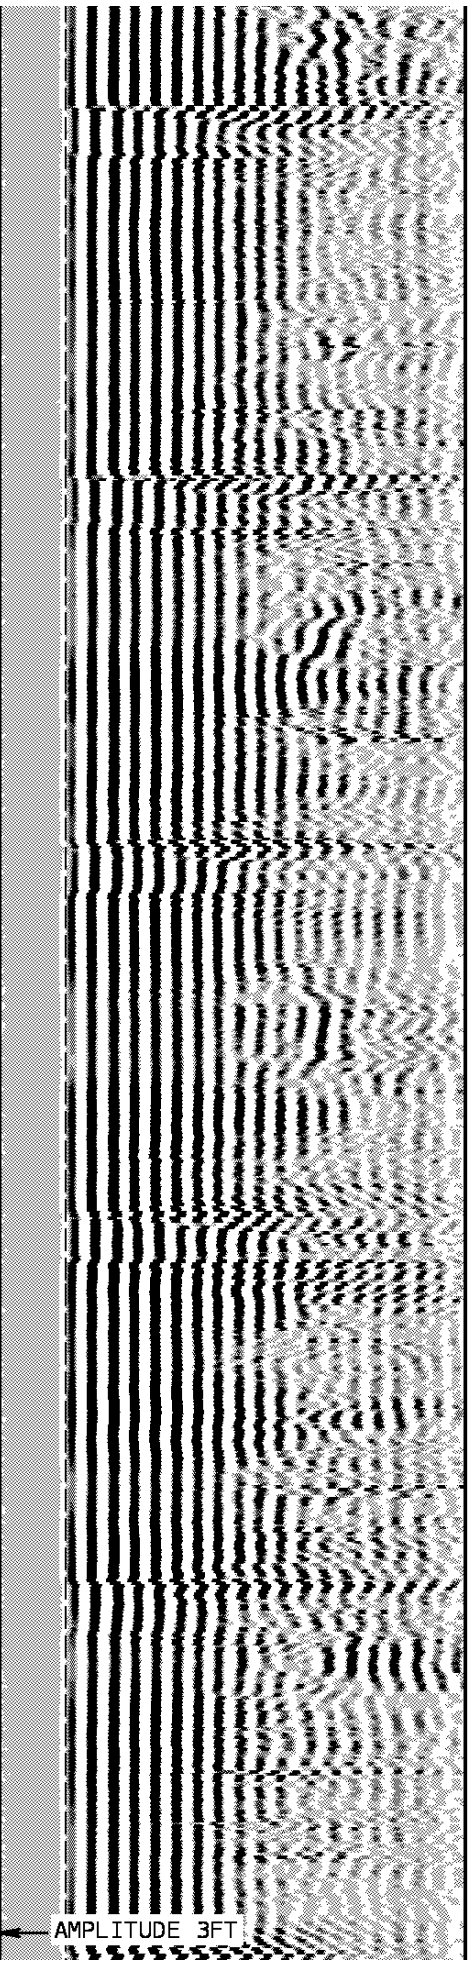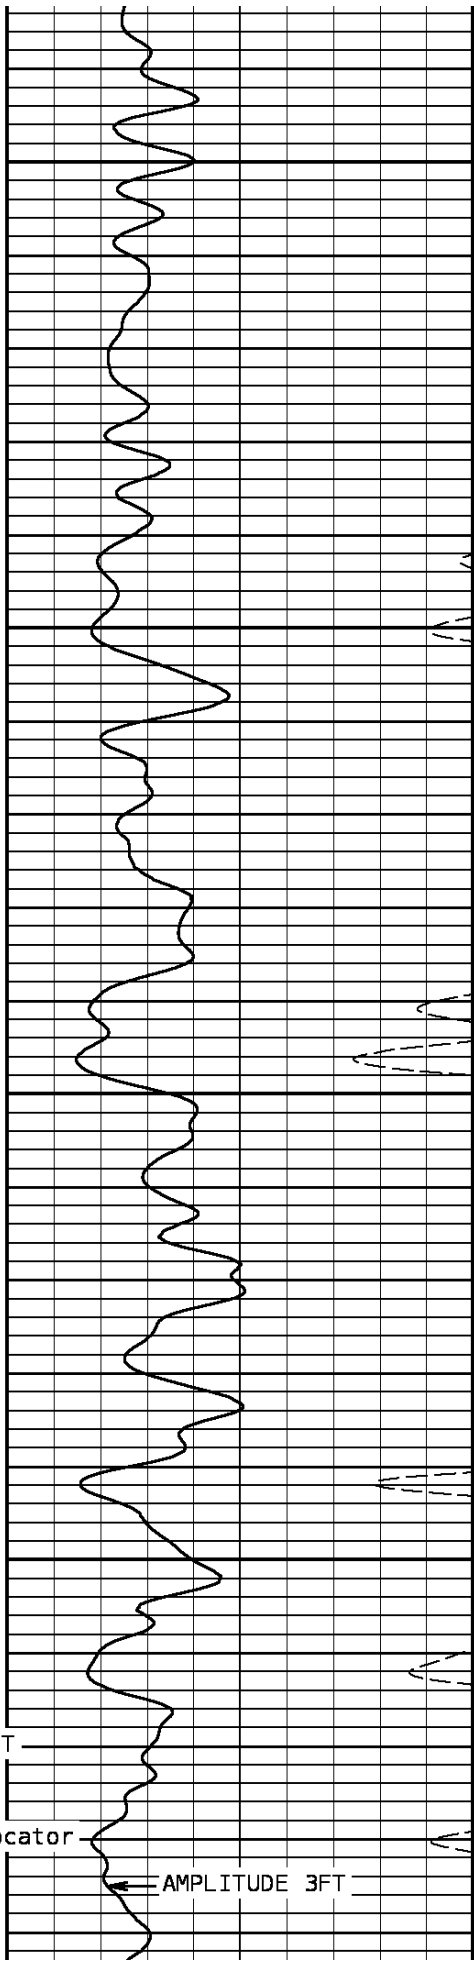



AMPLITUDE 3FT

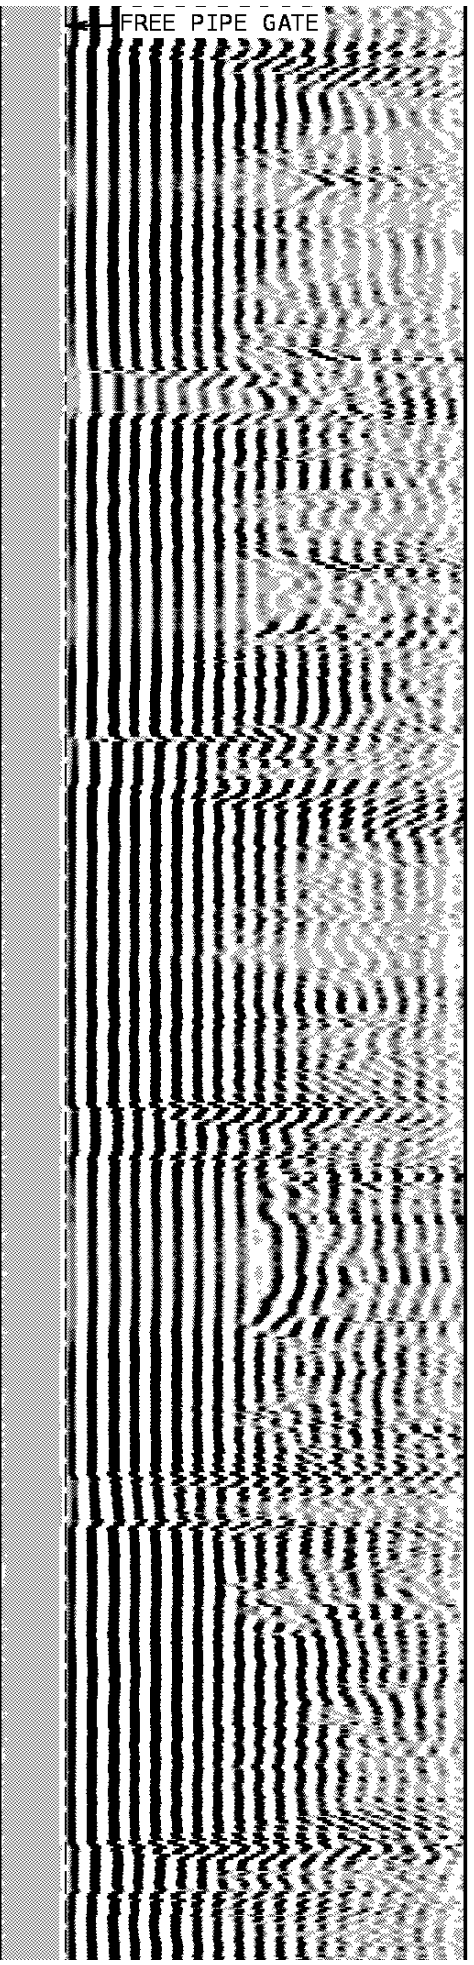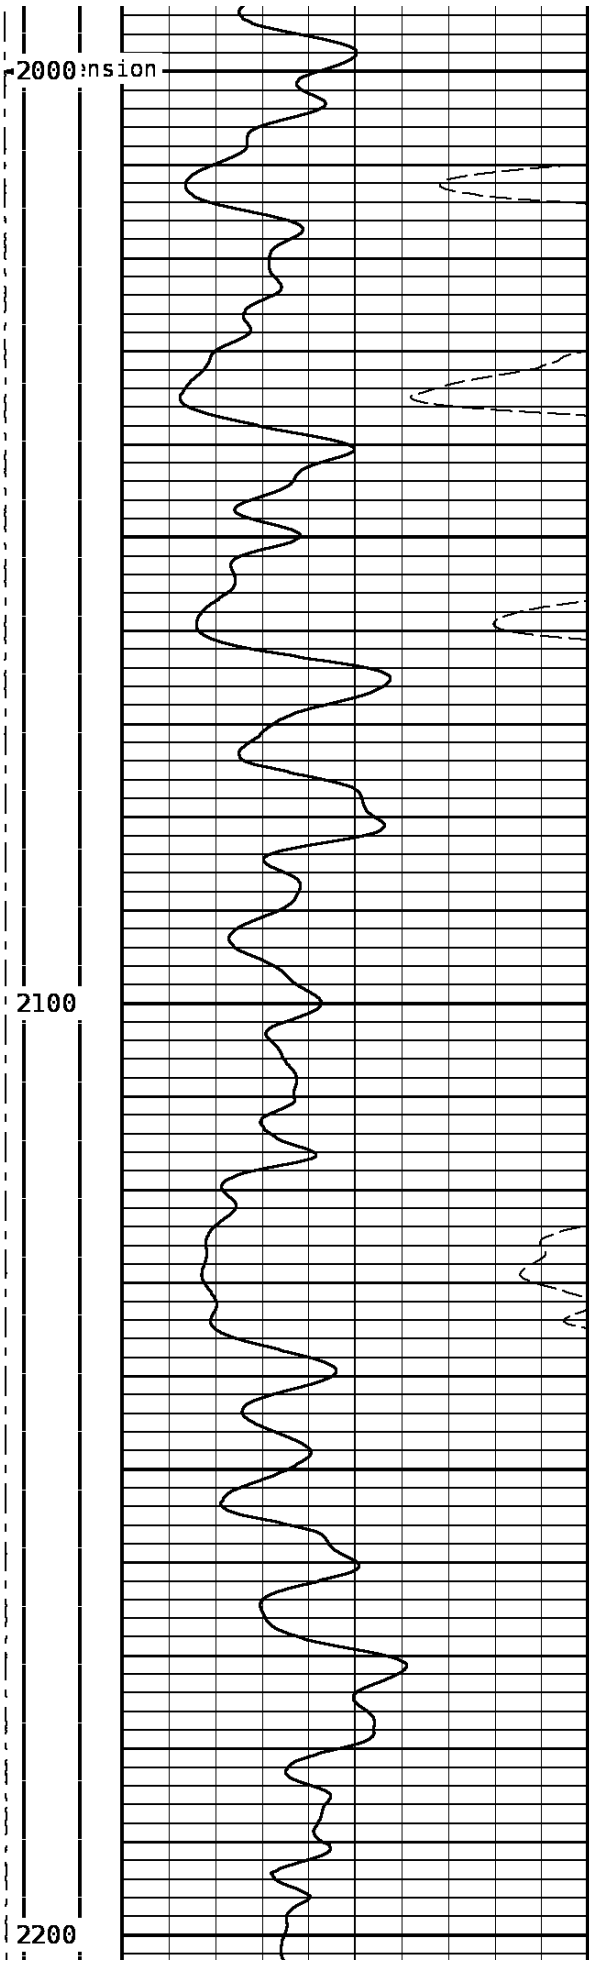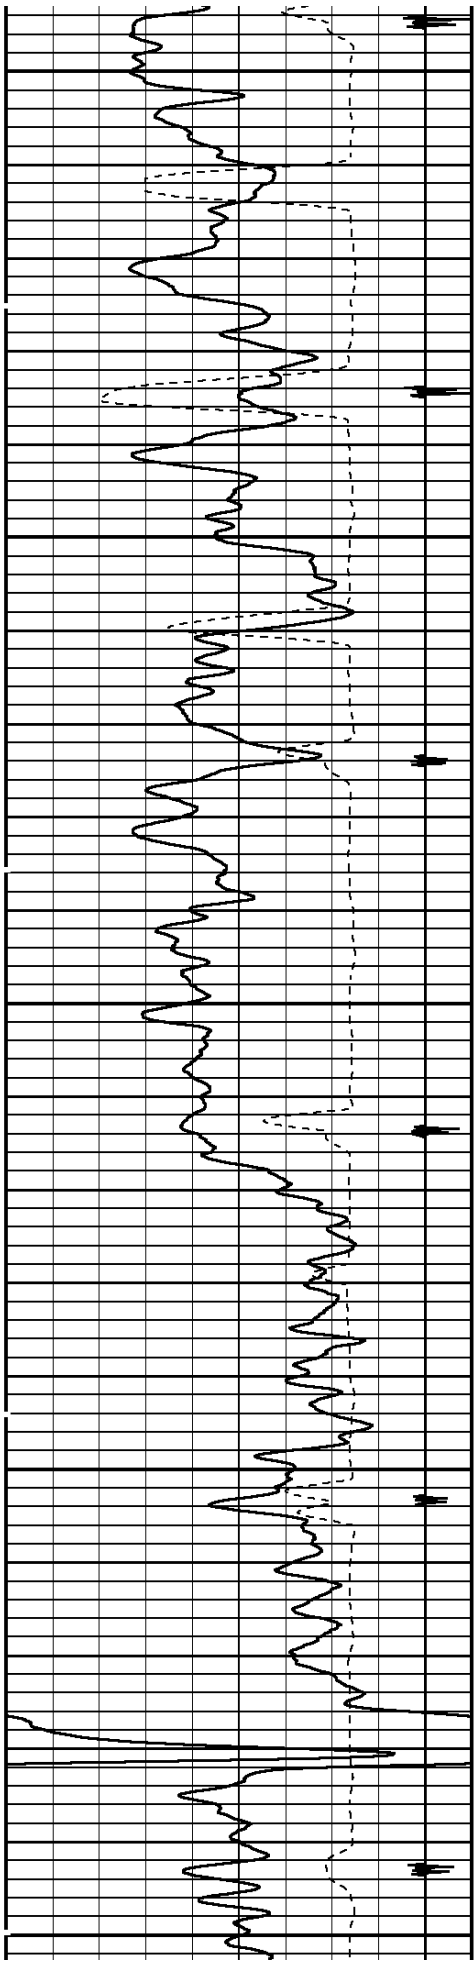


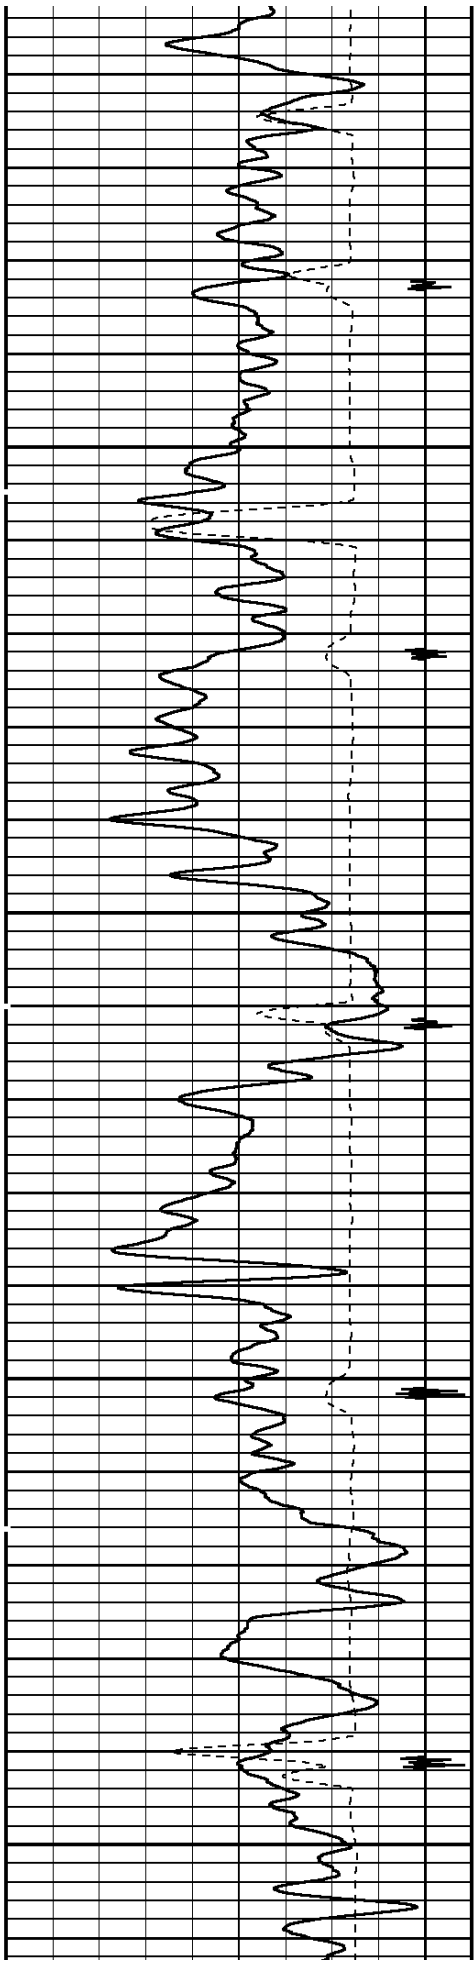

2300



2400

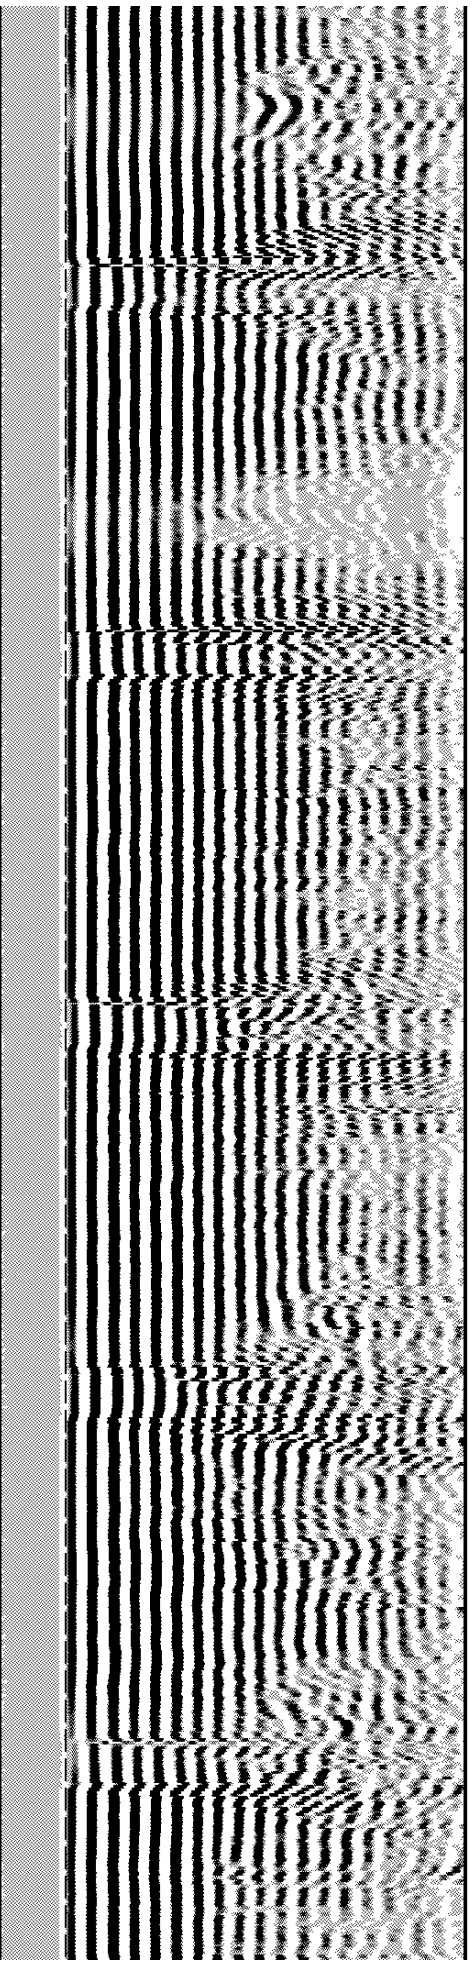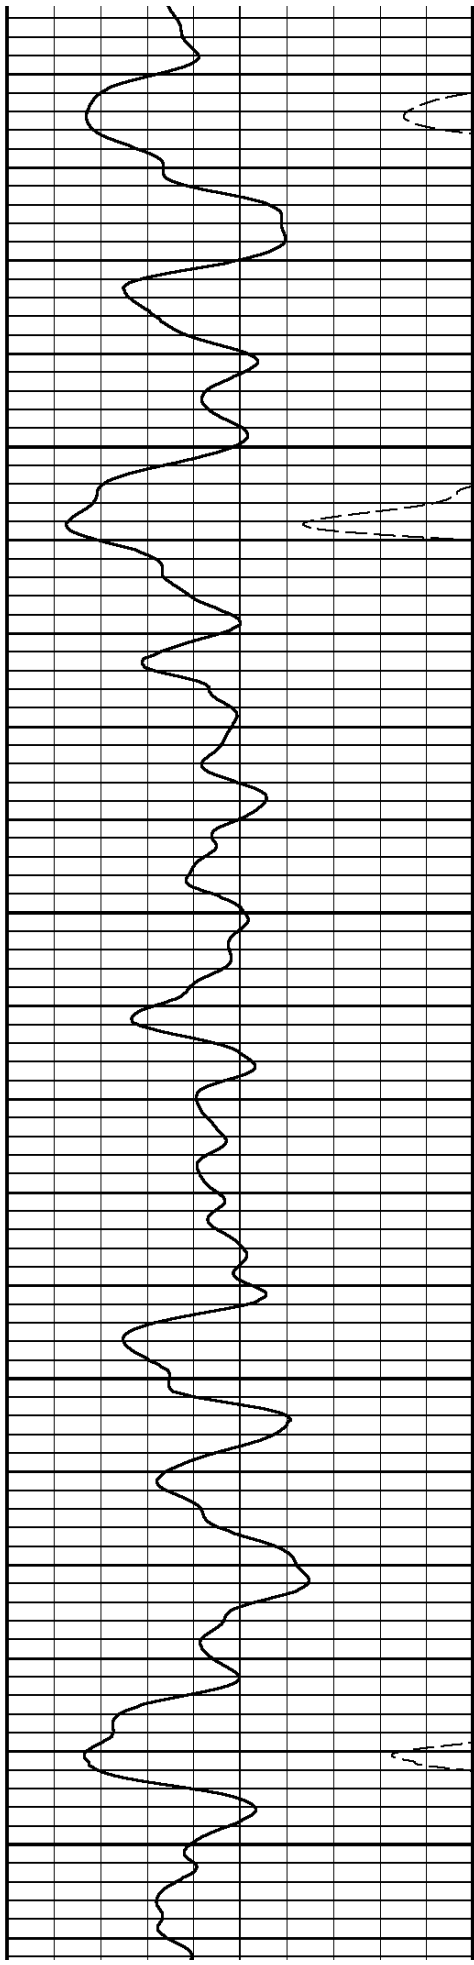


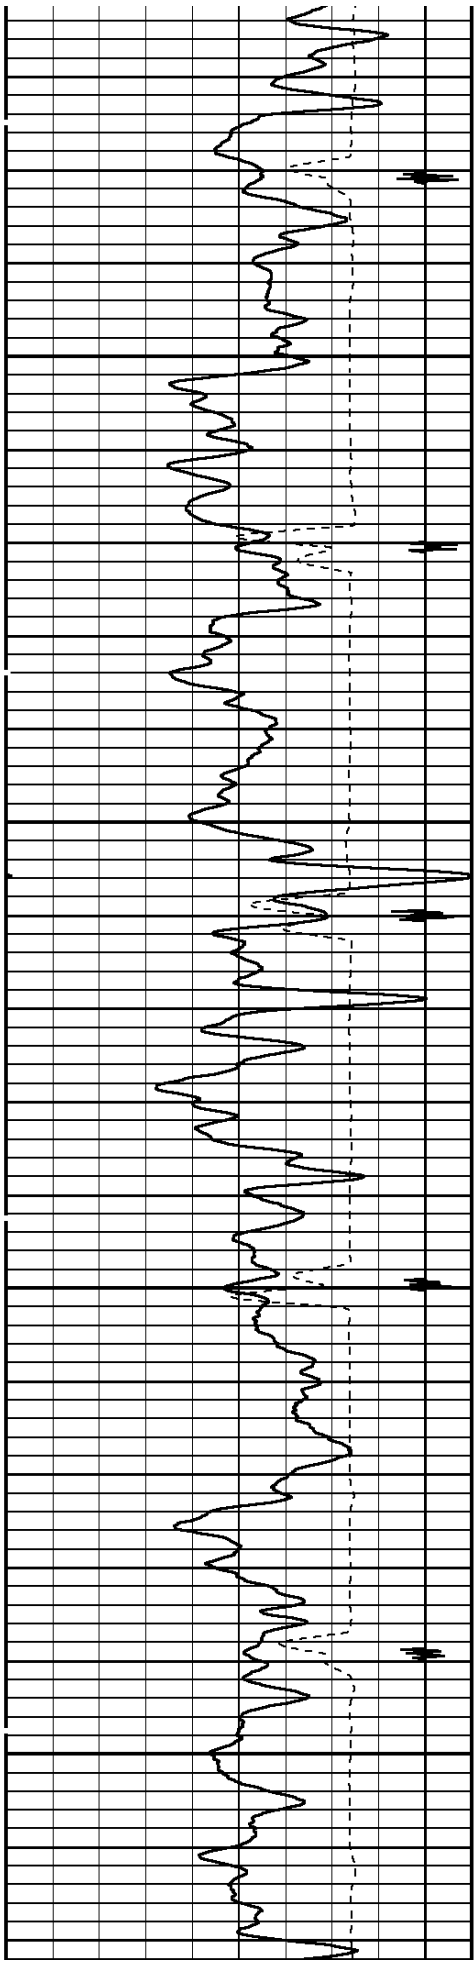

2500



2600

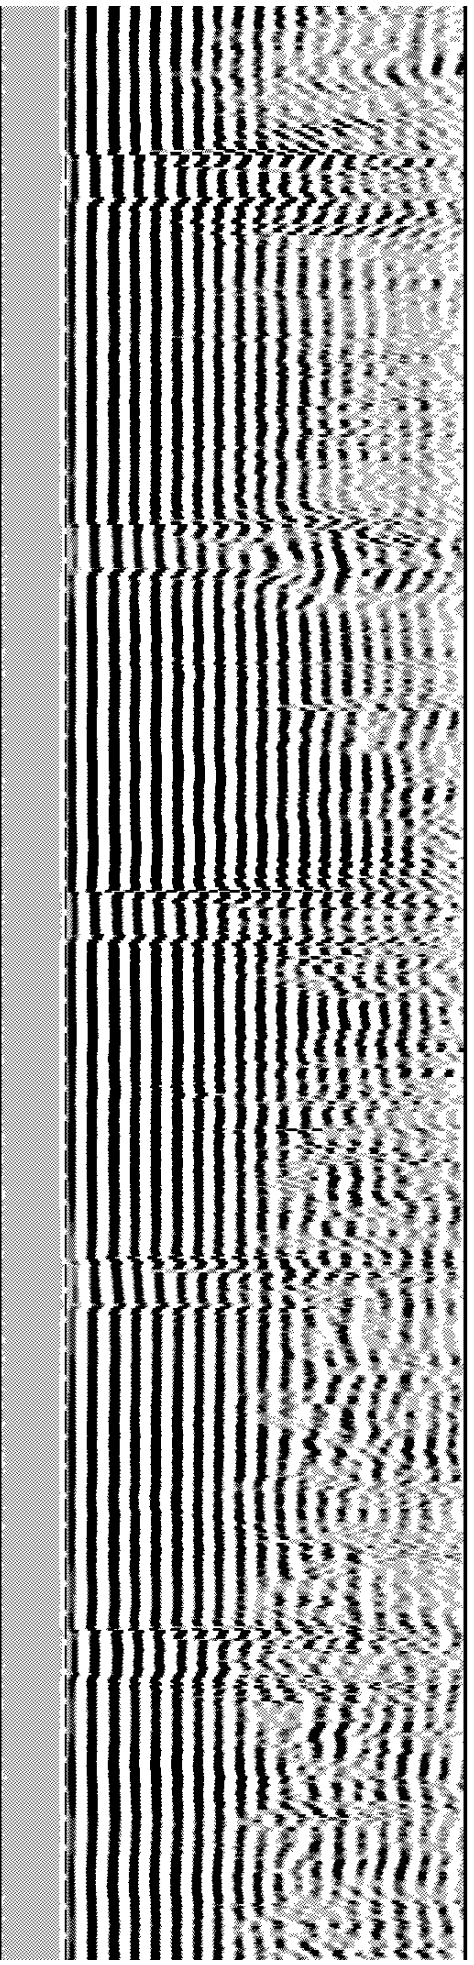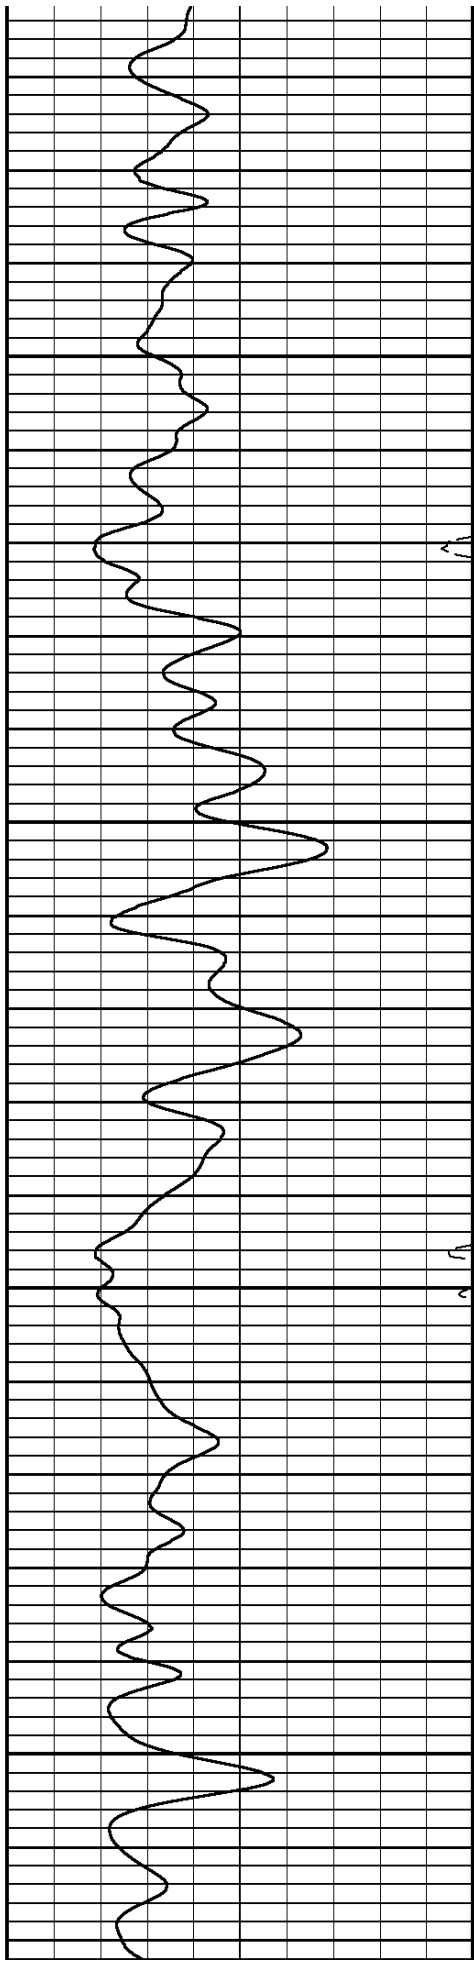


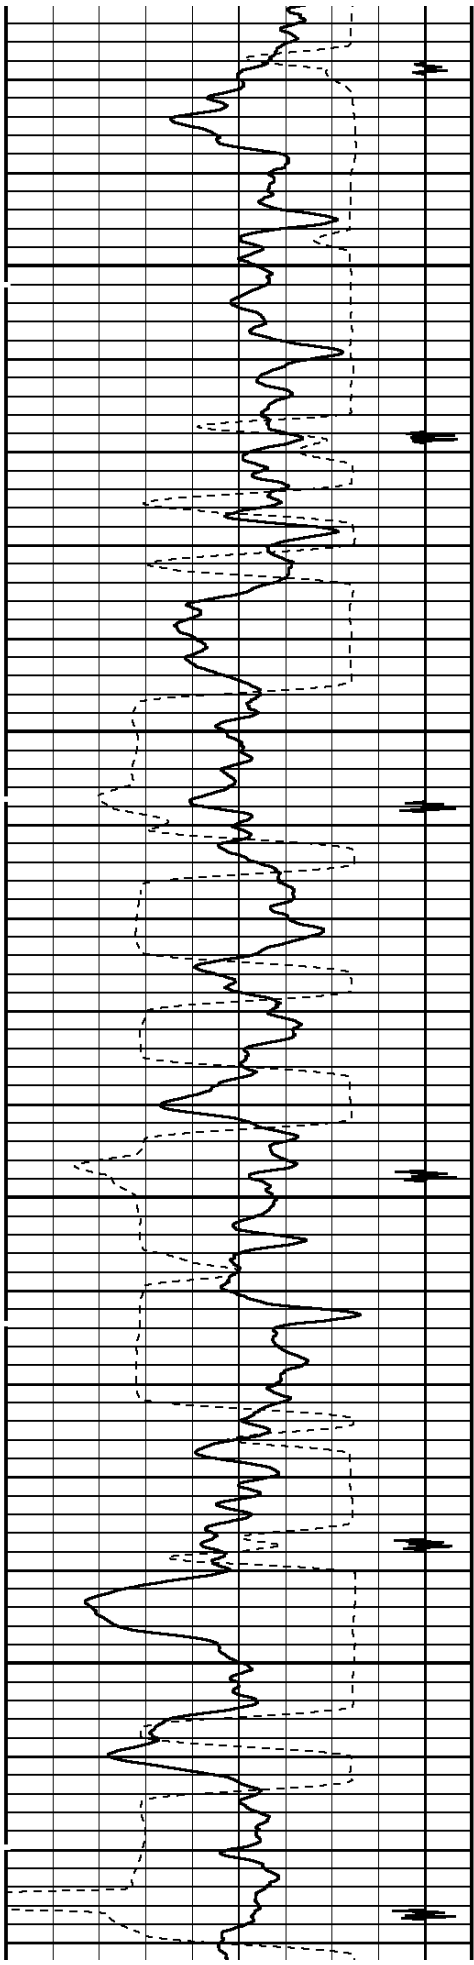

2700



2800

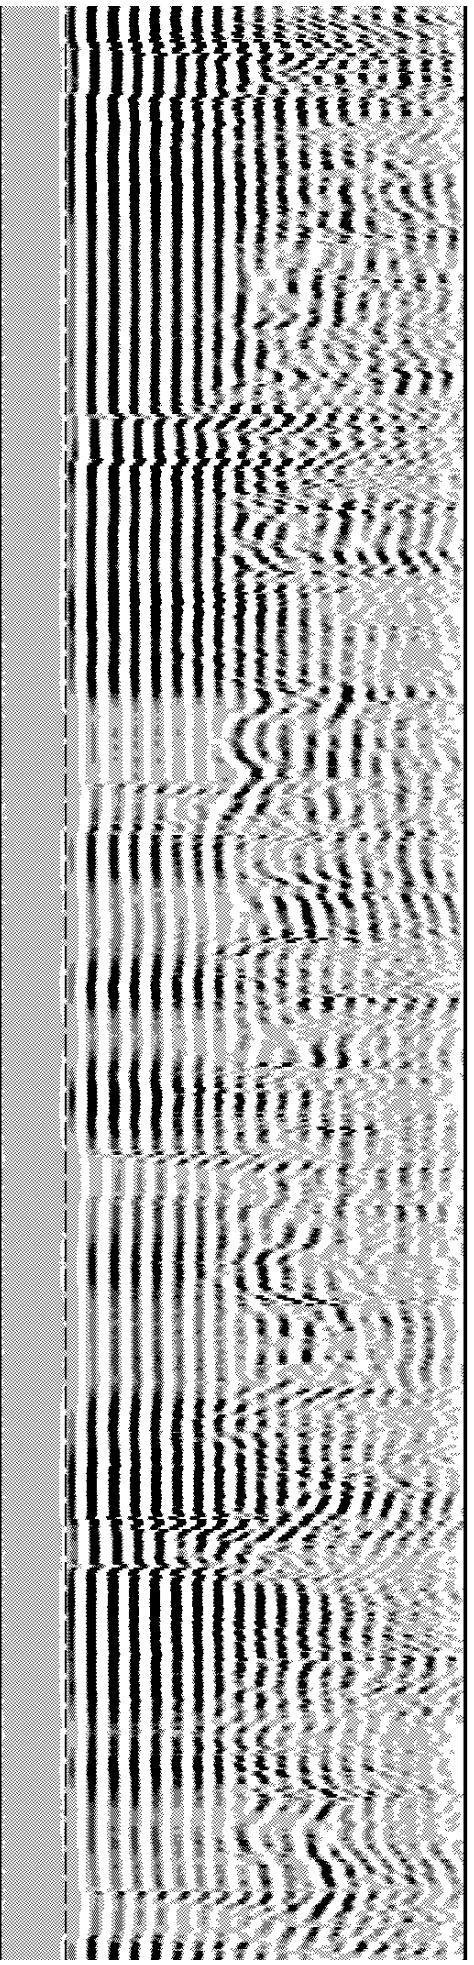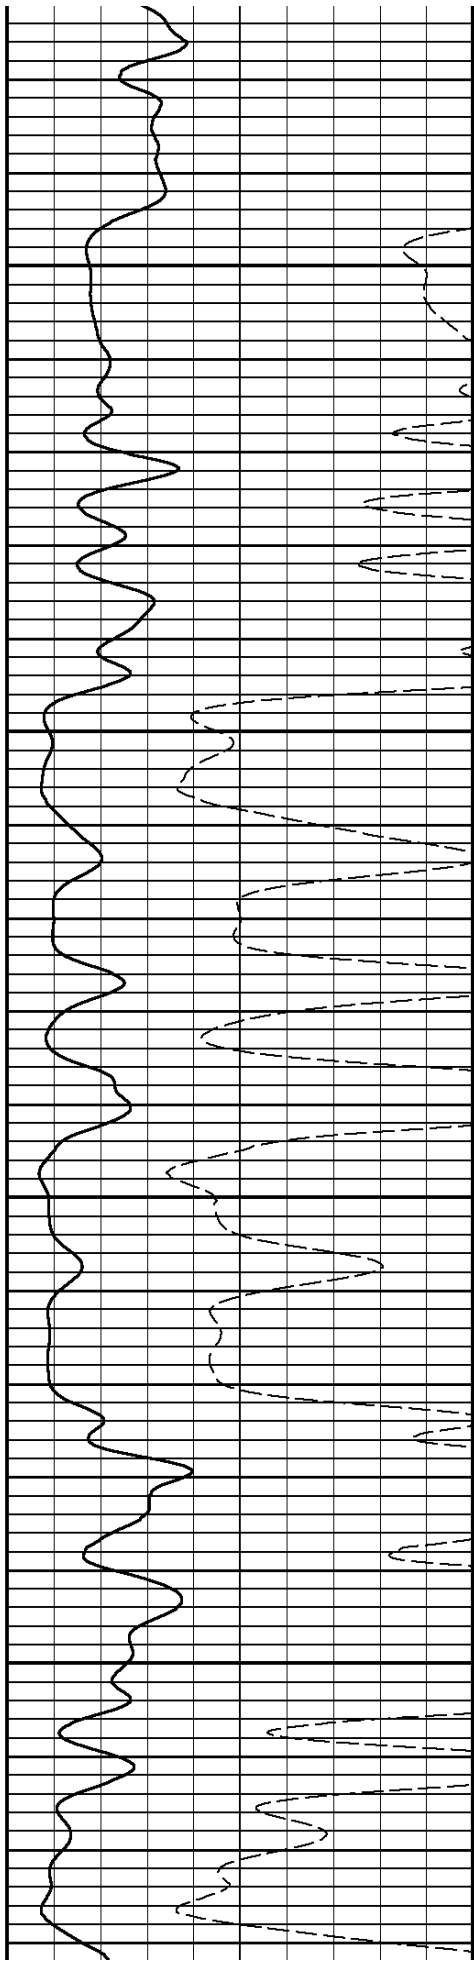


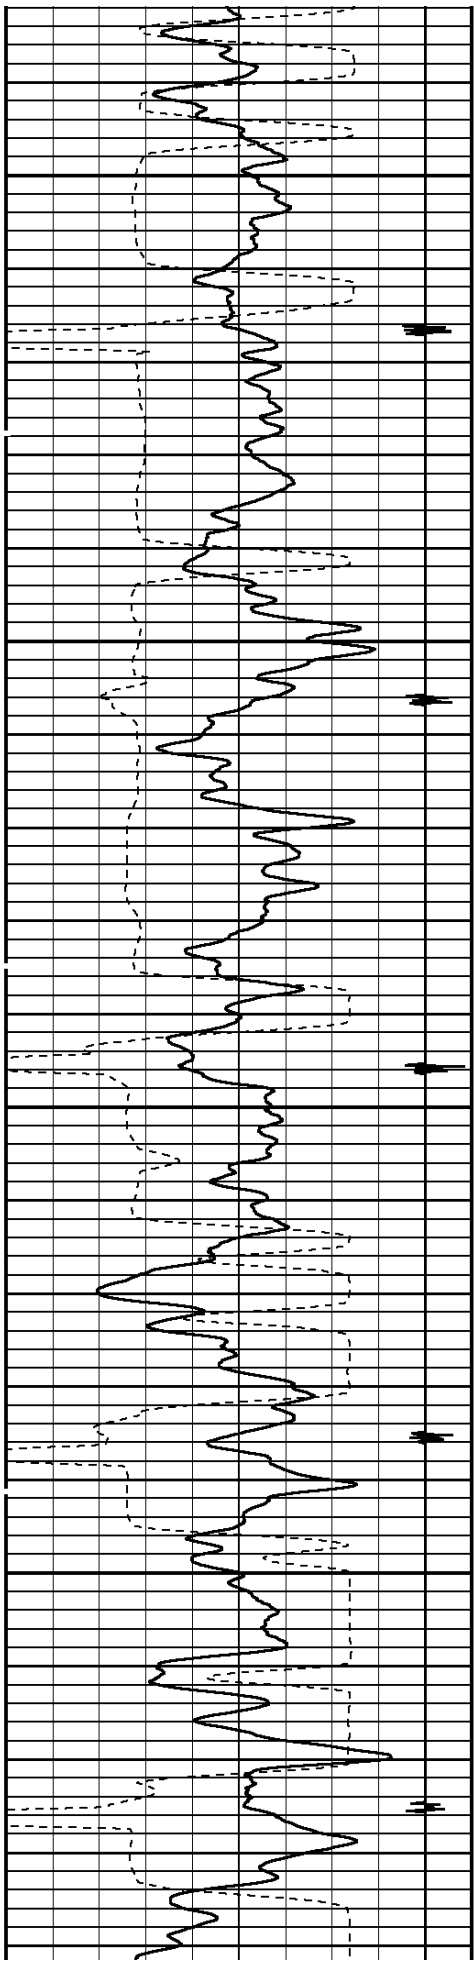

2900



3000

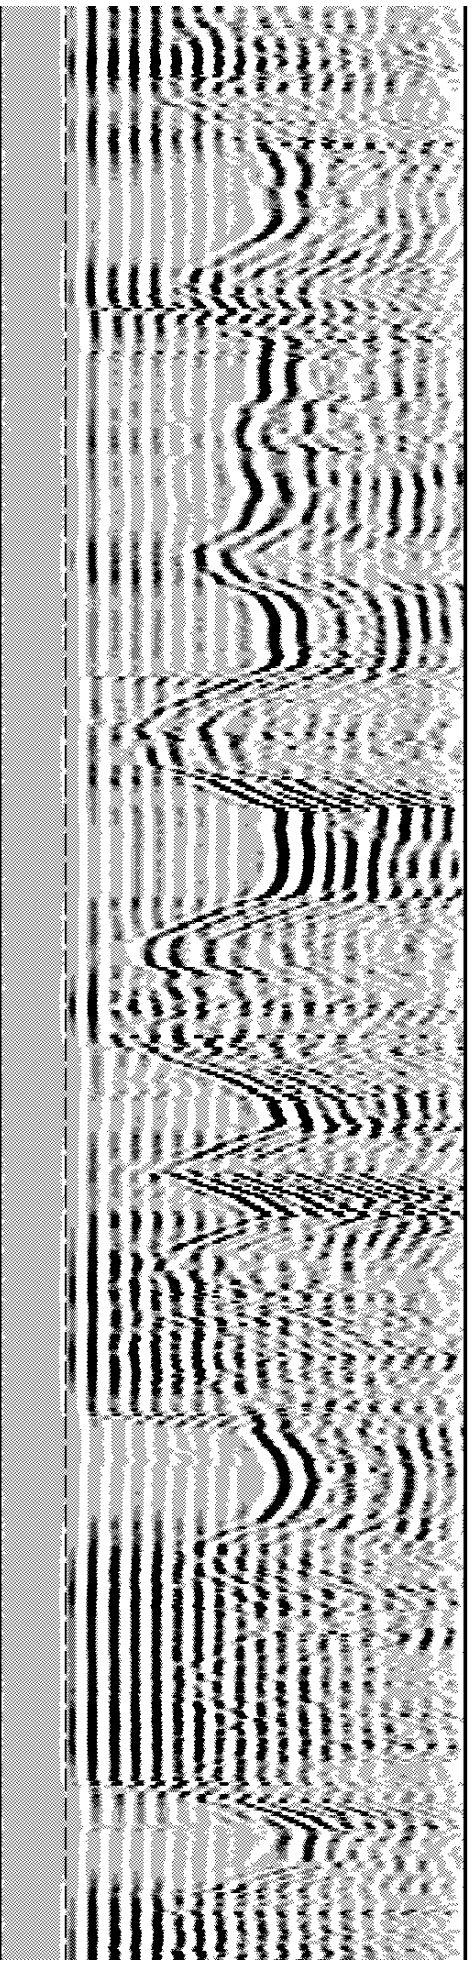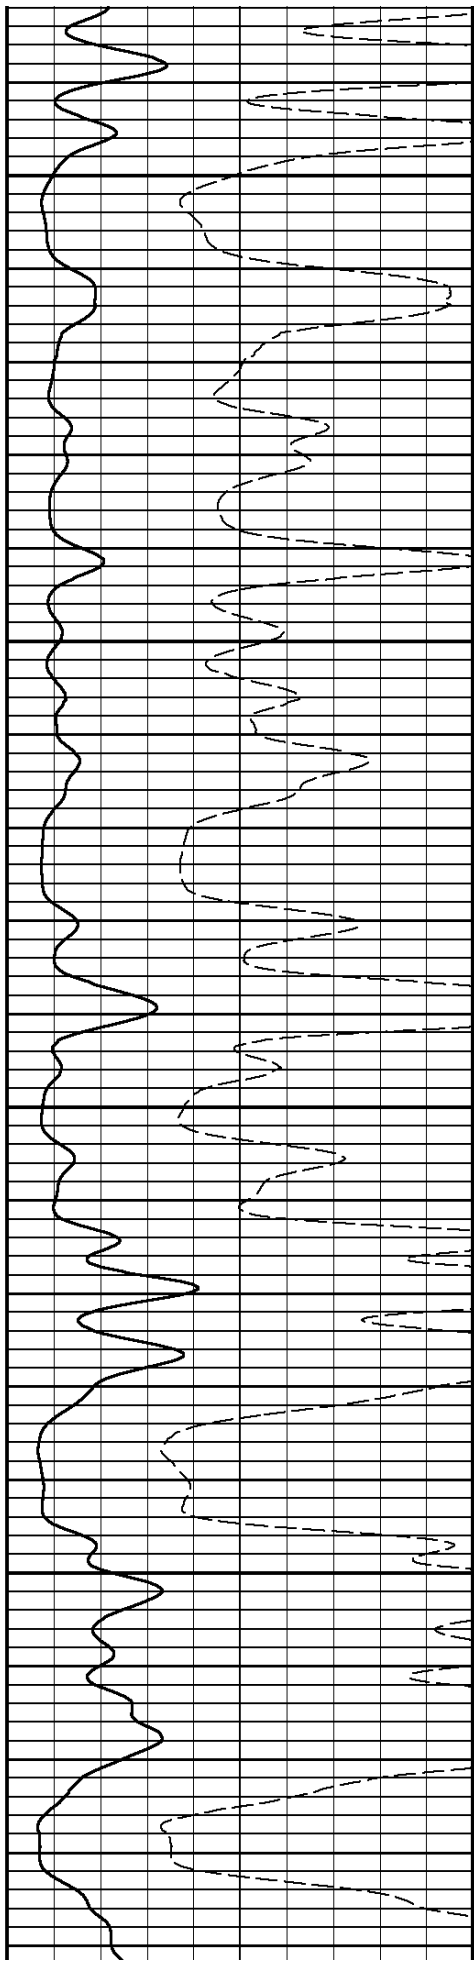


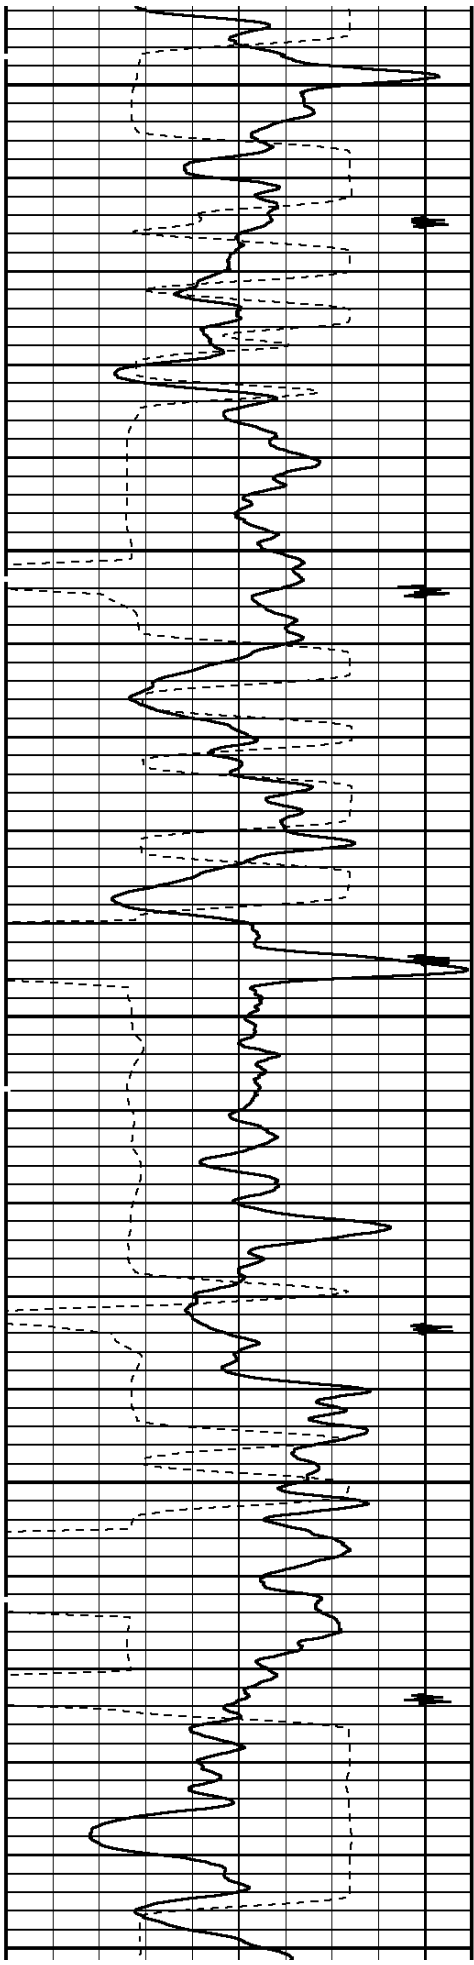

3100



3200

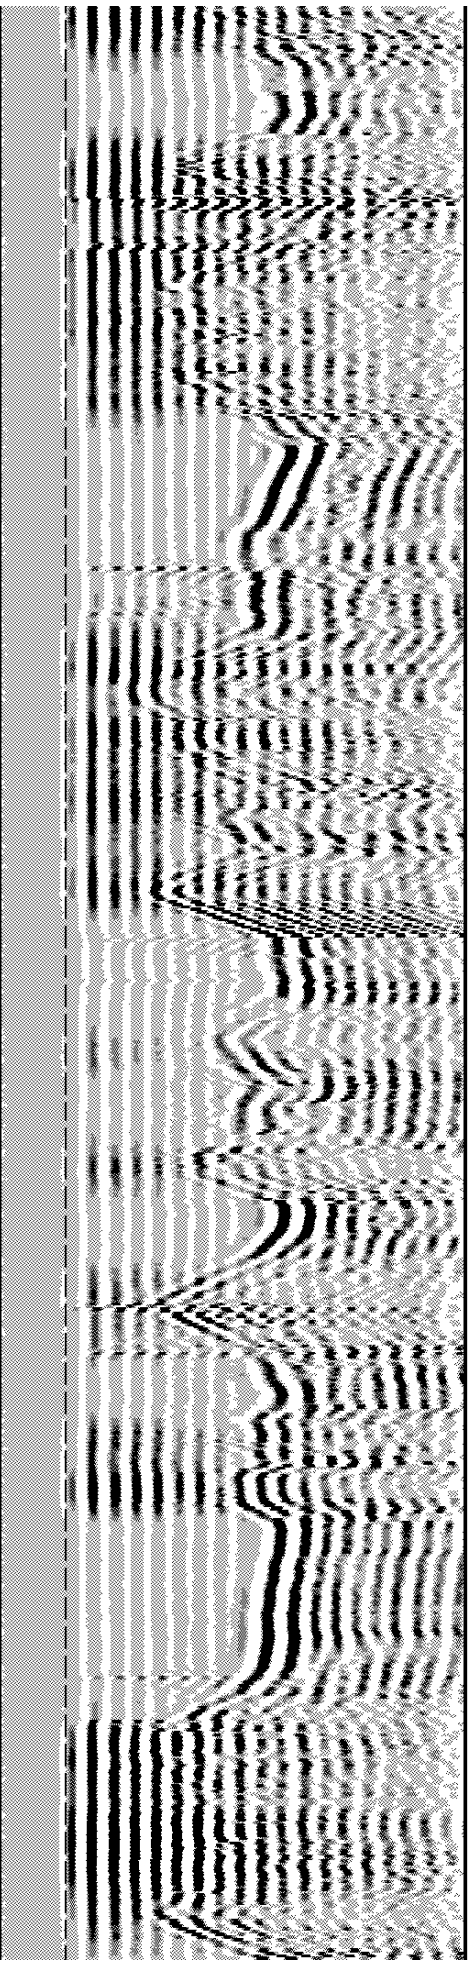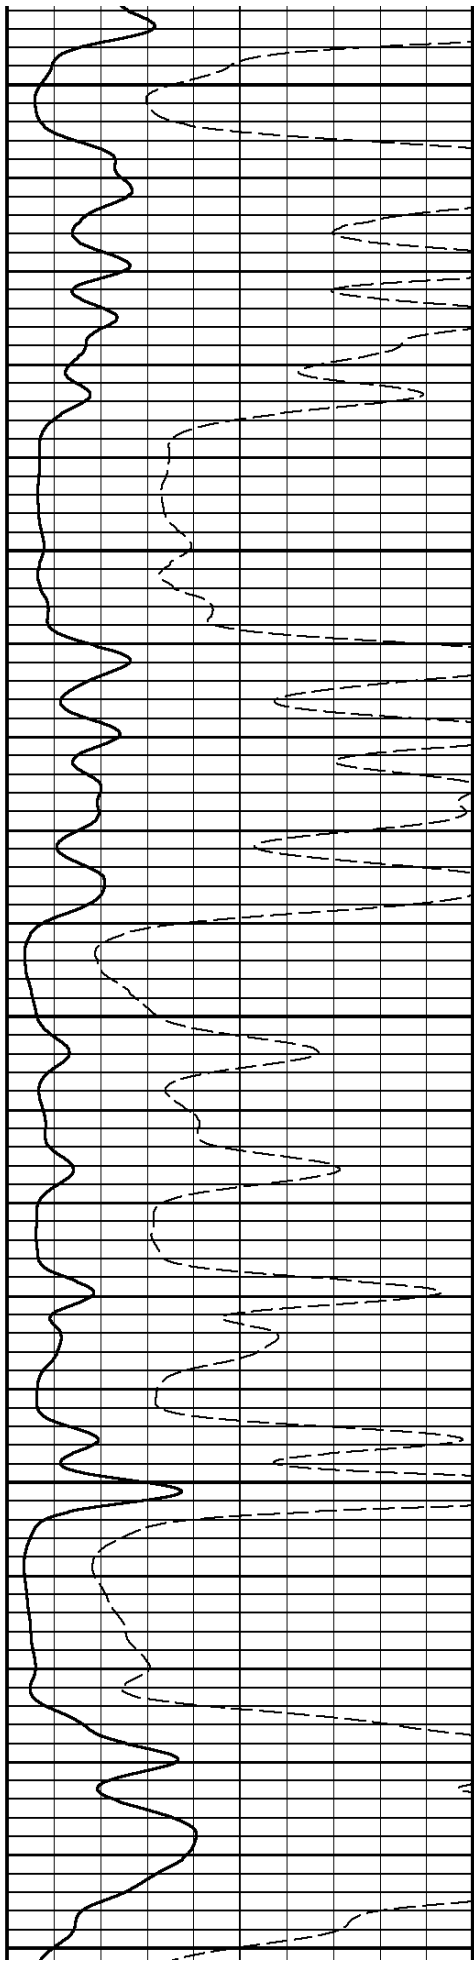


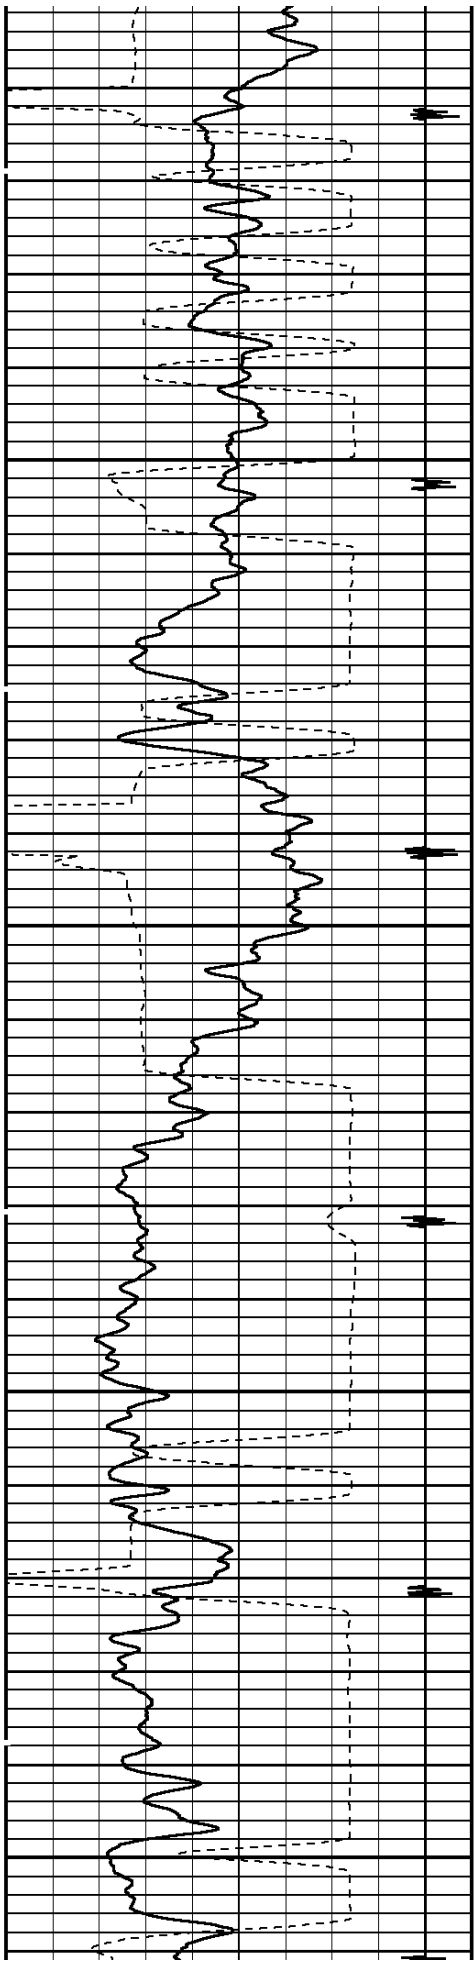

3300



3400

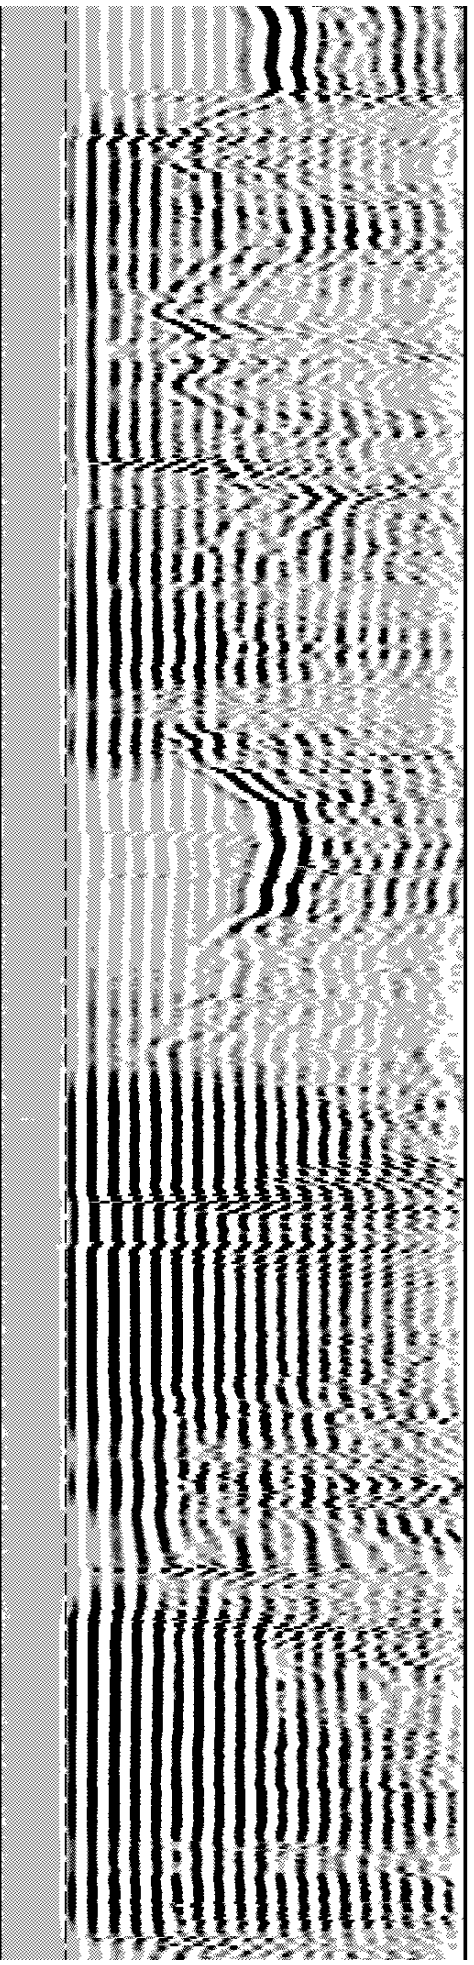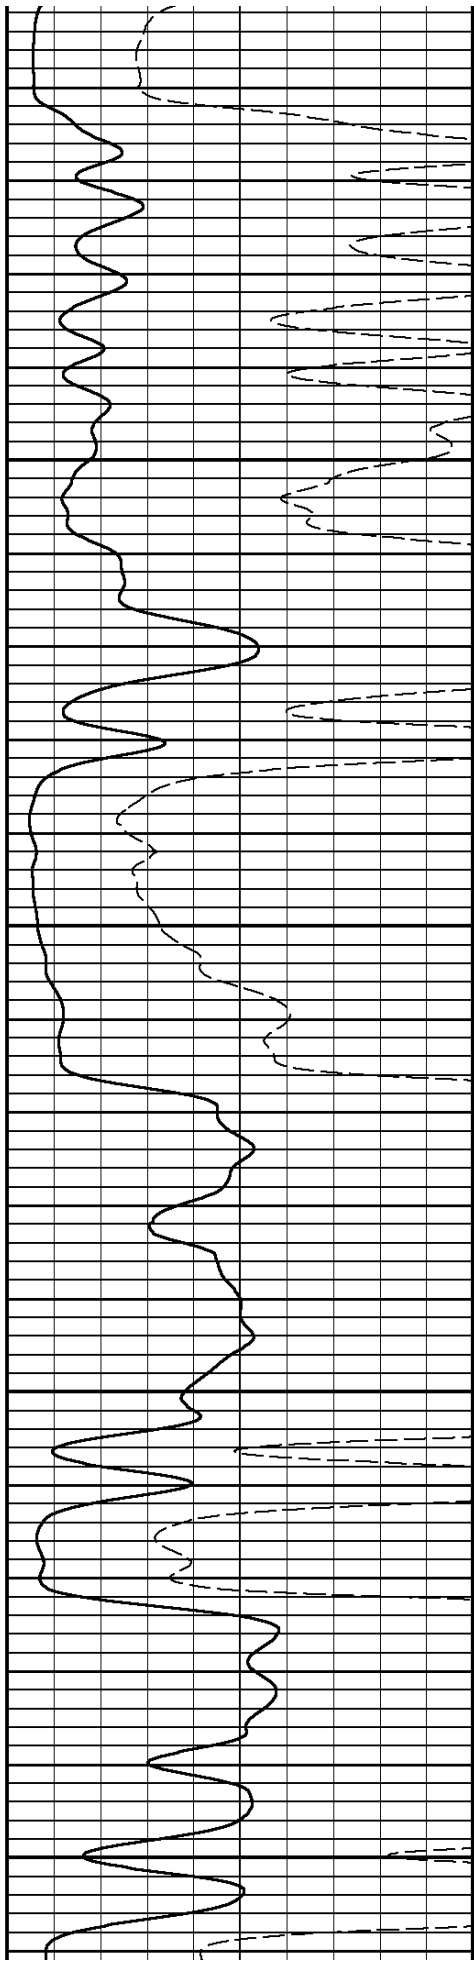


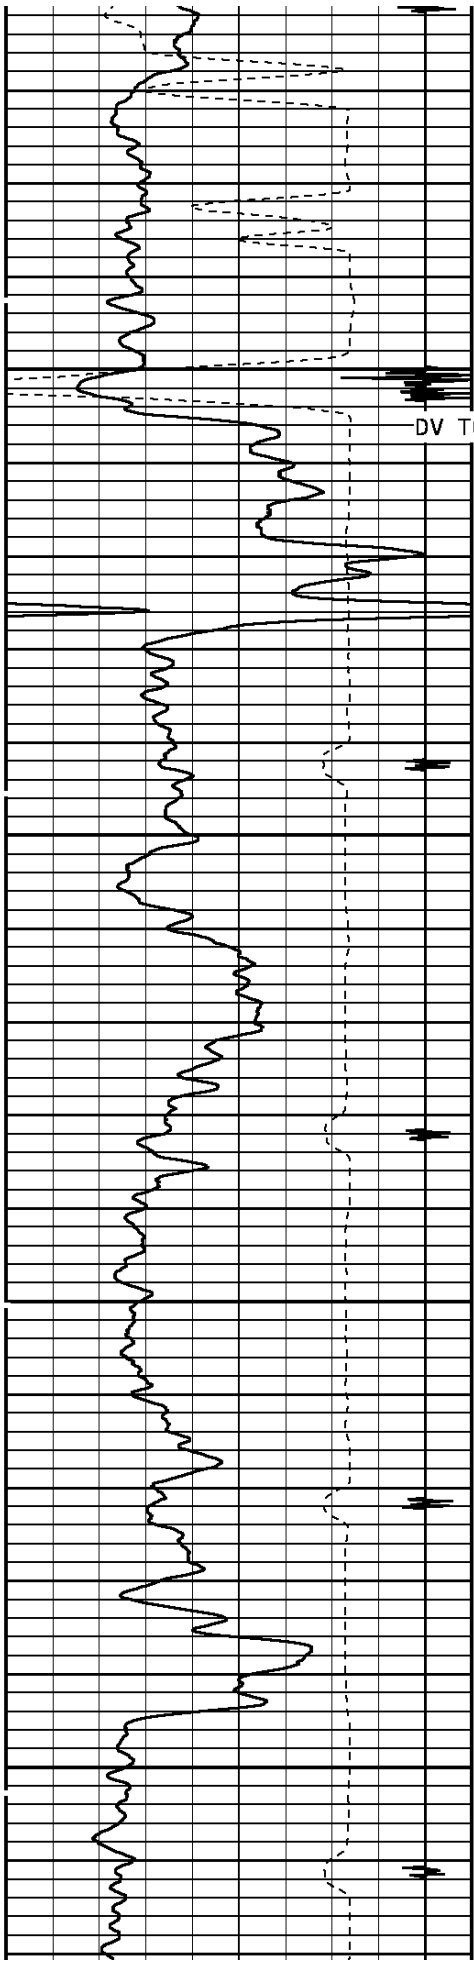

3500



3600

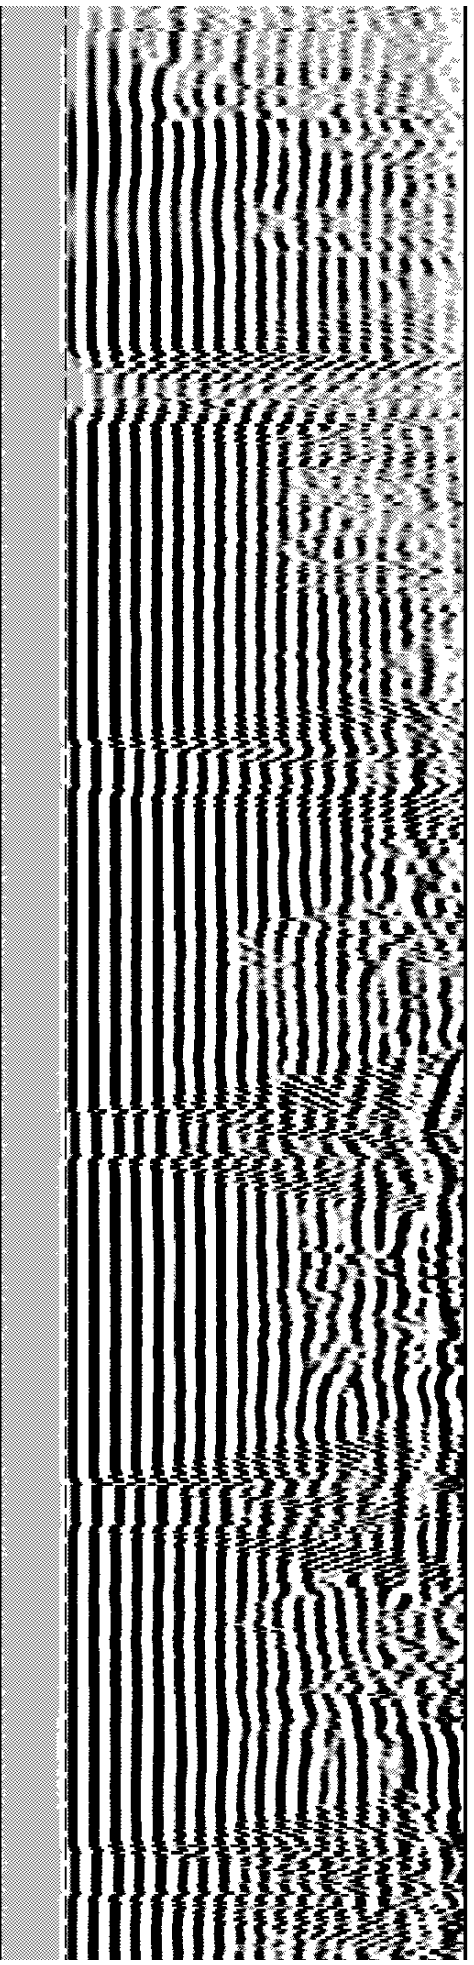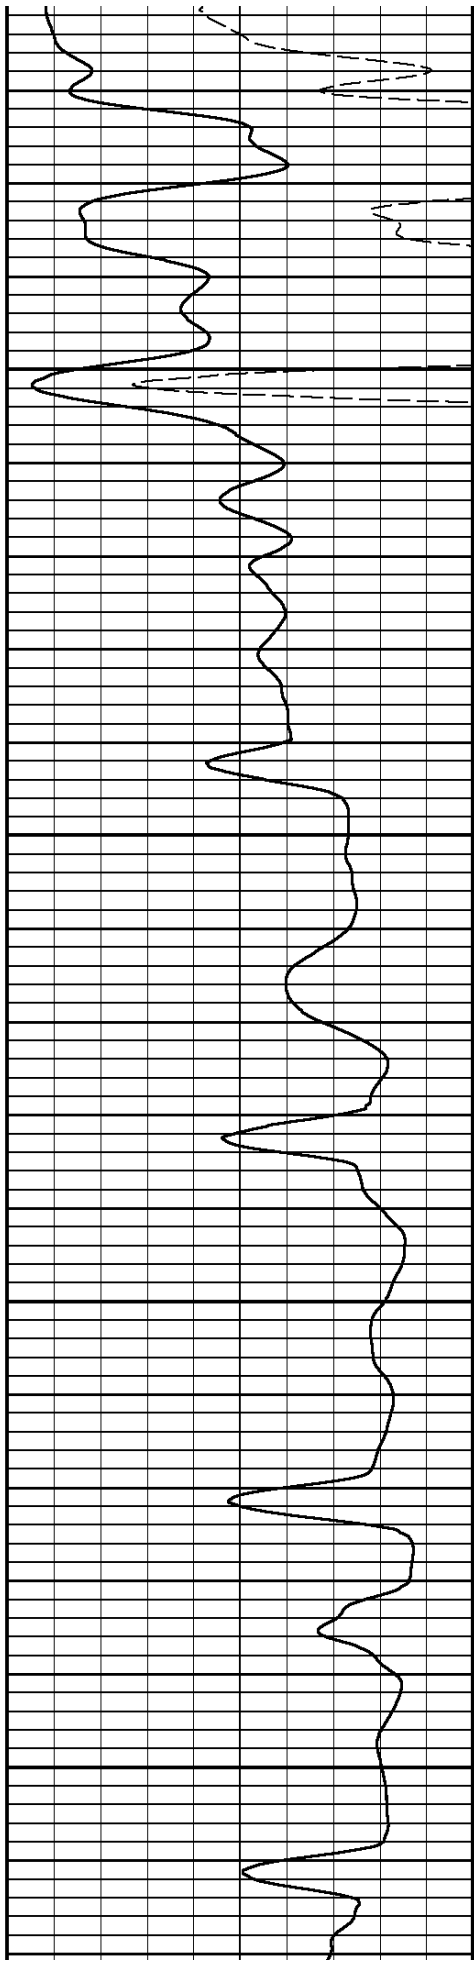


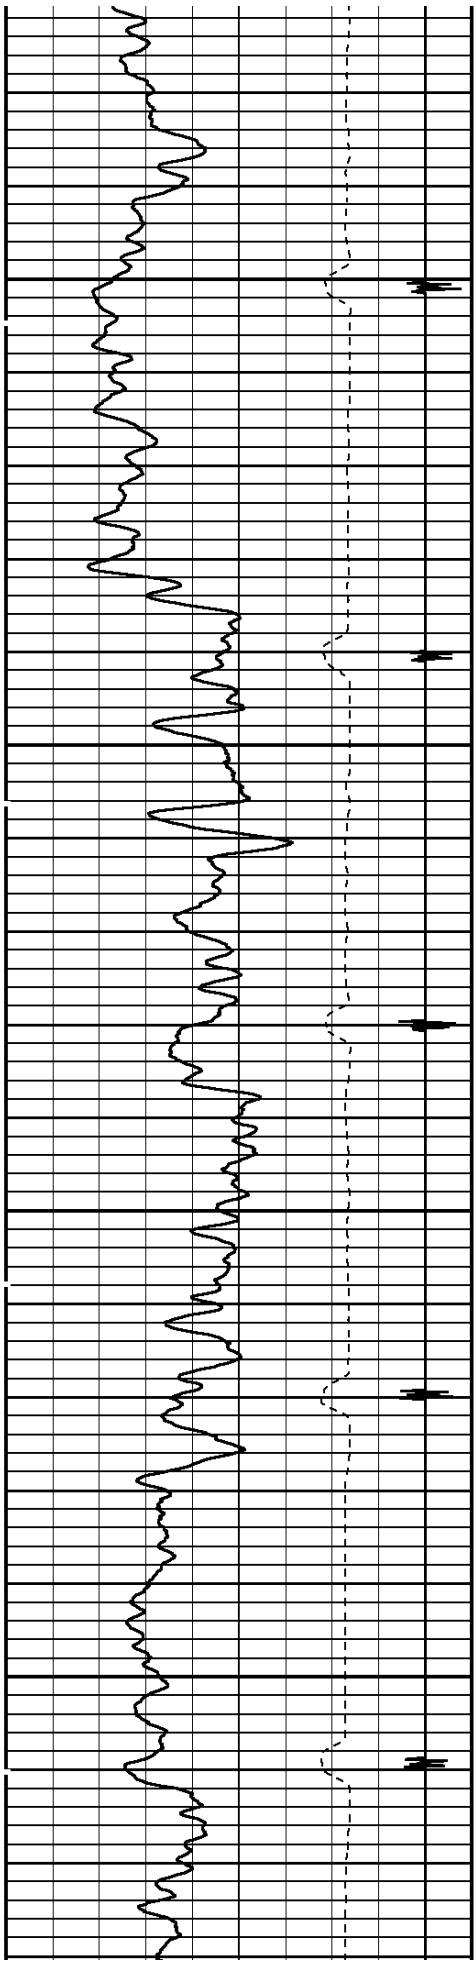

3700



3800

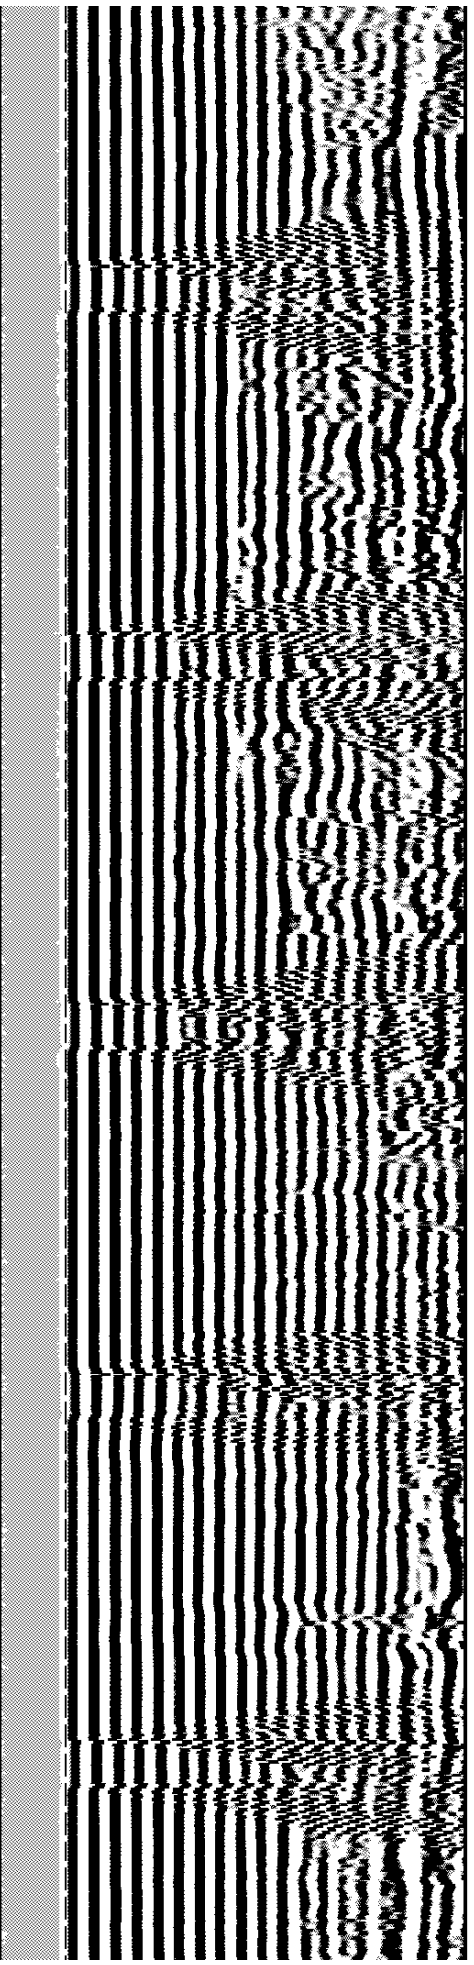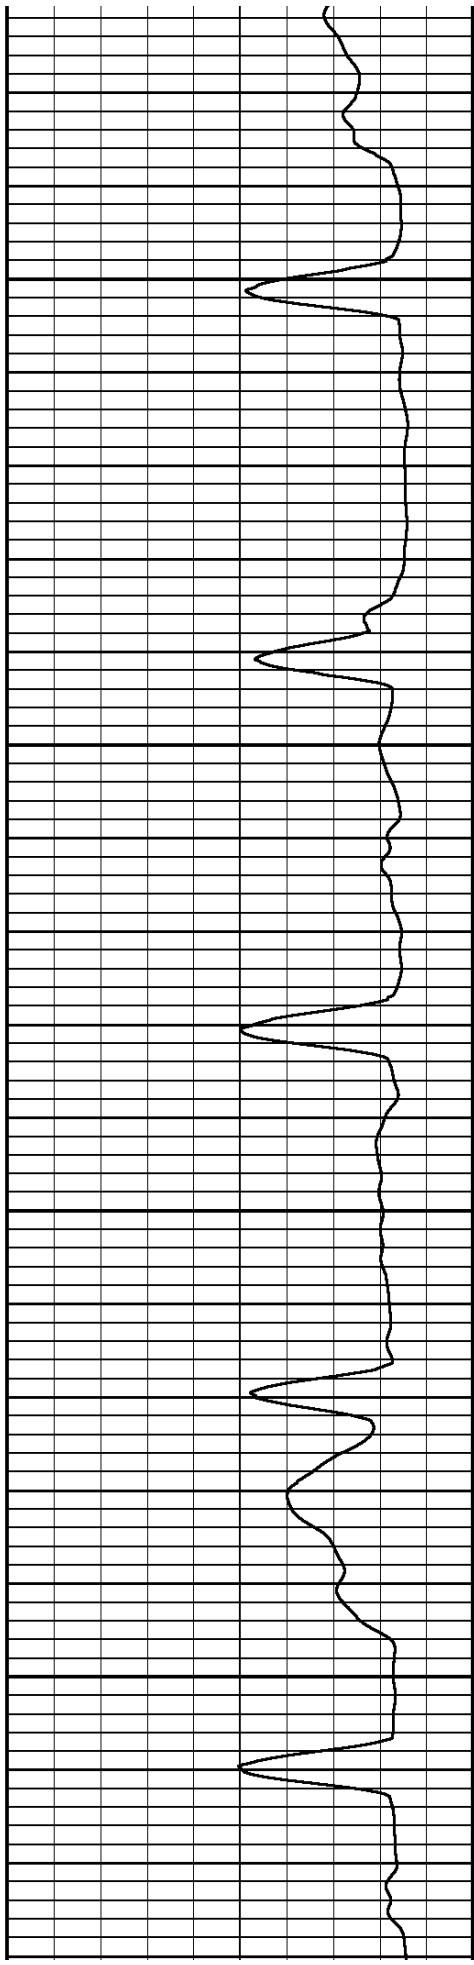


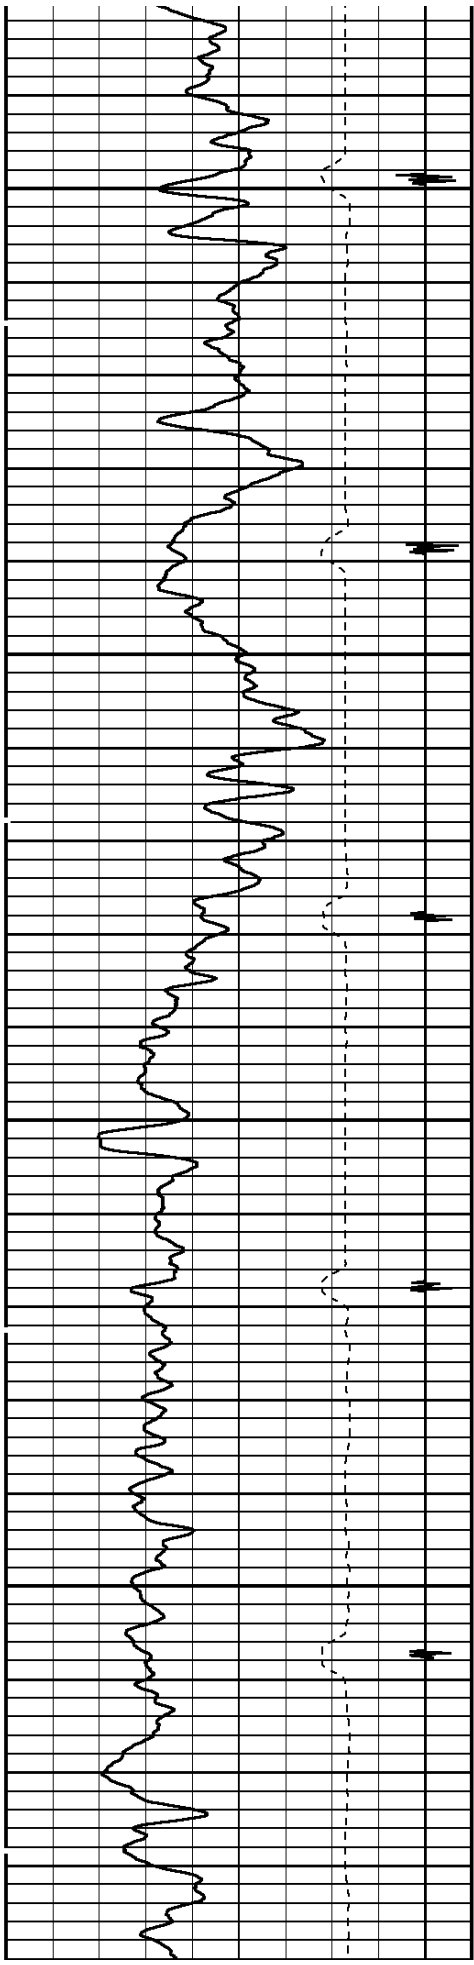

3900

4000

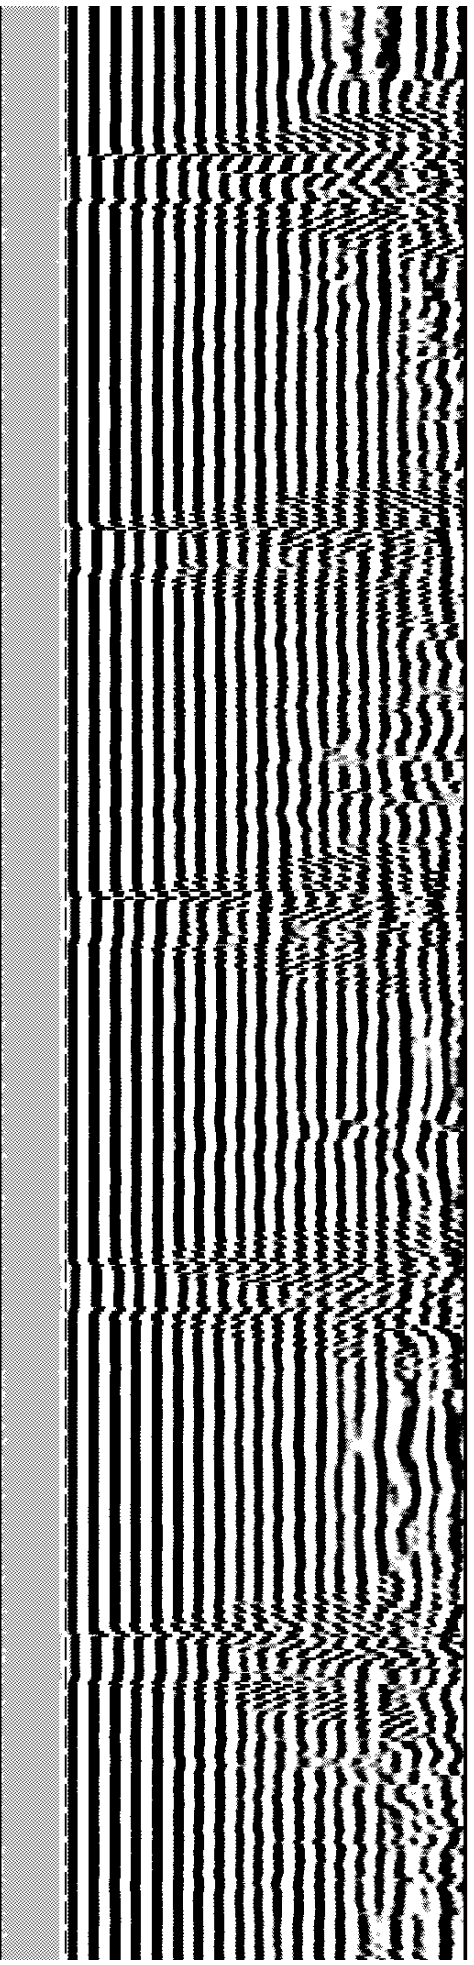
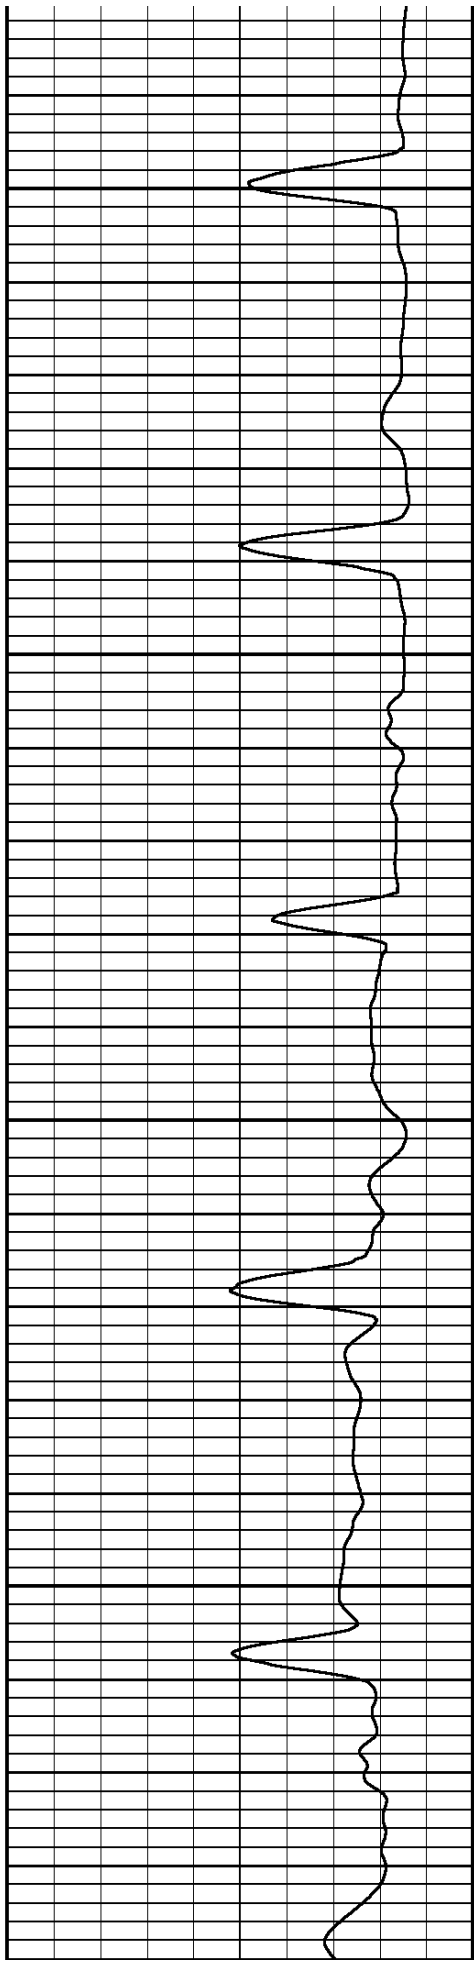


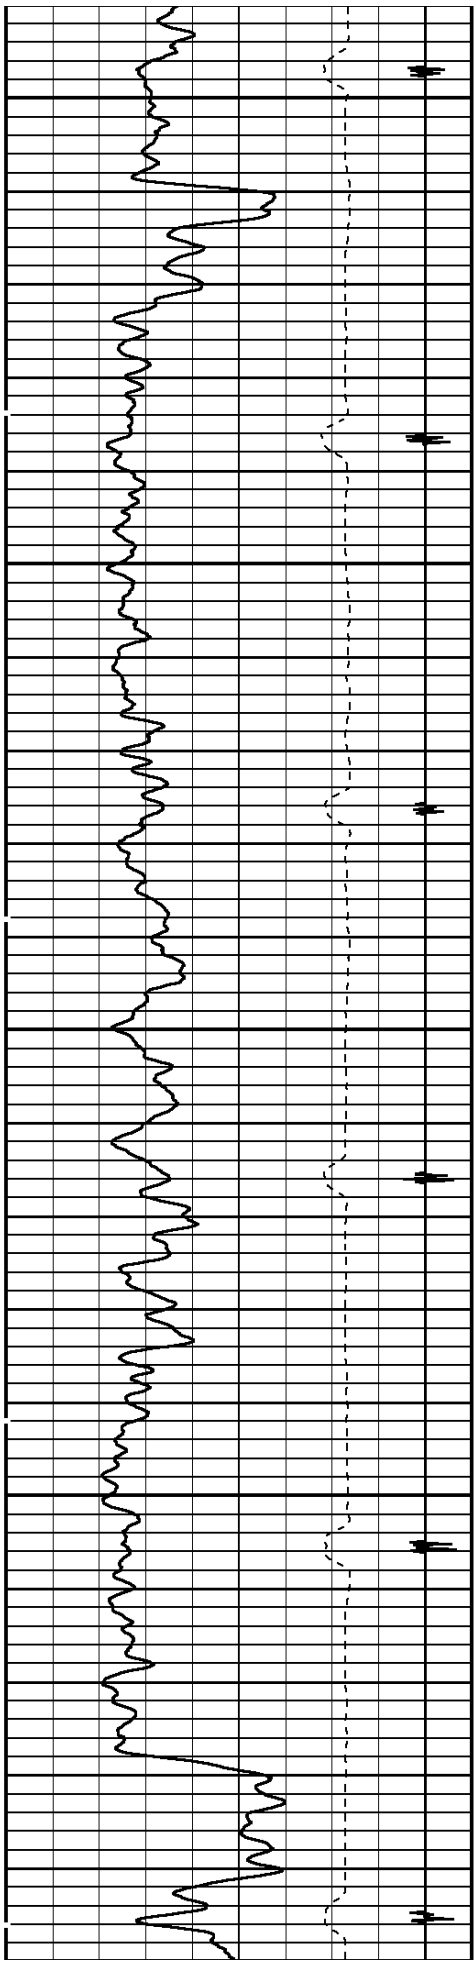


4100



4200

4300

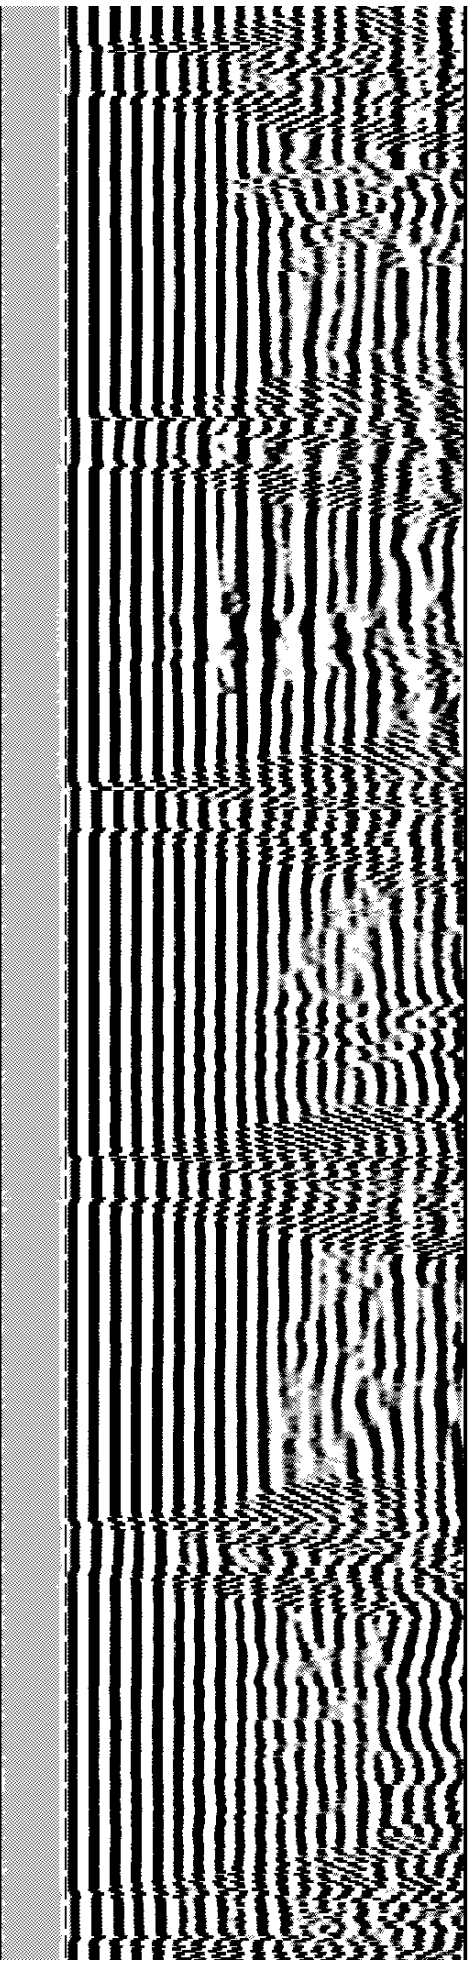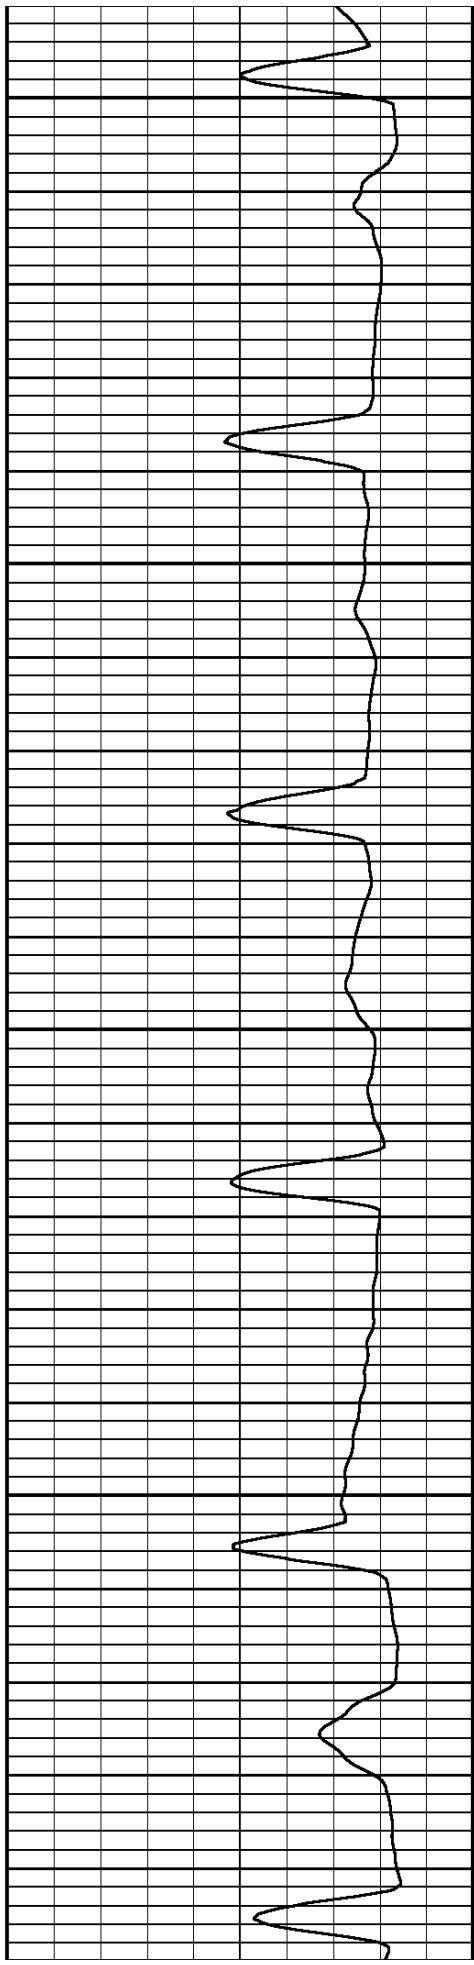

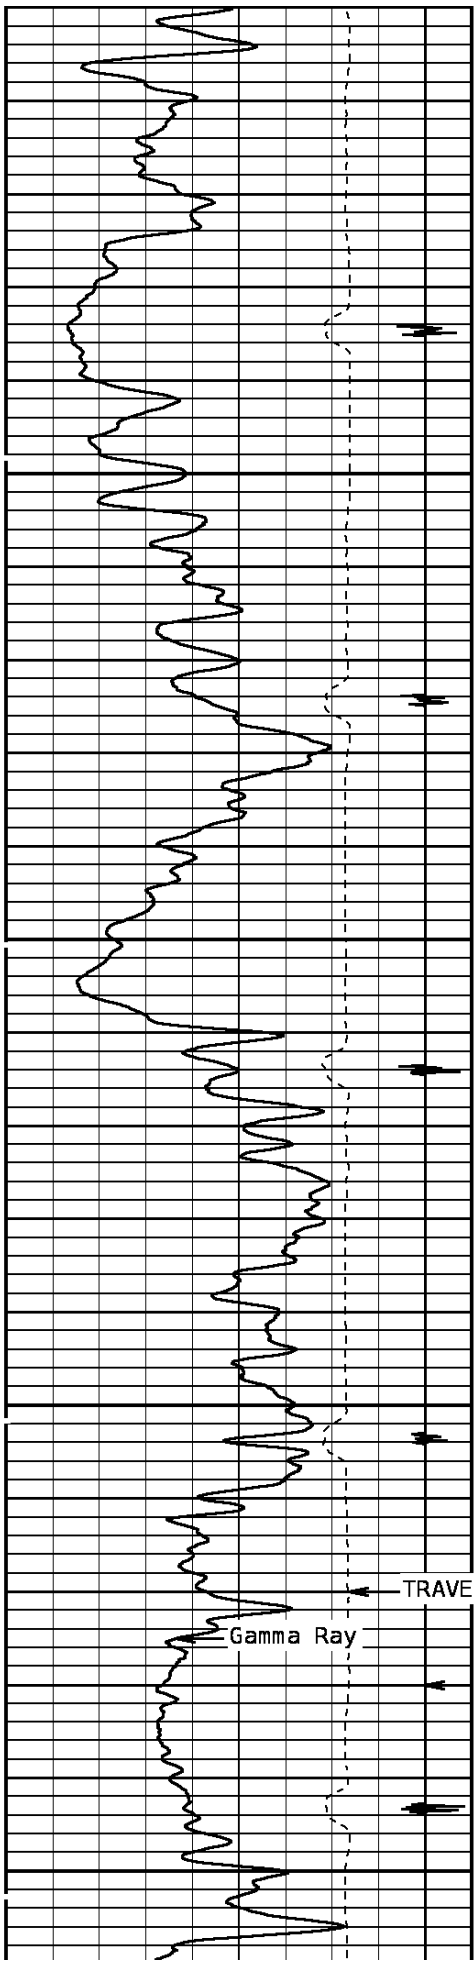

4300
4400
4500
TRAVEL TIME 3FT
Collar Locator
AMPLITUDE 3FT
AMPLITUDE 3FT
FREE PIPE GATE

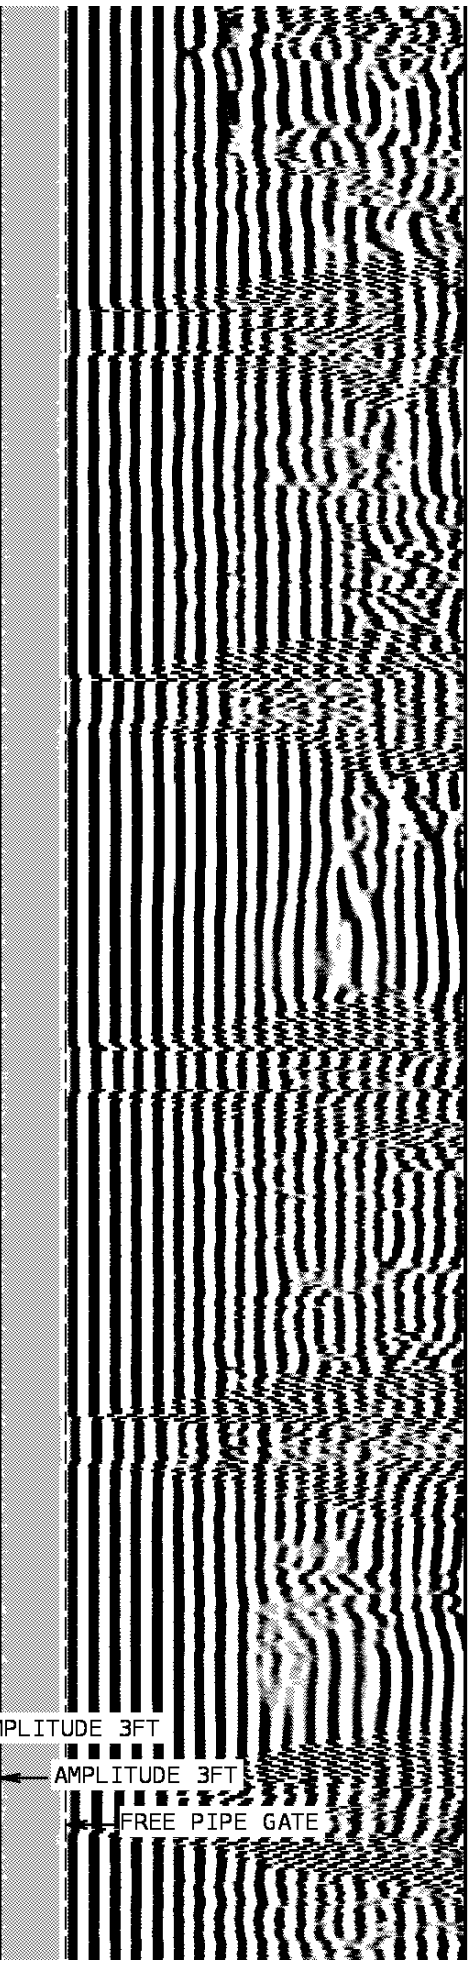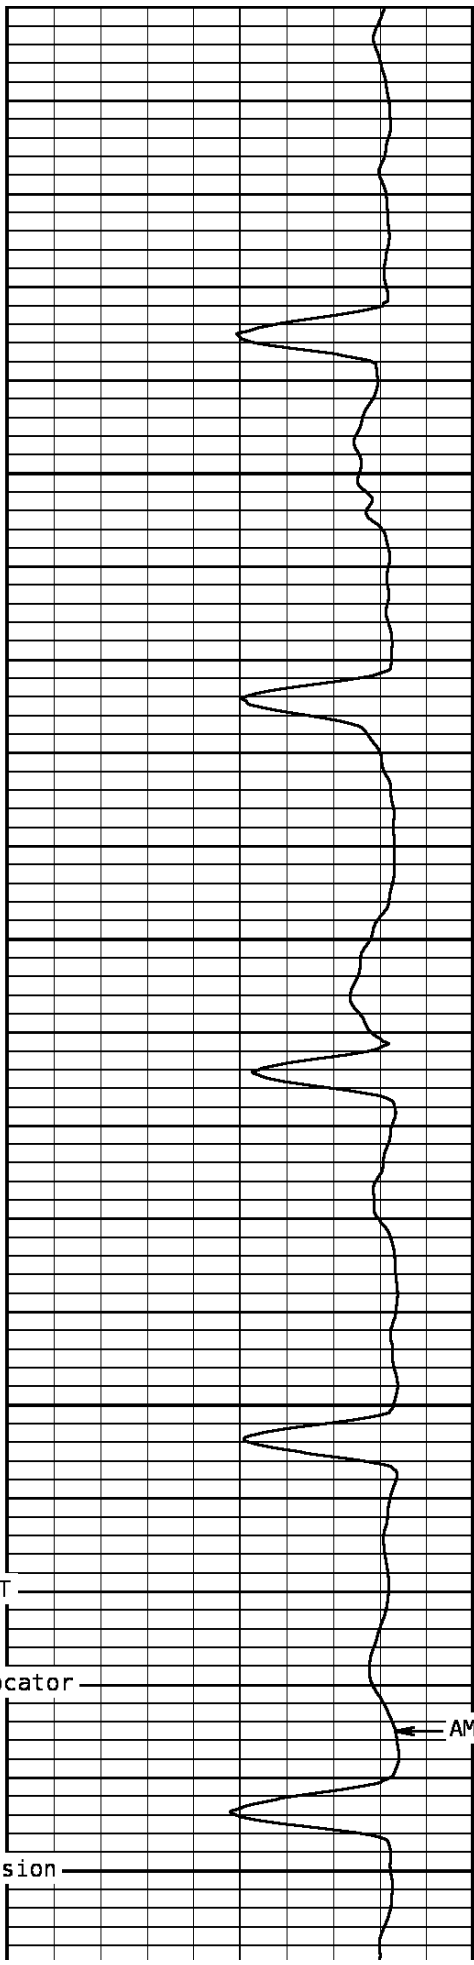

Gamma Ray

TRAVEL TIME 3FT


Collar Locator

AMPLITUDE 3FT

AMPLITUDE 3FT



FREE PIPE GATE


ension

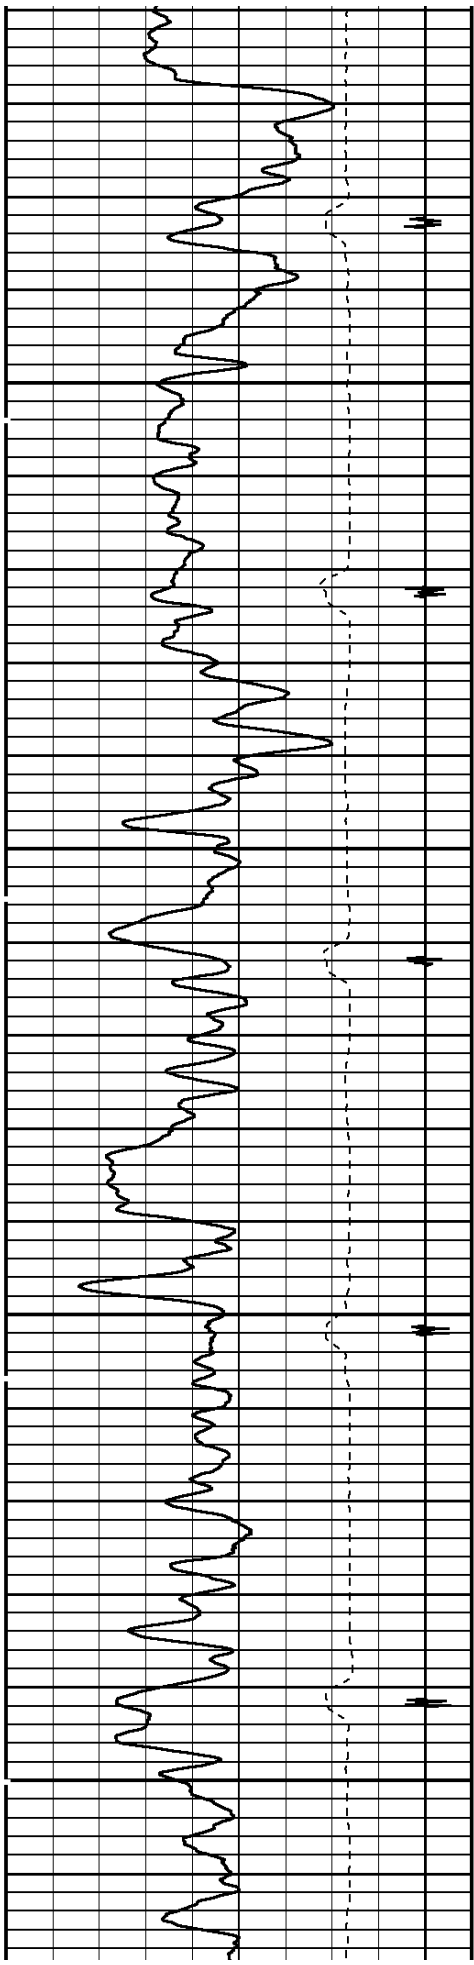

4600



4700

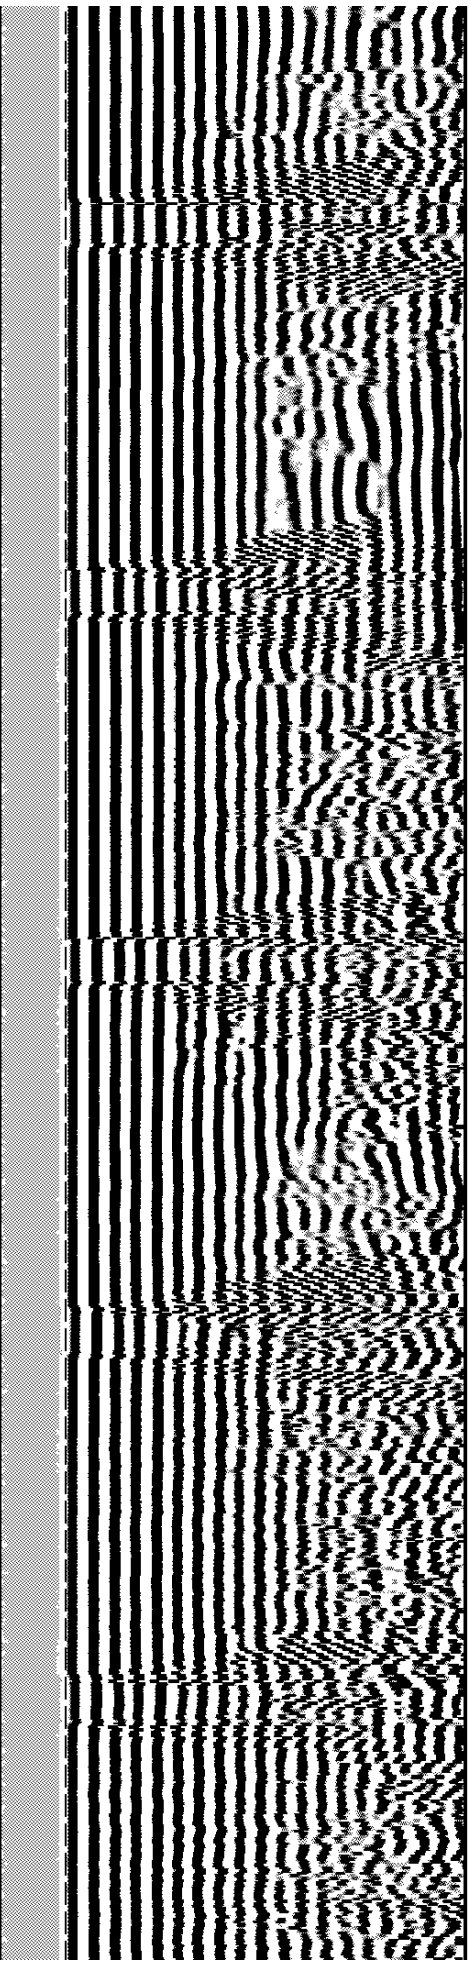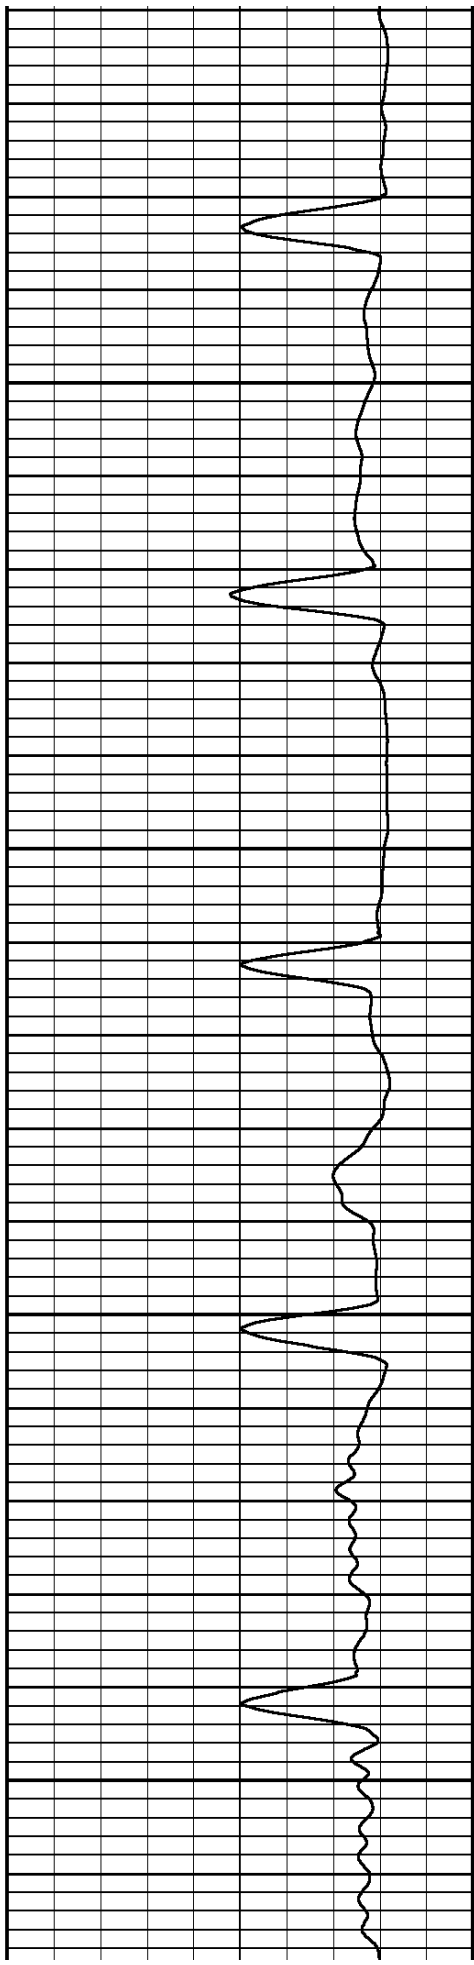


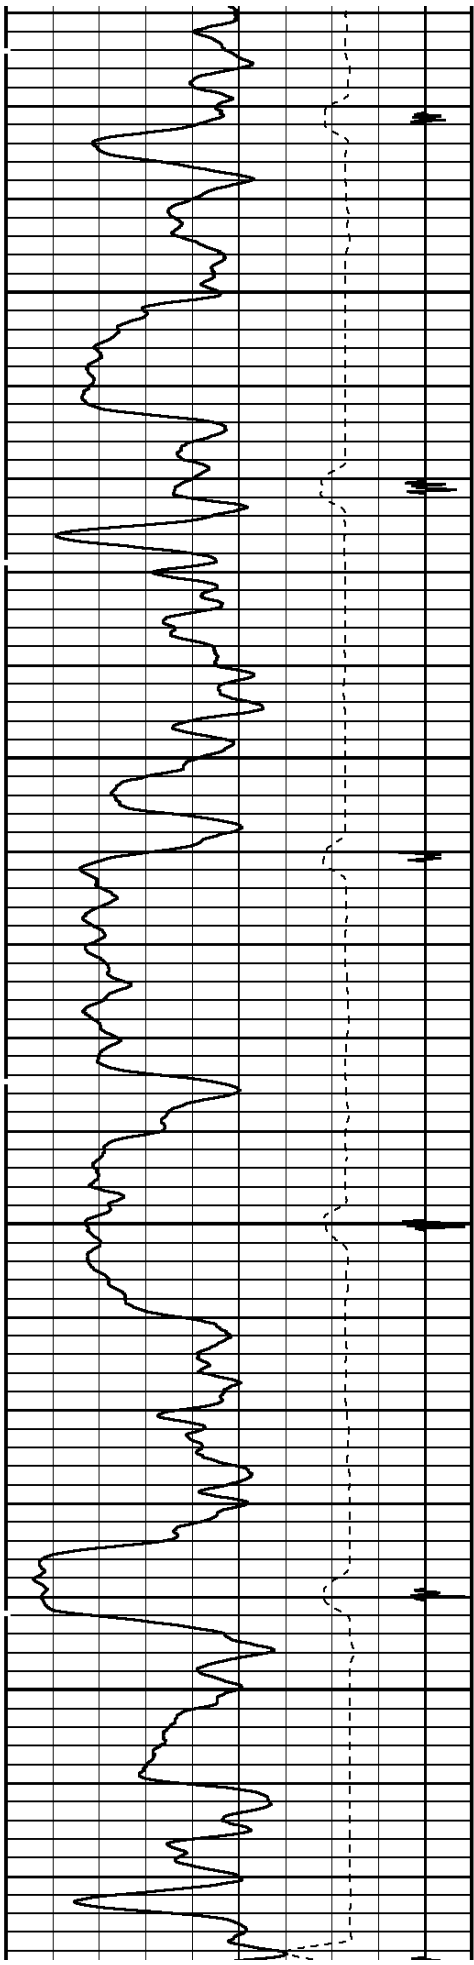

4800



4900

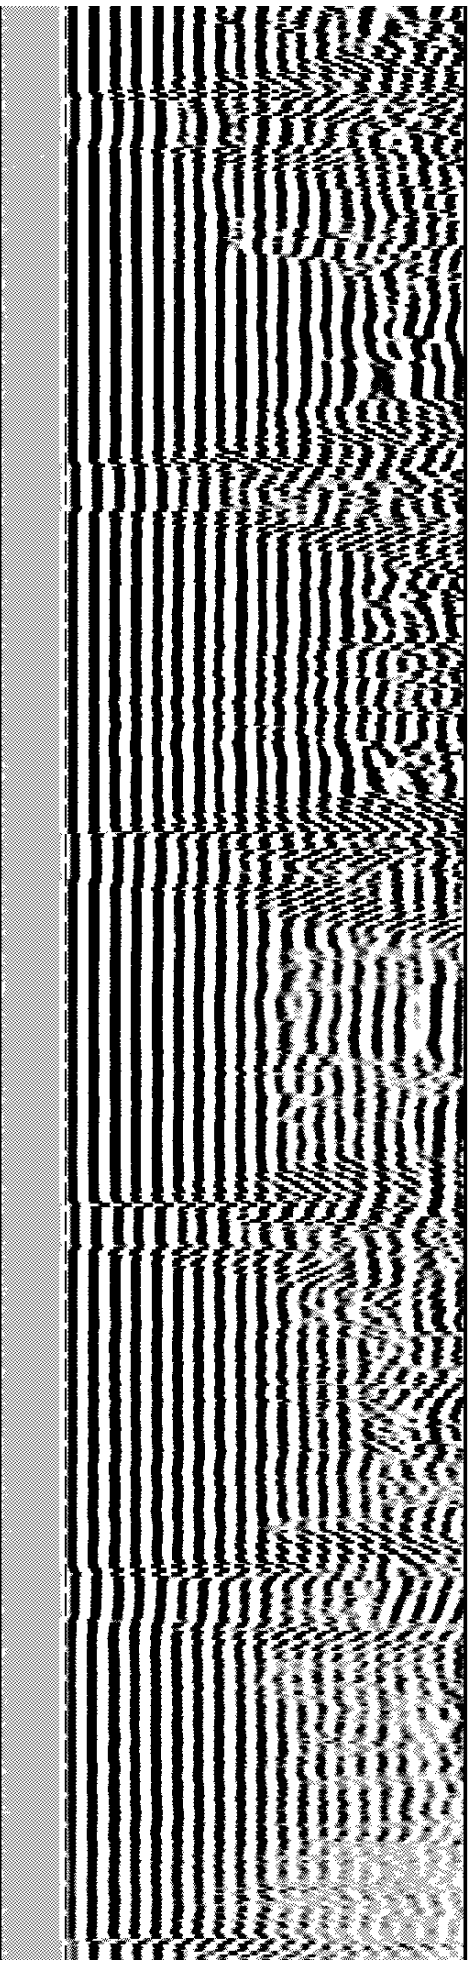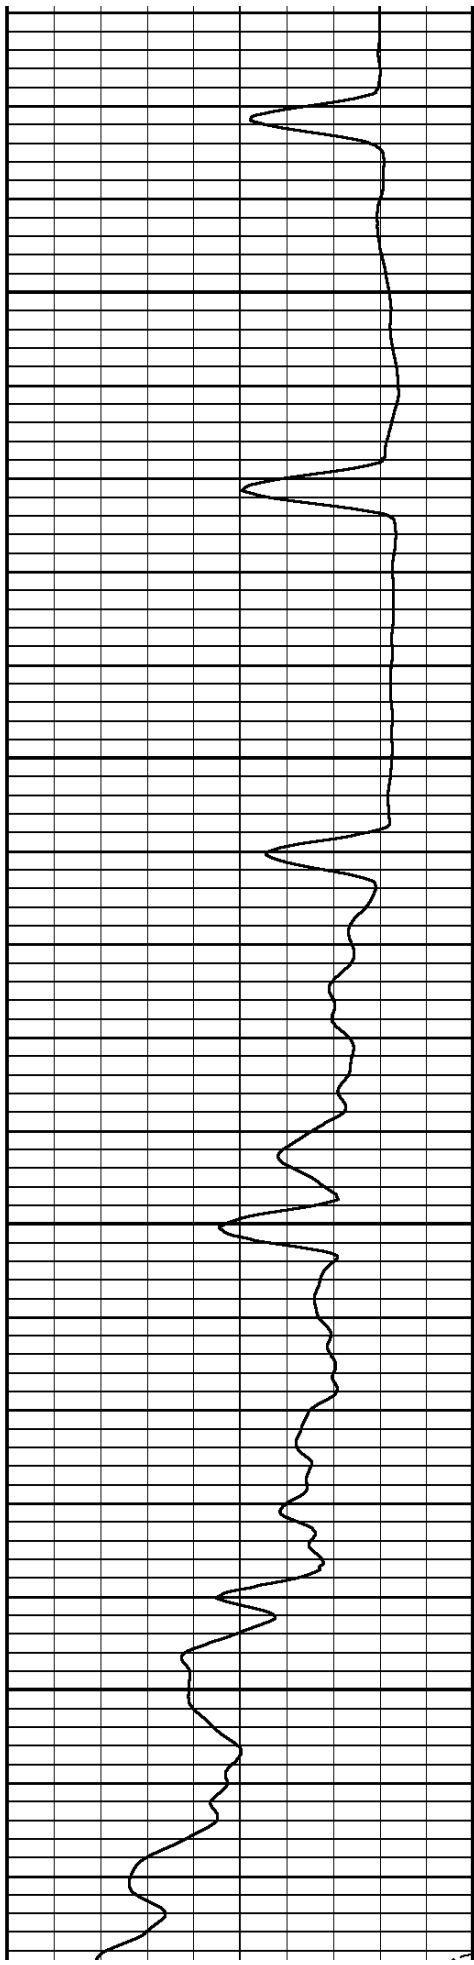


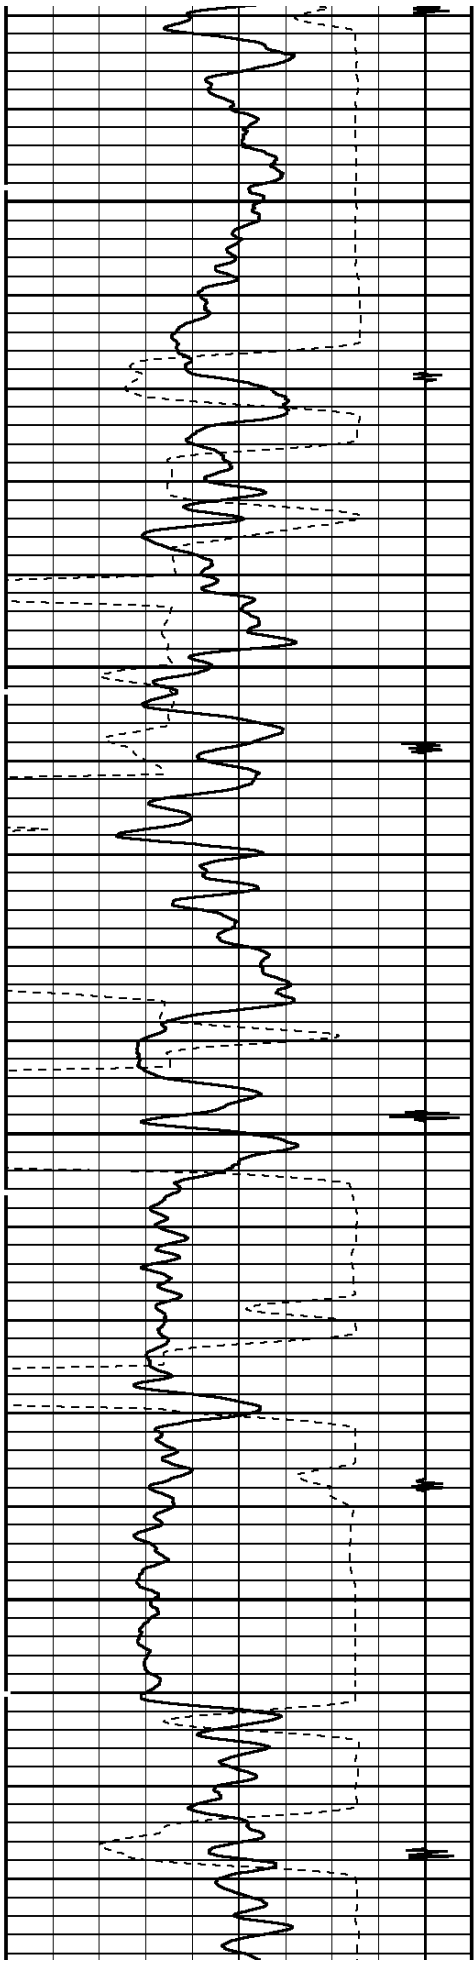

5000



5100

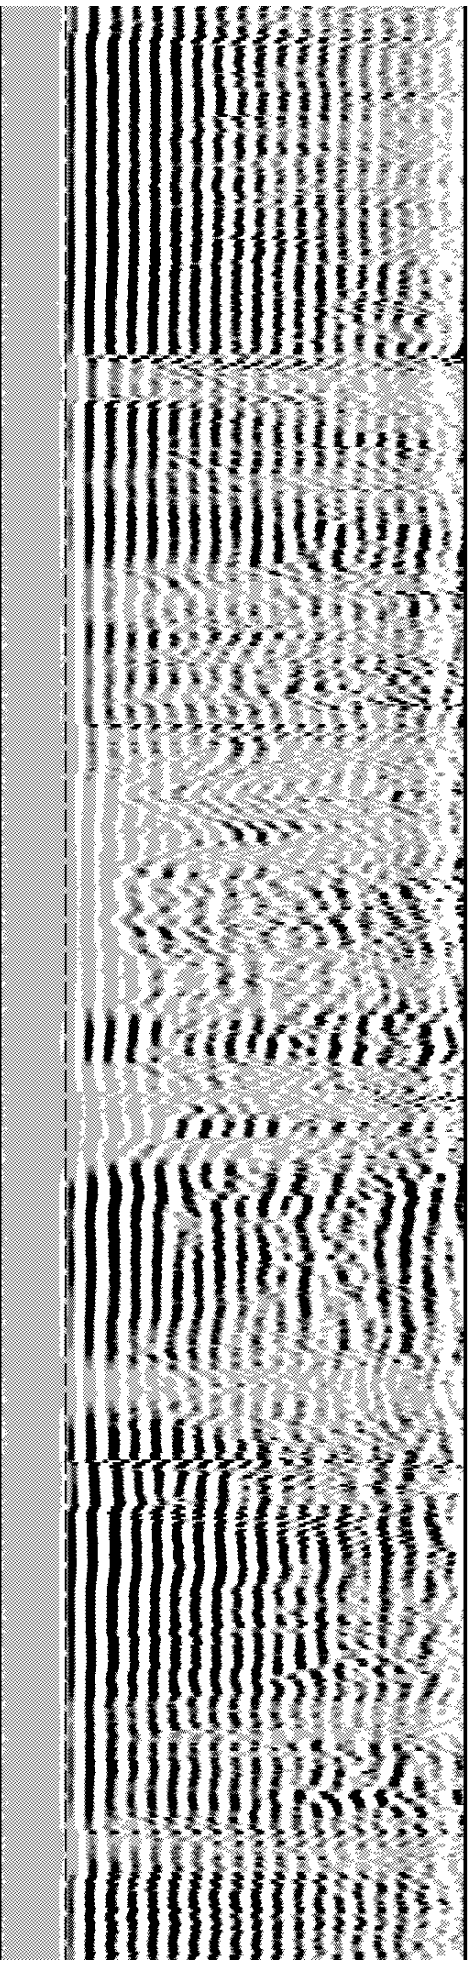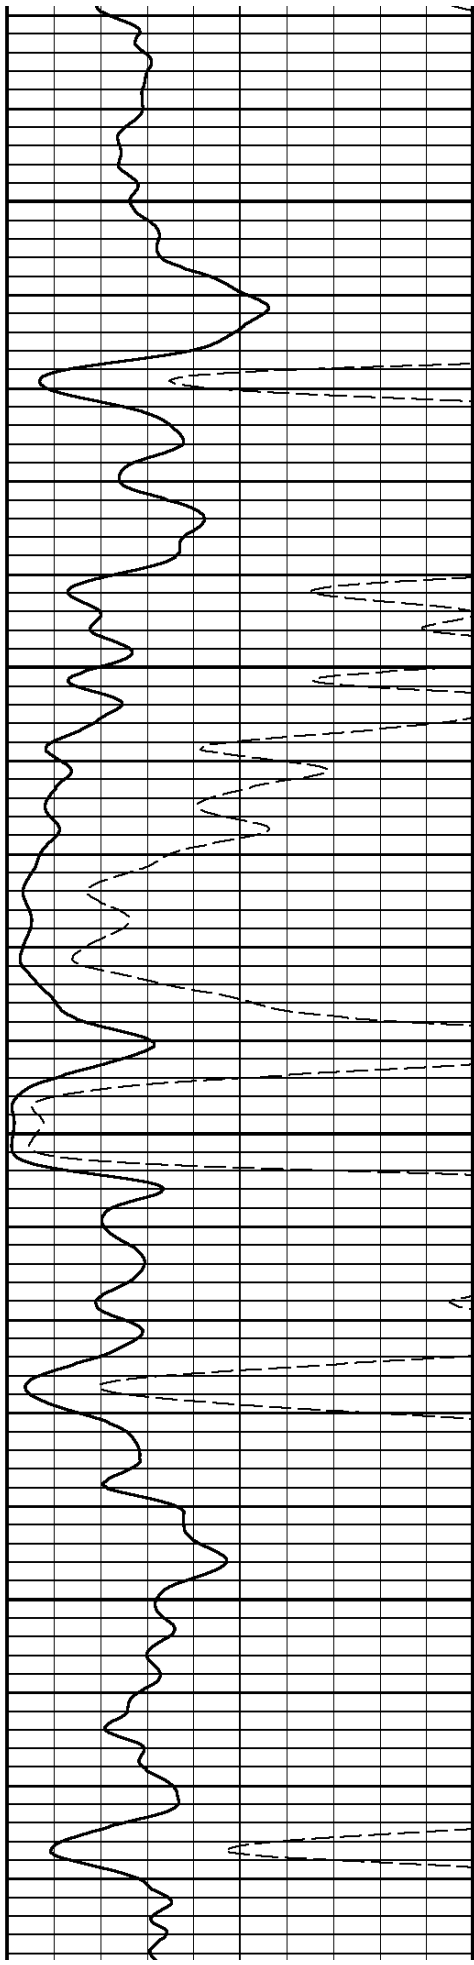


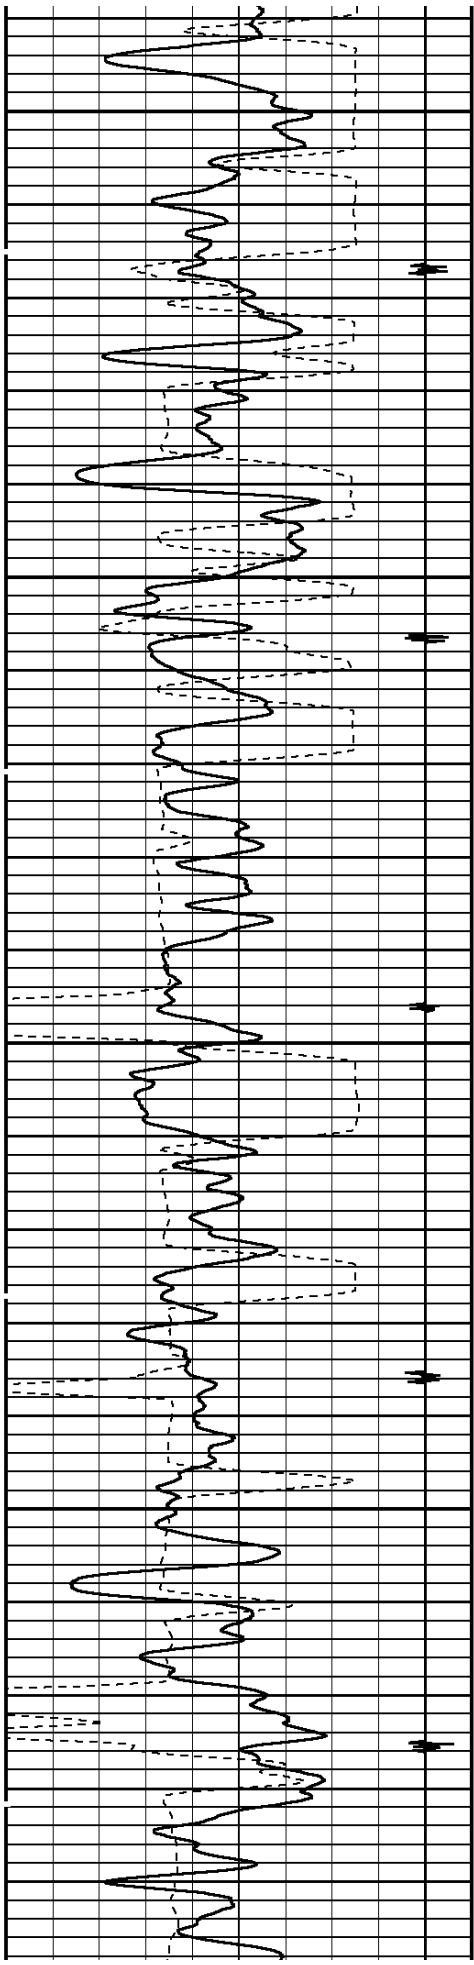

5200



5300

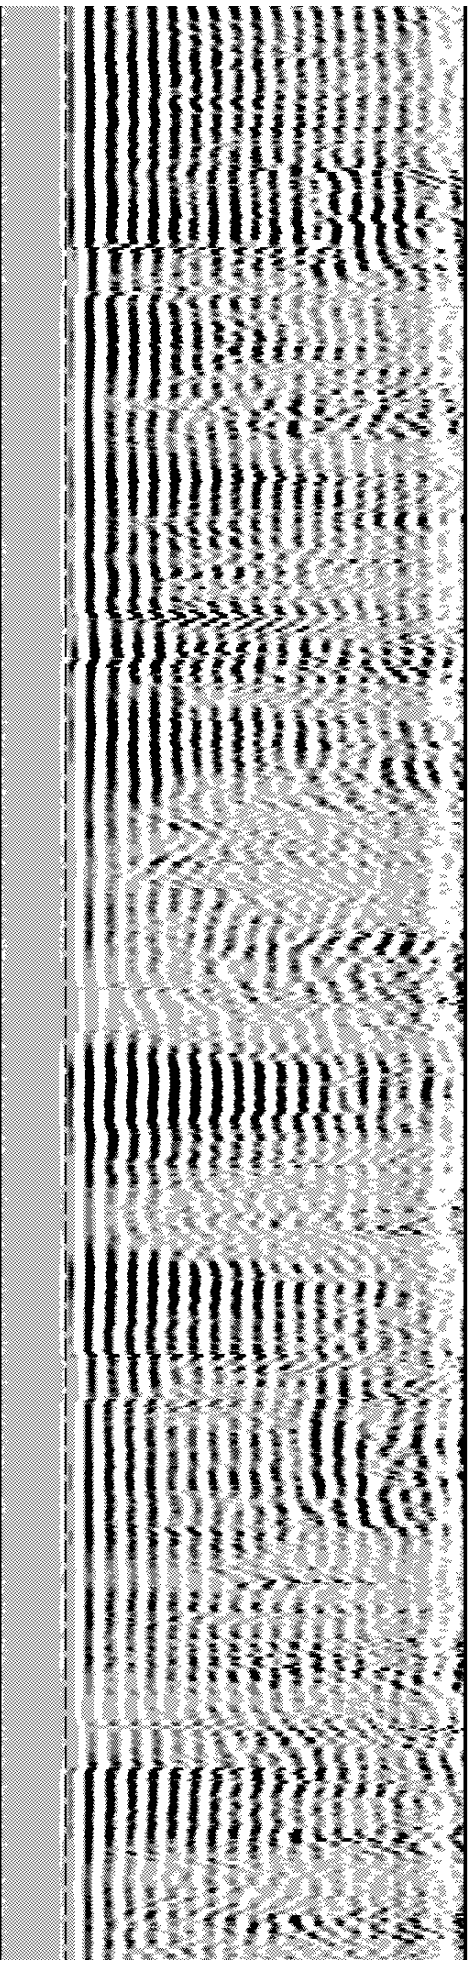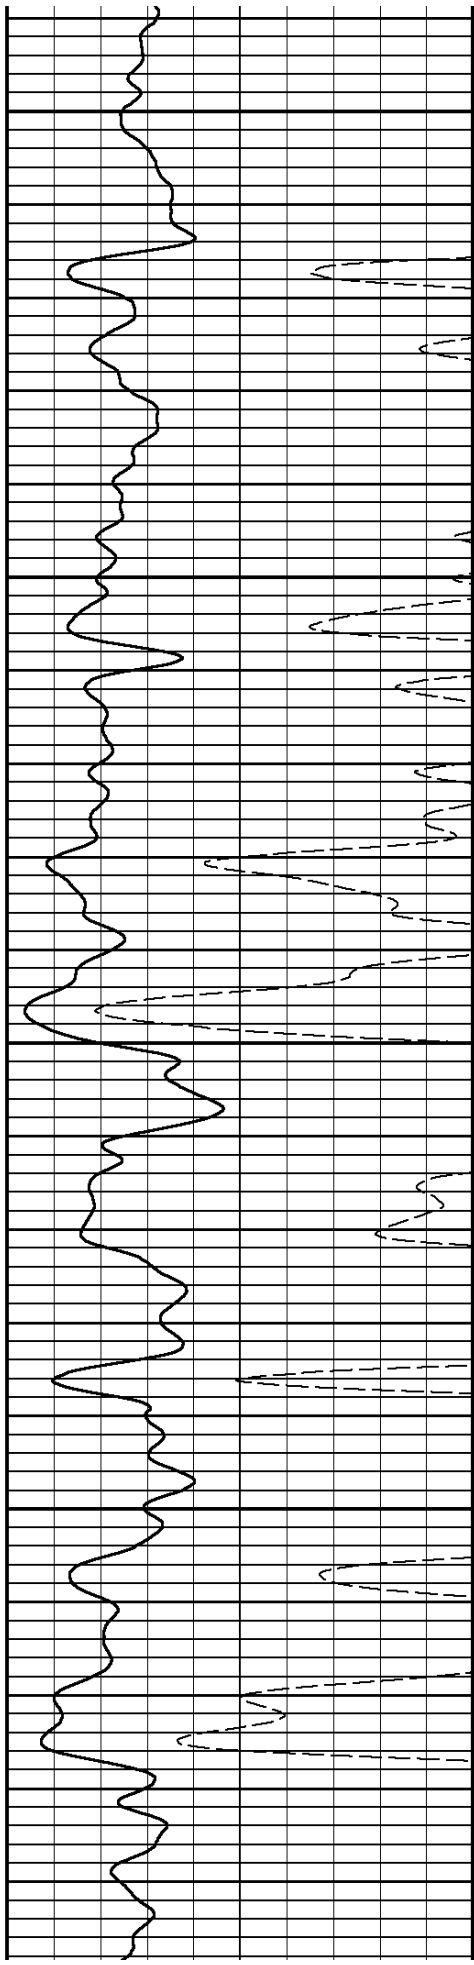


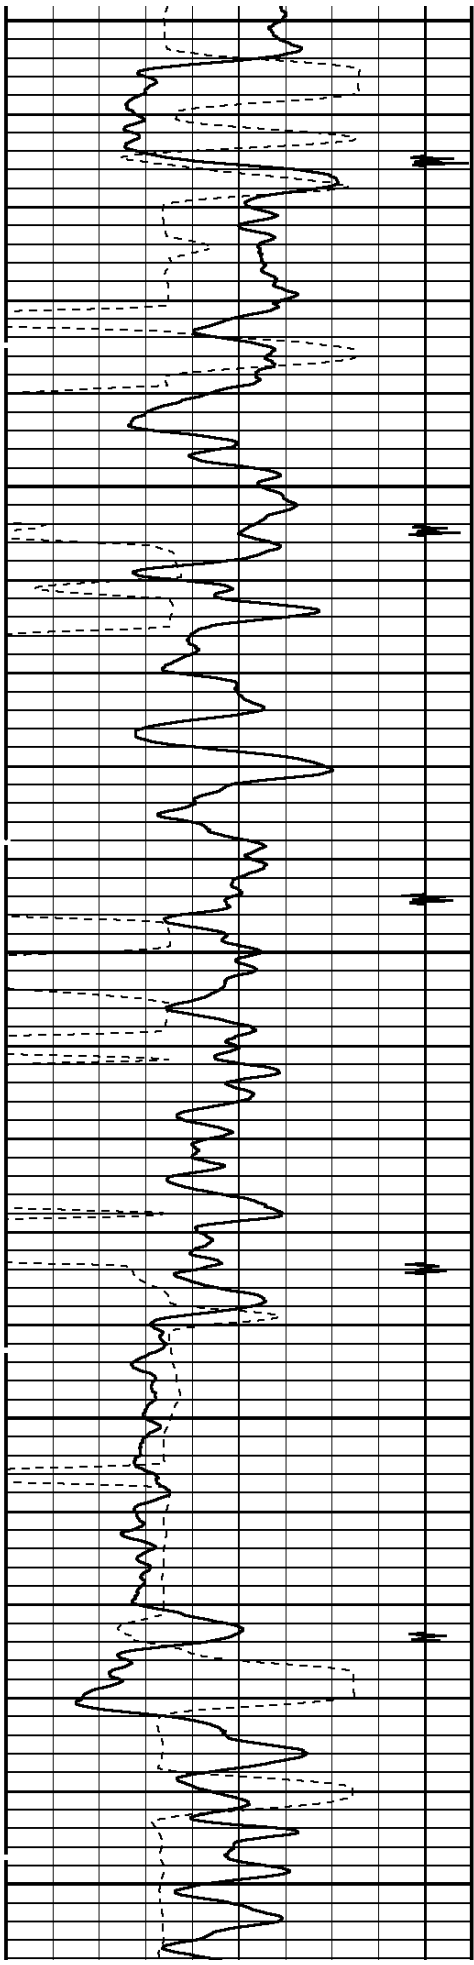

5400



5500

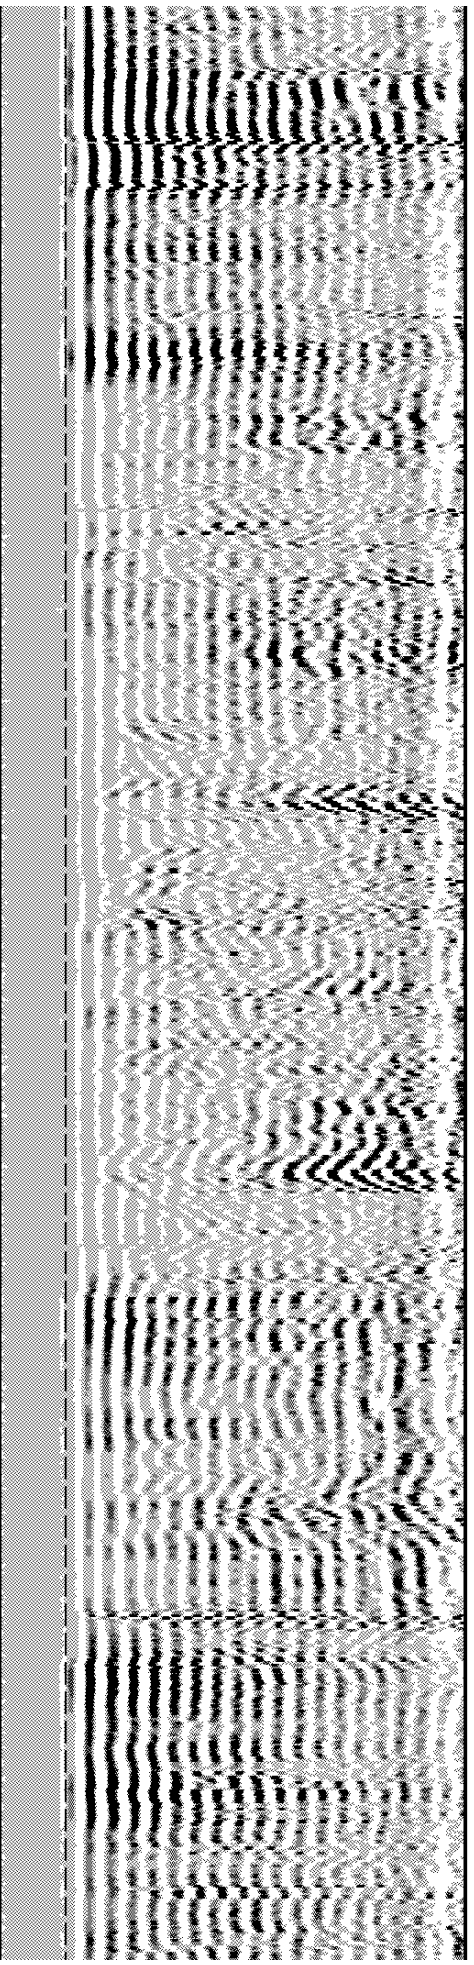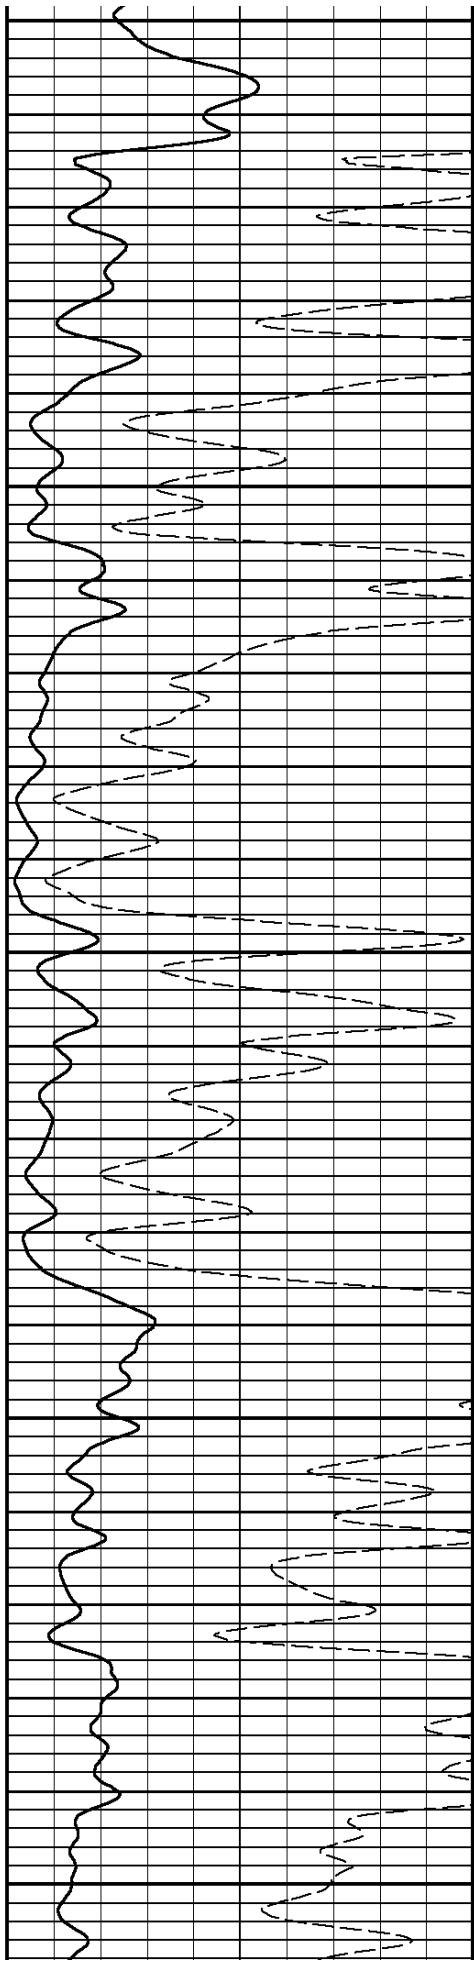


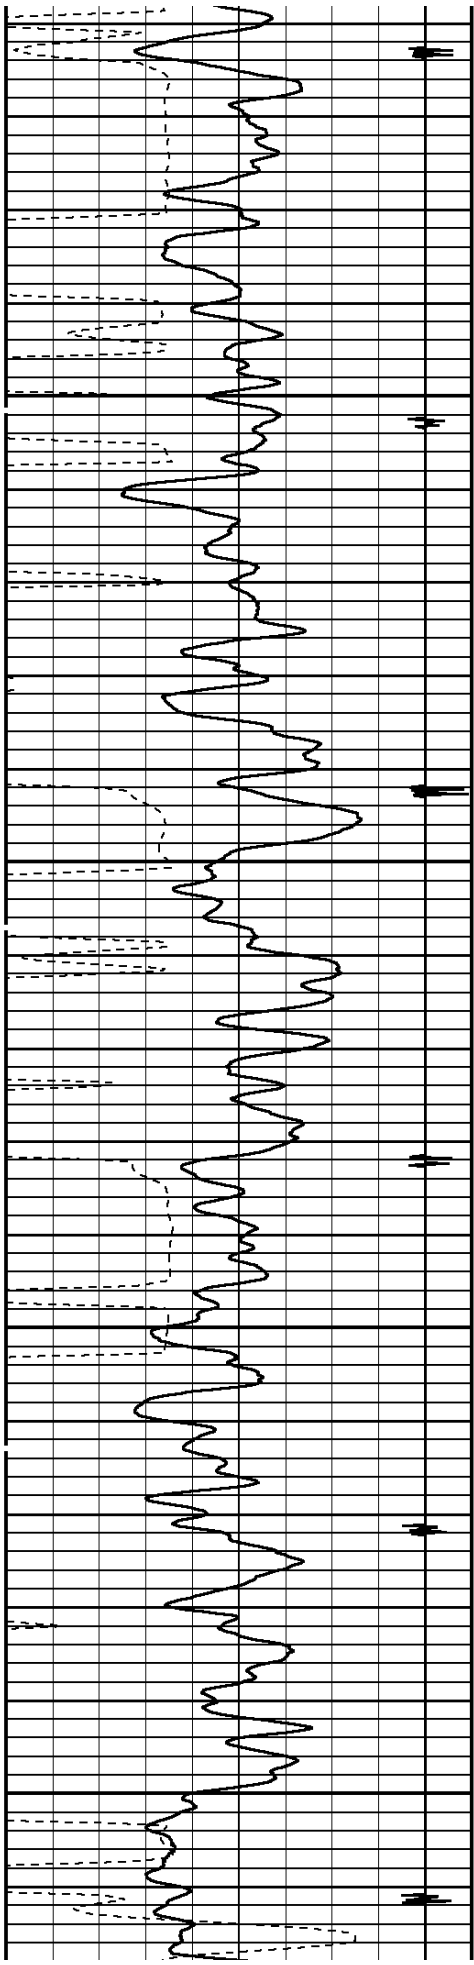

5600



5700


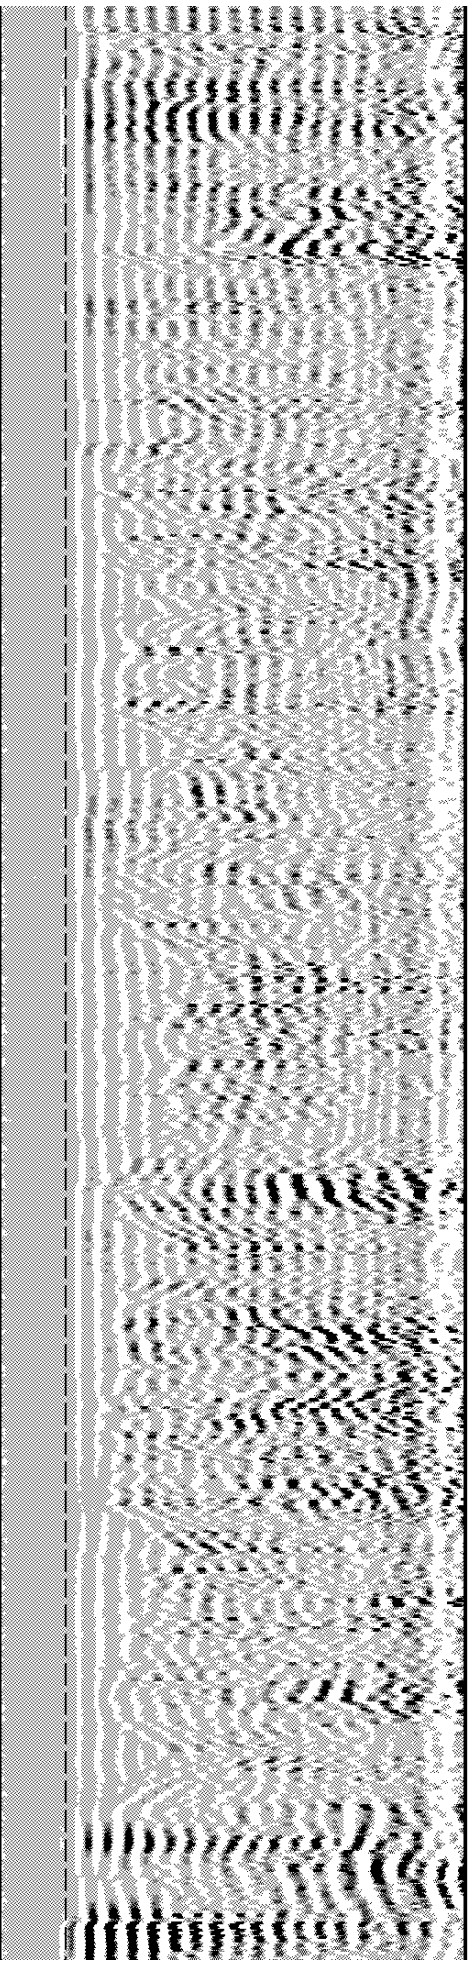
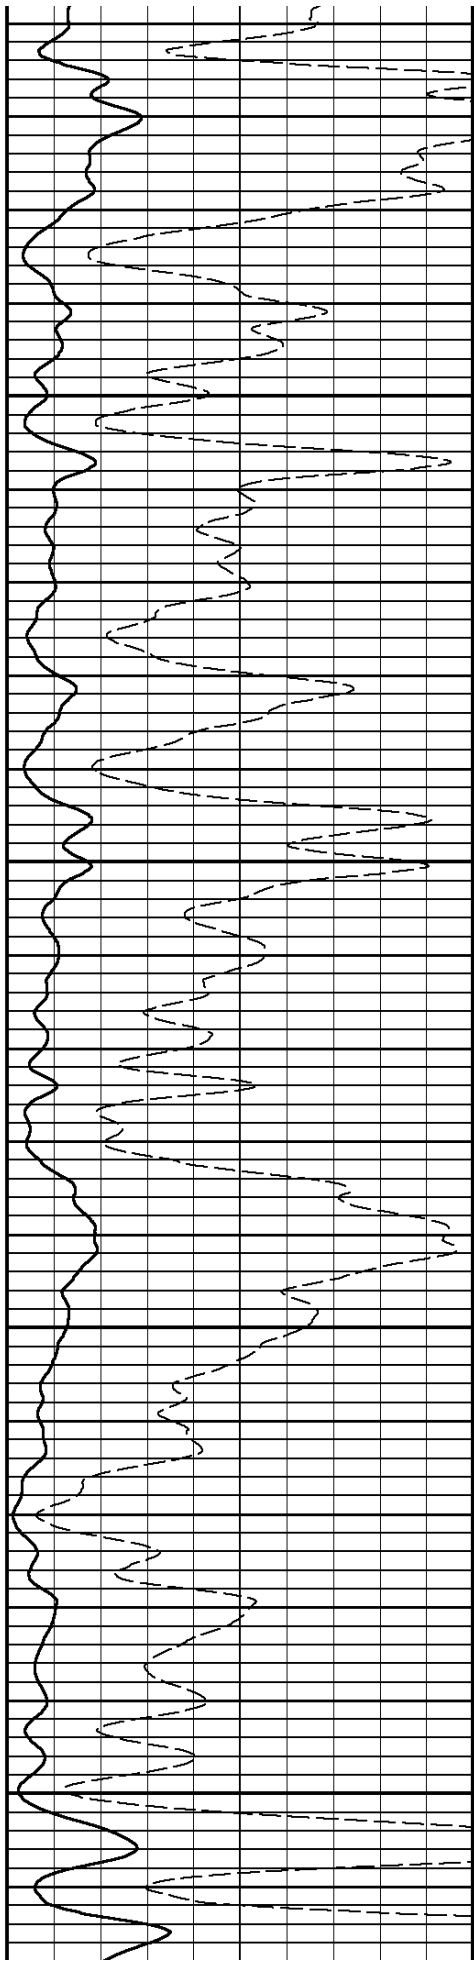


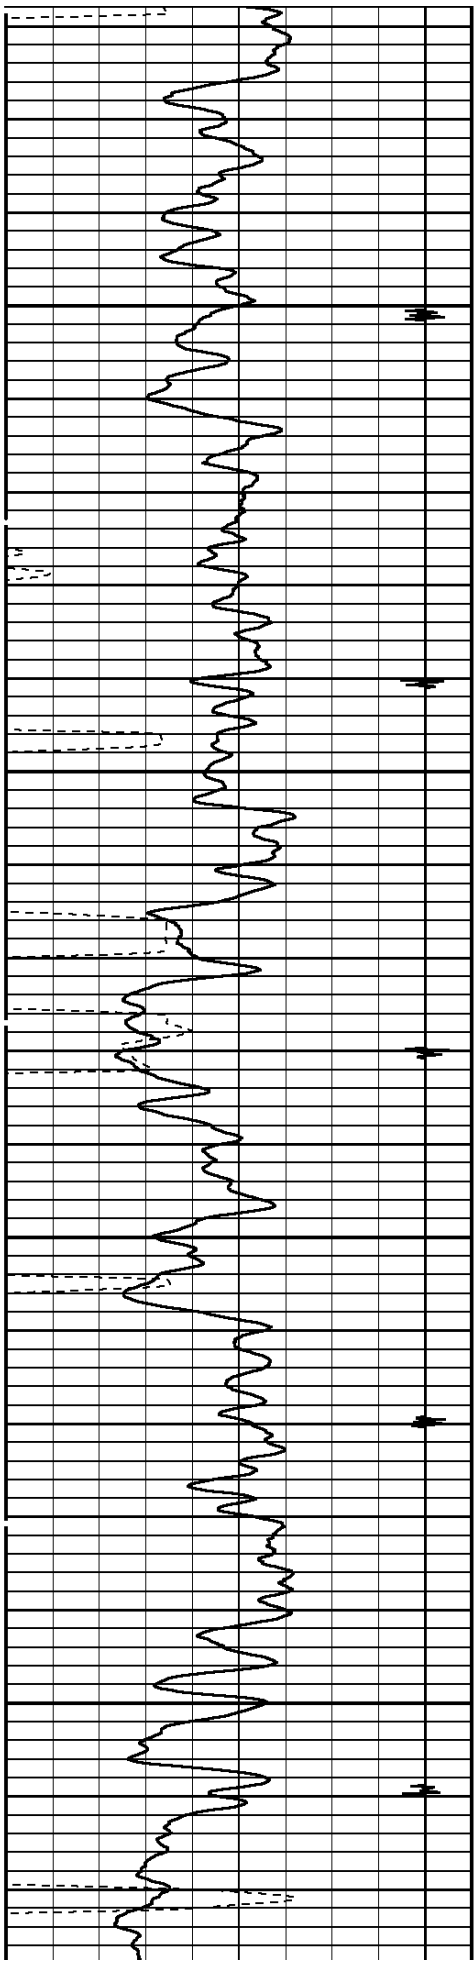


5800

5900

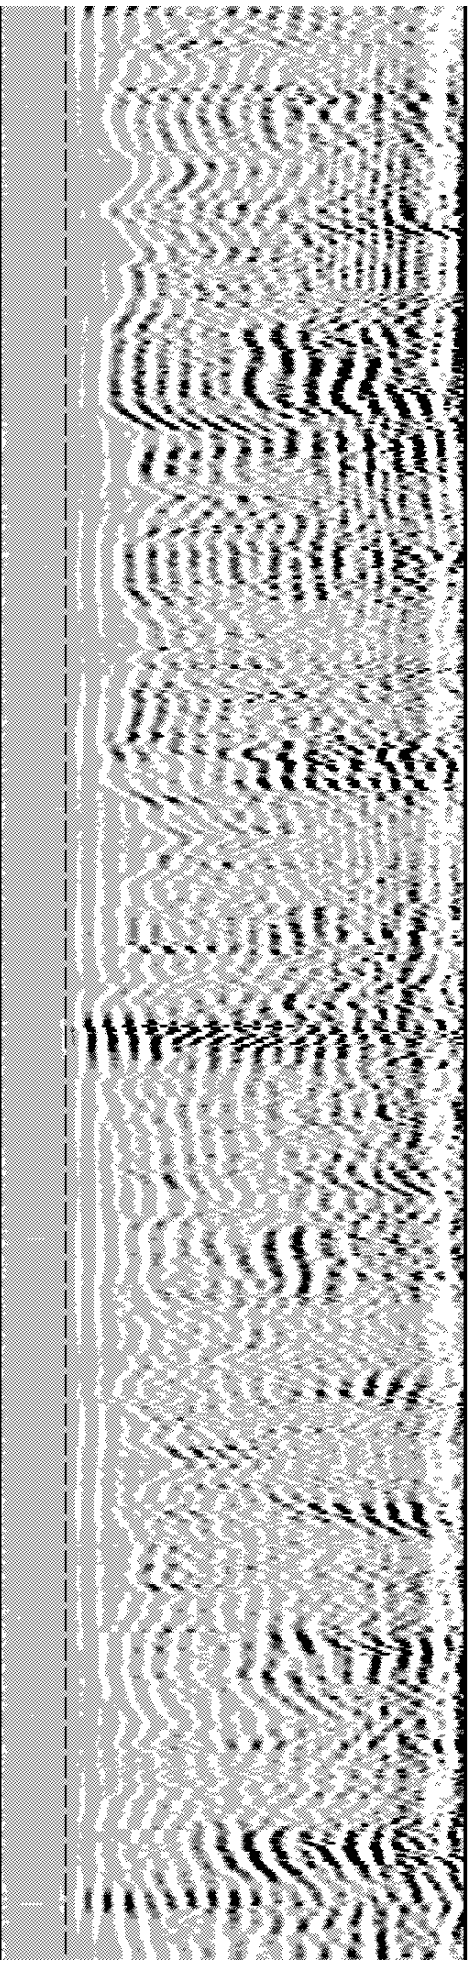
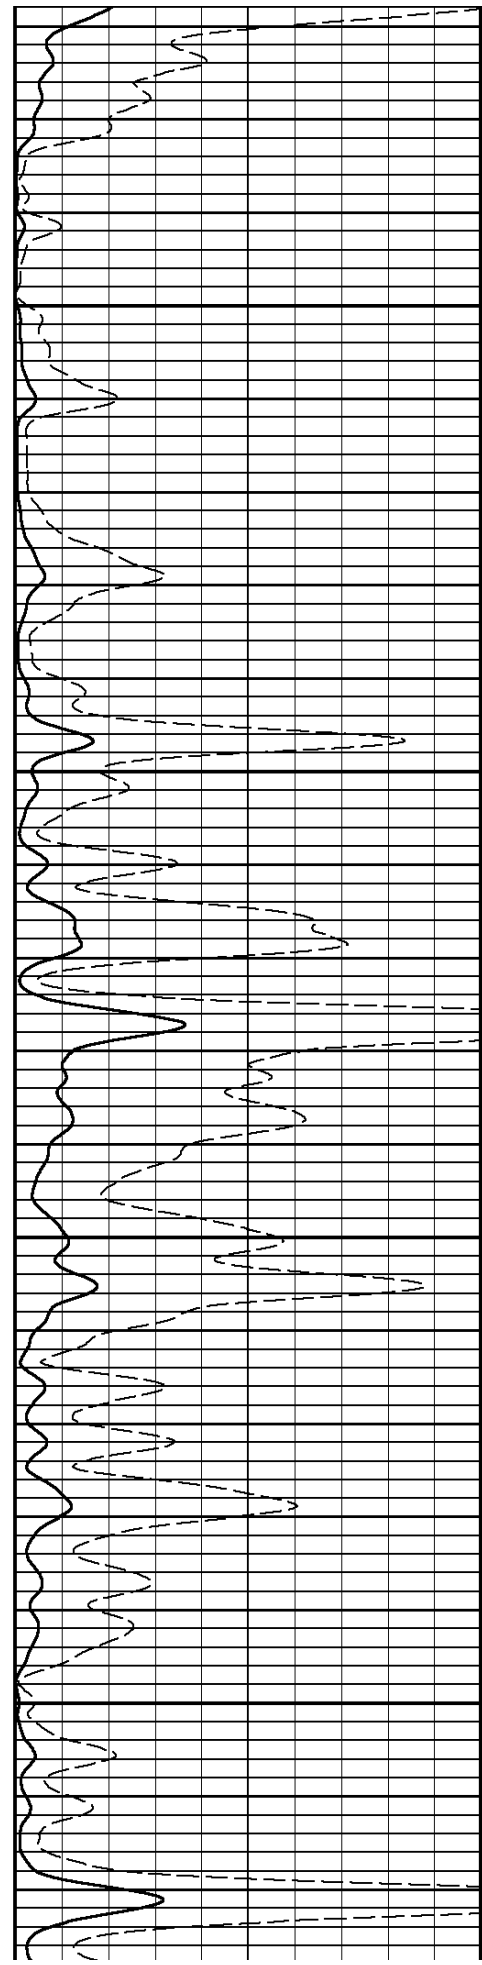


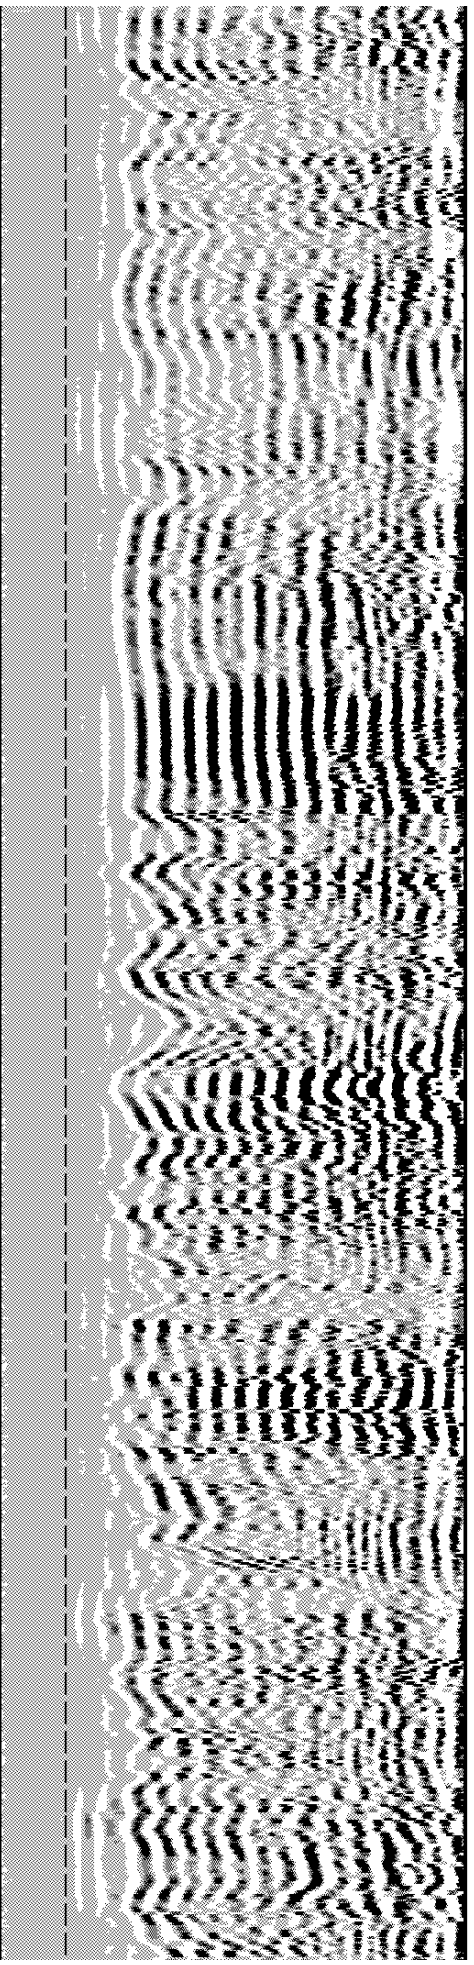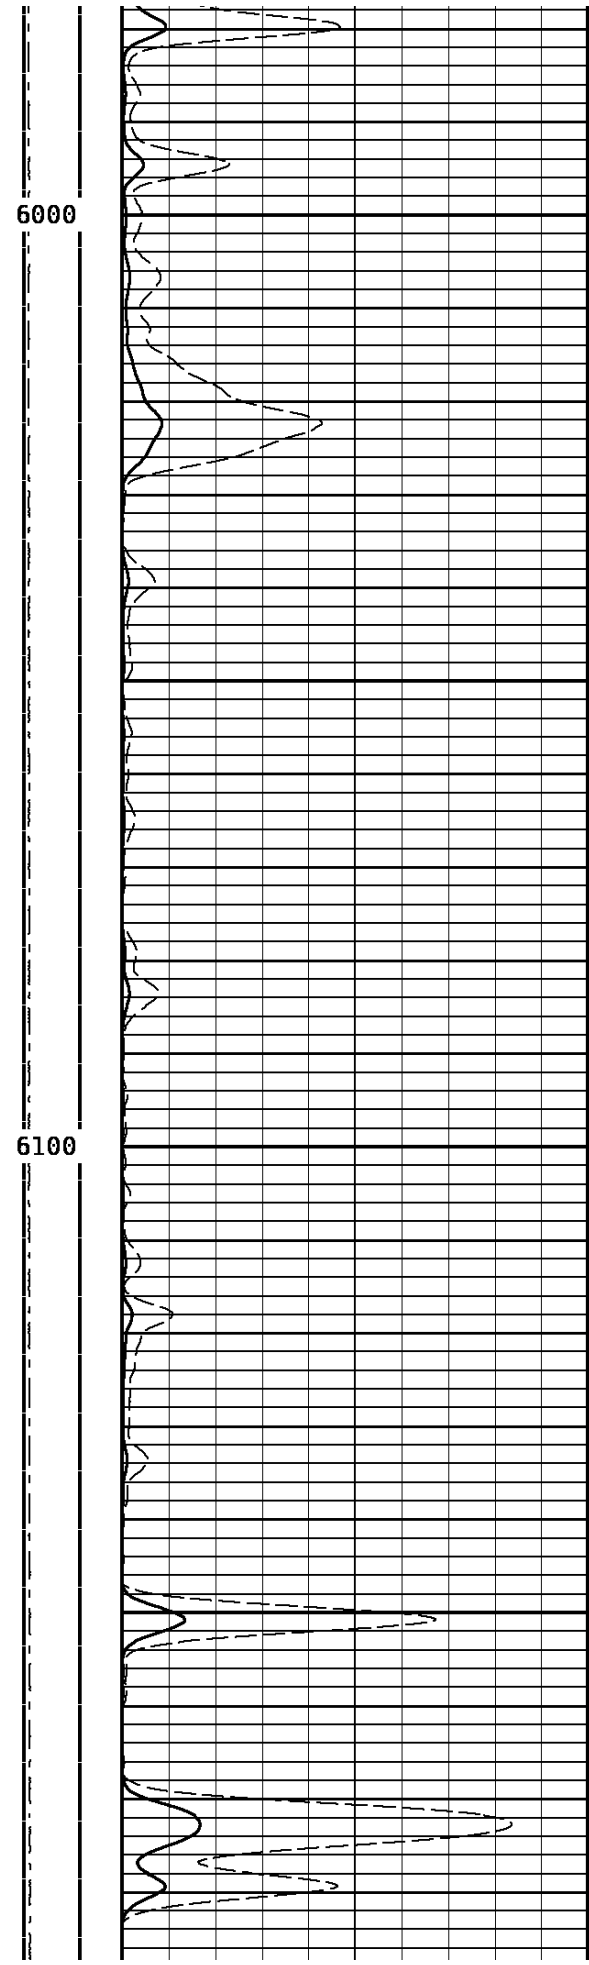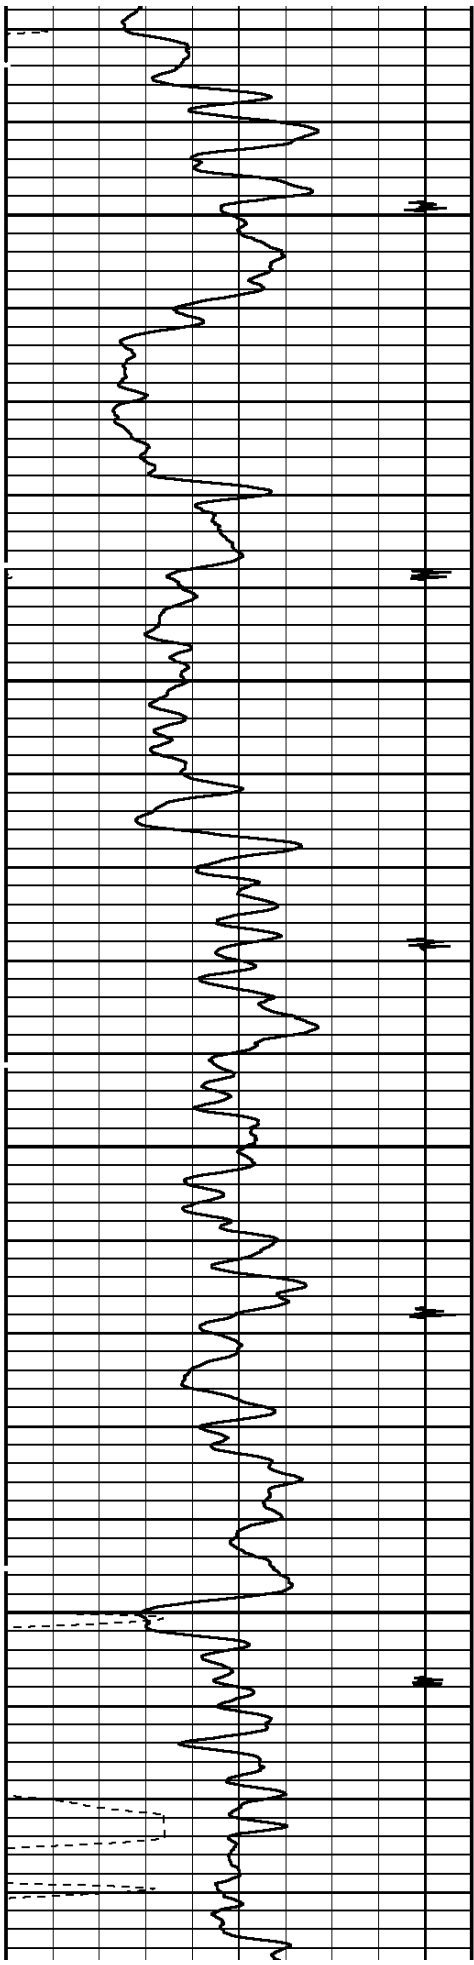


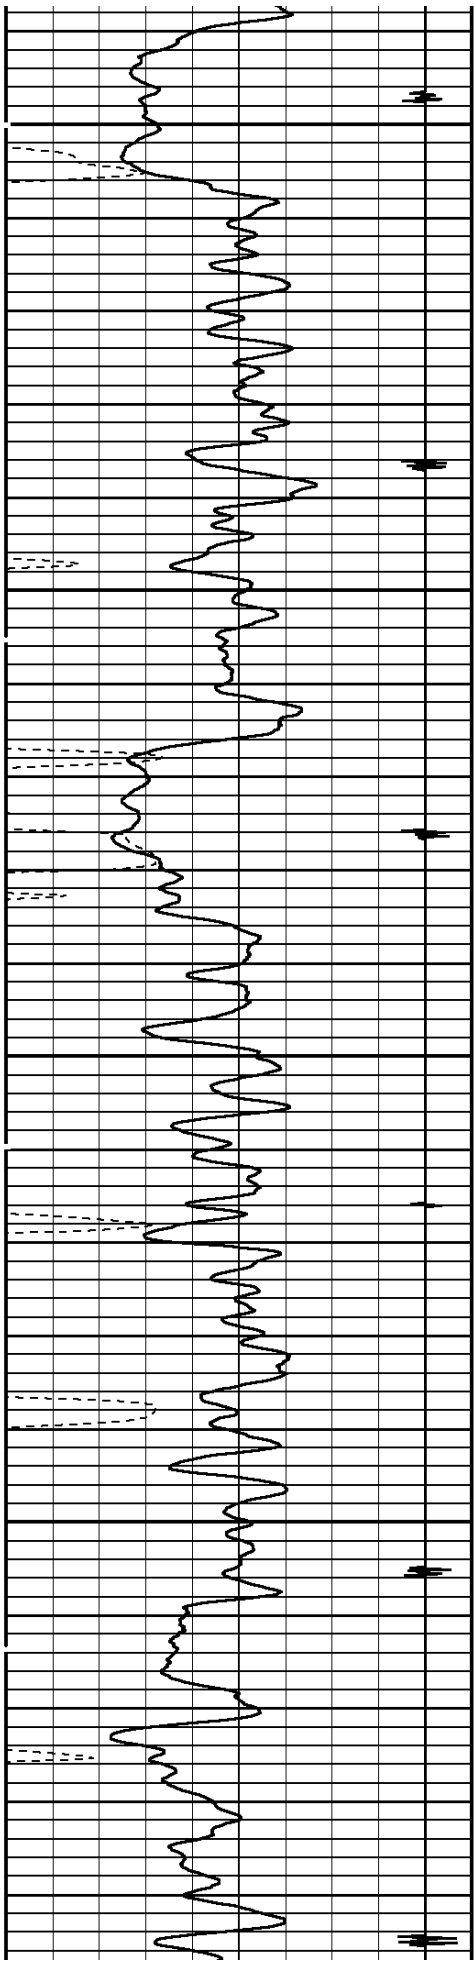

6200

6300

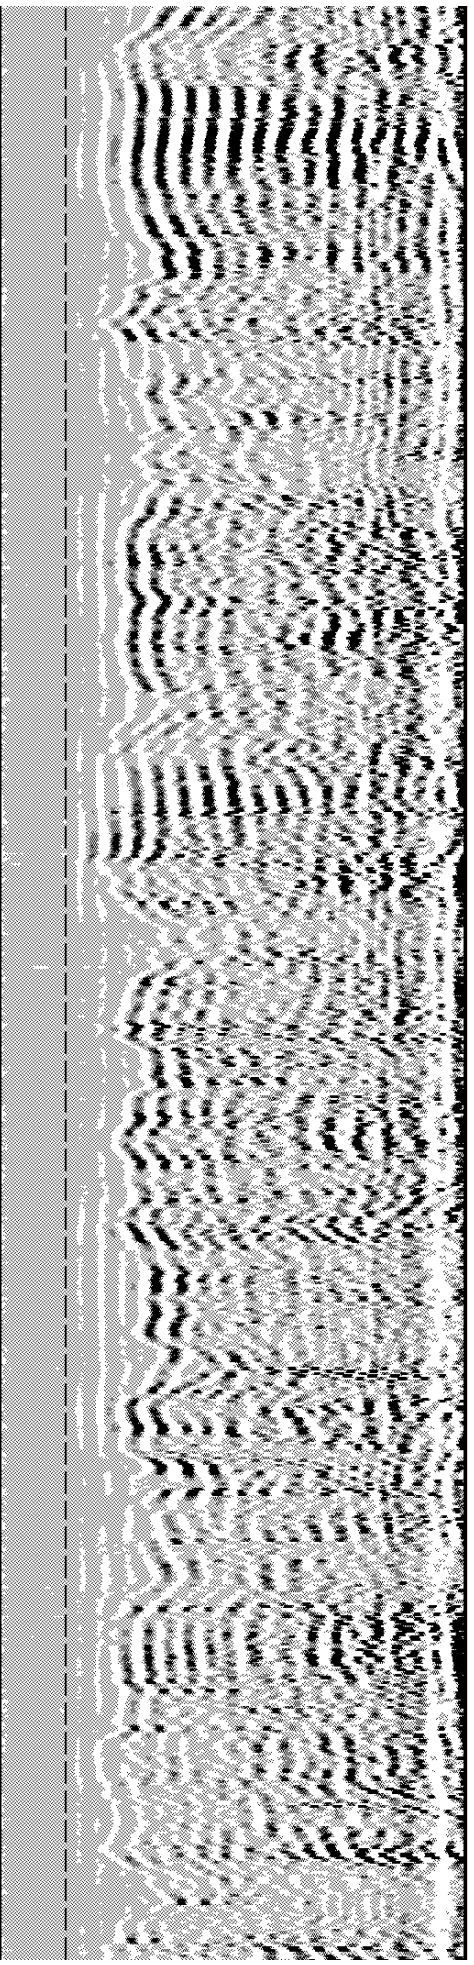
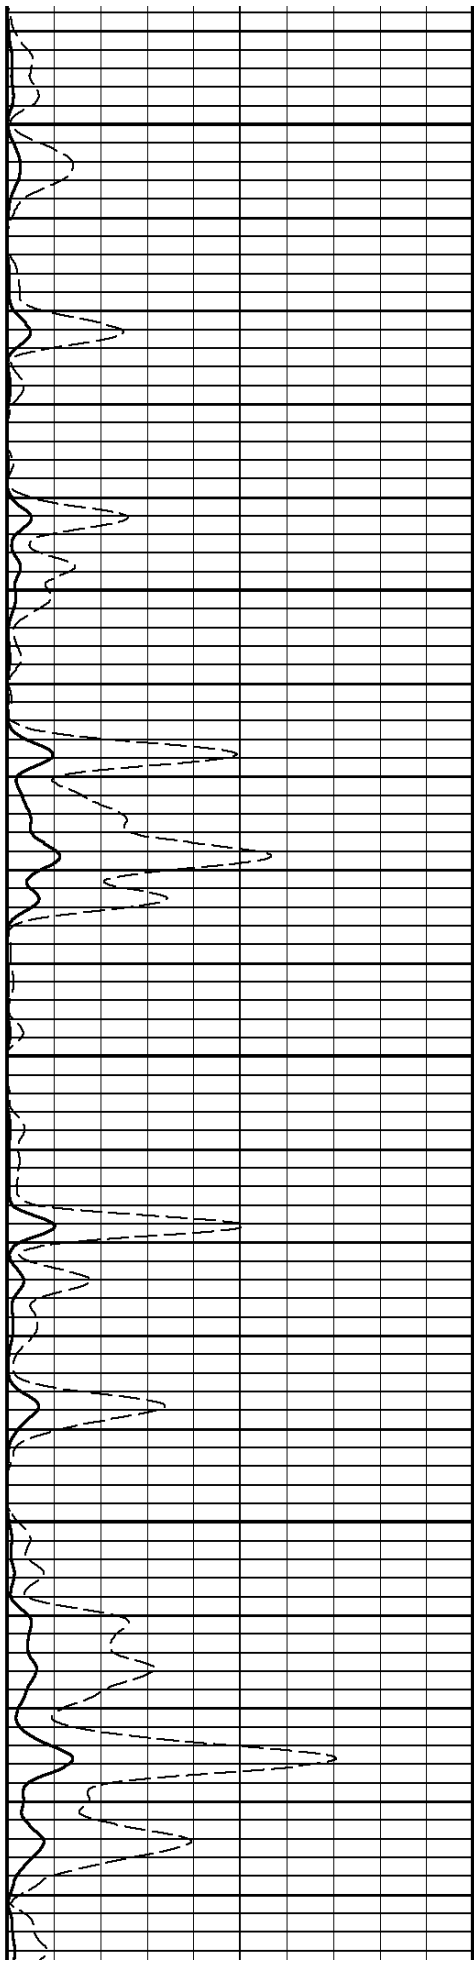


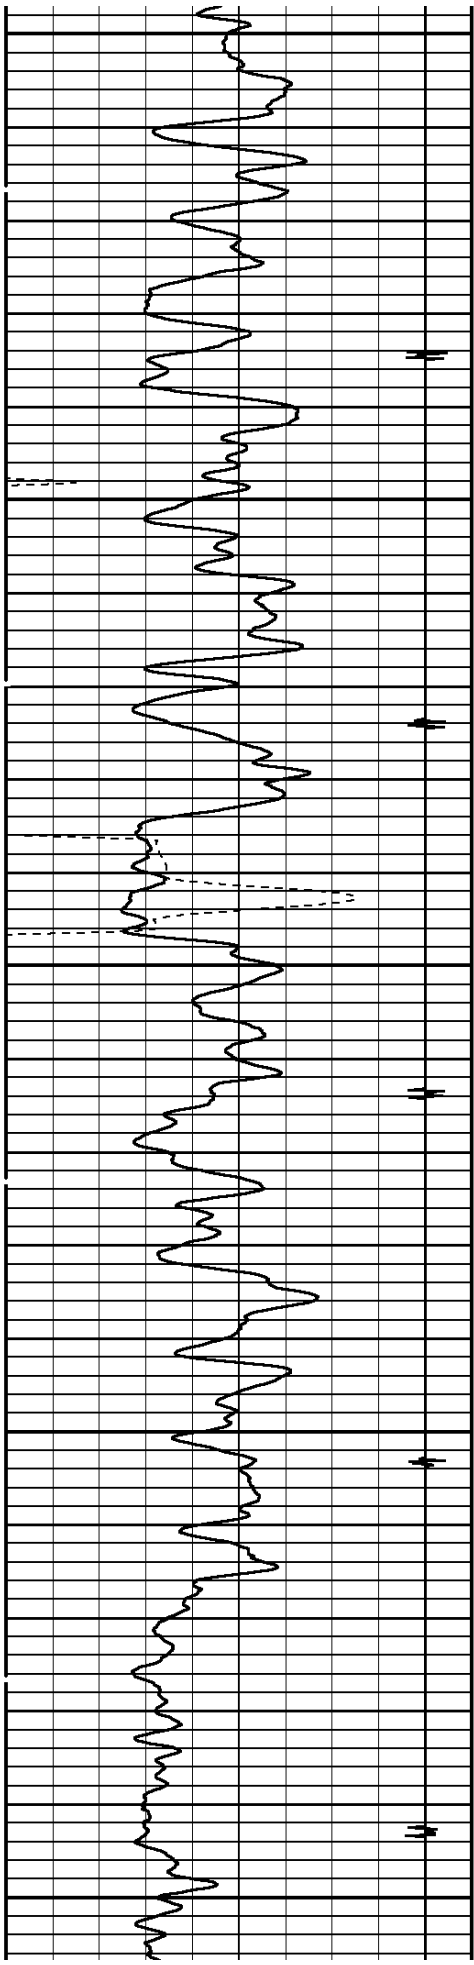


6400

6500



6600

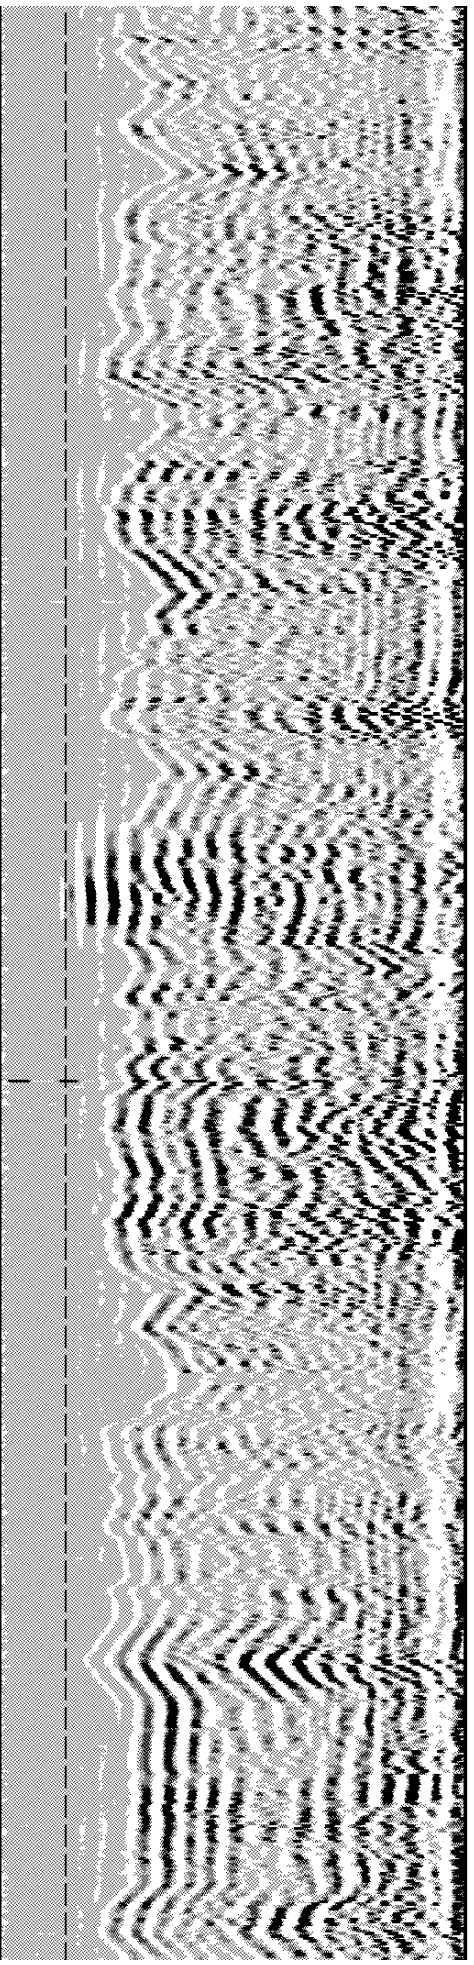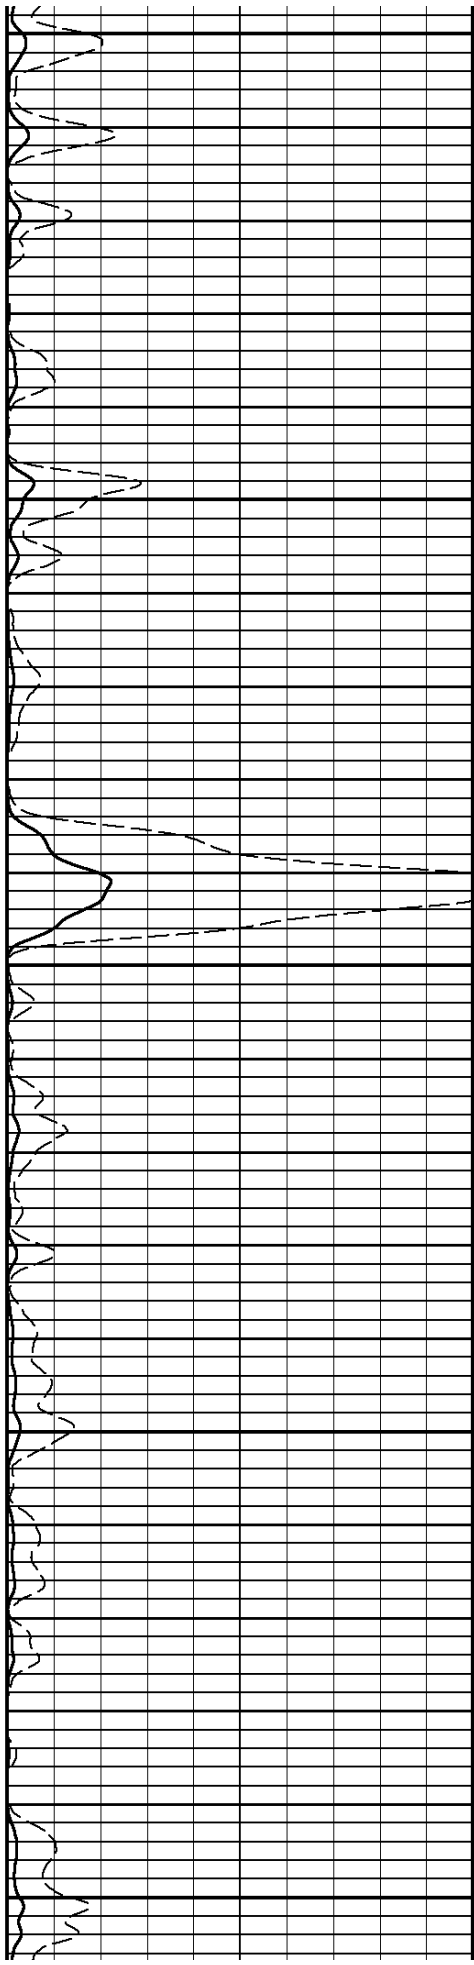


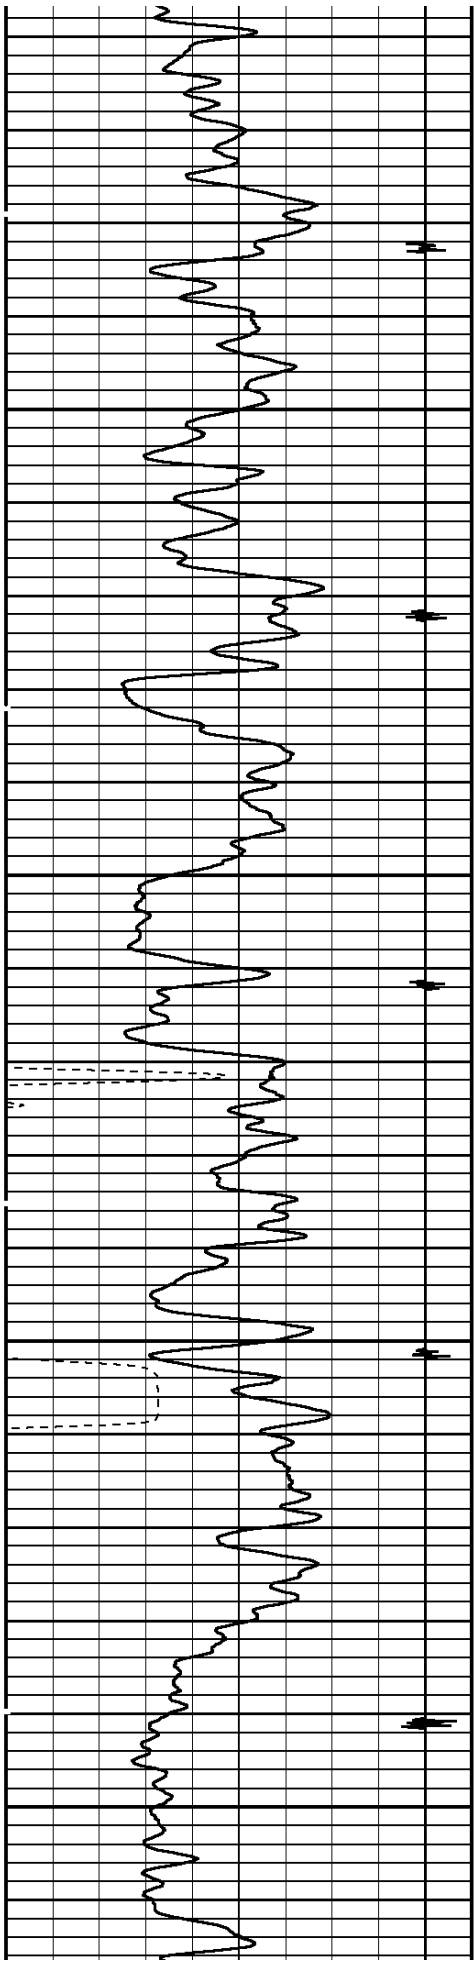

6700



6800

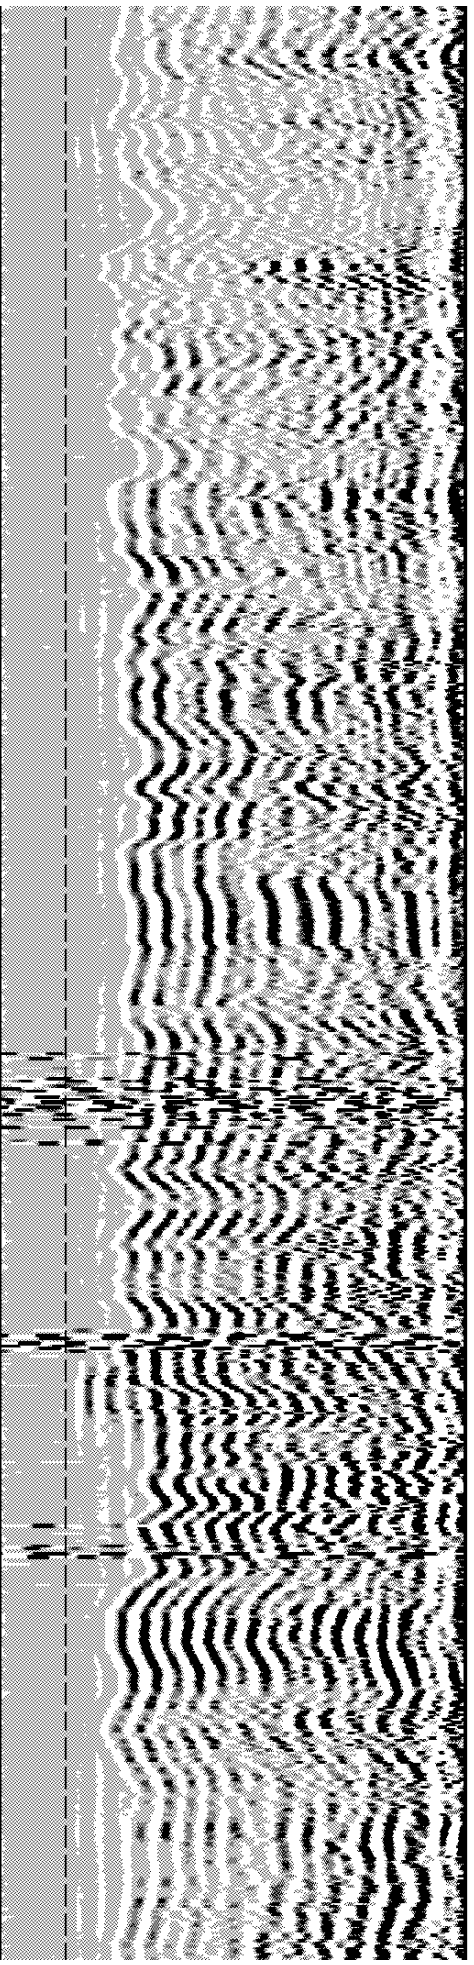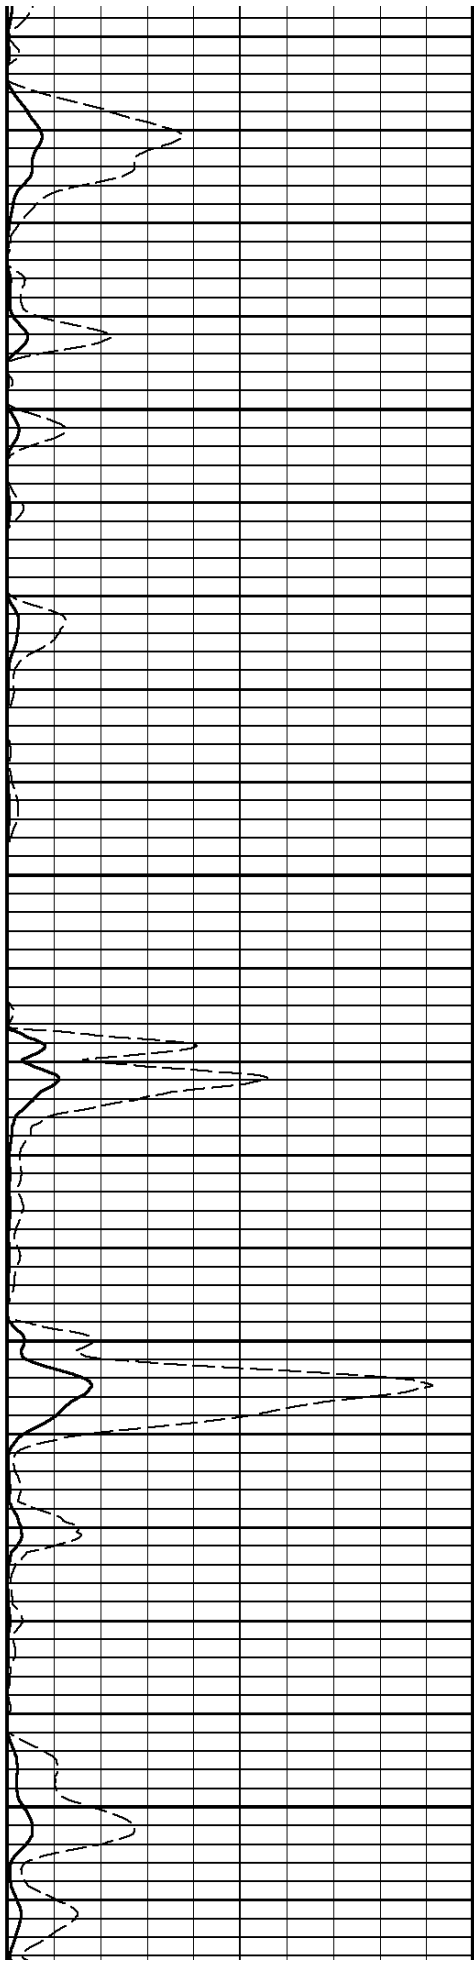


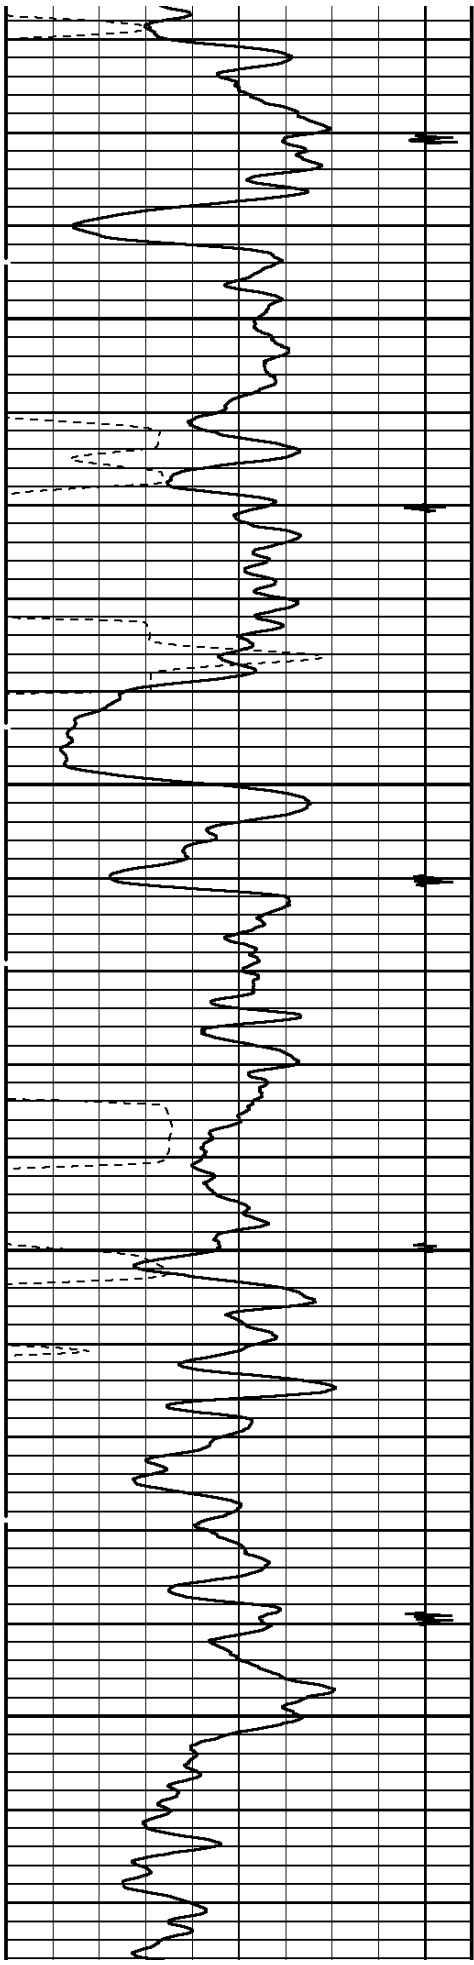

6900



7000

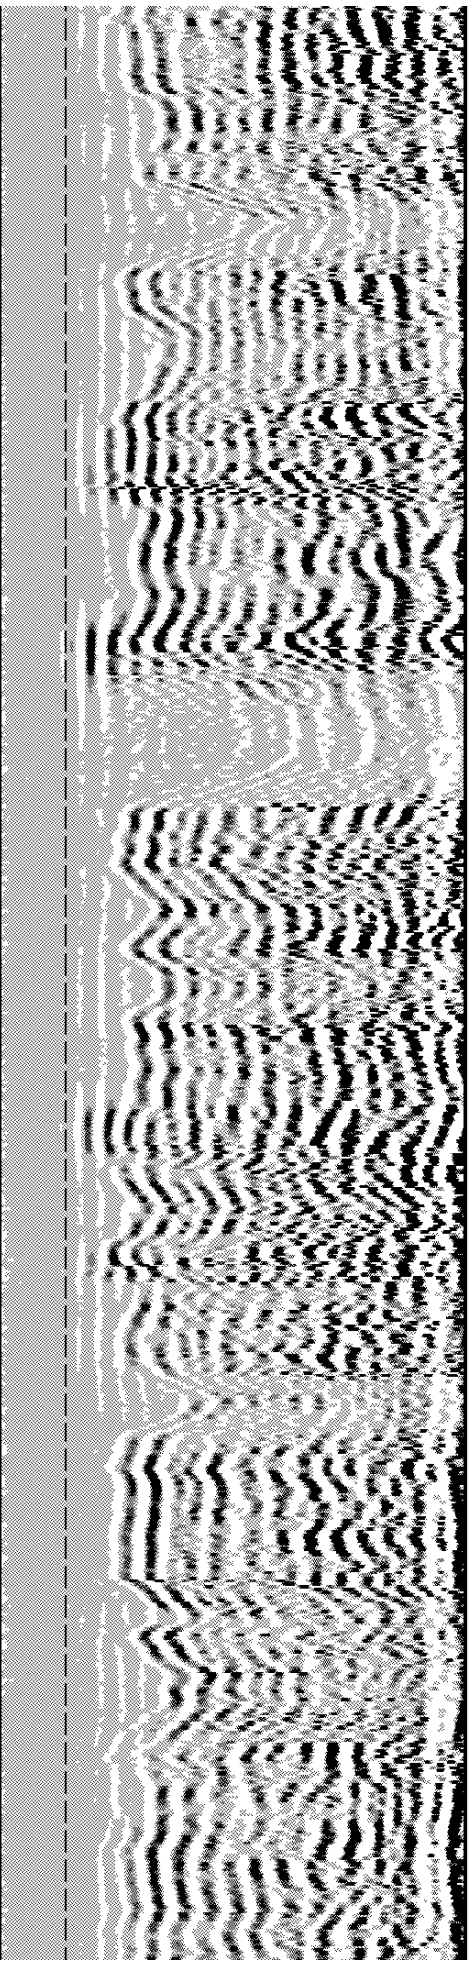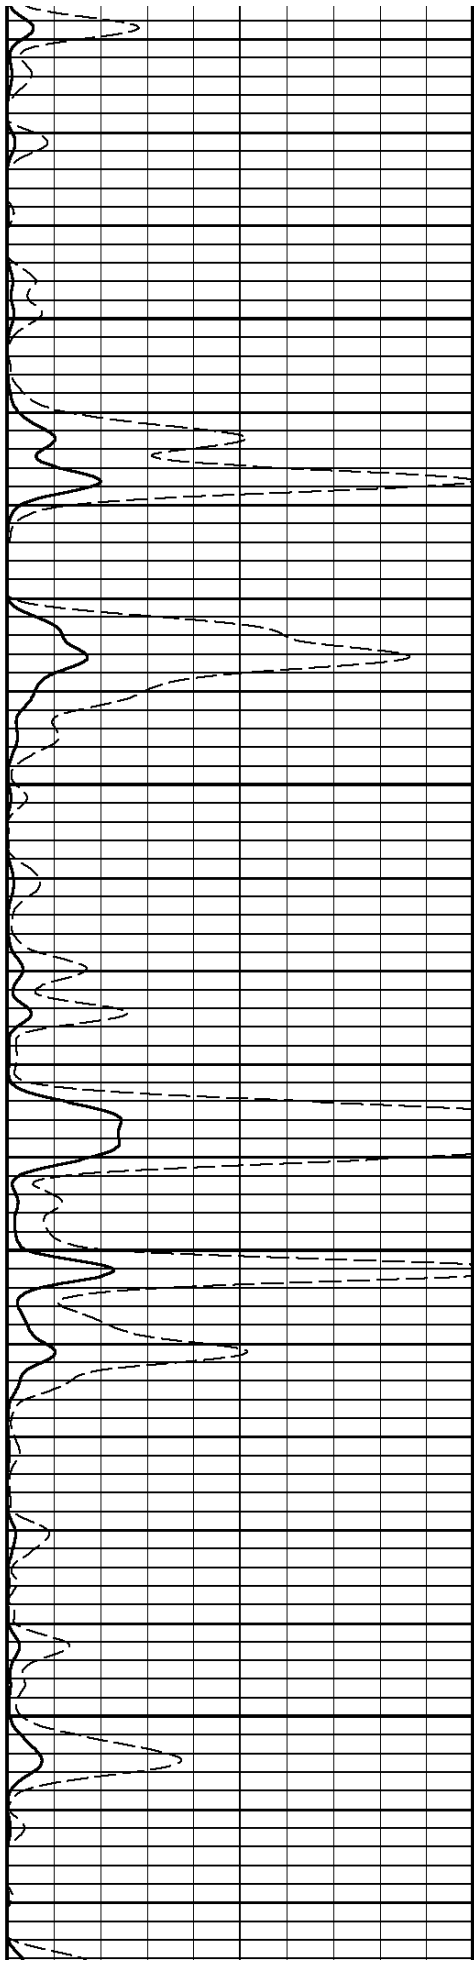


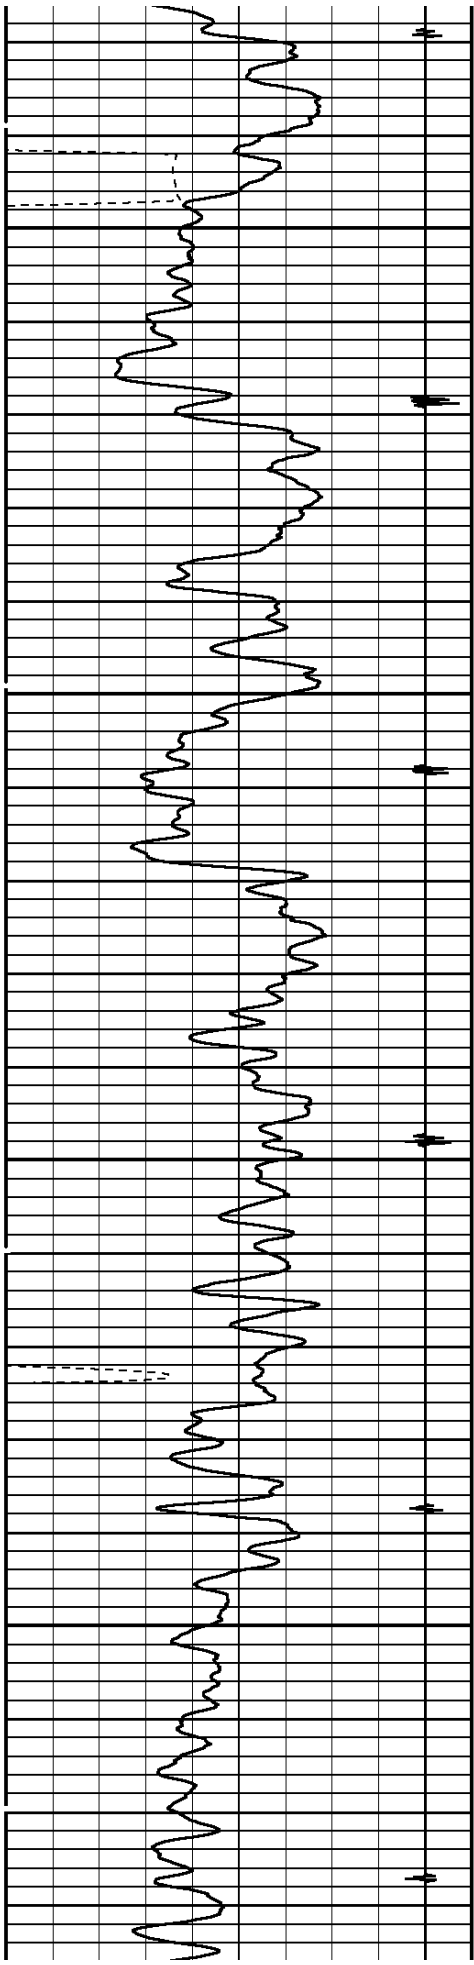

7100



7200

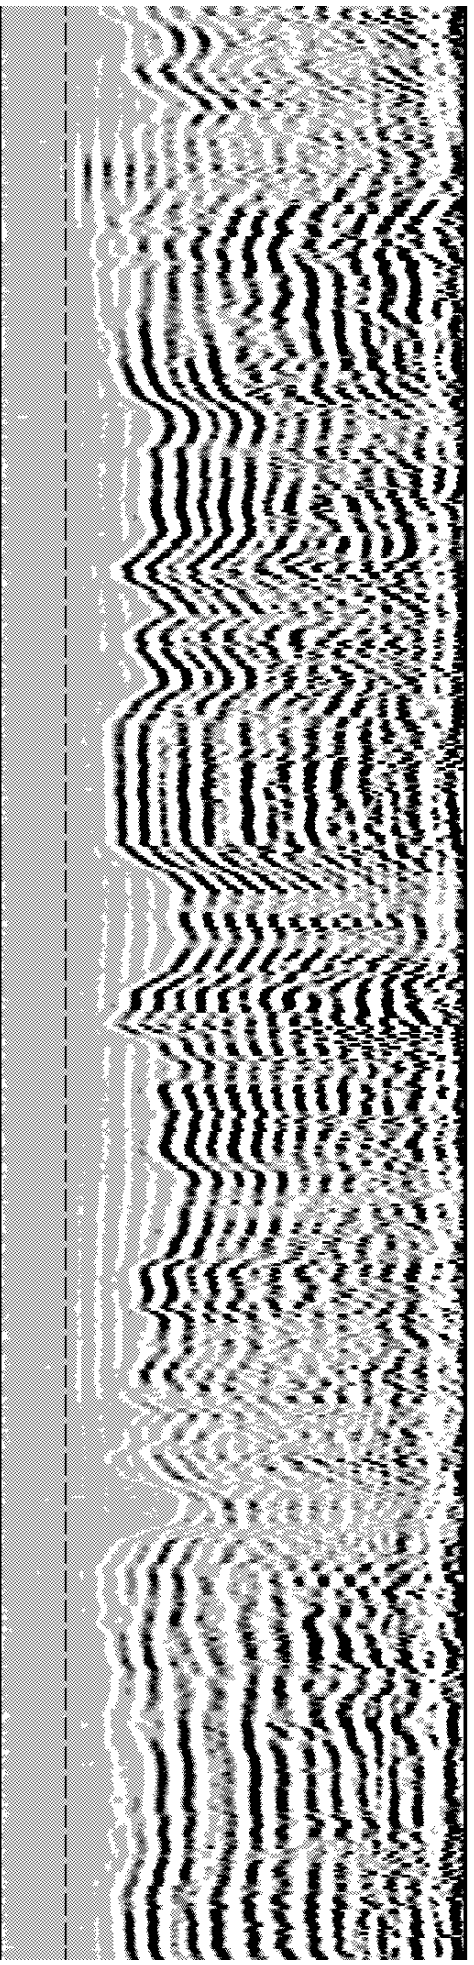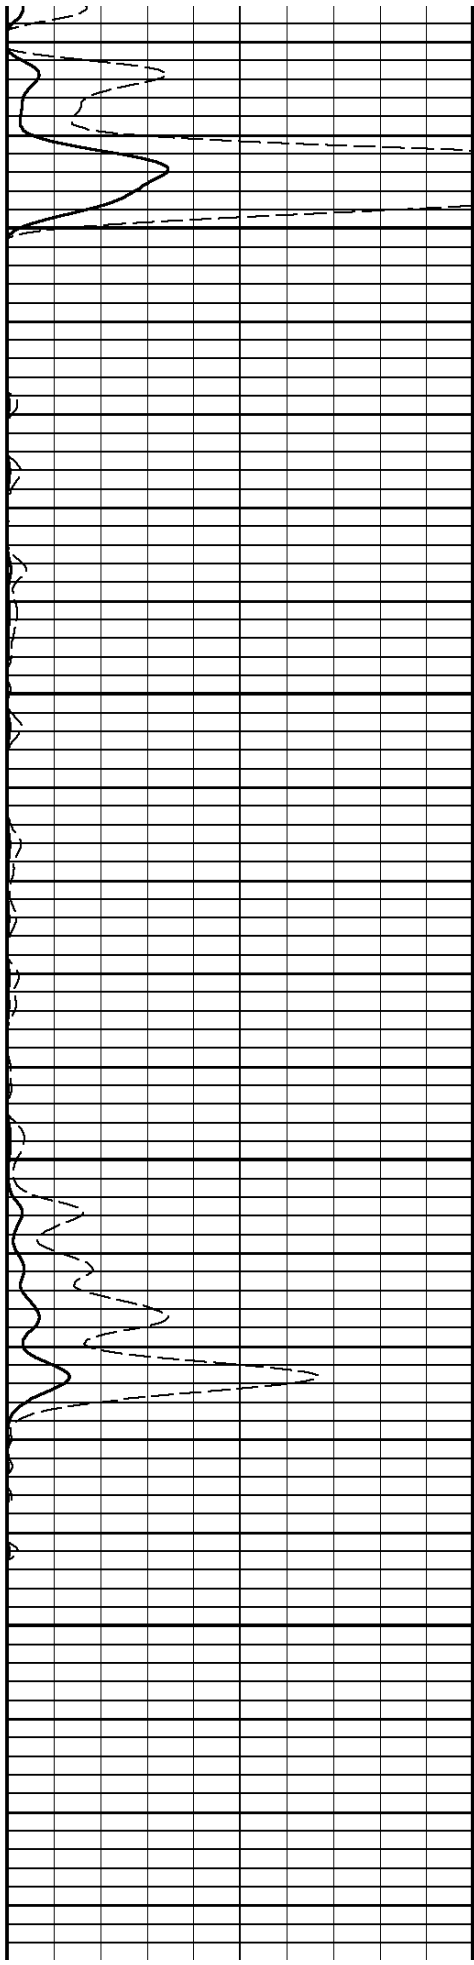


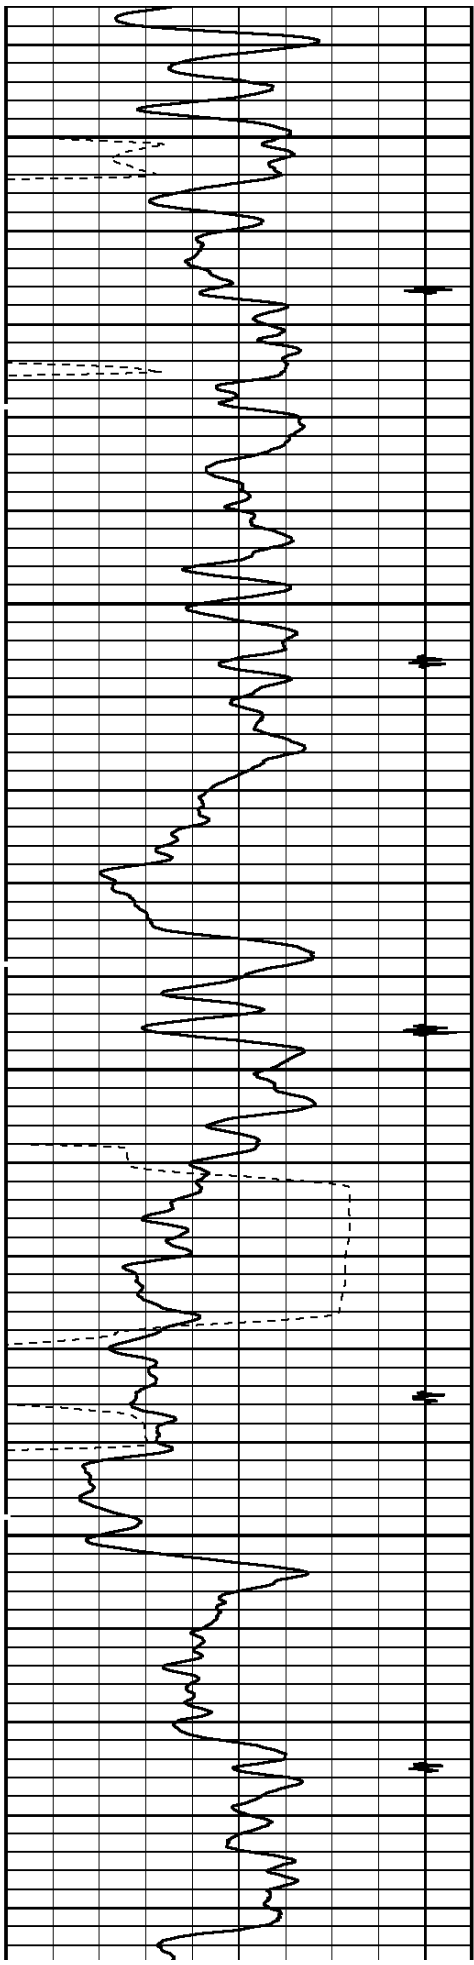

7300

7400

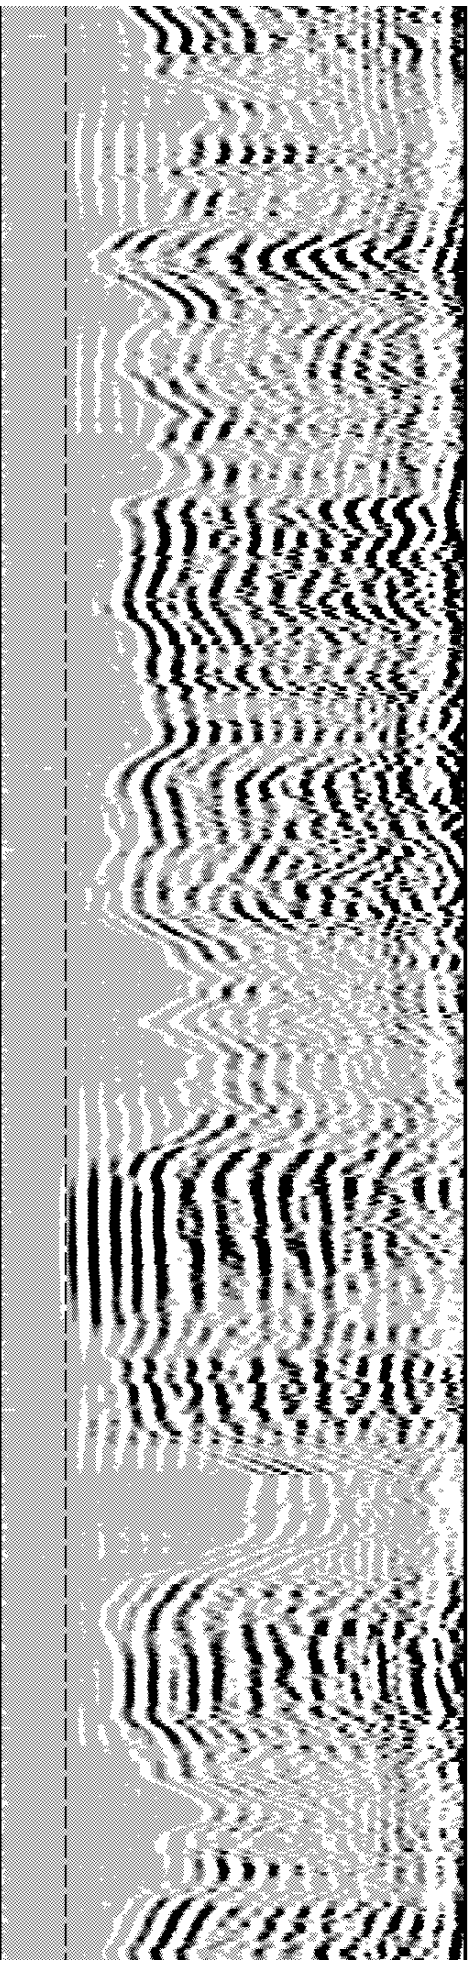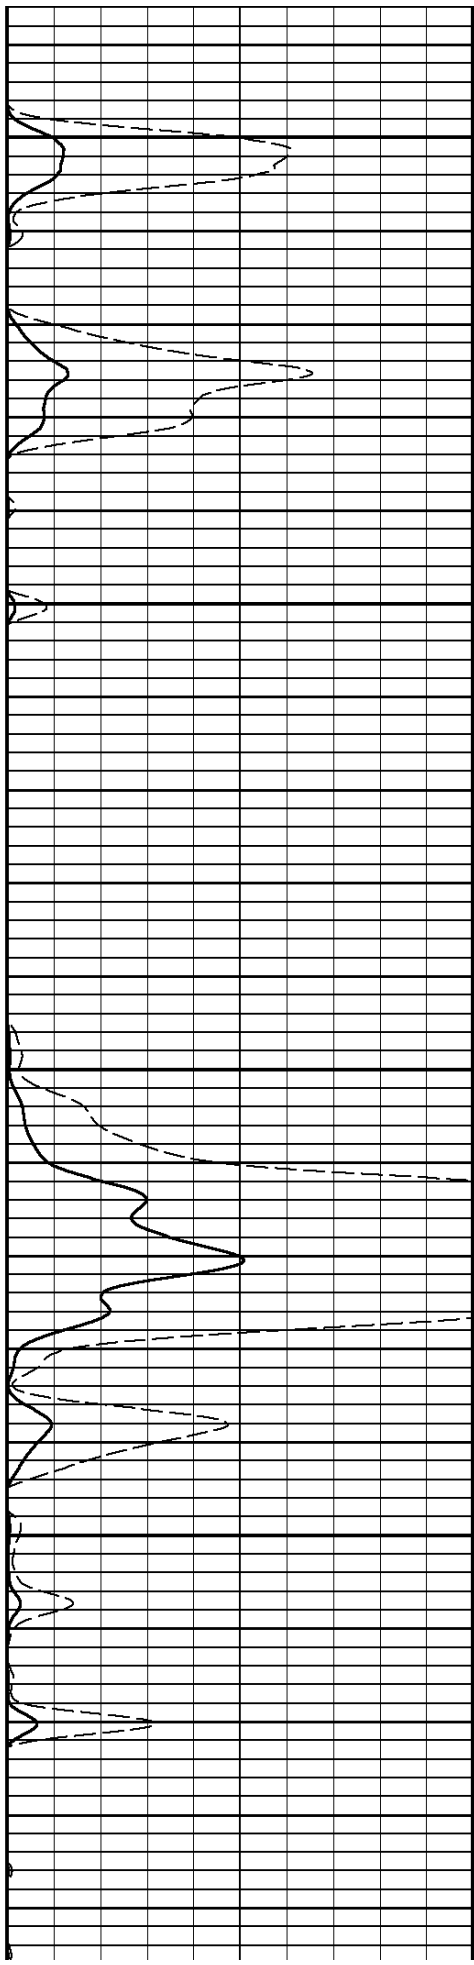

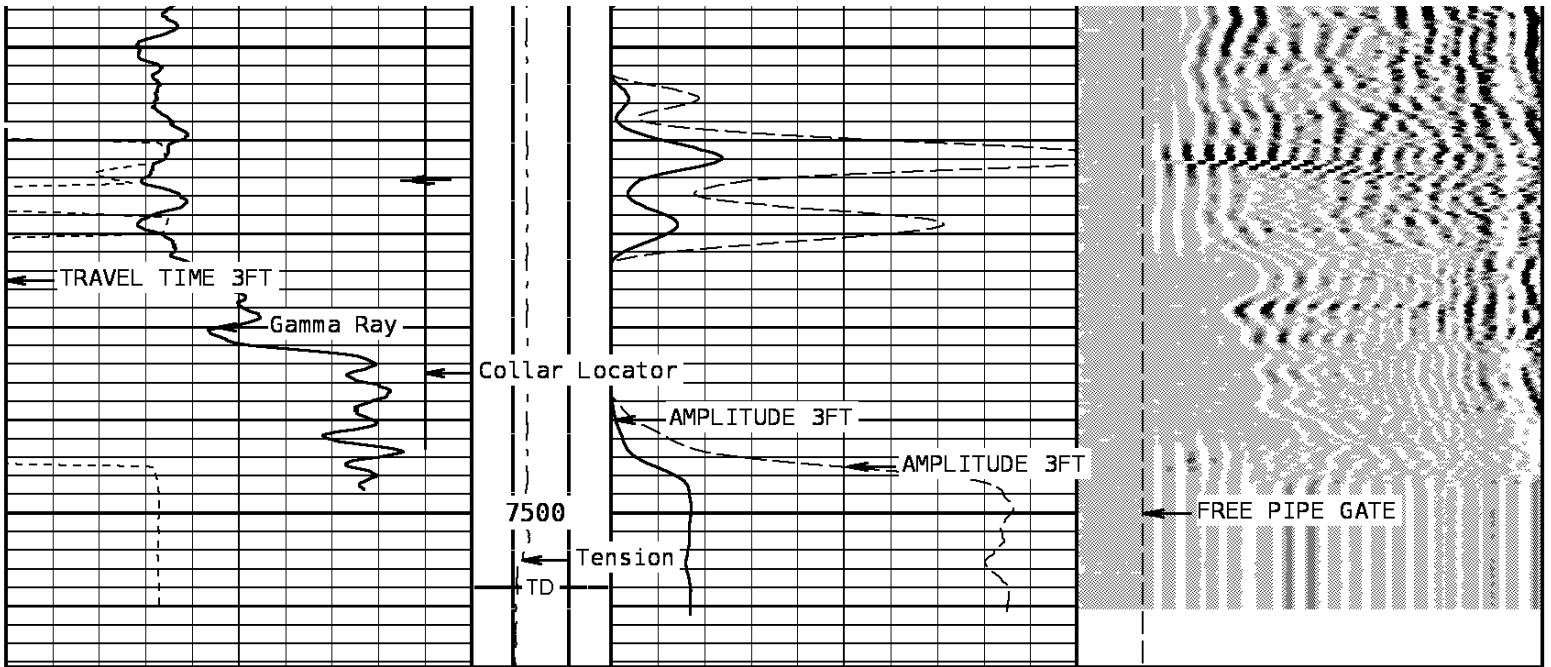

TRAVEL TIME 3FT		Tension		AMPLITUDE 3FT		VARIABLE DENSITY 5FT	
305	Microseconds	205	0	2000	0	100	200
Gamma Ray				AMPLITUDE 3FT X5		FREE PIPE GATE	
0	API	150	0	20	200	200	1200
Collar Locator							
4000	Millivolts	-440					

START DEPTH: **7516.6** DIRECTION: **UP** DATE: **08/04/2008** TIME: **11:11** MODE: **TRACE PLAYBACK**

132989 MAIN

MAIN PASS

DEPTH SCALE: **5":100'** VERSION: **80214133R"**

DEPTH SCALE: **5":100'** VERSION: **80214133R"**

REPEAT PASS

132989 Repeat

FINISH DEPTH: **7248.5** Feet DIRECTION: **UP** DATE: **08/04/2008** TIME: **08:49** MODE: **TRACE PLAYBACK**




Collar Locator

Collar Locator		
4000	Millivolts	-440
Gamma Ray		
0	API	150
TRAVEL TIME 3FT		
305	Microseconds	205

Tension	
0	2000


AMPLITUDE 3FT X5	
0	20
Millivolts	
AMPLITUDE 3FT	
0	100
Millivolts	

FREE PIPE GATE	
200	1200
Microseconds	
VARIABLE DENSITY 5FT	
200	1200
Microseconds	

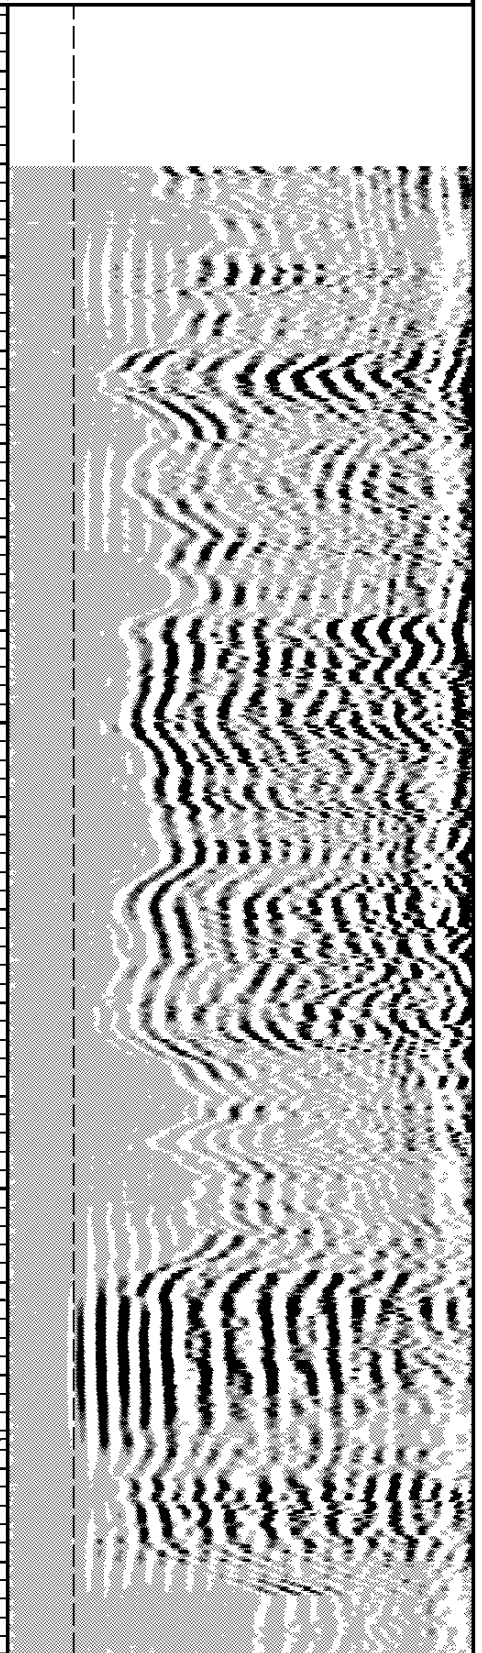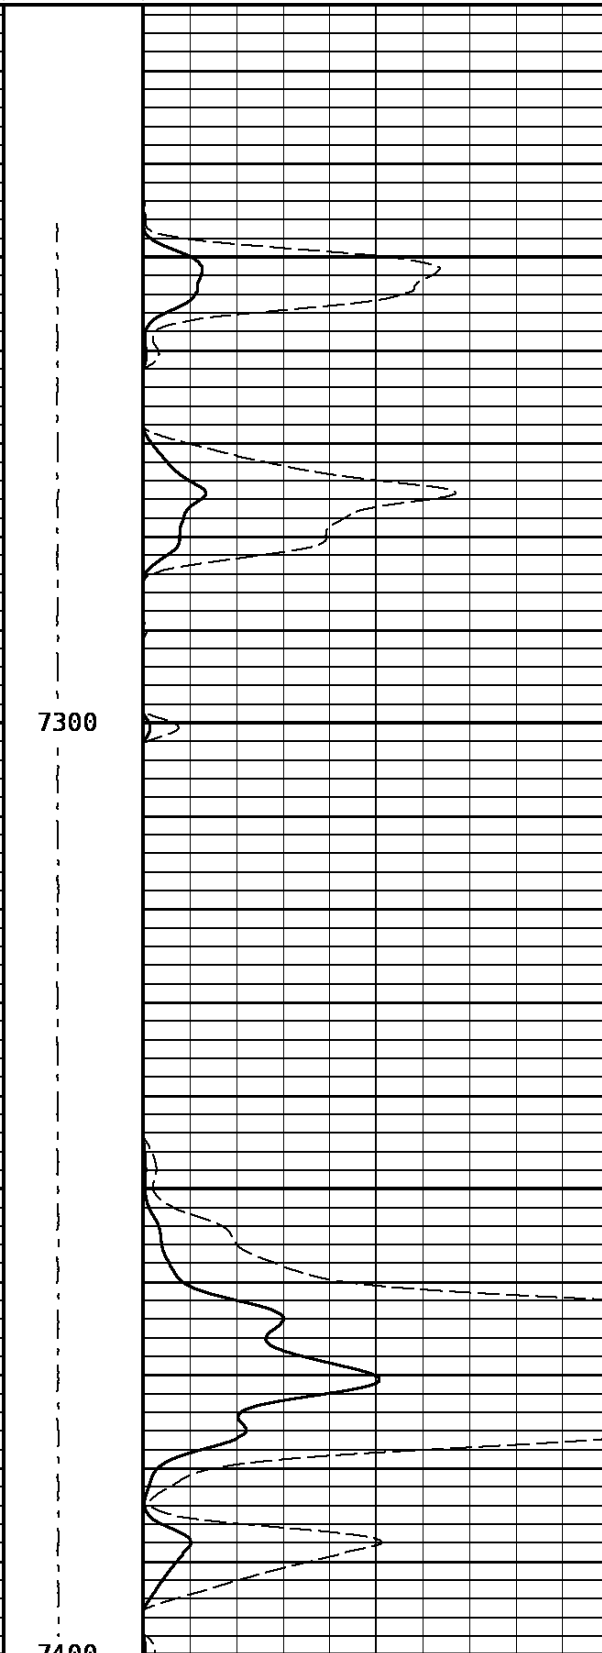
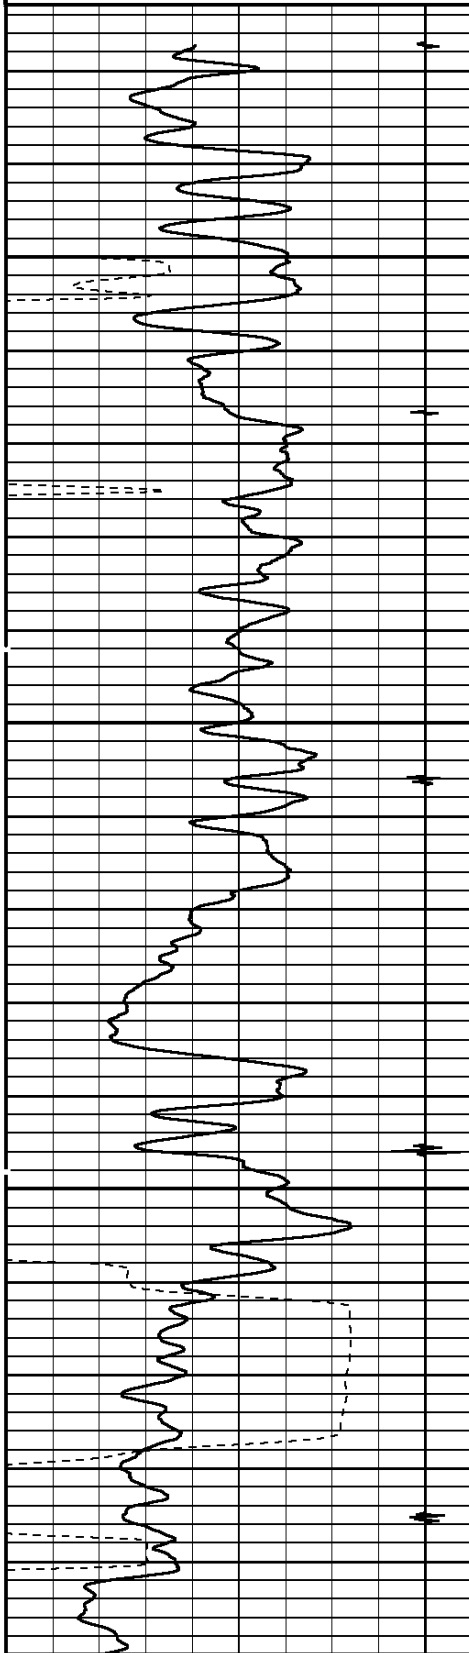


7300

7400

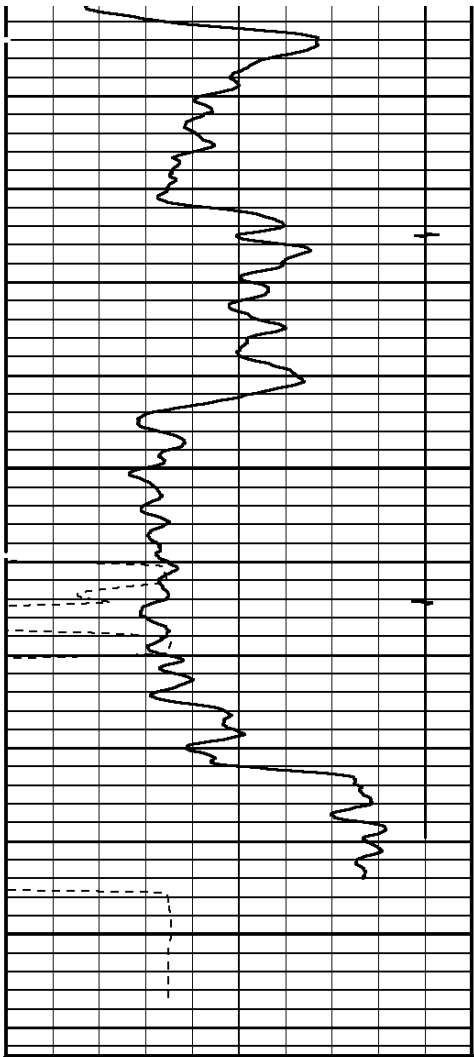

7500

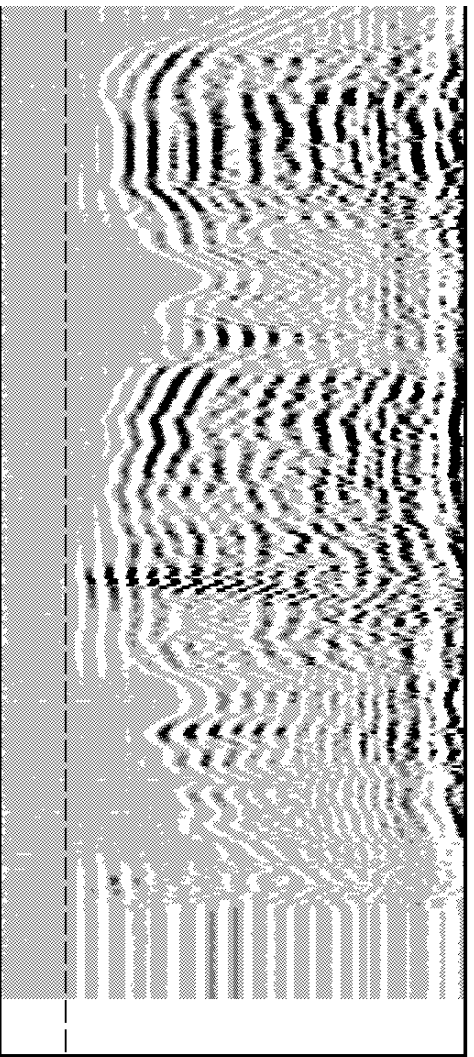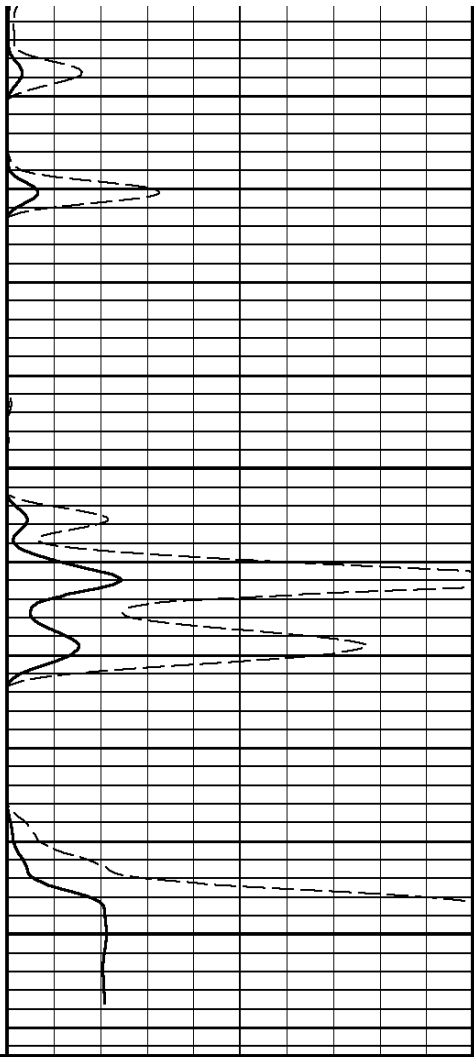

TRAVEL TIME 3FT		Tension	AMPLITUDE 3FT		VARIABLE DENSITY 5FT						
305	Microseconds		205	0	2000	0	Millivolts	100	200	Microseconds	1200
Gamma Ray			AMPLITUDE 3FT X5		FREE PIPE GATE						
0	API	150	0	0	Millivolts	20	200	0	Microseconds	1200	
Collar Locator											
4000	Millivolts	-440									

START DEPTH: 7515.2 DIRECTION: UP DATE: 08/04/2008 TIME: 08:44 MODE: TRACE PLAYBACK
 132989 Repeat

REPEAT PASS

DEPTH SCALE: 5":100' VERSION: 80214133R"

1 7/16 Adapter Head

Weight 2.2 LB.
 Length 2.54
 Max. Diameter 1.44 IN.

Total Stack Weight 223.0 LBS. in air
 Total Stack Length 27.83 FT.

Slim Hole Centralizer

Weight 15 lbs
 Length 2.49 FT.
 Max. Diameter 2.750 IN.

Collar Locator

Weight 39.8 LBS.
 Length 3.40 FT.
 Max. Diameter 2.75 IN.

Slim Hole Gamma Ray


Weight 39.8 LBS.
 Length 4.71 FT.
 Max. Diameter 2.750 IN.


Slim Hole Centralizer

Weight 22 LBS.
 Length 3.08 FT.
 Max. Diameter 2.750 IN.

Sector Bond

Weight 89.2 LBS.
 Length 10.32 FT.
 Max. Diameter 2.750 IN.

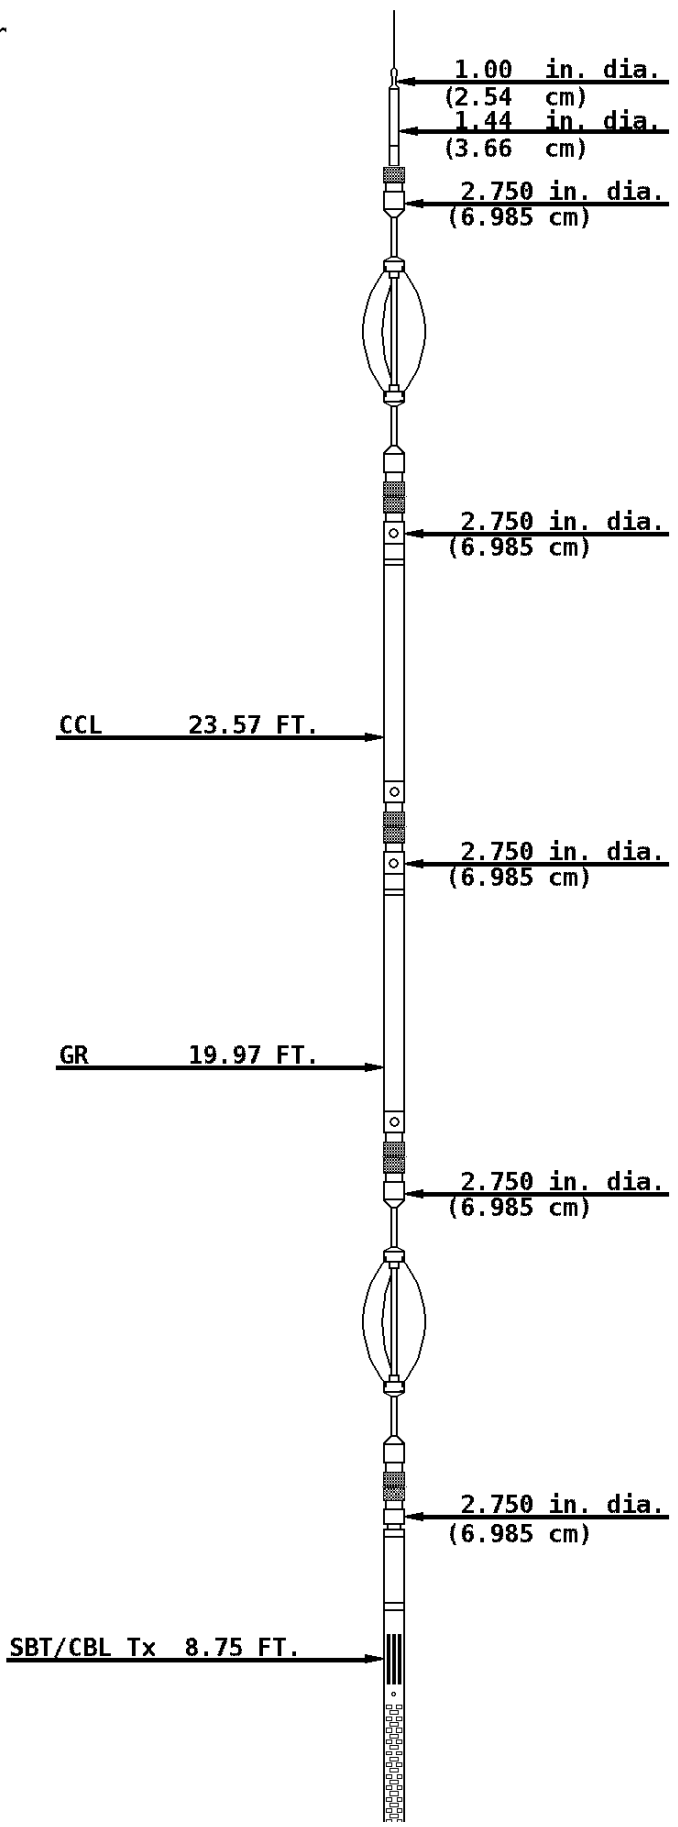

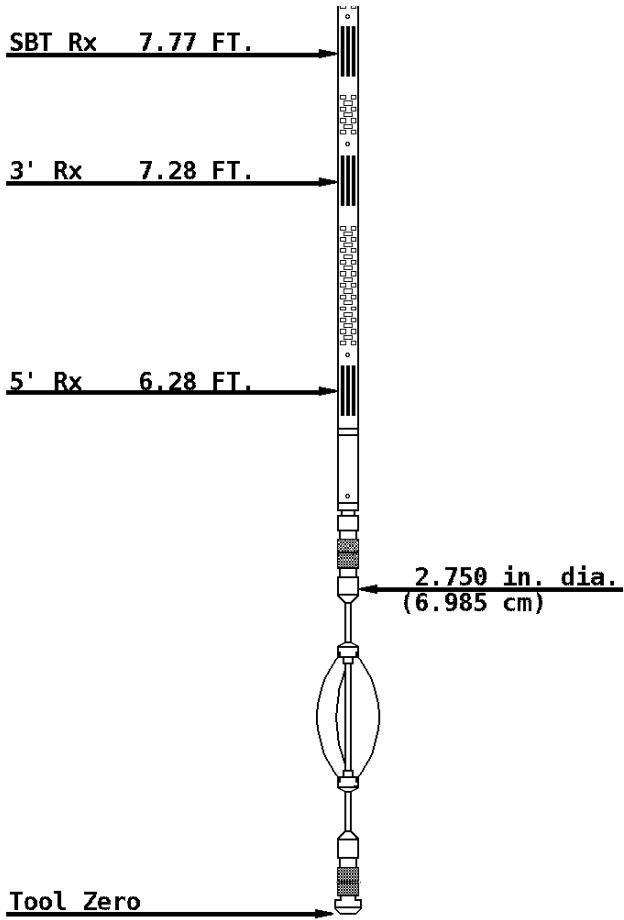

Slim Hole Centralizer

Weight 15.0 LBS.
 Length 2.82 FT.
 Max. Diameter 2.750 IN.

COMPANY EDEN ENERGY
 WELL ANT HILL UNIT #21-22
 FIELD WHITE RIVER DOME
 COUNTY RIO BLANCO STATE COLORADO

