

State of Colorado
Oil and Gas Conservation Commission
SUNDRY NOTICE

1120 Lincoln Street, Suite 801, Denver, Colorado 80203 Phone: (303)894-2100 Fax: (303)894-2109



02577423



Submit original plus one copy. This form is to be used for general, technical and environmental sundry information. For proposed or completed operations, describe in full on Technical Information Page (Page 2 of this form.) Identify well or other facility by API Number or by OGCC Facility ID. Operator shall send an informational copy of all sundry notices for wells located in High Density Areas to the Local Government Designee (Rule 603b.)

1. OGCC Operator Number: 28600	4. Contact Name
2. Name of Operator: ExxonMobil Corporation	Lynn Neely
3. Address: P. O. Box 4358, COPR-MI-205	Phone: 281-654-1949
City: Houston State: Tx. Zip 77210-4358	Fax: 281-654-1940
5. API Number 05-103-1137-00	OGCC Facility ID Number
6. Well/Facility Name: Freedom Unit	Well/Facility Number 297-32A2
8. Location (Qtr/Ctr, Sec, Twp, Rng, Meridian):	SENE, Sec. 32, T2S, R97W, 6th P.M.
9. County: Rio Blanco	10. Field Name: Piceance Creek
11. Federal, Indian or State Lease Number: COC-60725	

RECEIVED
NOV 05 2010
COGCC/Rifle Office

Complete the Attachment
Checklist

OP OGCC

Survey Plat	
Directional Survey	
Surface Exgmt Diagram	
Technical Info Page	X
Other	

General Notice

CHANGE OF LOCATION: Attach New Survey Plat (a change of surface qtr/ctr. is substantive and requires a new permit)

Change of Surface Footage from Exterior Section Lines:	FNL/FSL	FEL/FWL
Change of Surface Footage to Exterior Section Lines:	<input type="checkbox"/>	<input type="checkbox"/>
Change of Bottomhole Footage from Exterior Section Lines:	<input type="checkbox"/>	<input type="checkbox"/>
Change of Bottomhole Footage to Exterior Section Lines:	<input type="checkbox"/>	<input type="checkbox"/>

Bottomhole location Qtr/Ctr, Sec, Twp, Rng, Mer _____ Distance to nearest bldg, public rd, utility or RR _____

Latitude _____ Distance to nearest property line _____

Longitude _____ Distance to nearest lease line _____ Is location in a High Density Area (rule 603b)? Yes/No _____

Ground Elevation _____ Distance to nearest well same formation _____ Surface owner consultation date: _____

attach directional survey

GPS DATA:

Date of Measurement _____ PDOP Reading _____ Instrument Operator's Name _____

CHANGE SPACING UNIT

Remove from surface bond
Signed surface use agreement attached

Formation _____ Spacing order number _____ Unit Acreage _____ Unit configuration _____

CHANGE OF OPERATOR (prior to drilling):

Effective Date: _____

Plugging Bond: Blanket Individual

CHANGE WELL NAME

From: _____

To: _____

Effective Date: _____

NUMBER

ABANDONED LOCATION:

Was location ever built? Yes NoIs site ready for inspection? Yes No

Date Ready for Inspection: _____

NOTICE OF CONTINUED SHUT IN STATUS

Date well shut in or temporarily abandoned: _____

Has Production Equipment been removed from site? Yes No

MIT required if shut in longer than two years. Date of last MIT _____

SPUD DATE: _____

REQUEST FOR CONFIDENTIAL STATUS (6 mos from date casing set)

SUBSEQUENT REPORT OF STAGE, SQUEEZE OR REMEDIAL CEMENT WORK *submit cbl and cement job summaries

Method used _____ Cementing tool setting/perf depth _____ Cement volume _____ Cement top _____ Cement bottom _____ Date _____

RECLAMATION: Attach technical page describing final reclamation procedures per Rule 1004.

Final reclamation will commence on approximately _____ Final reclamation is completed and site is ready for inspection.

Technical Engineering/Environmental Notice

Notice of Intent

Approximate Start Date: _____

Report of Work Done

Date Work Completed: 10/18/2010

Intent to Recomplete (submit form 2)

Change Drilling Plans Request to Vent or Flare E&P Waste Disposal Gross interval Changed? Repair Well Beneficial Reuse of E&P Waste Casing/Cementing Program Change Rule 502 variance requested Status Update/Change of Remediation Plans

Other: install Plunger Lift _____
for Spills and Releases

I hereby certify that the statements made in this form are, to the best of my knowledge, true, correct and complete.

Signed: _____

Date: 10/29/2010

Email: lynn.r.neely@exxonmobil.com

Print Name: Lynn Neely

Title: Regulatory Specialist

COGCC Approved: _____

Title: EITB

Date: 11/11/2010

CONDITIONS OF APPROVAL, IF ANY: _____

TECHNICAL INFORMATION PAGE



FOR OGCC USE ONLY

1. OGCC Operator Number: 28600	API Number: 05-103-11137-00	RECEIVED
2. Name of Operator: ExxonMobil Corporation	OGCC Facility ID # 0	NOV 05 2010
3. Well/Facility Name: Freedom Unit	Well/Facility Number: 297-32A2	OGCC/Rifle Office
4. Location (Qtr, Sec, Twp, Rng, Meridian): SENE, Sec. 32, T2S, R97W, 6th P.M.		

This form is to be completed whenever a Sundry Notice is submitted requiring detailed report of work to be performed or completed. This form shall be transmitted within 30 days of work completed as a "subsequent" report and must accompany Form 4, page 1.

5.

DESCRIBE PROPOSED OR COMPLETED OPERATIONS


Plunger lift system has been installed on this well.

Three-phase or "wet gas" measurement meters have been installed on the flowlines for each of the plunger lift systems. This meter will be used for real time surveillance and plunger lift management only. The current well testing and allocation processed currently performed by operations will not change.

PLUNGER LIFT SYSTEM OVERVIEW

Plunger Lift Systems consist of a plunger, often referred to as a piston, two bumper springs, a lubricator to sense and stop the plunger as it arrives at the surface, and a surface controller of which several types are available. Various ancillary and accessory components are used to complement and support various application needs.

In a typical plunger lift operation, the plunger cycles between the lower bumper spring located in the bottom section of the production tubing string and the upper bumper spring located in the surface lubricator on top of the wellhead. In some applications, the lower bumper spring is placed above a gas lift mandrel. As the plunger travels to the surface, it creates a solid interface between the lifted gas below and produced fluid above to maximize lifting energy.

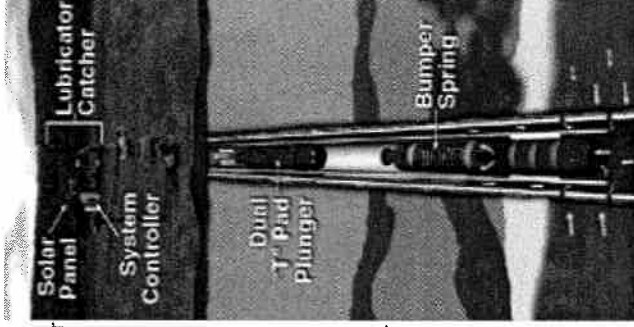

The plunger travels from the bottom of the well to the surface lubricator on the wellhead when the force of the lifting gas energy below the plunger is greater than the liquid load above the plunger. Any gas that bypasses the plunger during the lifting cycle flows up the production tubing and sweeps the area to minimize liquid fallback. The incrementation of the travel cycle is controlled by a surface controller and may be repeated as often as needed.