

HSR-Ericson 9-19A 05-123-15749 - Proposed WBD (P&A)
 12-1/4" Surface Hole

7-7/8" Prod Hole
 3-7/8" Deepened Hole

Existing

Planned

KB: 4919'
 GL: 4904'

8 5/8" Surf Csg Shoe @ 490'
 Base Fox Hills @ Behind Pipe


Top of Sussex @ 4305'
 Base of Sussex @ 5005'

TOC @ 6776'
 NB Top @ 7122'

NB perfs @ 6702'-6912'
 CD perfs @ 7010'-7027'

JS Top @ 7818'

JS perfs @ 7832'-7898'
 4 1/2" Prod Csg @ 7540'
 2-7/8" Liner @ 7976'
 TD @ 7976'

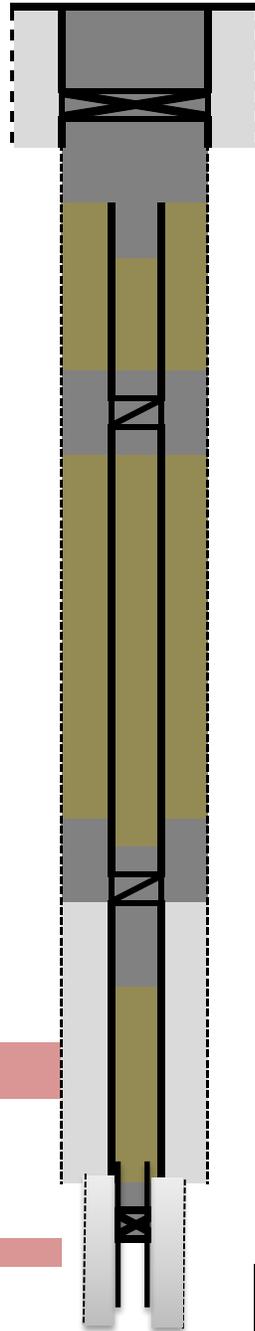

Welded Cap
 Surface plug 10'-150'

CIBP @ 150'

Cut Casing off at 690'
 Stub cement plug from 740'-150'

Proposed TOC @ 4075'
 Proposed Bottom of Cmnt @ 5205'
 Squeezed Holes @ 4075'-5205'

Proposed TOC @ 6711'

CICR @ 6700'
 Squeeze Holes @ 6770'

CIBP @ 7760' w/ min 2 sks cement

