



WELL: Puckett 43A-24D  
 FIELD: Grand Valley  
 COUNTY: Garfield  
 STATE: Co.


DATE JOB COMPLETED: 02/11/2011  
 ELEVATION KB: 8276'  
 HOLE SIZE: 16"

TOOL TYPE: \_\_\_\_\_  
 TYPE FLOAT COLLAR: Top-Co  
 TYPE FLOAT SHOE: Top-Co  
 TYPE CEMENT BASKET: Top-Co  
 OTHER: NA

045-19736

JT ABOVE KB#: \_\_\_\_\_  
 TOP JOINT #: \_\_\_\_\_

SIZE	WEIGHT	MAKE	API GRADE	THREAD	COUPLINGS	NO JOINTS	LENGTH
9 5/8"	36#	Evrax	J-55	8rd	LTC	54	2375
1 1/2"	2.76#	L.S.	J-55	10rd	IJ	65	2177
TOTALS:							

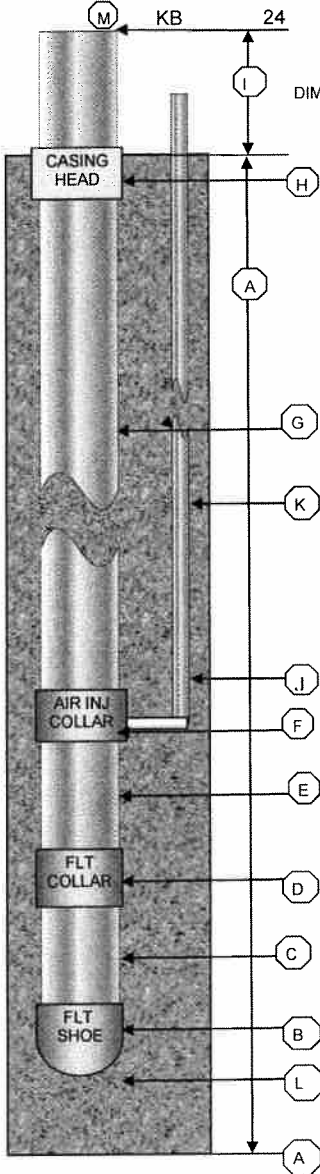

DIMENSIONS:		TUBULAR DATA	
A:	2435	JTS. RACK TALLY (THDS OFF)	2375
B:	1.5	JTS CSG LEFT ON RACK (THDS OFF)	(-)
C:	44	LANDING JOINT	24 (+)
D:	1.5	CSG USED INCLUDING LDJT (THDS OFF)	2399 (=)
E:	176	FEET OF LDJT REMOVED	24 (-)
F:	2	CASING LEFT IN HOLE, 54 JOINTS	2375 (=)
G:	44	AIR INJECTION COLLAR	2 (+)
H:	2	FLOAT COLLAR	1.5 (+)
I:	24	FLOAT /GUIDE SHOE	1.5 (+)
J:	2177	OTHER	8 (+)
K:	0	CASING IN HOLE	2388 ✓ (=)
L:	2388	KB TO TOP OF CASNG OR CASING HEAD	24 (+)
M:	2412	TOTAL DEPTH OF CASING POINT	2412 (=)

CEMENT DATA  
 CENTRALIZER LOCATIONS: \_\_\_\_\_

CEMENT BASKETS: \_\_\_\_\_  
 CEMENT COMPANY: BJ Services  
 TYPE CEMENT: FIRST STAGE 1427 sks 36/65 ✓  
 TYPE CEMENT: SECOND STAGE: 170 sks Typelll ✓

ADDITIVES: FIRST STAGE: .04lbsstatic+5%cacl+.25lbsflake+2lbskolseal+.5%sms+6%bent+fp-13L  
 ADDITIVES: SECOND STAGE: .04lbsstatic+1%cacl+.25%flake+fp-13L

SLURRY WEIGHT: 12.5/14.2 PPG: YIELD 1.97/1.47 CU. FT/ SK ✓  
 TOTAL SK CEMENT: 1597 sks and 763 sks Top Out

PLUG DOWN TIME: 7:59AM RETURNS A LUG DOWN: 0 %  
 MIX WATER 390/182 Bls

MUD WEIGHT: 8.8 SECS  
 MIXED CEMENT AT: 5 215 PSIG  
 DISPLACED CEMENT AT: 5.7 320 ✓ PSIG  
 PLUG DOWN WITH: 2.9 900 PSIG  
 CHECKED FLOAT: Yes Held ?

TOP OF CEMENT BEHIND CASNG (CALCULATED) Surface

TOP OF CEMENT CALCULATED USING: Top Out

PRECEDED CEMENT WITH: Rubber Plug

DISPLACED CEMENT WITH: Water

LINES TETED TO: 5000 psi.

CASING PICK UP (PRIOR TO CEMENTING): 110,000

CASAING SLACK OFF (PRIOR TO CEMENTING): 100,000

RIG RELEASED DATE AND TIME: \_\_\_\_\_

SUPERVISOR: Genen Sandefer

763 sks Type III Top Out., 14.2# yield 1.46 ✓

Type III +2%CACL+10%A-10+.04lbs static

Slurry 199.7 Water 134 bbls.