

Anadarko Petroleum Corp.

Weld County, CO (NAD 83)

Sec. 15-T3N-R66W

Morning Fresh 13C-15HZ

Plan A Rev 0

Plan: Plan A Rev 0 Permit

Sperry Drilling Services

Proposal Report

21 September, 2012

Well Coordinates: 1,328,041.66 N, 3,203,349.65 E (40° 13' 53.69" N, 104° 46' 18.00" W)

Ground Level: 4,852.00 ft

Local Coordinate Origin: Centered on Well Morning Fresh 13C-15HZ

Viewing Datum: RKB=17 @ 4869.00ft (Drilling Rig)

TVDs to System: N

North Reference: True

Unit System: API - US Survey Feet - Custom

Geodetic Scale Factor Applied

Version: 2003.16 Build: 431

HALLIBURTON

Project: Weld County, CO (NAD 83)
 Site: Sec. 15-T3N-R66W
 Well: Morning Fresh 13C-15HZ
 Wellbore: Plan A Rev 0
 Design: Plan A Rev 0 Permit

Anadarko Petroleum Corp.





SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	1100.00	0.00	0.00	1100.00	0.00	0.00	0.00	0.00	0.00	
3	1498.28	7.97	75.99	1497.00	6.69	26.82	2.00	75.99	-2.00	
4	6806.27	7.97	75.99	6753.78	184.82	740.50	0.00	0.00	-55.29	
5	7728.70	90.28	180.35	7341.00	-391.00	817.00	10.00	104.19	525.13	Morning Fresh 13C-15HZ_Casing Point
6	11893.02	90.28	180.35	7321.00	-4555.20	791.72	0.00	0.00	4623.49	Morning Fresh 13C-15HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude	Shape
Morning Fresh 13C-15HZ_Section Lines	0.00	0.00	0.00	40.231580	-104.771668	Polygon
Morning Fresh 13C-15HZ_Setback Lines	0.00	0.00	0.00	40.231580	-104.771668	Polygon
Morning Fresh 13C-15HZ_SHL	0.00	0.00	0.00	40.231580	-104.771668	Point
Morning Fresh 13C-15HZ_BHL	7321.00	-4555.20	791.72	40.219076	-104.768833	Point
Morning Fresh 13C-15HZ_Casing Point	7341.00	-391.00	817.00	40.230507	-104.768742	Point

Target Line:
7343.59' TVDkb @ 0° VS Drilling 90.28°

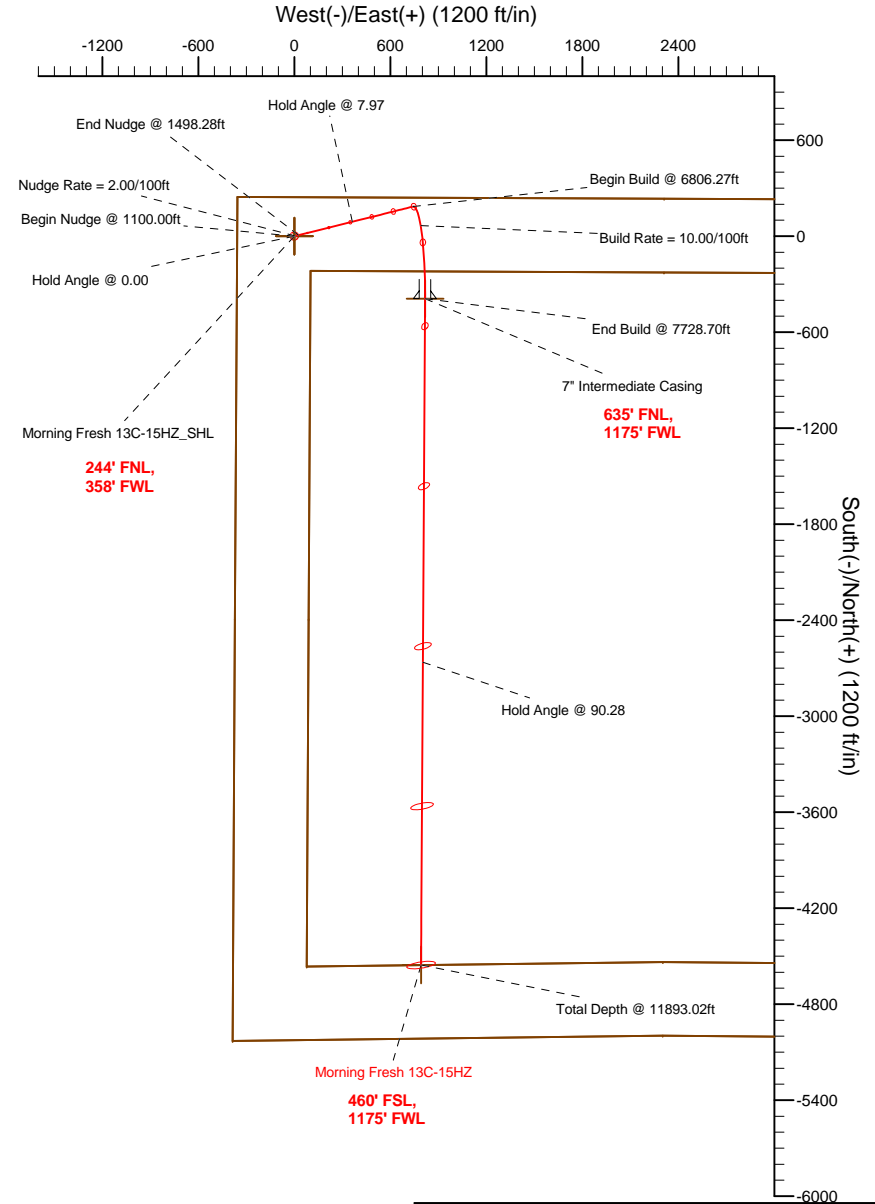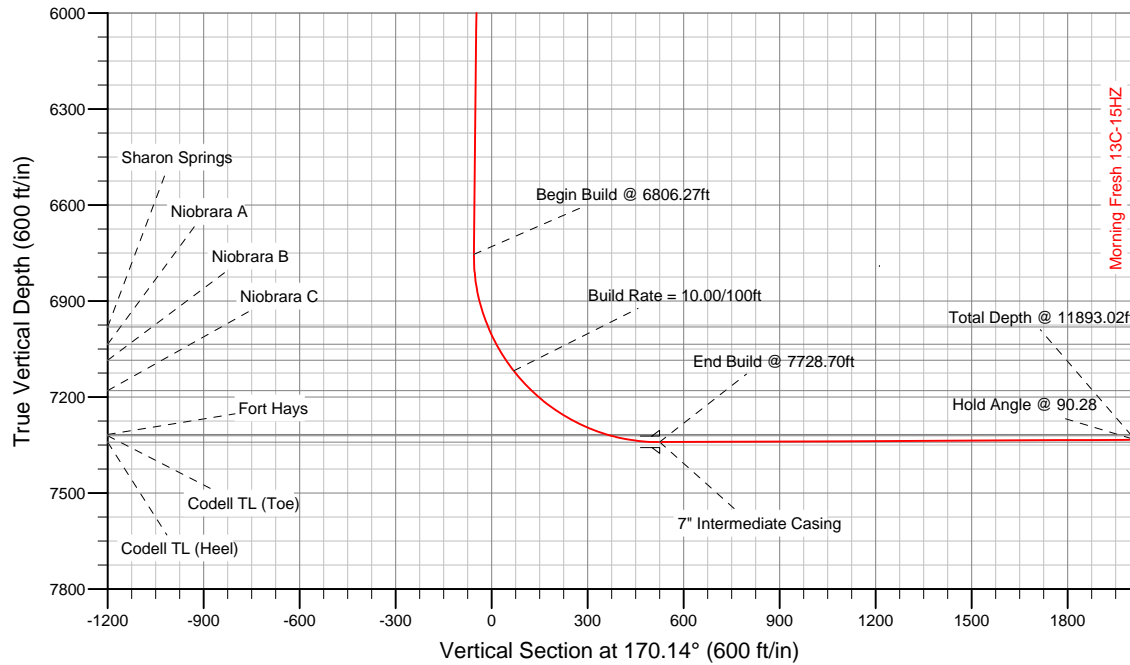

WELL DETAILS: Morning Fresh 13C-15HZ	
Ground Level: 4852.00	RKB=17 @ 4869.00ft (Drilling Rig)
Plan: Plan A Rev 0 Permit (Morning Fresh 13C-15HZ/Plan A Rev 0)	
Created By: Fred Hartmann	Date: 09/20/2012
Reviewed: _____	Date: _____

Plan Report for Morning Fresh 13C-15HZ - Plan A Rev 0 Permit

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Toolface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Morning Fresh 13C-15HZ_SHL - Morning Fresh 13C-15HZ_Section Lines - Morning Fresh 13C-15HZ_Setback Lines										
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Hold Angle @ 0.00										
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
701.00	0.00	0.00	701.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills										
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 1100.00ft										
1,200.00	2.00	75.99	1,199.98	0.42	1.69	-0.13	2.00	2.00	0.00	75.99
1,300.00	4.00	75.99	1,299.84	1.69	6.77	-0.51	2.00	2.00	0.00	0.00
Nudge Rate = 2.00/100ft										
1,400.00	6.00	75.99	1,399.45	3.80	15.23	-1.14	2.00	2.00	0.00	0.00
1,498.28	7.97	75.99	1,497.00	6.69	26.82	-2.00	2.00	2.00	0.00	0.00
End Nudge @ 1498.28ft										
1,500.00	7.97	75.99	1,498.70	6.75	27.05	-2.02	0.00	0.00	0.00	0.00
1,600.00	7.97	75.99	1,597.74	10.11	40.50	-3.02	0.00	0.00	0.00	0.00
1,700.00	7.97	75.99	1,696.77	13.46	53.94	-4.03	0.00	0.00	0.00	0.00
1,800.00	7.97	75.99	1,795.81	16.82	67.39	-5.03	0.00	0.00	0.00	0.00
1,900.00	7.97	75.99	1,894.84	20.17	80.83	-6.04	0.00	0.00	0.00	0.00
2,000.00	7.97	75.99	1,993.88	23.53	94.28	-7.04	0.00	0.00	0.00	0.00
2,100.00	7.97	75.99	2,092.91	26.89	107.72	-8.04	0.00	0.00	0.00	0.00
2,200.00	7.97	75.99	2,191.95	30.24	121.17	-9.05	0.00	0.00	0.00	0.00
2,300.00	7.97	75.99	2,290.98	33.60	134.61	-10.05	0.00	0.00	0.00	0.00
2,400.00	7.97	75.99	2,390.02	36.95	148.06	-11.05	0.00	0.00	0.00	0.00
2,500.00	7.97	75.99	2,489.05	40.31	161.50	-12.06	0.00	0.00	0.00	0.00
2,600.00	7.97	75.99	2,588.09	43.67	174.95	-13.06	0.00	0.00	0.00	0.00
2,700.00	7.97	75.99	2,687.12	47.02	188.40	-14.07	0.00	0.00	0.00	0.00
2,800.00	7.97	75.99	2,786.16	50.38	201.84	-15.07	0.00	0.00	0.00	0.00
2,900.00	7.97	75.99	2,885.19	53.73	215.29	-16.07	0.00	0.00	0.00	0.00
3,000.00	7.97	75.99	2,984.23	57.09	228.73	-17.08	0.00	0.00	0.00	0.00
3,100.00	7.97	75.99	3,083.26	60.44	242.18	-18.08	0.00	0.00	0.00	0.00
3,200.00	7.97	75.99	3,182.30	63.80	255.62	-19.09	0.00	0.00	0.00	0.00
3,300.00	7.97	75.99	3,281.33	67.16	269.07	-20.09	0.00	0.00	0.00	0.00
3,400.00	7.97	75.99	3,380.37	70.51	282.51	-21.09	0.00	0.00	0.00	0.00
3,500.00	7.97	75.99	3,479.40	73.87	295.96	-22.10	0.00	0.00	0.00	0.00
3,600.00	7.97	75.99	3,578.44	77.22	309.41	-23.10	0.00	0.00	0.00	0.00
3,700.00	7.97	75.99	3,677.47	80.58	322.85	-24.11	0.00	0.00	0.00	0.00
3,800.00	7.97	75.99	3,776.51	83.94	336.30	-25.11	0.00	0.00	0.00	0.00
3,900.00	7.97	75.99	3,875.54	87.29	349.74	-26.11	0.00	0.00	0.00	0.00
3,946.91	7.97	75.99	3,922.00	88.87	356.05	-26.58	0.00	0.00	0.00	0.00
Parkman										
4,000.00	7.97	75.99	3,974.58	90.65	363.19	-27.12	0.00	0.00	0.00	0.00
Hold Angle @ 7.97										
4,100.00	7.97	75.99	4,073.62	94.00	376.63	-28.12	0.00	0.00	0.00	0.00
4,200.00	7.97	75.99	4,172.65	97.36	390.08	-29.12	0.00	0.00	0.00	0.00
4,300.00	7.97	75.99	4,271.69	100.71	403.52	-30.13	0.00	0.00	0.00	0.00
4,400.00	7.97	75.99	4,370.72	104.07	416.97	-31.13	0.00	0.00	0.00	0.00
4,461.88	7.97	75.99	4,432.00	106.15	425.29	-31.75	0.00	0.00	0.00	0.00
Sussex										

Plan Report for Morning Fresh 13C-15HZ - Plan A Rev 0 Permit

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Toothface Azimuth (°)
4,500.00	7.97	75.99	4,469.76	107.43	430.41	-32.14	0.00	0.00	0.00	0.00
4,600.00	7.97	75.99	4,568.79	110.78	443.86	-33.14	0.00	0.00	0.00	0.00
4,700.00	7.97	75.99	4,667.83	114.14	457.31	-34.14	0.00	0.00	0.00	0.00
4,800.00	7.97	75.99	4,766.86	117.49	470.75	-35.15	0.00	0.00	0.00	0.00
4,900.00	7.97	75.99	4,865.90	120.85	484.20	-36.15	0.00	0.00	0.00	0.00
5,000.00	7.97	75.99	4,964.93	124.21	497.64	-37.16	0.00	0.00	0.00	0.00
5,100.00	7.97	75.99	5,063.97	127.56	511.09	-38.16	0.00	0.00	0.00	0.00
5,200.00	7.97	75.99	5,163.00	130.92	524.53	-39.16	0.00	0.00	0.00	0.00
5,300.00	7.97	75.99	5,262.04	134.27	537.98	-40.17	0.00	0.00	0.00	0.00
5,400.00	7.97	75.99	5,361.07	137.63	551.42	-41.17	0.00	0.00	0.00	0.00
5,500.00	7.97	75.99	5,460.11	140.98	564.87	-42.17	0.00	0.00	0.00	0.00
5,600.00	7.97	75.99	5,559.14	144.34	578.32	-43.18	0.00	0.00	0.00	0.00
5,700.00	7.97	75.99	5,658.18	147.70	591.76	-44.18	0.00	0.00	0.00	0.00
5,800.00	7.97	75.99	5,757.21	151.05	605.21	-45.19	0.00	0.00	0.00	0.00
5,900.00	7.97	75.99	5,856.25	154.41	618.65	-46.19	0.00	0.00	0.00	0.00
6,000.00	7.97	75.99	5,955.28	157.76	632.10	-47.19	0.00	0.00	0.00	0.00
6,100.00	7.97	75.99	6,054.32	161.12	645.54	-48.20	0.00	0.00	0.00	0.00
6,200.00	7.97	75.99	6,153.35	164.48	658.99	-49.20	0.00	0.00	0.00	0.00
6,300.00	7.97	75.99	6,252.39	167.83	672.43	-50.21	0.00	0.00	0.00	0.00
6,400.00	7.97	75.99	6,351.42	171.19	685.88	-51.21	0.00	0.00	0.00	0.00
6,500.00	7.97	75.99	6,450.46	174.54	699.32	-52.21	0.00	0.00	0.00	0.00
6,600.00	7.97	75.99	6,549.49	177.90	712.77	-53.22	0.00	0.00	0.00	0.00
6,700.00	7.97	75.99	6,648.53	181.25	726.22	-54.22	0.00	0.00	0.00	0.00
6,800.00	7.97	75.99	6,747.56	184.61	739.66	-55.23	0.00	0.00	0.00	0.00
6,806.27	7.97	75.99	6,753.77	184.82	740.50	-55.29	0.00	0.00	0.00	0.00
Begin Build @ 6806.27ft										
6,900.00	10.68	134.37	6,846.45	180.31	753.04	-48.69	10.00	2.90	62.29	104.19
7,000.00	18.99	157.12	6,943.10	158.78	766.03	-25.26	10.00	8.31	22.74	46.44
7,040.57	22.75	161.45	6,981.00	145.25	771.10	-11.07	10.00	9.25	10.68	24.38
Sharon Springs										
7,100.00	28.39	165.78	7,034.60	120.64	778.23	14.41	10.00	9.50	7.30	20.33
7,100.46	28.44	165.81	7,035.00	120.43	778.28	14.62	10.00	9.59	5.93	16.41
Niobrara A										
7,158.97	34.09	168.75	7,085.00	90.81	784.90	44.93	10.00	9.66	5.03	16.39
Niobrara B										
7,200.00	38.08	170.35	7,118.15	67.05	789.27	69.09	10.00	9.74	3.88	13.87
Build Rate = 10.00/100ft										
7,283.52	46.26	172.86	7,180.00	11.62	797.35	125.08	10.00	9.80	3.01	12.58
Niobrara C										
7,300.00	47.88	173.27	7,191.22	-0.35	798.81	137.14	10.00	9.83	2.51	10.72
7,400.00	57.74	175.40	7,251.60	-79.53	806.57	216.47	10.00	9.86	2.13	10.43
7,500.00	67.62	177.11	7,297.44	-168.08	812.30	304.70	10.00	9.88	1.71	9.14
7,558.71	73.43	178.00	7,317.00	-223.36	814.65	359.56	10.00	9.90	1.51	8.35
Fort Hays										
7,600.00	77.52	178.59	7,327.35	-263.30	815.84	399.12	10.00	9.90	1.43	8.06
7,700.00	87.43	179.96	7,340.43	-362.31	817.08	496.87	10.00	9.91	1.37	7.91
7,728.70	90.28	180.35	7,341.00	-391.00	817.00	525.13	10.00	9.91	1.34	7.73
End Build @ 7728.70ft - Codell TL (Heel) - 7" Intermediate Casing - Morning Fresh 13C-15HZ_Casing Point										
7,800.00	90.28	180.35	7,340.66	-462.30	816.57	595.30	0.00	0.00	0.00	7.72
7,900.00	90.28	180.35	7,340.18	-562.30	815.96	693.71	0.00	0.00	0.00	0.00
8,000.00	90.28	180.35	7,339.70	-662.29	815.35	792.13	0.00	0.00	0.00	0.00
8,100.00	90.28	180.35	7,339.22	-762.29	814.75	890.55	0.00	0.00	0.00	0.00
8,200.00	90.28	180.35	7,338.74	-862.29	814.14	988.96	0.00	0.00	0.00	0.00
8,300.00	90.28	180.35	7,338.26	-962.28	813.53	1,087.38	0.00	0.00	0.00	0.00
8,400.00	90.28	180.35	7,337.78	-1,062.28	812.92	1,185.79	0.00	0.00	0.00	0.00
8,500.00	90.28	180.35	7,337.30	-1,162.28	812.32	1,284.21	0.00	0.00	0.00	0.00
8,600.00	90.28	180.35	7,336.82	-1,262.27	811.71	1,382.63	0.00	0.00	0.00	0.00
8,700.00	90.28	180.35	7,336.34	-1,362.27	811.10	1,481.04	0.00	0.00	0.00	0.00
8,800.00	90.28	180.35	7,335.85	-1,462.27	810.50	1,579.46	0.00	0.00	0.00	0.00

Plan Report for Morning Fresh 13C-15HZ - Plan A Rev 0 Permit

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	Toothface Azimuth (°)
8,900.00	90.28	180.35	7,335.37	-1,562.27	809.89	1,677.87	0.00	0.00	0.00	0.00
9,000.00	90.28	180.35	7,334.89	-1,662.26	809.28	1,776.29	0.00	0.00	0.00	0.00
9,100.00	90.28	180.35	7,334.41	-1,762.26	808.67	1,874.71	0.00	0.00	0.00	0.00
9,200.00	90.28	180.35	7,333.93	-1,862.26	808.07	1,973.12	0.00	0.00	0.00	0.00
9,300.00	90.28	180.35	7,333.45	-1,962.25	807.46	2,071.54	0.00	0.00	0.00	0.00
9,400.00	90.28	180.35	7,332.97	-2,062.25	806.85	2,169.95	0.00	0.00	0.00	0.00
9,500.00	90.28	180.35	7,332.49	-2,162.25	806.25	2,268.37	0.00	0.00	0.00	0.00
9,600.00	90.28	180.35	7,332.01	-2,262.24	805.64	2,366.79	0.00	0.00	0.00	0.00
9,700.00	90.28	180.35	7,331.53	-2,362.24	805.03	2,465.20	0.00	0.00	0.00	0.00
9,800.00	90.28	180.35	7,331.05	-2,462.24	804.43	2,563.62	0.00	0.00	0.00	0.00
9,900.00	90.28	180.35	7,330.57	-2,562.24	803.82	2,662.03	0.00	0.00	0.00	0.00
10,000.00	90.28	180.35	7,330.09	-2,662.23	803.21	2,760.45	0.00	0.00	0.00	0.00
Hold Angle @ 90.28										
10,100.00	90.28	180.35	7,329.61	-2,762.23	802.60	2,858.87	0.00	0.00	0.00	0.00
10,200.00	90.28	180.35	7,329.13	-2,862.23	802.00	2,957.28	0.00	0.00	0.00	0.00
10,300.00	90.28	180.35	7,328.65	-2,962.22	801.39	3,055.70	0.00	0.00	0.00	0.00
10,400.00	90.28	180.35	7,328.17	-3,062.22	800.78	3,154.12	0.00	0.00	0.00	0.00
10,500.00	90.28	180.35	7,327.69	-3,162.22	800.18	3,252.53	0.00	0.00	0.00	0.00
10,600.00	90.28	180.35	7,327.21	-3,262.21	799.57	3,350.95	0.00	0.00	0.00	0.00
10,700.00	90.28	180.35	7,326.73	-3,362.21	798.96	3,449.36	0.00	0.00	0.00	0.00
10,800.00	90.28	180.35	7,326.25	-3,462.21	798.35	3,547.78	0.00	0.00	0.00	0.00
10,900.00	90.28	180.35	7,325.77	-3,562.21	797.75	3,646.20	0.00	0.00	0.00	0.00
11,000.00	90.28	180.35	7,325.29	-3,662.20	797.14	3,744.61	0.00	0.00	0.00	0.00
11,100.00	90.28	180.35	7,324.81	-3,762.20	796.53	3,843.03	0.00	0.00	0.00	0.00
11,200.00	90.28	180.35	7,324.33	-3,862.20	795.93	3,941.44	0.00	0.00	0.00	0.00
11,300.00	90.28	180.35	7,323.85	-3,962.19	795.32	4,039.86	0.00	0.00	0.00	0.00
11,400.00	90.28	180.35	7,323.37	-4,062.19	794.71	4,138.28	0.00	0.00	0.00	0.00
11,500.00	90.28	180.35	7,322.89	-4,162.19	794.10	4,236.69	0.00	0.00	0.00	0.00
11,600.00	90.28	180.35	7,322.41	-4,262.18	793.50	4,335.11	0.00	0.00	0.00	0.00
11,700.00	90.28	180.35	7,321.93	-4,362.18	792.89	4,433.52	0.00	0.00	0.00	0.00
11,800.00	90.28	180.35	7,321.45	-4,462.18	792.28	4,531.94	0.00	0.00	0.00	0.00
11,893.02	90.28	180.35	7,321.00	-4,555.20	791.72	4,623.49	0.00	0.00	0.00	0.00
Total Depth @ 11893.02ft - Codell TL (Toe) - Morning Fresh 13C-15HZ_BHL										

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
600.00	600.00	0.00	0.00	Hold Angle @ 0.00
1,100.00	1,100.00	0.00	0.00	Begin Nudge @ 1100.00ft
1,300.00	1,299.84	1.69	6.77	Nudge Rate = 2.00/100ft
1,498.28	1,497.00	6.69	26.82	End Nudge @ 1498.28ft
4,000.00	3,974.58	90.65	363.19	Hold Angle @ 7.97
6,806.27	6,753.77	184.82	740.50	Begin Build @ 6806.27ft
7,200.00	7,118.15	67.05	789.27	Build Rate = 10.00/100ft
7,728.70	7,341.00	-391.00	817.00	End Build @ 7728.70ft
10,000.00	7,330.09	-2,662.23	803.21	Hold Angle @ 90.28
11,893.02	7,321.00	-4,555.20	791.72	Total Depth @ 11893.02ft

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (ft)
				+N/-S (ft)	+E/-W (ft)	
Target	Morning Fresh 13C-15HZ_BHL	170.14	Slot	0.00	0.00	0.00

Plan Report for Morning Fresh 13C-15HZ - Plan A Rev 0 Permit**Survey tool program**

From (ft)	To (ft)	Survey/Plan	Survey Tool
0.00	11,893.02	Plan A Rev 0 Permit	MWD

Casing Details

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
7,728.70	7,341.00	7" Intermediate Casing	7	8-3/4

Formation Details

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
701.00	701.00	Fox Hills		0.00	
3,946.91	3,922.00	Parkman		0.00	
4,461.88	4,432.00	Sussex		0.00	
7,040.57	6,981.00	Sharon Springs		0.00	
7,100.46	7,035.00	Niobrara A		0.00	
7,158.97	7,085.00	Niobrara B		0.00	
7,283.52	7,180.00	Niobrara C		0.00	
7,558.71	7,317.00	Fort Hays		0.00	
7,728.70	7,341.00	Codell TL (Heel)		0.00	
11,893.02	7,321.00	Codell TL (Toe)		0.00	

Targets associated with this wellbore

Target Name	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Shape
Morning Fresh 13C-15HZ_Casing Point	7,341.00	-391.00	817.00	Point
Morning Fresh 13C-15HZ_BHL	7,321.00	-4,555.20	791.72	Point
Morning Fresh 13C-15HZ_Section Lines	0.00	0.00	0.00	Polygon
Morning Fresh 13C-15HZ_Setback Lines	0.00	0.00	0.00	Polygon
Morning Fresh 13C-15HZ_SHL	0.00	0.00	0.00	Point

**North Reference Sheet for Sec. 15-T3N-R66W - Morning Fresh 13C-15HZ - Plan A
Rev 0**

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference.
Vertical Depths are relative to RKB=17 @ 4869.00ft (Drilling Rig). Northing and Easting are relative to Morning Fresh 13C-15HZ
Coordinate System is US State Plane 1983, Colorado Northern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Lambert Conformal Conic (2 parallel)
Central Meridian is -105.50°, Longitude Origin:0.000000°, Latitude Origin:40.783333°
False Easting: 3,000,000.00ft, False Northing: 1,000,000.00ft, Scale Reduction: 0.99995690

Grid Coordinates of Well: 1,328,041.66 ft N, 3,203,349.65 ft E
Geographical Coordinates of Well: 40° 13' 53.69" N, 104° 46' 18.00" W
Grid Convergence at Surface is: 0.47°

Based upon Minimum Curvature type calculations, at a Measured Depth of 11,893.02ft
the Bottom Hole Displacement is 4,623.49ft in the Direction of 170.14° (True).

Magnetic Convergence at surface is: -8.26° (20 September 2012, , BGGM2012)

