



SOIL EROSION
BLANKET



STRAW WATTLE



CHECK DAM

NOTES:

1. ALL AREAS DISTURBED BY CONSTRUCTION ACTIVITIES (INCLUDING STAGING AREAS) NOT CALLED OUT IN THIS PLAN ARE TO BE TOP SOILED 4" MIN. AND SEEDED.

2. CHECK DAMS AND INLET/OUTLET PROTECTION ARE TO BE CONSTRUCTED USING STRAW WATTLES INSTALLED ACCORDING TO DETAIL.

3. EC BLANKETS ARE TO BE SINGLE LAYER (TOP ONLY) UV DEGRADABLE PLASTIC MESH.


4. ALL STRAW WATTLES INCLUDING CHECK DAMS AND INLET PROTECTION ARE TEMPORARY EROSION CONTROL MEASURES THAT ARE TO BE REMOVED WHEN 70% RE-VEGETATION IS COMPLETE.

5. EROSION CONTROL DEVICES ARE TO BE INSTALLED AS AREAS OF CONSTRUCTION THEY ARE INTENDED TO PROTECT ARE COMPLETED.

6. SEED MIX IS TO BE APPROVED BLM SEED MIX FOR LOCATION ELEVATION AND CLIMATE.


7. SOIL EROSION BLANKET IS TO BE INSTALLED ACCORDING TO MANUFACTURERS SPECIFICATIONS.

8. MIRAFI 140N GEOTEXTILE FABRIC OR APPROVED EQUAL IS TO BE INSTALLED UNDER ALL RIPRAP.

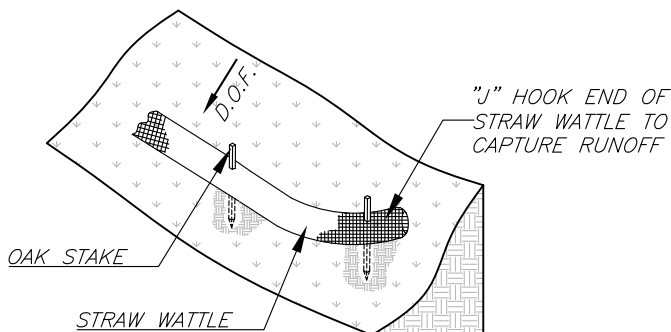

END OF WATTLE INSTALLATION

N.T.S

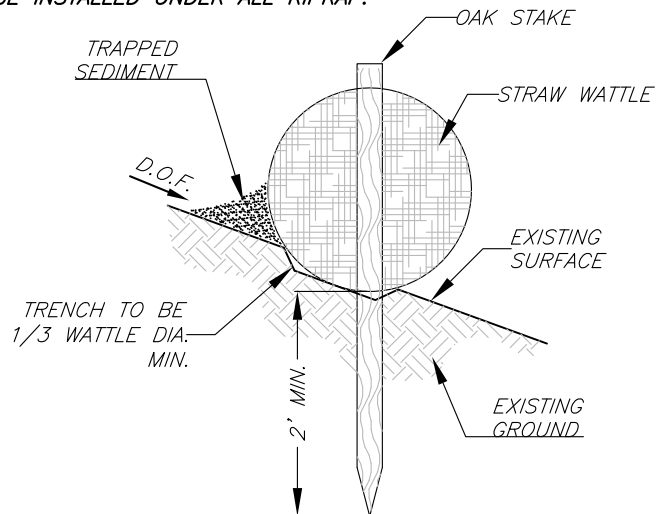

STRAW WATTLE DETAIL TYP.



SGM INC.

118 W. 6th Street, Suite 200
Glenwood Springs, Colorado 81601
(970) 945-1004 (FAX 945-5948)
Aspen, Colorado (970) 925-6727

Scale: N/A

Sheet 2H of 7

Pad 15A

Dejour Pad 15A SWMP Details & Notes

Sections 15&16, T.6 S, R. 91 W., 6th P.M., Garfield County, CO

Job# 2010-112.001

Date: 7.16.13

By: DCS

File: Pad 15 2013