



Scientific Drilling
Rocky Mountain Operations

Company: OXY USA RMAT
Project: Garfield County, CO NAD27
Site: Cascade Creek 697-08A Pad





Well Details: CC 697-05-67A

TVD Reference: GL 8401' & RKB 30' @ 8431.00ft (H&P Rig) Ground Level: 8401.00
+N/-S +E/-W Northing Easting Latitude Longitude Slot
0.00 0.00 634632.21 1225756.69 39° 32' 37.538 N 108° 14' 44.891 W G



Azimuths to True North
Magnetic North: 10.48°

Magnetic Field
Strength: 52229.5nT
Dip Angle: 65.73°
Date: 5/24/2011
Model: IGRF2010

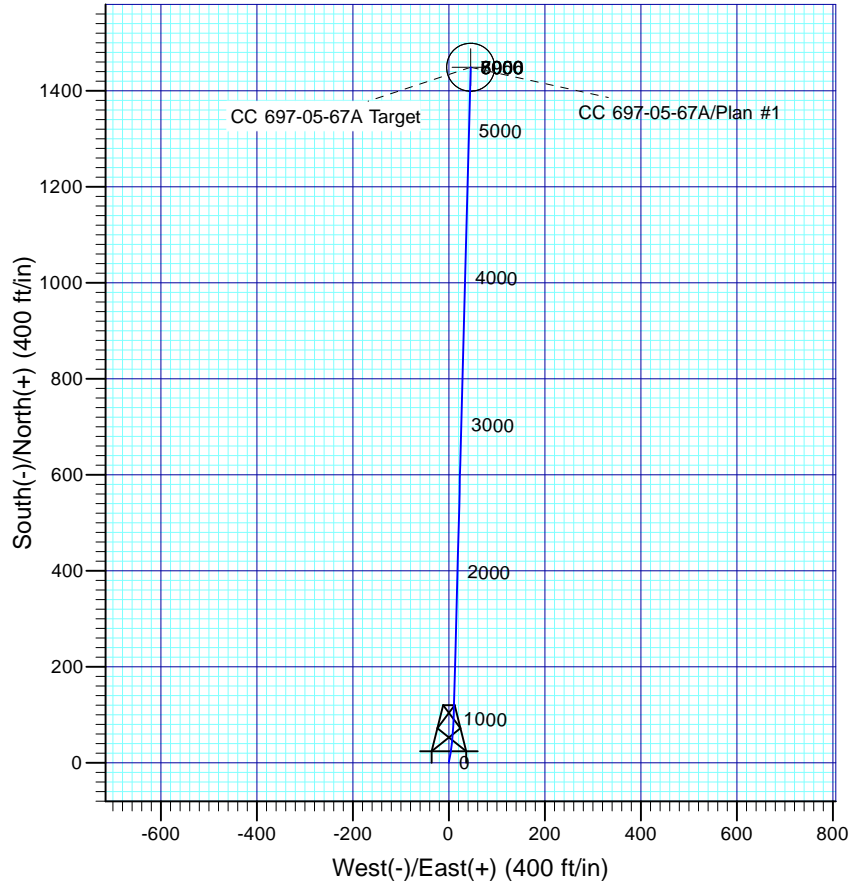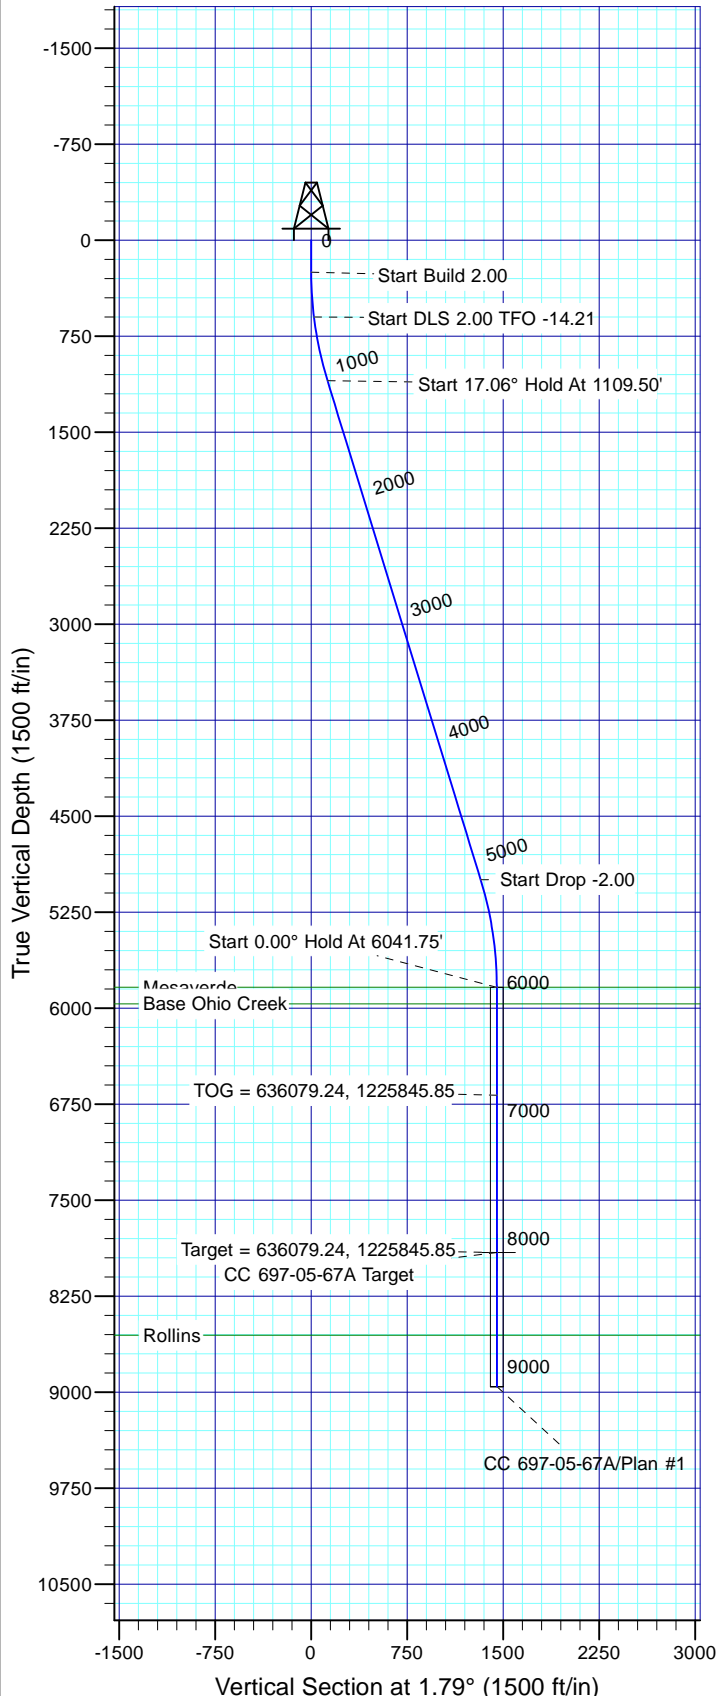

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
5836.00	6040.75	Mesaverde
5966.00	6170.75	Base Ohio Creek
8556.00	8760.75	Rollins

Plan: Plan #1

15:54, May 25 2011
Created By: Rex Hall

PROJECT DETAILS: Garfield County, CO NAD27

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: Colorado Central 502

System Datum: Mean Sea Level

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	V Sect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	
3	600.00	7.00	10.00	599.13	21.03	3.71	2.00	10.00	21.14	
4	1109.22	17.06	1.49	1096.56	126.52	11.05	2.00	-14.21	126.80	CC 697-05-67A Target
5	1109.50	17.06	1.49	1096.83	126.60	11.06	2.00	0.00	126.89	
6	5188.66	17.06	1.49	4996.47	1323.03	42.12	0.00	0.00	1323.70	
7	6041.75	0.00	0.00	5837.00	1449.06	45.40	2.00	180.00	1449.77	
8	8113.75	0.00	0.00	7909.00	1449.06	45.40	0.00	0.00	1449.77	CC 697-05-67A Target
9	9160.75	0.00	0.00	8956.00	1449.06	45.40	0.00	0.00	1449.77	

OXY USA RMAT

**Garfield County, CO NAD27
Cascade Creek 697-08A Pad
CC 697-05-67A - Slot G**

OH

Plan: Plan #1

Standard Planning Report

25 May, 2011





Database:	Rockies Compass Server	Local Co-ordinate Reference:	Well CC 697-05-67A - Slot G
Company:	OXY USA RMAT	TVD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Project:	Garfield County, CO NAD27	MD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Site:	Cascade Creek 697-08A Pad	North Reference:	True
Well:	CC 697-05-67A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Garfield County, CO NAD27		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Colorado Central 502		

Site	Cascade Creek 697-08A Pad, Sec 8 T6S R97W			
Site Position:		Northing:	635,765.16 usft	Latitude: 39° 32' 48.728 N
From:	Lat/Long	Easting:	1,225,748.33 usft	Longitude: 108° 14' 45.434 W
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence: -1.73 °

Well	CC 697-05-67A - Slot G			
Well Position	+N/-S	-1,132.18 ft	Northing:	634,632.22 usft
	+E/-W	42.59 ft	Easting:	1,225,756.69 usft
Position Uncertainty		0.00 ft	Wellhead Elevation:	Latitude: 39° 32' 37.538 N
				Longitude: 108° 14' 44.891 W
				Ground Level: 8,401.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	5/24/2011	10.48	65.73	52,230

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	1.79

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	7.00	10.00	599.13	21.03	3.71	2.00	2.00	0.00	10.00	
1,109.22	17.06	1.49	1,096.56	126.52	11.05	2.00	1.97	-1.67	-14.21	CC 697-05-67A Target
1,109.50	17.06	1.49	1,096.83	126.60	11.06	2.00	2.00	0.00	0.00	
5,188.66	17.06	1.49	4,996.47	1,323.03	42.12	0.00	0.00	0.00	0.00	
6,041.75	0.00	0.00	5,837.00	1,449.06	45.40	2.00	-2.00	0.00	180.00	
8,113.75	0.00	0.00	7,909.00	1,449.06	45.40	0.00	0.00	0.00	0.00	CC 697-05-67A Target
9,160.75	0.00	0.00	8,956.00	1,449.06	45.40	0.00	0.00	0.00	0.00	



Database:	Rockies Compass Server	Local Co-ordinate Reference:	Well CC 697-05-67A - Slot G
Company:	OXY USA RMAT	TVD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Project:	Garfield County, CO NAD27	MD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Site:	Cascade Creek 697-08A Pad	North Reference:	True
Well:	CC 697-05-67A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
300.00	1.00	10.00	300.00	0.43	0.08	0.43	2.00	2.00	0.00
400.00	3.00	10.00	399.93	3.87	0.68	3.89	2.00	2.00	0.00
500.00	5.00	10.00	499.68	10.74	1.89	10.79	2.00	2.00	0.00
600.00	7.00	10.00	599.13	21.03	3.71	21.14	2.00	2.00	0.00
Start DLS 2.00 TFO -14.21									
700.00	8.95	6.84	698.16	34.76	5.69	34.92	2.00	1.95	-3.16
800.00	10.92	4.81	796.65	51.92	7.42	52.13	2.00	1.97	-2.03
900.00	12.90	3.40	894.50	72.51	8.87	72.75	2.00	1.98	-1.41
1,000.00	14.88	2.35	991.57	96.49	10.06	96.75	2.00	1.98	-1.04
1,100.00	16.87	1.55	1,087.75	123.83	10.98	124.11	2.00	1.99	-0.80
1,109.22	17.06	1.49	1,096.56	126.52	11.05	126.80	2.00	1.99	-0.70
1,109.50	17.06	1.49	1,096.83	126.60	11.06	126.89	2.00	2.00	0.00
Start 17.06° Hold At 1109.50'									
1,200.00	17.06	1.49	1,183.35	153.14	11.75	153.44	0.00	0.00	0.00
1,300.00	17.06	1.49	1,278.95	182.47	12.51	182.78	0.00	0.00	0.00
1,400.00	17.06	1.49	1,374.55	211.80	13.27	212.12	0.00	0.00	0.00
1,500.00	17.06	1.49	1,470.15	241.13	14.03	241.46	0.00	0.00	0.00
1,600.00	17.06	1.49	1,565.75	270.47	14.79	270.80	0.00	0.00	0.00
1,700.00	17.06	1.49	1,661.34	299.80	15.55	300.14	0.00	0.00	0.00
1,800.00	17.06	1.49	1,756.94	329.13	16.31	329.47	0.00	0.00	0.00
1,900.00	17.06	1.49	1,852.54	358.46	17.08	358.81	0.00	0.00	0.00
2,000.00	17.06	1.49	1,948.14	387.79	17.84	388.15	0.00	0.00	0.00
2,100.00	17.06	1.49	2,043.74	417.12	18.60	417.49	0.00	0.00	0.00
2,200.00	17.06	1.49	2,139.34	446.45	19.36	446.83	0.00	0.00	0.00
2,300.00	17.06	1.49	2,234.94	475.78	20.12	476.17	0.00	0.00	0.00
2,400.00	17.06	1.49	2,330.54	505.11	20.88	505.51	0.00	0.00	0.00
2,500.00	17.06	1.49	2,426.14	534.44	21.65	534.85	0.00	0.00	0.00
2,600.00	17.06	1.49	2,521.73	563.77	22.41	564.19	0.00	0.00	0.00
2,700.00	17.06	1.49	2,617.33	593.10	23.17	593.53	0.00	0.00	0.00
2,800.00	17.06	1.49	2,712.93	622.43	23.93	622.87	0.00	0.00	0.00
2,900.00	17.06	1.49	2,808.53	651.76	24.69	652.21	0.00	0.00	0.00
3,000.00	17.06	1.49	2,904.13	681.09	25.45	681.55	0.00	0.00	0.00
3,100.00	17.06	1.49	2,999.73	710.42	26.22	710.89	0.00	0.00	0.00
3,200.00	17.06	1.49	3,095.33	739.75	26.98	740.23	0.00	0.00	0.00
3,300.00	17.06	1.49	3,190.93	769.08	27.74	769.57	0.00	0.00	0.00
3,400.00	17.06	1.49	3,286.53	798.41	28.50	798.91	0.00	0.00	0.00
3,500.00	17.06	1.49	3,382.13	827.74	29.26	828.25	0.00	0.00	0.00
3,600.00	17.06	1.49	3,477.72	857.07	30.02	857.59	0.00	0.00	0.00
3,700.00	17.06	1.49	3,573.32	886.40	30.79	886.93	0.00	0.00	0.00
3,800.00	17.06	1.49	3,668.92	915.73	31.55	916.27	0.00	0.00	0.00
3,900.00	17.06	1.49	3,764.52	945.06	32.31	945.61	0.00	0.00	0.00
4,000.00	17.06	1.49	3,860.12	974.39	33.07	974.95	0.00	0.00	0.00
4,100.00	17.06	1.49	3,955.72	1,003.72	33.83	1,004.29	0.00	0.00	0.00
4,200.00	17.06	1.49	4,051.32	1,033.05	34.59	1,033.63	0.00	0.00	0.00
4,300.00	17.06	1.49	4,146.92	1,062.38	35.35	1,062.97	0.00	0.00	0.00
4,400.00	17.06	1.49	4,242.52	1,091.71	36.12	1,092.31	0.00	0.00	0.00
4,500.00	17.06	1.49	4,338.11	1,121.04	36.88	1,121.65	0.00	0.00	0.00
4,600.00	17.06	1.49	4,433.71	1,150.37	37.64	1,150.98	0.00	0.00	0.00



Database:	Rockies Compass Server	Local Co-ordinate Reference:	Well CC 697-05-67A - Slot G
Company:	OXY USA RMAT	TVD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Project:	Garfield County, CO NAD27	MD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Site:	Cascade Creek 697-08A Pad	North Reference:	True
Well:	CC 697-05-67A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,700.00	17.06	1.49	4,529.31	1,179.70	38.40	1,180.32	0.00	0.00	0.00
4,800.00	17.06	1.49	4,624.91	1,209.03	39.16	1,209.66	0.00	0.00	0.00
4,900.00	17.06	1.49	4,720.51	1,238.36	39.92	1,239.00	0.00	0.00	0.00
5,000.00	17.06	1.49	4,816.11	1,267.69	40.69	1,268.34	0.00	0.00	0.00
5,100.00	17.06	1.49	4,911.71	1,297.02	41.45	1,297.68	0.00	0.00	0.00
5,188.66	17.06	1.49	4,996.47	1,323.03	42.12	1,323.70	0.00	0.00	0.00
Start Drop -2.00									
5,200.00	16.83	1.49	5,007.31	1,326.33	42.21	1,327.00	2.00	-2.00	0.00
5,300.00	14.83	1.49	5,103.51	1,353.61	42.92	1,354.29	2.00	-2.00	0.00
5,400.00	12.83	1.49	5,200.61	1,377.51	43.54	1,378.20	2.00	-2.00	0.00
5,500.00	10.83	1.49	5,298.48	1,398.01	44.07	1,398.70	2.00	-2.00	0.00
5,600.00	8.83	1.49	5,397.00	1,415.08	44.51	1,415.78	2.00	-2.00	0.00
5,700.00	6.83	1.49	5,496.06	1,428.71	44.87	1,429.42	2.00	-2.00	0.00
5,800.00	4.83	1.49	5,595.54	1,438.87	45.13	1,439.58	2.00	-2.00	0.00
5,900.00	2.83	1.49	5,695.31	1,445.56	45.30	1,446.27	2.00	-2.00	0.00
6,000.00	0.83	1.49	5,795.26	1,448.76	45.39	1,449.47	2.00	-2.00	0.00
6,040.75	0.02	1.49	5,836.00	1,449.06	45.40	1,449.77	2.00	-2.00	0.00
Mesaverde									
6,041.75	0.00	0.00	5,837.00	1,449.06	45.40	1,449.77	2.00	-2.00	0.00
Start 0.00° Hold At 6041.75'									
6,100.00	0.00	0.00	5,895.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,170.75	0.00	0.00	5,966.00	1,449.06	45.40	1,449.77	0.00	0.00	0.00
Base Ohio Creek									
6,200.00	0.00	0.00	5,995.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,300.00	0.00	0.00	6,095.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,400.00	0.00	0.00	6,195.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,500.00	0.00	0.00	6,295.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,600.00	0.00	0.00	6,395.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,700.00	0.00	0.00	6,495.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,800.00	0.00	0.00	6,595.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
6,885.75	0.00	0.00	6,681.00	1,449.06	45.40	1,449.77	0.00	0.00	0.00
TOG = 636079.24, 1225845.85									
6,900.00	0.00	0.00	6,695.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,000.00	0.00	0.00	6,795.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,100.00	0.00	0.00	6,895.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,200.00	0.00	0.00	6,995.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,300.00	0.00	0.00	7,095.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,400.00	0.00	0.00	7,195.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,500.00	0.00	0.00	7,295.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,600.00	0.00	0.00	7,395.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,700.00	0.00	0.00	7,495.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,800.00	0.00	0.00	7,595.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
7,900.00	0.00	0.00	7,695.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,000.00	0.00	0.00	7,795.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,100.00	0.00	0.00	7,895.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,113.75	0.00	0.00	7,909.00	1,449.06	45.40	1,449.77	0.00	0.00	0.00
Target = 636079.24, 1225845.85									
8,200.00	0.00	0.00	7,995.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,300.00	0.00	0.00	8,095.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,400.00	0.00	0.00	8,195.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,500.00	0.00	0.00	8,295.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,600.00	0.00	0.00	8,395.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,700.00	0.00	0.00	8,495.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00



Database:	Rockies Compass Server	Local Co-ordinate Reference:	Well CC 697-05-67A - Slot G
Company:	OXY USA RMAT	TVD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Project:	Garfield County, CO NAD27	MD Reference:	GL 8401' & RKB 30' @ 8431.00ft (H&P Rig)
Site:	Cascade Creek 697-08A Pad	North Reference:	True
Well:	CC 697-05-67A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,760.75	0.00	0.00	8,556.00	1,449.06	45.40	1,449.77	0.00	0.00	0.00
Rollins									
8,800.00	0.00	0.00	8,595.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
8,900.00	0.00	0.00	8,695.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
9,000.00	0.00	0.00	8,795.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
9,100.00	0.00	0.00	8,895.25	1,449.06	45.40	1,449.77	0.00	0.00	0.00
9,160.75	0.00	0.00	8,956.00	1,449.06	45.40	1,449.77	0.00	0.00	0.00
PBHL = 636079.24, 1225845.85									

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
CC 697-05-67A Target - plan hits target center - Circle (radius 50.00)	0.00	0.00	7,909.00	1,449.06	45.40	636,079.24	1,225,845.85	39° 32' 51.860 N	108° 14' 44.311 W

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
6,040.75	5,836.00	Mesaverde		0.00	
6,170.75	5,966.00	Base Ohio Creek		0.00	
8,760.75	8,556.00	Rollins		0.00	

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
250.00	250.00	0.00	0.00	Start Build 2.00
600.00	599.13	21.03	3.71	Start DLS 2.00 TFO -14.21
1,109.50	1,096.83	126.60	11.06	Start 17.06° Hold At 1109.50'
5,188.66	4,996.47	1,323.03	42.12	Start Drop -2.00
6,041.75	5,837.00	1,449.06	45.40	Start 0.00° Hold At 6041.75'
6,885.75	6,681.00	1,449.06	45.40	TOG = 636079.24, 1225845.85
8,113.75	7,909.00	1,449.06	45.40	Target = 636079.24, 1225845.85
9,160.75	8,956.00	1,449.06	45.40	PBHL = 636079.24, 1225845.85