CEMENT BOND LOG
GAMMA RAY C C L
V D L

Company EOG Resources
Well CRITTER CREEK 30-26H
Field Wildcat
County Weld State Colorado

Location: API # :
SHL: 501' FSL & 777' FEL SE / SE
BHL: 600' FSL & 1450' FWL SW / SE
SEC 26 TWP 11N RGE 63W

Other Services

Permanent Datum GL Elevation 5161
Log Measured From KB 25'
Drilling Measured From KB

Elevation
K.B. 5186
D.F. 5185
G.L. 5161

Company	EOG Resources
Well	CRITTER CREEK 30-26H
Field	Wildcat
County	Weld
State	Colorado

Date	January 3, 2011	
Run Number	ONE	
Depth Driller	12523 TD	
Depth Logger	6800	
Bottom Logged Interval	6799	
Top Log Interval	Surface	
Casing Size	7.0"	
Type Fluid	Water	
Max. Recorded Temp.	210 deg F	
Estimated Cement Top	Surface	
Time Well Ready	Mast Truck	
Time Logger On Bottom	PM	
Unit Number	3344	
Tool Size / ID Number	2.75 Tool 2 RED	
Location	Platteville, CO	
Recorded By	K. Monaghan	
Witnessed By	D. Haase	

Borehole Record			Tubing Record			
Run Number	Bit	From	To	Size	Weight	From	To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	7.0"			
Prot. String				
Production String	4 1/2"			
Liner				

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank You For Choosing Superior Well Services!!
LOG NOT CORRELATED
Eastern Most well of 2 Well Pad, East of Critter Creek 21-26H

Database File: cblcritter creek 30-26h.db
Dataset Pathname: pass3
Presentation Format: nuexbond
Dataset Creation: Mon Jan 03 13:41:19 2011 by Log Std Casedhole 10081
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	130	0	Amplified Amplitude (mV)	20	200	VDL	1200
30	CCL	-1.5	0	Amplitude (mV)	100			
340	TT3 (usec)	240						

0	Gamma Ray (GAPI)	130	0	Amplified Amplitude (mV)	20	200	VDL	1200
30	CCL	-1.5	0	Amplitude (mV)	100			
340	TT3 (usec)	240						

Database File: cblcritter creek 30-26h.db
Dataset Pathname: pass2
Presentation Format: nuexbond
Dataset Creation: Mon Jan 03 13:19:43 2011 by Log Std Casedhole 10081
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	0	Amplified Amplitude (mV)	20	200	VDL	1200
30	CCL	-1.5	0	Amplitude (mV)	100			
340	TT3 (usec)	240						

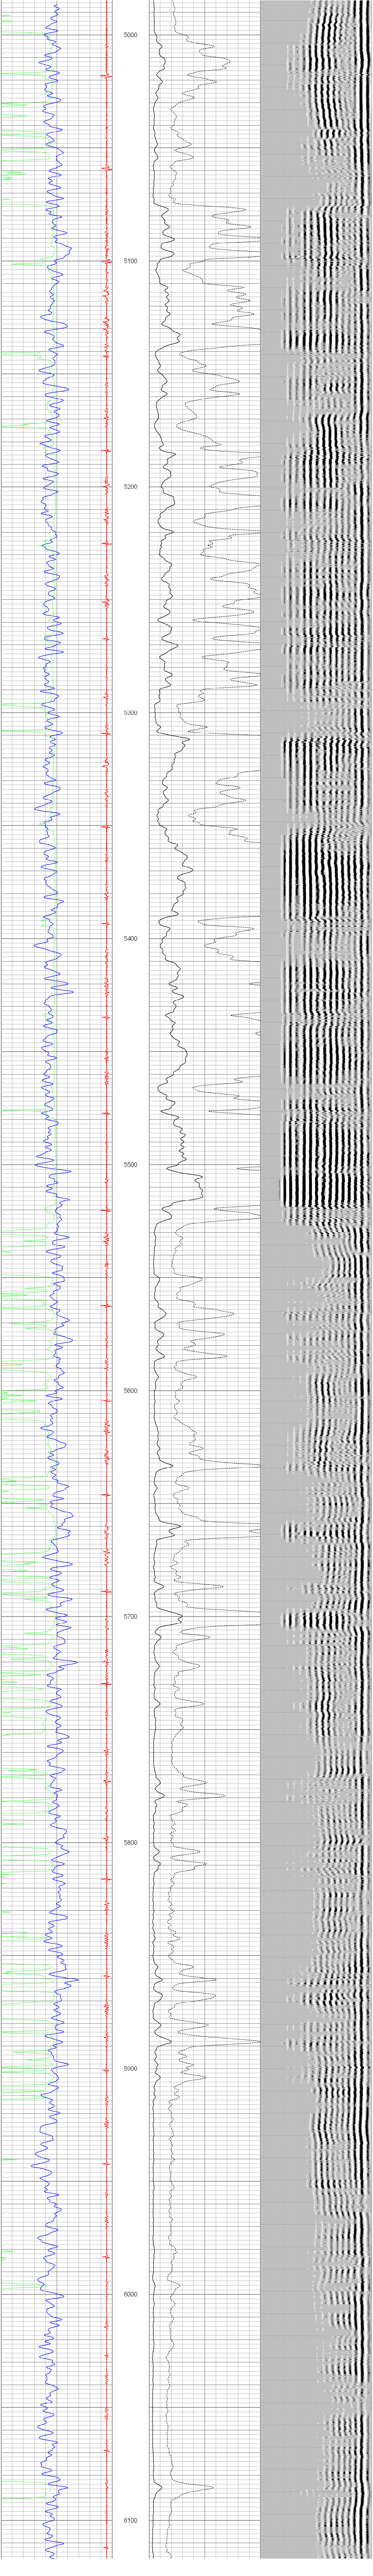

Calibration Report

Database File: cblcritter creek 30-26h.db
Dataset Pathname: pass3
Dataset Creation: Mon Jan 03 13:41:19 2011 by Log Std Casedhole 10081

Gamma Ray Calibration Report

Serial Number:	234GR-328	
Tool Model:	TekcoGR	
Performed:	Thu Aug 02 12:04:45 2007	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.8000	GAPI/cps

Segmented Cement Bond Log Calibration Report

Serial Number:	234B35C-8013	
Tool Model:	TEKCO	
Calibration Casing Diameter:	7.000	in
Calibration Depth:	101.025	ft

Master Calibration, performed Mon Jan 03 12:59:58 2011:

	Raw (v)		Calibrated (mv)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
3'	-0.009	2.475	0.900	62.165	24.661	1.126
CAL	-0.012	0.664				
5'	-0.009	2.318	0.900	62.165	26.330	1.145
SUM						
S1						
S2						
S3						
S4						
S5						
S6						
S7						
S8						

Internal Reference Calibration, performed Mon Dec 27 10:10:40 2010:

	Raw (v)		Calibrated (v)		Results	
	Zero	Cal	Zero	Cal	Gain	Offset
CAL	0.000	0.000	-0.012	0.664	1.000	0.000

Air Zero Calibration, performed Mon Dec 27 10:04:32 2010:

	Raw (v)	Calibrated (v)	Results
	Zero	Zero	Offset
3'	0.000	0.000	0.000
5'	0.000	0.000	0.000
SUM			
S1			
S2			
S3			
S4			
S5			
S6			
S7			
S8			