

## DC-17 Form 2A

### Kinder Morgan CO2 Company, LP

#### INTRODUCTION

This Form 2A stormwater report includes the best management practices (BMPs) and reclamation plans for Kinder Morgan's proposed DC-17 well pad in accordance with the Colorado Oil and Gas Conservation Commission's Form 2A requirements. BMP diagrams and additional general stormwater information is included with Kinder Morgan's Master Stormwater Management Plan (MSWMP) for oil and gas construction activities for McElmo Dome and Doe Canyon. The MSWMP can be obtained from Kinder Morgan and is in accordance with Colorado Department of Public Health and Environment (CDPHE) stormwater guidelines. Phil Kennedy is the Kinder Morgan contact person and his contact information is listed below:

Phil Kennedy  
Regulatory Manager  
Kinder Morgan CO2 Company L.P.  
17801 Highway 491 Cortez, CO 81321  
Office - 970-882-5527

#### PROJECT DESCRIPTION

The proposed well pad would be located on an active agricultural field. The proposed access road would connect the well pad to County Road J. Slopes within the proposed project average 1 to 2 percent. Disturbance would include the removal of topsoil to create a level pad (530 feet by 490 feet) for drilling. The wellhead will be the only item on the pad once the well goes to completion.

#### ESTIMATED TOTAL AREA OF THE SITE TO UNDERGO CLEARING, EXCAVATION, OR GRADING

The maximum disturbance associated with the proposed well pad would be 5.46 acres.

#### EXISTING SOIL

Parent materials found at the project site and surrounding areas include alluvium and eolian deposits derived from sandstone. The surveyed soil-map unit for the project area consists of Cahona-Sharps Wetherill complex, 2 to 6 percent slopes. This soil type is not highly erodible by wind or water; it is well drained and partially hydric (NRCS 2014<sup>1</sup>).

<sup>1</sup> Natural Resources Conservation Service (NRCS). 2014. Web Soil Survey. Available online at <http://websoilsurvey.sc.egov.usda.gov/App/WebSoilSurvey.aspx>. Accessed April 2014.

**DESCRIPTION OF EXISTING VEGETATION AND ESTIMATE OF PERCENT OF GROUND COVER**

The proposed well pad would be located on an active agricultural field that has been plowed and tilled.

**NAME OF RECEIVING WATER AND TYPE OF OUTFALLS**

The nearest perennial water—indicated on the U.S. Geological Survey topographic map—is Dove Creek, located approximately 4 miles west of the project area. Drainage from the proposed project area generally flows southwest through unnamed intermittent drainages to Dove Creek. There is an intermittent pond 943 feet northwest of the well pad, as well as an intermittent stream 361 feet southeast of the well pad.

**PROJECT-SPECIFIC BMPs**

The following BMPs are site-specific BMPs identified by Ecosphere Environmental Services during a field visit on April 10, 2014. BMP diagrams are included in the MSWMP. BMPs would be maintained or amended by Kinder Morgan as site conditions change throughout the construction and reclamation process. Stormwater inspections would occur as stipulated in the MSWMP and as required by the CDPHE. A map showing the BMP locations is attached. Site-specific BMPs will be installed pre-construction and during the construction process; BMPs will continue to be maintained until the site is finally stabilized per CDPHE requirements. Table 1 describes the structural BMPs used at DC-17.

**Table 1. Structural BMPs**

BMP	How It Works	Location
Bonded Fiber Matrix (Tackifier)	Bonding agents provide durability to minimize water and wind erosion, while also allowing for optimal rainwater penetration into soil for vegetative growth.	When needed on disturbed areas surrounding well pad.
Culvert Protection	Inlet and outlet protection prevent soil and debris from entering storm drain inlets and preventing scouring at outlets by reducing flow.	At culverts along access road.
Erosion Control Logs	Erosion control logs are made of fibrous material and work by trapping sediment. Erosion control logs must be trenched into the ground to be effective.	Around perimeter of the well pad.
Diversion Ditch with Wattles	The diversion ditch diverts run on around the well pad.	Diversion ditch would be located along east and west sections of the well pad. Wattles would be located every 50 feet in the diversion ditch.
Fuel and Chemical Containment	Fuel and chemicals stored on-site will be within secondary containments to reduce the potential for spills or off-site releases.	Where needed.
Rock Check Dams	Rock check dams are constructed across a ditch to catch sediment.	Along the County Road J roadside ditch.

BMP	How It Works	Location
Tracking Control	An effective vehicle tracking control helps remove sediment (mud or dirt) from vehicle tires, reducing the potential for tracking onto off-site paved roadways.	Where needed.
Earth Berm	A compacted and stabilized earth berm greatly helps prevent any off-site releases.	Around perimeter of well pad.
Rock Armor	Rock armor is outlet/inlet protection consisting of a layer of angular rocks. The rocks slow stormwater flow, thereby reducing erosion and settling out sediment.	Installed on geotextile blankets at inlets and/or outlets of diversion ditches, drainpipes, and culverts.


### NON-STRUCTURAL BMPs

Table 2 includes non-structural BMPs that will be applied to the entire project area where needed, beginning with construction and continuing until final stabilization is reached.

**Table 2. Non-Structural BMPs**

BMP	How It Works	Location
Soil Roughening	Surface roughening creates small ridges and gullies with the teeth of the bucket on the front-end loader or with the grooves of tracked equipment. These ridges and gullies go across the slope (or along the contour of the slope), trapping stormwater and helping with revegetation. To create these ridges/gullies with tracked equipment, the equipment should be run up/down the slope.	All disturbed areas where needed.
Equipment Storage	All equipment will be contained within the ROW disturbance.	Within disturbance area where needed.
Rapid Reclamation	Rapid reclamation (surface contouring, surface roughening, seeding, and weed control) help to stabilize soil with vegetation and reduce runoff.	Within disturbance area where needed.
Dust Mitigation	Whenever needed, a water truck will be used to add moisture to the soil that will prevent the soil from becoming airborne and leaving the site.	Within disturbance area where needed.

**PROJECT BMP MAP**

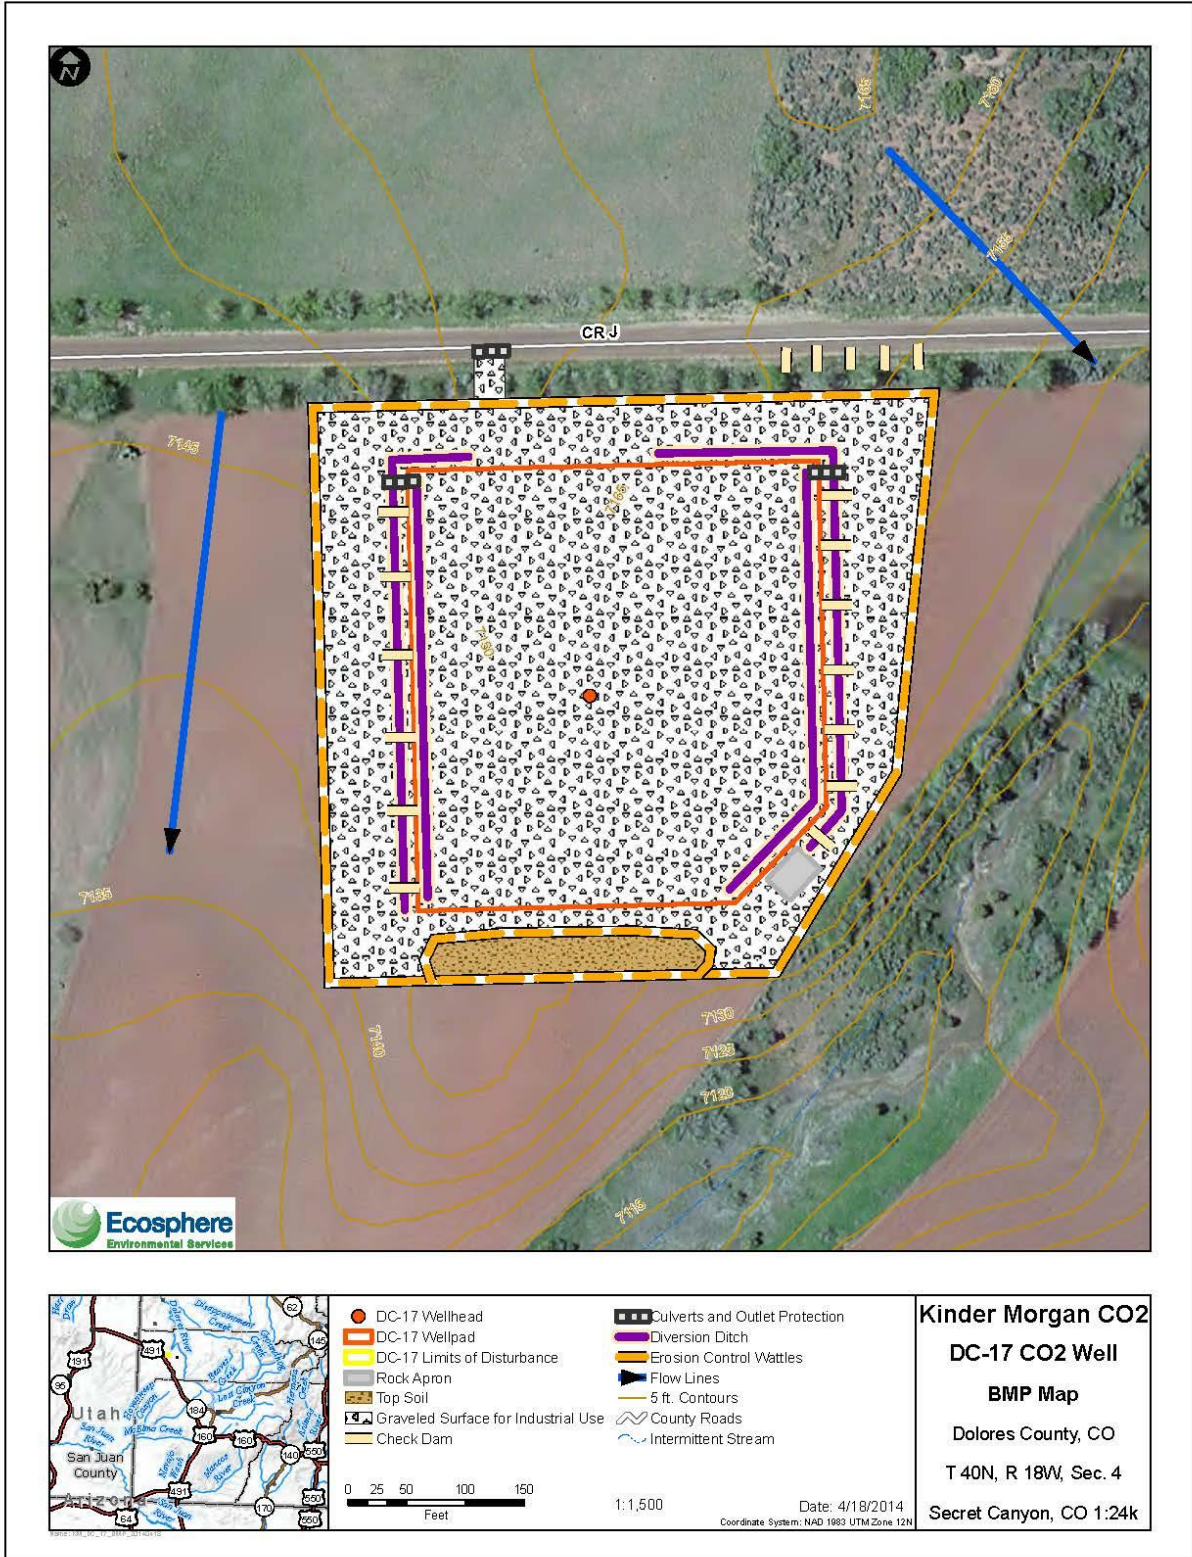

- DC-17 Wellhead
  - DC-17 Wellpad
  - DC-17 Limits of Disturbance
  - Rock Apron
  - Top Soil
  - Graveled Surface for Industrial Use
  - Check Dam
  - Culverts and Outlet Protection
  - Diversion Ditch
  - Erosion Control Wattles
  - ▶ Flow Lines
  - 5 ft. Contours
  - County Roads
  - ~ Intermittent Stream
- 0 25 50 100 150  
Feet
- 1:1,500
- Date: 4/18/2014  
Coordinate System: NAD 1983 UTM Zone 12N

**Kinder Morgan CO2**  
**DC-17 CO2 Well**  
**BMP Map**  
Dolores County, CO  
T 40N, R 18W, Sec. 4  
Secret Canyon, CO 1:24k