


REFERENCE INFORMATION												
Co-ordinate (N/E) Reference: Well Slater 34-28, True North												
Vertical (TVD) Reference: WELL @ 4974.0ft (Original Well Elev)												
Section (VS) Reference: Slot - (0.0N, 0.0E)												
Measured Depth Reference: WELL @ 4974.0ft (Original Well Elev)												
Calculation Method:												
WELL DETAILS: Slater 34-28												
+N/-S		+E/-W		Northing		Ground Level: 4961.0		Easting		Latitude	Longitude	Slot
SECTION DETAILS												
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target		
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0			
2	750.0	0.00	0.00	750.0	0.0	0.0	0.00	0.00	0.0			
3	1146.8	7.94	207.26	1145.5	-24.4	-12.6	2.00	207.26	27.4			
4	6359.7	7.94	207.26	6308.5	-664.1	-342.2	0.00	0.00	747.1			
5	6756.4	0.00	0.00	6704.0	-688.5	-354.8	2.00	180.00	774.5			
6	7806.4	0.00	0.00	7754.0	-688.5	-354.8	0.00	0.00	774.5	Slater 34-28		

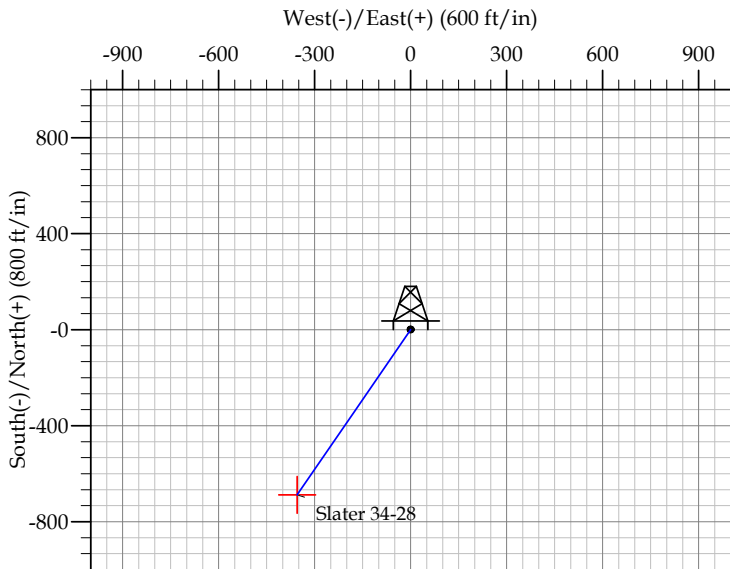

FORMATION TOP DETAILS		
TVDPath	MDPath	Formation
3924.0	3952.1	Sussex
4442.0	4475.1	Shannon
6916.0	6968.4	Niobrara
7158.0	7210.4	Codell
7604.0	7656.4	J Sand
7652.0	7704.4	A Marker

CASING DETAILS			
TVD	MD	Name	Size
700.0	700.0	Surface	8.625
7754.0	7806.4	Production	4.500

EnCana Corporation

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Slater 34-28
Company:	DJ/Paradox/WTX	TVD Reference:	WELL @ 4974.0ft (Original Well Elev)
Project:	Wattenberg	MD Reference:	WELL @ 4974.0ft (Original Well Elev)
Site:	New Drills	North Reference:	True
Well:	Slater 34-28	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Slater 34-28		

Project	Wattenberg,		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		

Site		New Drills				
Site Position:		Northing:	1,278,589.08ft	Latitude:	40° 5' 49.848 N	
From:	Lat/Long	Easting:	3,130,247.44ft	Longitude:	105° 2' 3.912 W	
Position Uncertainty:		ft	Slot Radius:	in	Grid Convergence:	0.30 °

Well	Slater 34-28					
Well Position	+N-S	34,980.5 ft	Northing:	1,313,615.82 ft	Latitude:	40° 11' 35.556 N
	+E-W	8,389.9 ft	Easting:	3,138,441.66 ft	Longitude:	105° 0' 15.948 W
Position Uncertainty		ft	Wellhead Elevation:	ft	Ground Level:	4,961.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	12/31/2009	9.13	66.90	53,168

Design	Slater 34-28				
Audit Notes:					
Version:	Phase:	PROTOTYPE		Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.0	0.0	0.0	207.26	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
750.0	0.00	0.00	750.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,146.8	7.94	207.26	1,145.5	-24.4	-12.6	2.00	2.00	0.00	207.26	
6,359.7	7.94	207.26	6,308.5	-664.1	-342.2	0.00	0.00	0.00	0.00	
6,756.4	0.00	0.00	6,704.0	-688.5	-354.8	2.00	-2.00	0.00	180.00	
7,806.4	0.00	0.00	7,754.0	-688.5	-354.8	0.00	0.00	0.00	0.00	Slater 34-28

EnCana Corporation

Planning Report - Geographic

Database:	EDM	Local Co-ordinate Reference:	Well Slater 34-28
Company:	DJ/Paradox/WTX	TVD Reference:	WELL @ 4974.0ft (Original Well Elev)
Project:	Wattenberg	MD Reference:	WELL @ 4974.0ft (Original Well Elev)
Site:	New Drills	North Reference:	True
Well:	Slater 34-28	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Slater 34-28		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (ft)	Map Easting (ft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	1,313,615.82	3,138,441.66	40° 11' 35.556 N	105° 0' 15.948 W
700.0	0.00	0.00	700.0	0.0	0.0	1,313,615.82	3,138,441.66	40° 11' 35.556 N	105° 0' 15.948 W
Surface									
750.0	0.00	0.00	750.0	0.0	0.0	1,313,615.82	3,138,441.66	40° 11' 35.556 N	105° 0' 15.948 W
1,146.8	7.94	207.26	1,145.5	-24.4	-12.6	1,313,591.37	3,138,429.23	40° 11' 35.315 N	105° 0' 16.110 W
3,952.1	7.94	207.26	3,924.0	-368.7	-190.0	1,313,246.11	3,138,253.74	40° 11' 31.913 N	105° 0' 18.396 W
Sussex									
4,475.1	7.94	207.26	4,442.0	-432.8	-223.1	1,313,181.75	3,138,221.03	40° 11' 31.278 N	105° 0' 18.822 W
Shannon									
6,359.7	7.94	207.26	6,308.5	-664.1	-342.2	1,312,949.82	3,138,103.14	40° 11' 28.993 N	105° 0' 20.358 W
6,756.4	0.00	0.00	6,704.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
6,968.4	0.00	0.00	6,916.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
Niobrara									
7,210.4	0.00	0.00	7,158.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
Codell									
7,656.4	0.00	0.00	7,604.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
J Sand									
7,704.4	0.00	0.00	7,652.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
A Marker									
7,806.4	0.00	0.00	7,754.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
Production - Slater 34-28									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
- hit/miss target									
- Shape									
Slater 34-28	0.00	0.00	7,754.0	-688.5	-354.8	1,312,925.37	3,138,090.71	40° 11' 28.752 N	105° 0' 20.520 W
- plan hits target									
- Point									

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)	
700.0	700.0	Surface	8.625	12.250	
7,806.4	7,754.0	Production	4.500	7.785	

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
3,952.1	3,924.0	Sussex		0.00		
4,475.1	4,442.0	Shannon		0.00		
6,968.4	6,916.0	Niobrara		0.00		
7,210.4	7,158.0	Codell		0.00		
7,656.4	7,604.0	J Sand		0.00		
7,704.4	7,652.0	A Marker		0.00		