



WELL DETAILS: GREENLEAF 30N-2HZ									
GL 4854 & KB 17 @ 4871.00ft (ASSUMED)									
		+N-S 0.00	+E-W 0.00	Northing 1302935.38	Easting 3241862.26	Latitude 40.1617130	Longitude -104.6346140		
SECTION DETAILS									
MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSect	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1327.00	0.00	0.00	1327.00	0.00	0.00	0.00	0.00	0.00	
2339.18	20.24	253.42	2318.25	-50.51	-169.60	2.00	253.42	-50.51	
5366.68	20.24	253.42	5158.75	-349.49	-1173.57	0.00	0.00	-349.49	
6378.86	0.00	0.00	6150.00	-400.00	-1343.17	2.00	180.00	-400.00	
6582.05	0.00	0.00	6353.19	-400.00	-1343.17	0.00	0.00	-400.00	
7043.00	46.09	0.00	6766.00	-224.37	-1343.17	10.00	0.00	-224.37	
7158.71	53.04	0.00	6841.00	-136.35	-1343.17	6.00	0.00	-136.35	
7515.52	88.72	0.00	6956.00	195.35	-1343.17	10.00	0.00	195.35	
11540.34	88.72	0.00	7046.00	4219.16	-1343.17	0.00	0.00	4219.16	PBHL_GREENLEAF 30N-2HZ(460 FNL 225 FWL)
DESIGN TARGET DETAILS									
Name	TVD	+N-S	+E-W	Northing	Easting	Latitude	Longitude	Shape	
PBHL	7046.00	4219.16	-1343.17	1307141.22	3240477.99	40.1732950	-104.6394206	Point	
- plan hits target center									

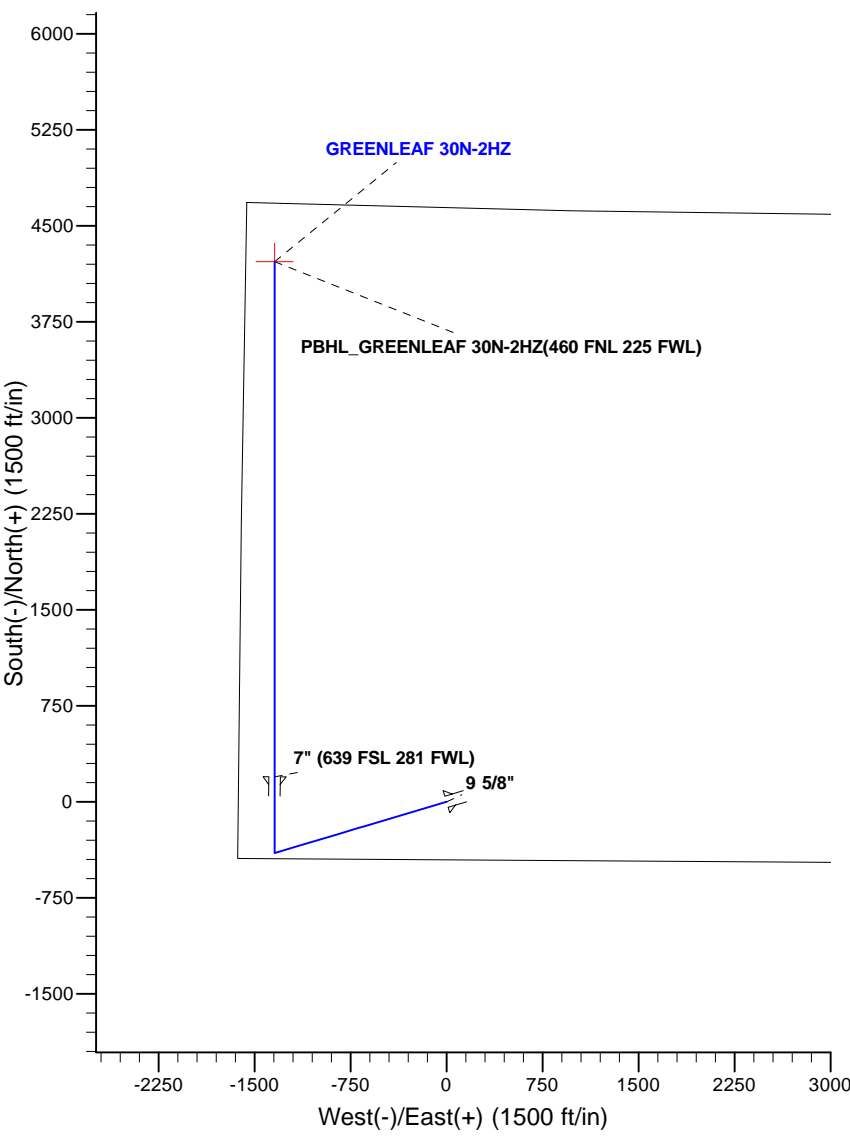

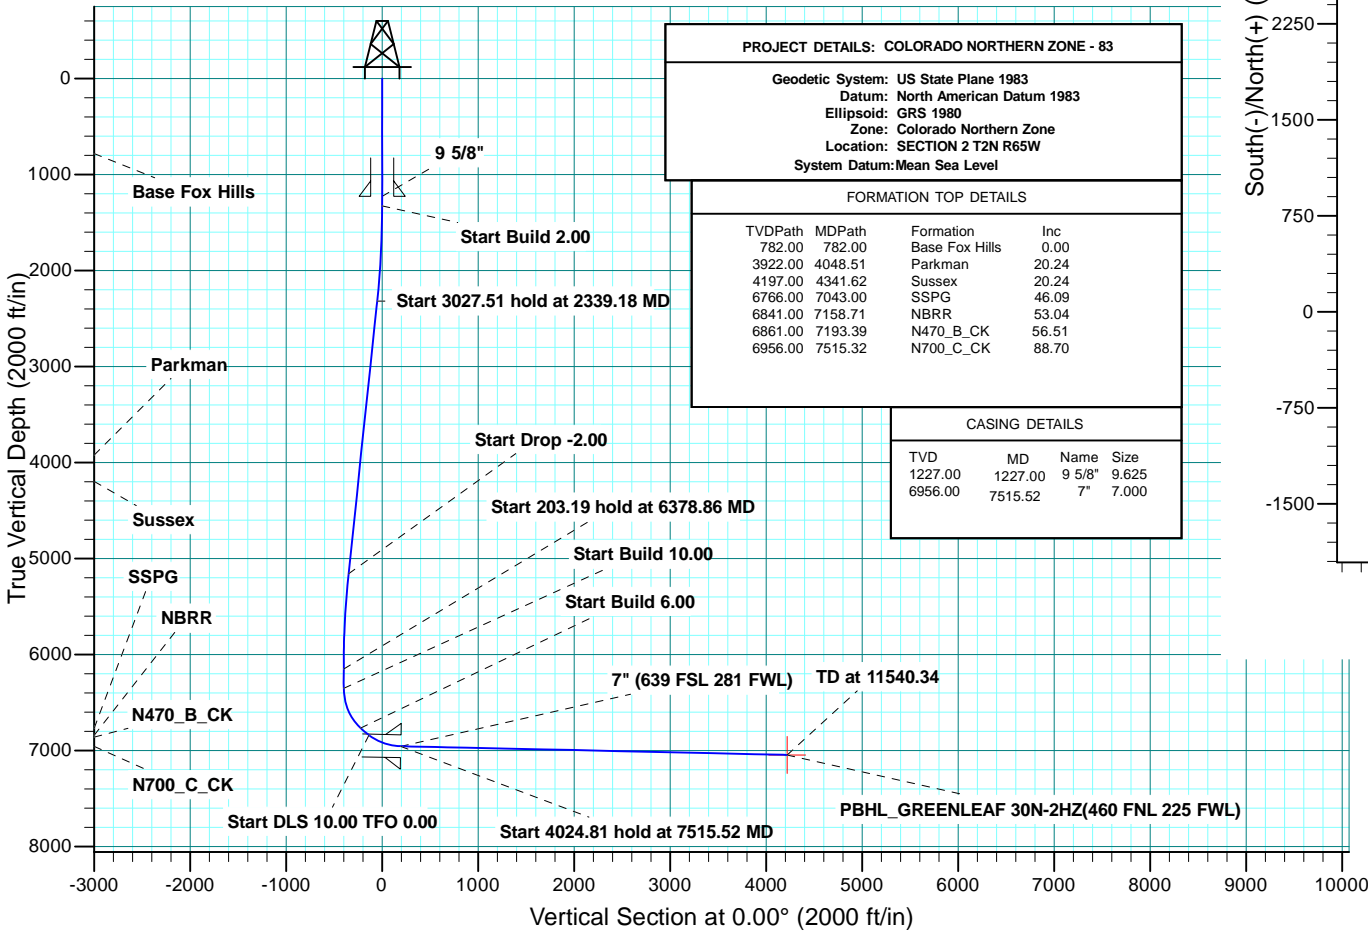

Scientific Drilling

US ROCKIES REGION PLANNING

COLORADO NORTHERN ZONE - 83

GREENLEAF 14-2HZ PAD

GREENLEAF 30N-2HZ

OH

Plan: PLAN #1 PRELIMINARY

Standard Planning Report

03 September, 2014

Database:	Denver Sales	Local Co-ordinate Reference:	Site GREENLEAF 14-2HZ PAD
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Project:	COLORADO NORTHERN ZONE - 83	MD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Site:	GREENLEAF 14-2HZ PAD	North Reference:	True
Well:	GREENLEAF 30N-2HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Project	COLORADO NORTHERN ZONE - 83, KERR MCGEE OIL & GAS ONSHORE LP		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		

Site	GREENLEAF 14-2HZ PAD, SECTION 2 T2N R65W			
Site Position:		Northing:	1,302,935.38 usft	Latitude: 40.1617130
From:	Lat/Long	Easting:	3,241,862.27 usft	Longitude: -104.6346140
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence: 0.56 °

Well	GREENLEAF 30N-2HZ, 453 FSL 1626 FWL			
Well Position	+N/-S	0.00 ft	Northing:	1,302,935.37 usft
	+E/-W	0.00 ft	Easting:	3,241,862.27 usft
Position Uncertainty		0.00 ft	Wellhead Elevation:	0.00 ft
			Ground Level:	4,854.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2014	8/21/2014	8.43	66.76	52,580

Design	PLAN #1 PRELIMINARY			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	0.00

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,327.00	0.00	0.00	1,327.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,339.18	20.24	253.42	2,318.25	-50.51	-169.60	2.00	2.00	0.00	253.42	
5,366.68	20.24	253.42	5,158.75	-349.50	-1,173.57	0.00	0.00	0.00	0.00	
6,378.86	0.00	0.00	6,150.00	-400.00	-1,343.17	2.00	-2.00	0.00	180.00	
6,582.05	0.00	0.00	6,353.19	-400.00	-1,343.17	0.00	0.00	0.00	0.00	
7,043.00	46.09	0.00	6,766.00	-224.37	-1,343.17	10.00	10.00	0.00	0.00	
7,158.71	53.04	0.00	6,841.00	-136.35	-1,343.17	6.00	6.00	0.00	0.00	
7,515.53	88.72	360.00	6,956.00	195.35	-1,343.17	10.00	10.00	0.00	0.00	
11,540.34	88.72	360.00	7,046.00	4,219.16	-1,343.17	0.00	0.00	0.00	0.00	PBHL_GREENLEAF :

Database:	Denver Sales	Local Co-ordinate Reference:	Site GREENLEAF 14-2HZ PAD
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Project:	COLORADO NORTHERN ZONE - 83	MD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Site:	GREENLEAF 14-2HZ PAD	North Reference:	True
Well:	GREENLEAF 30N-2HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
782.00	0.00	0.00	782.00	0.00	0.00	0.00	0.00	0.00	0.00
Base Fox Hills									
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,227.00	0.00	0.00	1,227.00	0.00	0.00	0.00	0.00	0.00	0.00
9 5/8"									
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,327.00	0.00	0.00	1,327.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
1,400.00	1.46	253.42	1,399.99	-0.27	-0.89	-0.27	2.00	2.00	0.00
1,500.00	3.46	253.42	1,499.89	-1.49	-5.00	-1.49	2.00	2.00	0.00
1,600.00	5.46	253.42	1,599.59	-3.71	-12.46	-3.71	2.00	2.00	0.00
1,700.00	7.46	253.42	1,698.95	-6.93	-23.24	-6.92	2.00	2.00	0.00
1,800.00	9.46	253.42	1,797.85	-11.12	-37.34	-11.12	2.00	2.00	0.00
1,900.00	11.46	253.42	1,896.19	-16.31	-54.74	-16.30	2.00	2.00	0.00
2,000.00	13.46	253.42	1,993.83	-22.46	-75.42	-22.46	2.00	2.00	0.00
2,100.00	15.46	253.42	2,090.65	-29.59	-99.35	-29.59	2.00	2.00	0.00
2,200.00	17.46	253.42	2,186.55	-37.68	-126.50	-37.67	2.00	2.00	0.00
2,300.00	19.46	253.42	2,281.40	-46.71	-156.85	-46.71	2.00	2.00	0.00
2,339.18	20.24	253.42	2,318.25	-50.51	-169.60	-50.51	2.00	2.00	0.00
Start 3027.51 hold at 2339.18 MD									
2,400.00	20.24	253.42	2,375.32	-56.52	-189.77	-56.51	0.00	0.00	0.00
2,500.00	20.24	253.42	2,469.14	-66.39	-222.93	-66.39	0.00	0.00	0.00
2,600.00	20.24	253.42	2,562.96	-76.27	-256.09	-76.26	0.00	0.00	0.00
2,700.00	20.24	253.42	2,656.78	-86.14	-289.25	-86.14	0.00	0.00	0.00
2,800.00	20.24	253.42	2,750.61	-96.02	-322.41	-96.02	0.00	0.00	0.00
2,900.00	20.24	253.42	2,844.43	-105.90	-355.58	-105.89	0.00	0.00	0.00
3,000.00	20.24	253.42	2,938.25	-115.77	-388.74	-115.77	0.00	0.00	0.00
3,100.00	20.24	253.42	3,032.08	-125.65	-421.90	-125.64	0.00	0.00	0.00
3,200.00	20.24	253.42	3,125.90	-135.52	-455.06	-135.52	0.00	0.00	0.00
3,300.00	20.24	253.42	3,219.72	-145.40	-488.22	-145.39	0.00	0.00	0.00
3,400.00	20.24	253.42	3,313.55	-155.27	-521.38	-155.27	0.00	0.00	0.00
3,500.00	20.24	253.42	3,407.37	-165.15	-554.55	-165.15	0.00	0.00	0.00
3,600.00	20.24	253.42	3,501.19	-175.03	-587.71	-175.02	0.00	0.00	0.00
3,700.00	20.24	253.42	3,595.01	-184.90	-620.87	-184.90	0.00	0.00	0.00
3,800.00	20.24	253.42	3,688.84	-194.78	-654.03	-194.77	0.00	0.00	0.00
3,900.00	20.24	253.42	3,782.66	-204.65	-687.19	-204.65	0.00	0.00	0.00
4,000.00	20.24	253.42	3,876.48	-214.53	-720.36	-214.52	0.00	0.00	0.00
4,048.51	20.24	253.42	3,922.00	-219.32	-736.44	-219.32	0.00	0.00	0.00
Parkman									
4,100.00	20.24	253.42	3,970.31	-224.40	-753.52	-224.40	0.00	0.00	0.00
4,200.00	20.24	253.42	4,064.13	-234.28	-786.68	-234.28	0.00	0.00	0.00
4,300.00	20.24	253.42	4,157.95	-244.16	-819.84	-244.15	0.00	0.00	0.00

Database:	Denver Sales	Local Co-ordinate Reference:	Site GREENLEAF 14-2HZ PAD
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Project:	COLORADO NORTHERN ZONE - 83	MD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Site:	GREENLEAF 14-2HZ PAD	North Reference:	True
Well:	GREENLEAF 30N-2HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,341.62	20.24	253.42	4,197.00	-248.27	-833.64	-248.26	0.00	0.00	0.00
Sussex									
4,400.00	20.24	253.42	4,251.78	-254.03	-853.00	-254.03	0.00	0.00	0.00
4,500.00	20.24	253.42	4,345.60	-263.91	-886.16	-263.90	0.00	0.00	0.00
4,600.00	20.24	253.42	4,439.42	-273.78	-919.33	-273.78	0.00	0.00	0.00
4,700.00	20.24	253.42	4,533.25	-283.66	-952.49	-283.65	0.00	0.00	0.00
4,800.00	20.24	253.42	4,627.07	-293.53	-985.65	-293.53	0.00	0.00	0.00
4,900.00	20.24	253.42	4,720.89	-303.41	-1,018.81	-303.41	0.00	0.00	0.00
5,000.00	20.24	253.42	4,814.71	-313.29	-1,051.97	-313.28	0.00	0.00	0.00
5,100.00	20.24	253.42	4,908.54	-323.16	-1,085.14	-323.16	0.00	0.00	0.00
5,200.00	20.24	253.42	5,002.36	-333.04	-1,118.30	-333.03	0.00	0.00	0.00
5,300.00	20.24	253.42	5,096.18	-342.91	-1,151.46	-342.91	0.00	0.00	0.00
5,366.68	20.24	253.42	5,158.75	-349.50	-1,173.57	-349.49	0.00	0.00	0.00
Start Drop -2.00									
5,400.00	19.58	253.42	5,190.07	-352.74	-1,184.45	-352.73	2.00	-2.00	0.00
5,500.00	17.58	253.42	5,284.86	-361.83	-1,214.98	-361.82	2.00	-2.00	0.00
5,600.00	15.58	253.42	5,380.70	-369.97	-1,242.32	-369.97	2.00	-2.00	0.00
5,700.00	13.58	253.42	5,477.47	-377.15	-1,266.44	-377.15	2.00	-2.00	0.00
5,800.00	11.58	253.42	5,575.07	-383.37	-1,287.31	-383.36	2.00	-2.00	0.00
5,900.00	9.58	253.42	5,673.36	-388.61	-1,304.90	-388.60	2.00	-2.00	0.00
6,000.00	7.58	253.42	5,772.24	-392.86	-1,319.20	-392.86	2.00	-2.00	0.00
6,100.00	5.58	253.42	5,871.58	-396.13	-1,330.17	-396.13	2.00	-2.00	0.00
6,200.00	3.58	253.42	5,971.25	-398.41	-1,337.82	-398.41	2.00	-2.00	0.00
6,300.00	1.58	253.42	6,071.15	-399.69	-1,342.13	-399.69	2.00	-2.00	0.00
6,378.86	0.00	0.00	6,150.00	-400.00	-1,343.17	-400.00	2.00	-2.00	0.00
Start 203.19 hold at 6378.86 MD									
6,400.00	0.00	0.00	6,171.14	-400.00	-1,343.17	-400.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,271.14	-400.00	-1,343.17	-400.00	0.00	0.00	0.00
6,582.05	0.00	0.00	6,353.19	-400.00	-1,343.17	-400.00	0.00	0.00	0.00
Start Build 10.00									
6,600.00	1.79	0.00	6,371.13	-399.72	-1,343.17	-399.72	10.00	10.00	0.00
6,700.00	11.79	0.00	6,470.31	-387.91	-1,343.17	-387.90	10.00	10.00	0.00
6,800.00	21.79	0.00	6,565.92	-359.05	-1,343.17	-359.05	10.00	10.00	0.00
6,900.00	31.79	0.00	6,655.07	-314.03	-1,343.17	-314.02	10.00	10.00	0.00
7,000.00	41.79	0.00	6,735.05	-254.21	-1,343.17	-254.20	10.00	10.00	0.00
7,043.00	46.09	0.00	6,766.00	-224.37	-1,343.17	-224.37	10.00	10.00	0.00
Start Build 6.00 - SSPG									
7,100.00	49.51	0.00	6,804.28	-182.15	-1,343.17	-182.15	6.00	6.00	0.00
7,158.71	53.04	0.00	6,841.00	-136.35	-1,343.17	-136.35	6.00	6.00	0.00
Start DLS 10.00 TFO 0.00 - NBRR									
7,193.39	56.51	360.00	6,861.00	-108.03	-1,343.17	-108.03	10.00	10.00	0.00
N470_B_CK									
7,200.00	57.17	360.00	6,864.62	-102.50	-1,343.17	-102.49	10.00	10.00	0.00
7,300.00	67.17	360.00	6,911.25	-14.18	-1,343.17	-14.18	10.00	10.00	0.00
7,400.00	77.17	360.00	6,941.83	80.89	-1,343.17	80.90	10.00	10.00	0.00
7,500.00	87.17	360.00	6,955.45	179.84	-1,343.17	179.84	10.00	10.00	0.00
7,515.32	88.70	360.00	6,956.00	195.15	-1,343.17	195.15	10.00	10.00	0.00
N700_C_CK									
7,515.52	88.72	360.00	6,956.00	195.35	-1,343.17	195.35	10.00	10.00	0.00
Start 4024.81 hold at 7515.52 MD - 7" (639 FSL 281 FWL)									
7,600.00	88.72	360.00	6,957.89	279.80	-1,343.17	279.81	0.00	0.00	0.00
7,700.00	88.72	360.00	6,960.13	379.78	-1,343.17	379.78	0.00	0.00	0.00
7,800.00	88.72	360.00	6,962.37	479.75	-1,343.17	479.76	0.00	0.00	0.00

Database:	Denver Sales	Local Co-ordinate Reference:	Site GREENLEAF 14-2HZ PAD
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Project:	COLORADO NORTHERN ZONE - 83	MD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Site:	GREENLEAF 14-2HZ PAD	North Reference:	True
Well:	GREENLEAF 30N-2HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,900.00	88.72	360.00	6,964.60	579.73	-1,343.17	579.73	0.00	0.00	0.00
8,000.00	88.72	360.00	6,966.84	679.70	-1,343.17	679.71	0.00	0.00	0.00
8,100.00	88.72	360.00	6,969.07	779.68	-1,343.17	779.68	0.00	0.00	0.00
8,200.00	88.72	360.00	6,971.31	879.65	-1,343.17	879.66	0.00	0.00	0.00
8,300.00	88.72	360.00	6,973.55	979.63	-1,343.17	979.63	0.00	0.00	0.00
8,400.00	88.72	360.00	6,975.78	1,079.60	-1,343.17	1,079.61	0.00	0.00	0.00
8,500.00	88.72	360.00	6,978.02	1,179.58	-1,343.17	1,179.58	0.00	0.00	0.00
8,600.00	88.72	360.00	6,980.25	1,279.55	-1,343.17	1,279.56	0.00	0.00	0.00
8,700.00	88.72	360.00	6,982.49	1,379.53	-1,343.17	1,379.53	0.00	0.00	0.00
8,800.00	88.72	360.00	6,984.73	1,479.50	-1,343.17	1,479.51	0.00	0.00	0.00
8,900.00	88.72	360.00	6,986.96	1,579.48	-1,343.17	1,579.48	0.00	0.00	0.00
9,000.00	88.72	360.00	6,989.20	1,679.45	-1,343.17	1,679.46	0.00	0.00	0.00
9,100.00	88.72	360.00	6,991.43	1,779.43	-1,343.17	1,779.43	0.00	0.00	0.00
9,200.00	88.72	360.00	6,993.67	1,879.40	-1,343.17	1,879.41	0.00	0.00	0.00
9,300.00	88.72	360.00	6,995.91	1,979.38	-1,343.17	1,979.38	0.00	0.00	0.00
9,400.00	88.72	360.00	6,998.14	2,079.35	-1,343.17	2,079.36	0.00	0.00	0.00
9,500.00	88.72	360.00	7,000.38	2,179.33	-1,343.17	2,179.33	0.00	0.00	0.00
9,600.00	88.72	360.00	7,002.61	2,279.30	-1,343.17	2,279.31	0.00	0.00	0.00
9,700.00	88.72	360.00	7,004.85	2,379.28	-1,343.17	2,379.28	0.00	0.00	0.00
9,800.00	88.72	360.00	7,007.09	2,479.25	-1,343.17	2,479.26	0.00	0.00	0.00
9,900.00	88.72	360.00	7,009.32	2,579.23	-1,343.17	2,579.23	0.00	0.00	0.00
10,000.00	88.72	360.00	7,011.56	2,679.20	-1,343.17	2,679.21	0.00	0.00	0.00
10,100.00	88.72	360.00	7,013.79	2,779.18	-1,343.17	2,779.18	0.00	0.00	0.00
10,200.00	88.72	360.00	7,016.03	2,879.15	-1,343.17	2,879.16	0.00	0.00	0.00
10,300.00	88.72	360.00	7,018.27	2,979.13	-1,343.17	2,979.13	0.00	0.00	0.00
10,400.00	88.72	360.00	7,020.50	3,079.10	-1,343.17	3,079.11	0.00	0.00	0.00
10,500.00	88.72	360.00	7,022.74	3,179.08	-1,343.17	3,179.08	0.00	0.00	0.00
10,600.00	88.72	360.00	7,024.97	3,279.05	-1,343.17	3,279.06	0.00	0.00	0.00
10,700.00	88.72	360.00	7,027.21	3,379.03	-1,343.17	3,379.03	0.00	0.00	0.00
10,800.00	88.72	360.00	7,029.45	3,479.00	-1,343.17	3,479.01	0.00	0.00	0.00
10,900.00	88.72	360.00	7,031.68	3,578.98	-1,343.17	3,578.98	0.00	0.00	0.00
11,000.00	88.72	360.00	7,033.92	3,678.95	-1,343.17	3,678.96	0.00	0.00	0.00
11,100.00	88.72	360.00	7,036.15	3,778.93	-1,343.17	3,778.93	0.00	0.00	0.00
11,200.00	88.72	360.00	7,038.39	3,878.90	-1,343.17	3,878.91	0.00	0.00	0.00
11,300.00	88.72	360.00	7,040.63	3,978.88	-1,343.17	3,978.88	0.00	0.00	0.00
11,400.00	88.72	360.00	7,042.86	4,078.85	-1,343.17	4,078.86	0.00	0.00	0.00
11,500.00	88.72	360.00	7,045.10	4,178.83	-1,343.17	4,178.83	0.00	0.00	0.00
11,540.34	88.72	360.00	7,046.00	4,219.16	-1,343.17	4,219.16	0.00	0.00	0.00
TD at 11540.34 - PBHL_GREENLEAF 30N-2HZ(460 FNL 225 FWL)									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL_GREENLEAF 30I	0.00	0.00	7,046.00	4,219.16	-1,343.17	1,307,141.22	3,240,477.99	40.1732950	-104.6394206
- plan hits target center									
- Point									

Database:	Denver Sales	Local Co-ordinate Reference:	Site GREENLEAF 14-2HZ PAD
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Project:	COLORADO NORTHERN ZONE - 83	MD Reference:	GL 4854 & KB 17 @ 4871.00ft (ASSUMED)
Site:	GREENLEAF 14-2HZ PAD	North Reference:	True
Well:	GREENLEAF 30N-2HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)	
1,227.00	1,227.00	9 5/8"	9.625	13.500	
7,515.52	6,956.00	7" (639 FSL 281 FWL)	7.000	8.750	

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction	
782.00	782.00	Base Fox Hills				
4,048.51	3,922.00	Parkman				
4,341.62	4,197.00	Sussex				
7,043.00	6,766.00	SSPG				
7,158.71	6,841.00	NBRR				
7,193.39	6,861.00	N470_B_CK				
7,515.32	6,956.00	N700_C_CK				

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment	
		+N/-S (ft)	+E/-W (ft)		
1,327.00	1,327.00	0.00	0.00	Start Build 2.00	
2,339.18	2,318.25	-50.51	-169.60	Start 3027.51 hold at 2339.18 MD	
5,366.68	5,158.75	-349.50	-1,173.57	Start Drop -2.00	
6,378.86	6,150.00	-400.00	-1,343.17	Start 203.19 hold at 6378.86 MD	
6,582.05	6,353.19	-400.00	-1,343.17	Start Build 10.00	
7,043.00	6,766.00	-224.37	-1,343.17	Start Build 6.00	
7,158.71	6,841.00	-136.35	-1,343.17	Start DLS 10.00 TFO 0.00	
7,515.53	6,956.00	195.35	-1,343.17	Start 4024.81 hold at 7515.52 MD	
11,540.34	7,046.00	4,219.16	-1,343.17	TD at 11540.34	