

US ROCKIES WATTENBERG PLANNING

WELD-NAD83-UTMFT13N

1N-65W-08 English Farms 15C-8HZ Pad

ENGLISH FARMS 37N-8HZ

Plan B

Plan: Permit Rev-1

Sperry Drilling Services

Proposal Report

06 January, 2015

Well Coordinates: 14,553,257.34 N, 1,728,225.93 E (40° 04' 20.69" N, 104° 41' 10.04" W)

Ground Level: 4,948.00 usft

Local Coordinate Origin:	Centered on Well ENGLISH FARMS 37N-8HZ
Viewing Datum:	RKB = 17' @ 4965.00usft (D Rig)
TVDs to System:	N
North Reference:	True
Unit System:	Dec-Deg - API - US Survey Feet - Custom

Version: 5000.1 Build: 70

HALLIBURTON

Project: WELD-NAD83-UTMFT13N
 Site: 1N-65W-08 English Farms 15C-8HZ Pad
 Well: ENGLISH FARMS 37N-8HZ
 Wellbore: Plan B
 Design: Permit Rev-1

US ROCKIES WATTENBERG PLANNING





SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	V Sect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	2375.00	0.00	0.00	2375.00	0.00	0.00	0.00	0.00	0.00	
3	3625.00	25.00	20.00	3585.71	252.22	91.80	2.00	20.00	-252.49	
4	6676.24	25.00	20.00	6351.07	1463.96	532.84	0.00	0.00	-1465.54	
5	7809.87	89.94	180.17	7142.00	938.49	656.26	10.00	158.31	-940.43	
6	13259.81	89.94	180.17	7148.00	-4511.42	640.20	0.00	0.00	4509.50	ENGLISH FARMS 37N-8HZ_BHL

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
ENGLISH FARMS 37N-8HZ_SHL	0.00	0.00	0.00	40.072414	-104.686121
ENGLISH FARMS 37N-8HZ_BHL	7148.00	-4511.42	640.20	40.060025	-104.683833

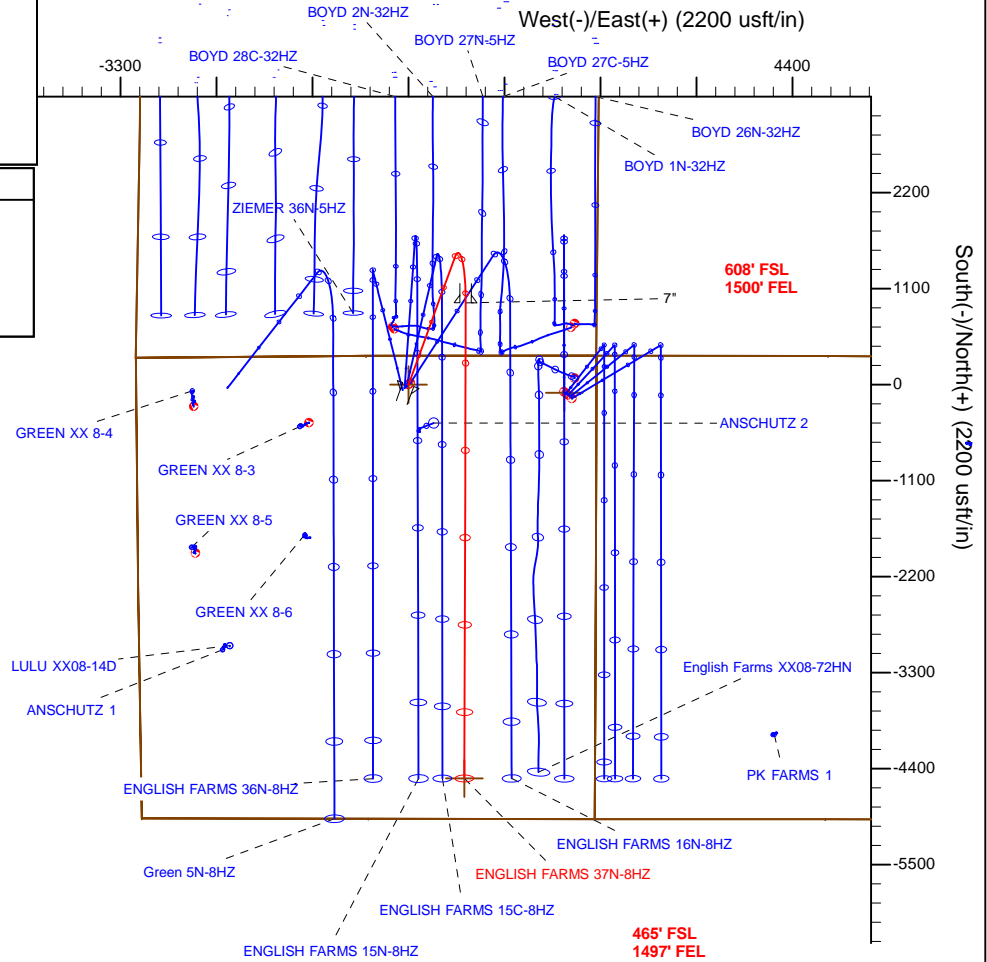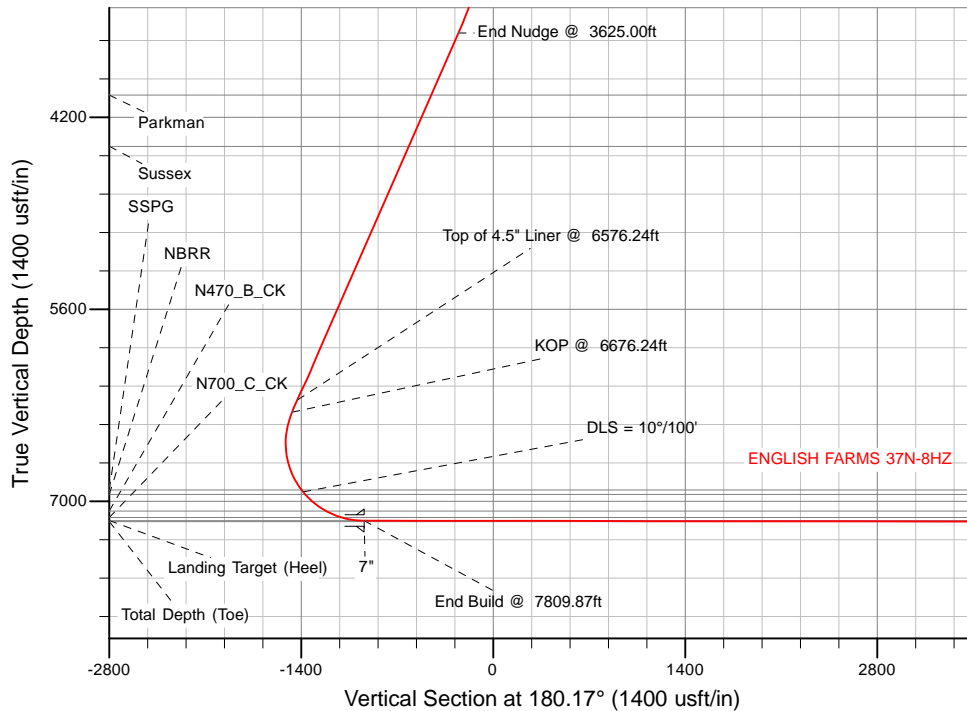

		WELL DETAILS: ENGLISH FARMS 37N-8HZ	
		Ground Level: 4948.00	
		RKB = 17' @ 4965.00usft (D Rig)	
		Plan: Permit Rev-1 (ENGLISH FARMS 37N-8HZ/Plan B)	
		Created By: Clint Eshelman Date: 1/06/2014	
		Reviewed: _____ Date: _____	
TVD	MD		
6260.44	6576.24	Top of 4.5" Liner @ 6576.24ft	
6351.07	6676.24	KOP @ 6676.24ft	



Plan Report for ENGLISH FARMS 37N-8HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ENGLISH FARMS 37N-8HZ_SHL - 1N-R65W-Sec. 9_Section lines - 1N-R65W-Sec. 8_Section lines										
16.00	0.00	0.00	16.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1N-R65W-Sec. 5_Section Lines										
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
962.00	0.00	0.00	962.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Base Fox Hills										
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,494.00	0.00	0.00	1,494.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Surface Csg Setting Depth - 9 5/8"										
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,375.00	0.00	0.00	2,375.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 2375.00ft										
2,400.00	0.50	20.00	2,400.00	0.10	0.04	-0.10	2.00	2.00	0.00	20.00
2,500.00	2.50	20.00	2,499.96	2.56	0.93	-2.56	2.00	2.00	0.00	0.00
2,600.00	4.50	20.00	2,599.77	8.30	3.02	-8.31	2.00	2.00	0.00	0.00
2,700.00	6.50	20.00	2,699.30	17.30	6.30	-17.32	2.00	2.00	0.00	0.00
2,800.00	8.50	20.00	2,798.44	29.57	10.76	-29.60	2.00	2.00	0.00	0.00
2,900.00	10.50	20.00	2,897.07	45.08	16.41	-45.13	2.00	2.00	0.00	0.00
3,000.00	12.50	20.00	2,995.05	63.81	23.23	-63.88	2.00	2.00	0.00	0.00
3,100.00	14.50	20.00	3,092.29	85.75	31.21	-85.84	2.00	2.00	0.00	0.00
3,200.00	16.50	20.00	3,188.64	110.86	40.35	-110.98	2.00	2.00	0.00	0.00
3,300.00	18.50	20.00	3,284.01	139.11	50.63	-139.26	2.00	2.00	0.00	0.00
3,400.00	20.50	20.00	3,378.27	170.48	62.05	-170.66	2.00	2.00	0.00	0.00
3,500.00	22.50	20.00	3,471.31	204.92	74.58	-205.14	2.00	2.00	0.00	0.00
3,600.00	24.50	20.00	3,563.01	242.39	88.22	-242.65	2.00	2.00	0.00	0.00
3,625.00	25.00	20.00	3,585.71	252.22	91.80	-252.49	2.00	2.00	0.00	0.00
End Nudge @ 3625.00ft										
3,700.00	25.00	20.00	3,653.69	282.01	102.64	-282.31	0.00	0.00	0.00	0.00
3,800.00	25.00	20.00	3,744.32	321.72	117.10	-322.07	0.00	0.00	0.00	0.00
3,900.00	25.00	20.00	3,834.95	361.43	131.55	-361.82	0.00	0.00	0.00	0.00
4,000.00	25.00	20.00	3,925.58	401.15	146.01	-401.58	0.00	0.00	0.00	0.00
4,100.00	25.00	20.00	4,016.21	440.86	160.46	-441.33	0.00	0.00	0.00	0.00
4,124.04	25.00	20.00	4,038.00	450.41	163.93	-450.89	0.00	0.00	0.00	0.00
Parkman										
4,200.00	25.00	20.00	4,106.84	480.57	174.91	-481.09	0.00	0.00	0.00	0.00
4,300.00	25.00	20.00	4,197.47	520.29	189.37	-520.84	0.00	0.00	0.00	0.00



Plan Report for ENGLISH FARMS 37N-8HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
4,400.00	25.00	20.00	4,288.10	560.00	203.82	-560.60	0.00	0.00	0.00	0.00
4,500.00	25.00	20.00	4,378.73	599.71	218.28	-600.36	0.00	0.00	0.00	0.00
4,537.81	25.00	20.00	4,413.00	614.73	223.74	-615.39	0.00	0.00	0.00	0.00
Sussex										
4,600.00	25.00	20.00	4,469.36	639.42	232.73	-640.11	0.00	0.00	0.00	0.00
4,700.00	25.00	20.00	4,559.99	679.14	247.19	-679.87	0.00	0.00	0.00	0.00
4,800.00	25.00	20.00	4,650.62	718.85	261.64	-719.62	0.00	0.00	0.00	0.00
4,900.00	25.00	20.00	4,741.25	758.56	276.09	-759.38	0.00	0.00	0.00	0.00
5,000.00	25.00	20.00	4,831.89	798.28	290.55	-799.14	0.00	0.00	0.00	0.00
5,100.00	25.00	20.00	4,922.52	837.99	305.00	-838.89	0.00	0.00	0.00	0.00
5,200.00	25.00	20.00	5,013.15	877.70	319.46	-878.65	0.00	0.00	0.00	0.00
5,300.00	25.00	20.00	5,103.78	917.42	333.91	-918.40	0.00	0.00	0.00	0.00
5,400.00	25.00	20.00	5,194.41	957.13	348.37	-958.16	0.00	0.00	0.00	0.00
5,500.00	25.00	20.00	5,285.04	996.84	362.82	-997.91	0.00	0.00	0.00	0.00
5,600.00	25.00	20.00	5,375.67	1,036.56	377.28	-1,037.67	0.00	0.00	0.00	0.00
5,700.00	25.00	20.00	5,466.30	1,076.27	391.73	-1,077.43	0.00	0.00	0.00	0.00
5,800.00	25.00	20.00	5,556.93	1,115.98	406.18	-1,117.18	0.00	0.00	0.00	0.00
5,900.00	25.00	20.00	5,647.56	1,155.70	420.64	-1,156.94	0.00	0.00	0.00	0.00
6,000.00	25.00	20.00	5,738.19	1,195.41	435.09	-1,196.69	0.00	0.00	0.00	0.00
6,100.00	25.00	20.00	5,828.82	1,235.12	449.55	-1,236.45	0.00	0.00	0.00	0.00
6,200.00	25.00	20.00	5,919.45	1,274.83	464.00	-1,276.21	0.00	0.00	0.00	0.00
6,300.00	25.00	20.00	6,010.09	1,314.55	478.46	-1,315.96	0.00	0.00	0.00	0.00
6,400.00	25.00	20.00	6,100.72	1,354.26	492.91	-1,355.72	0.00	0.00	0.00	0.00
6,500.00	25.00	20.00	6,191.35	1,393.97	507.36	-1,395.47	0.00	0.00	0.00	0.00
6,576.24	25.00	20.00	6,260.44	1,424.25	518.38	-1,425.78	0.00	0.00	0.00	0.00
Top of 4.5" Liner @ 6576.24ft										
6,600.00	25.00	20.00	6,281.98	1,433.69	521.82	-1,435.23	0.00	0.00	0.00	0.00
6,676.24	25.00	20.00	6,351.07	1,463.96	532.84	-1,465.54	0.00	0.00	0.00	0.00
KOP @ 6676.24ft										
6,700.00	22.81	22.27	6,372.80	1,472.95	536.30	-1,474.53	10.00	-9.23	9.53	158.31
6,800.00	14.21	38.83	6,467.60	1,500.51	551.38	-1,502.14	10.00	-8.60	16.56	156.24
6,900.00	9.05	83.48	6,565.70	1,510.99	566.92	-1,512.67	10.00	-5.16	44.65	140.48
7,000.00	12.66	135.42	6,664.11	1,504.07	582.46	-1,505.79	10.00	3.61	51.94	96.62
7,100.00	20.90	155.72	6,759.85	1,479.94	597.52	-1,481.71	10.00	8.25	20.30	45.47
7,200.00	30.20	164.41	6,850.00	1,439.36	611.65	-1,441.17	10.00	9.30	8.69	25.96
7,280.94	37.96	168.49	6,917.00	1,395.28	622.11	-1,397.12	10.00	9.60	5.04	18.09
SSPG										
7,300.00	39.81	169.24	6,931.83	1,383.54	624.42	-1,385.39	10.00	9.69	3.96	14.71
DLS = 10°/100'										
7,322.72	42.02	170.07	6,949.00	1,368.91	627.09	-1,370.76	10.00	9.71	3.64	14.12
NBRR										
7,400.00	49.56	172.43	7,002.86	1,314.19	635.43	-1,316.07	10.00	9.76	3.06	13.49
7,500.00	59.37	174.81	7,060.91	1,233.42	644.36	-1,235.33	10.00	9.81	2.37	11.84
7,522.51	61.59	175.27	7,072.00	1,213.91	646.05	-1,215.82	10.00	9.84	2.06	10.46
N470_B_CK										
7,600.00	69.22	176.74	7,104.23	1,143.67	650.93	-1,145.60	10.00	9.85	1.89	10.23
7,639.56	73.12	177.43	7,117.00	1,106.29	652.83	-1,108.22	10.00	9.86	1.74	9.62
N700_C_CK										
7,700.00	79.09	178.43	7,131.51	1,047.68	654.94	-1,049.62	10.00	9.87	1.66	9.39
7,800.00	88.96	180.01	7,141.91	948.36	656.28	-950.30	10.00	9.88	1.58	9.15
7,809.87	89.94	180.17	7,142.00	938.49	656.26	-940.43	10.00	9.88	1.56	8.99
End Build @ 7809.87ft - Landing Target (Heel) - 7"										
7,900.00	89.94	180.17	7,142.10	848.36	655.99	-850.30	0.00	0.00	0.00	8.99
8,000.00	89.94	180.17	7,142.21	748.36	655.70	-750.30	0.00	0.00	0.00	0.00
8,100.00	89.94	180.17	7,142.32	648.36	655.40	-650.30	0.00	0.00	0.00	0.00
8,200.00	89.94	180.17	7,142.43	548.36	655.11	-550.30	0.00	0.00	0.00	0.00
8,300.00	89.94	180.17	7,142.54	448.36	654.82	-450.30	0.00	0.00	0.00	0.00
8,400.00	89.94	180.17	7,142.65	348.36	654.52	-350.30	0.00	0.00	0.00	0.00
8,500.00	89.94	180.17	7,142.76	248.36	654.23	-250.30	0.00	0.00	0.00	0.00

Plan Report for ENGLISH FARMS 37N-8HZ - Permit Rev-1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Tooface Azimuth (°)
8,600.00	89.94	180.17	7,142.87	148.36	653.93	-150.30	0.00	0.00	0.00	0.00
8,700.00	89.94	180.17	7,142.98	48.36	653.64	-50.30	0.00	0.00	0.00	0.00
8,800.00	89.94	180.17	7,143.09	-51.64	653.34	49.70	0.00	0.00	0.00	0.00
8,900.00	89.94	180.17	7,143.20	-151.64	653.05	149.70	0.00	0.00	0.00	0.00
9,000.00	89.94	180.17	7,143.31	-251.63	652.75	249.70	0.00	0.00	0.00	0.00
9,100.00	89.94	180.17	7,143.42	-351.63	652.46	349.70	0.00	0.00	0.00	0.00
9,200.00	89.94	180.17	7,143.53	-451.63	652.16	449.70	0.00	0.00	0.00	0.00
9,300.00	89.94	180.17	7,143.64	-551.63	651.87	549.70	0.00	0.00	0.00	0.00
9,400.00	89.94	180.17	7,143.75	-651.63	651.57	649.70	0.00	0.00	0.00	0.00
9,500.00	89.94	180.17	7,143.86	-751.63	651.28	749.70	0.00	0.00	0.00	0.00
9,600.00	89.94	180.17	7,143.97	-851.63	650.98	849.70	0.00	0.00	0.00	0.00
9,700.00	89.94	180.17	7,144.08	-951.63	650.69	949.70	0.00	0.00	0.00	0.00
9,800.00	89.94	180.17	7,144.19	-1,051.63	650.39	1,049.70	0.00	0.00	0.00	0.00
9,900.00	89.94	180.17	7,144.30	-1,151.63	650.10	1,149.70	0.00	0.00	0.00	0.00
10,000.00	89.94	180.17	7,144.41	-1,251.63	649.81	1,249.70	0.00	0.00	0.00	0.00
10,100.00	89.94	180.17	7,144.52	-1,351.63	649.51	1,349.70	0.00	0.00	0.00	0.00
10,200.00	89.94	180.17	7,144.63	-1,451.63	649.22	1,449.70	0.00	0.00	0.00	0.00
10,300.00	89.94	180.17	7,144.74	-1,551.63	648.92	1,549.70	0.00	0.00	0.00	0.00
10,400.00	89.94	180.17	7,144.85	-1,651.63	648.63	1,649.70	0.00	0.00	0.00	0.00
10,500.00	89.94	180.17	7,144.96	-1,751.63	648.33	1,749.70	0.00	0.00	0.00	0.00
10,600.00	89.94	180.17	7,145.07	-1,851.63	648.04	1,849.70	0.00	0.00	0.00	0.00
10,700.00	89.94	180.17	7,145.18	-1,951.63	647.74	1,949.70	0.00	0.00	0.00	0.00
10,800.00	89.94	180.17	7,145.29	-2,051.63	647.45	2,049.70	0.00	0.00	0.00	0.00
10,900.00	89.94	180.17	7,145.40	-2,151.63	647.15	2,149.70	0.00	0.00	0.00	0.00
11,000.00	89.94	180.17	7,145.51	-2,251.62	646.86	2,249.70	0.00	0.00	0.00	0.00
11,100.00	89.94	180.17	7,145.62	-2,351.62	646.56	2,349.70	0.00	0.00	0.00	0.00
11,200.00	89.94	180.17	7,145.73	-2,451.62	646.27	2,449.70	0.00	0.00	0.00	0.00
11,300.00	89.94	180.17	7,145.84	-2,551.62	645.97	2,549.70	0.00	0.00	0.00	0.00
11,400.00	89.94	180.17	7,145.95	-2,651.62	645.68	2,649.70	0.00	0.00	0.00	0.00
11,500.00	89.94	180.17	7,146.06	-2,751.62	645.38	2,749.70	0.00	0.00	0.00	0.00
11,600.00	89.94	180.17	7,146.17	-2,851.62	645.09	2,849.70	0.00	0.00	0.00	0.00
11,700.00	89.94	180.17	7,146.28	-2,951.62	644.79	2,949.70	0.00	0.00	0.00	0.00
11,800.00	89.94	180.17	7,146.39	-3,051.62	644.50	3,049.70	0.00	0.00	0.00	0.00
11,900.00	89.94	180.17	7,146.50	-3,151.62	644.21	3,149.70	0.00	0.00	0.00	0.00
12,000.00	89.94	180.17	7,146.61	-3,251.62	643.91	3,249.70	0.00	0.00	0.00	0.00
12,100.00	89.94	180.17	7,146.72	-3,351.62	643.62	3,349.70	0.00	0.00	0.00	0.00
12,200.00	89.94	180.17	7,146.83	-3,451.62	643.32	3,449.70	0.00	0.00	0.00	0.00
12,300.00	89.94	180.17	7,146.94	-3,551.62	643.03	3,549.70	0.00	0.00	0.00	0.00
12,400.00	89.94	180.17	7,147.05	-3,651.62	642.73	3,649.69	0.00	0.00	0.00	0.00
12,500.00	89.94	180.17	7,147.16	-3,751.62	642.44	3,749.69	0.00	0.00	0.00	0.00
12,600.00	89.94	180.17	7,147.27	-3,851.62	642.14	3,849.69	0.00	0.00	0.00	0.00
12,700.00	89.94	180.17	7,147.38	-3,951.62	641.85	3,949.69	0.00	0.00	0.00	0.00
12,800.00	89.94	180.17	7,147.49	-4,051.62	641.55	4,049.69	0.00	0.00	0.00	0.00
12,900.00	89.94	180.17	7,147.60	-4,151.62	641.26	4,149.69	0.00	0.00	0.00	0.00
13,000.00	89.94	180.17	7,147.71	-4,251.62	640.96	4,249.69	0.00	0.00	0.00	0.00
13,100.00	89.94	180.17	7,147.82	-4,351.61	640.67	4,349.69	0.00	0.00	0.00	0.00
13,200.00	89.94	180.17	7,147.93	-4,451.61	640.37	4,449.69	0.00	0.00	0.00	0.00
13,259.80	89.94	180.17	7,148.00	-4,511.41	640.20	4,509.49	0.00	0.00	0.00	0.00
Total Depth (Toe)										
13,259.81	89.94	180.17	7,148.00	-4,511.42	640.20	4,509.50	0.00	0.00	0.00	0.00
TD Well @ 13259.81ft - ENGLISH FARMS 37N-8HZ_BHL										

Plan Report for ENGLISH FARMS 37N-8HZ - Permit Rev-1

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,375.00	2,375.00	0.00	0.00	Begin Nudge @ 2375.00ft
3,625.00	3,585.71	252.22	91.80	End Nudge @ 3625.00ft
6,576.24	6,260.44	1,424.25	518.38	Top of 4.5" Liner @ 6576.24ft
6,676.24	6,351.07	1,463.96	532.84	KOP @ 6676.24ft
7,300.00	6,931.83	1,383.54	624.42	DLS = 10°/100'
7,809.87	7,142.00	938.49	656.26	End Build @ 7809.87ft
13,259.81	7,148.00	-4,511.42	640.20	TD Well @ 13259.81ft

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (usft)
				+N/_S (usft)	+E/-W (usft)	
User	No Target (Freehand)	180.17	Slot	0.00	0.00	0.00

Survey tool program

From (usft)	To (usft)	Survey/Plan	Survey Tool
0.00	7,809.87	Permit Rev-1	MWD+IFR1
7,809.87	13,259.81	Permit Rev-1	MWD+IFR1

Casing Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
1,494.00	1,494.00	9 5/8"	9-5/8	13-1/2
7,809.87	7,142.00	7"	7	8-3/4

Formation Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
962.00	962.00	Base Fox Hills		0.00	
1,494.00	1,494.00	Surface Csg Setting Depth		0.00	
4,124.04	4,038.00	Parkman		0.00	
4,537.81	4,413.00	Sussex		0.00	
7,280.94	6,917.00	SSPG		0.00	
7,322.72	6,949.00	NBRR		0.00	
7,522.51	7,072.00	N470_B_CK		0.00	
7,639.56	7,117.00	N700_C_CK		0.00	
7,809.87	7,142.00	Landing Target (Heel)		0.00	
13,259.80	7,148.00	Total Depth (Toe)		0.00	

Targets associated with this wellbore

Target Name	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Shape
ENGLISH FARMS 37N-8HZ_SHL	0.00	0.00	0.00	Point
1N-R65W-Sec. 9_Section lines	-16.00	-4,358.53	5,862.78	Polygon
ENGLISH FARMS 37N-8HZ_BHL	7,148.00	-4,511.42	640.20	Point
1N-R65W-Sec. 5_Section Lines	16.00	-92.07	1,785.42	Polygon
1N-R65W-Sec. 8_Section lines	-16.00	-4,358.53	5,862.78	Polygon

North Reference Sheet for 1N-65W-08 English Farms 15C-8HZ Pad - ENGLISH FARMS 37N-8HZ - Plan B

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to True North Reference .

Vertical Depths are relative to RKB = 17' @ 4965.00usft (D Rig). Northing and Easting are relative to ENGLISH FARMS 37N-8HZ

Coordinate System is Universal Transverse Mercator (US Survey Feet), Zone 13N (108 W to 102 W) using datum North American Datum 1983, ellipsoid

Projection method is Transverse Mercator (Gauss-Kruger)

Central Meridian is -105.00°, Longitude Origin:0.000000°, Latitude Origin:0.000000°

False Easting: 1,640,416.67usft, False Northing: 0.00usft, Scale Reduction: 0.99960882

Grid Coordinates of Well: 14,553,257.34 usft N, 1,728,225.93 usft E

Geographical Coordinates of Well: 40° 04' 20.69" N, 104° 41' 10.04" W

Grid Convergence at Surface is: 0.20°

Based upon Minimum Curvature type calculations, at a Measured Depth of 13,259.81usft the Bottom Hole Displacement is 4,556.62usft in the Direction of 171.92° (True).

Magnetic Convergence at surface is: -8.14° (22 October 2014, , IGRF2010)

