


DEPTH SCALE: 1":100'



VERSION: 143R 2.0b"


MAIN PASS

177021 TLTMP


FINISH DEPTH: 1.5 Feet DIRECTION: UP DATE: 09/25/2011 TIME: 17:13 MODE: TRACE PLAYBACK

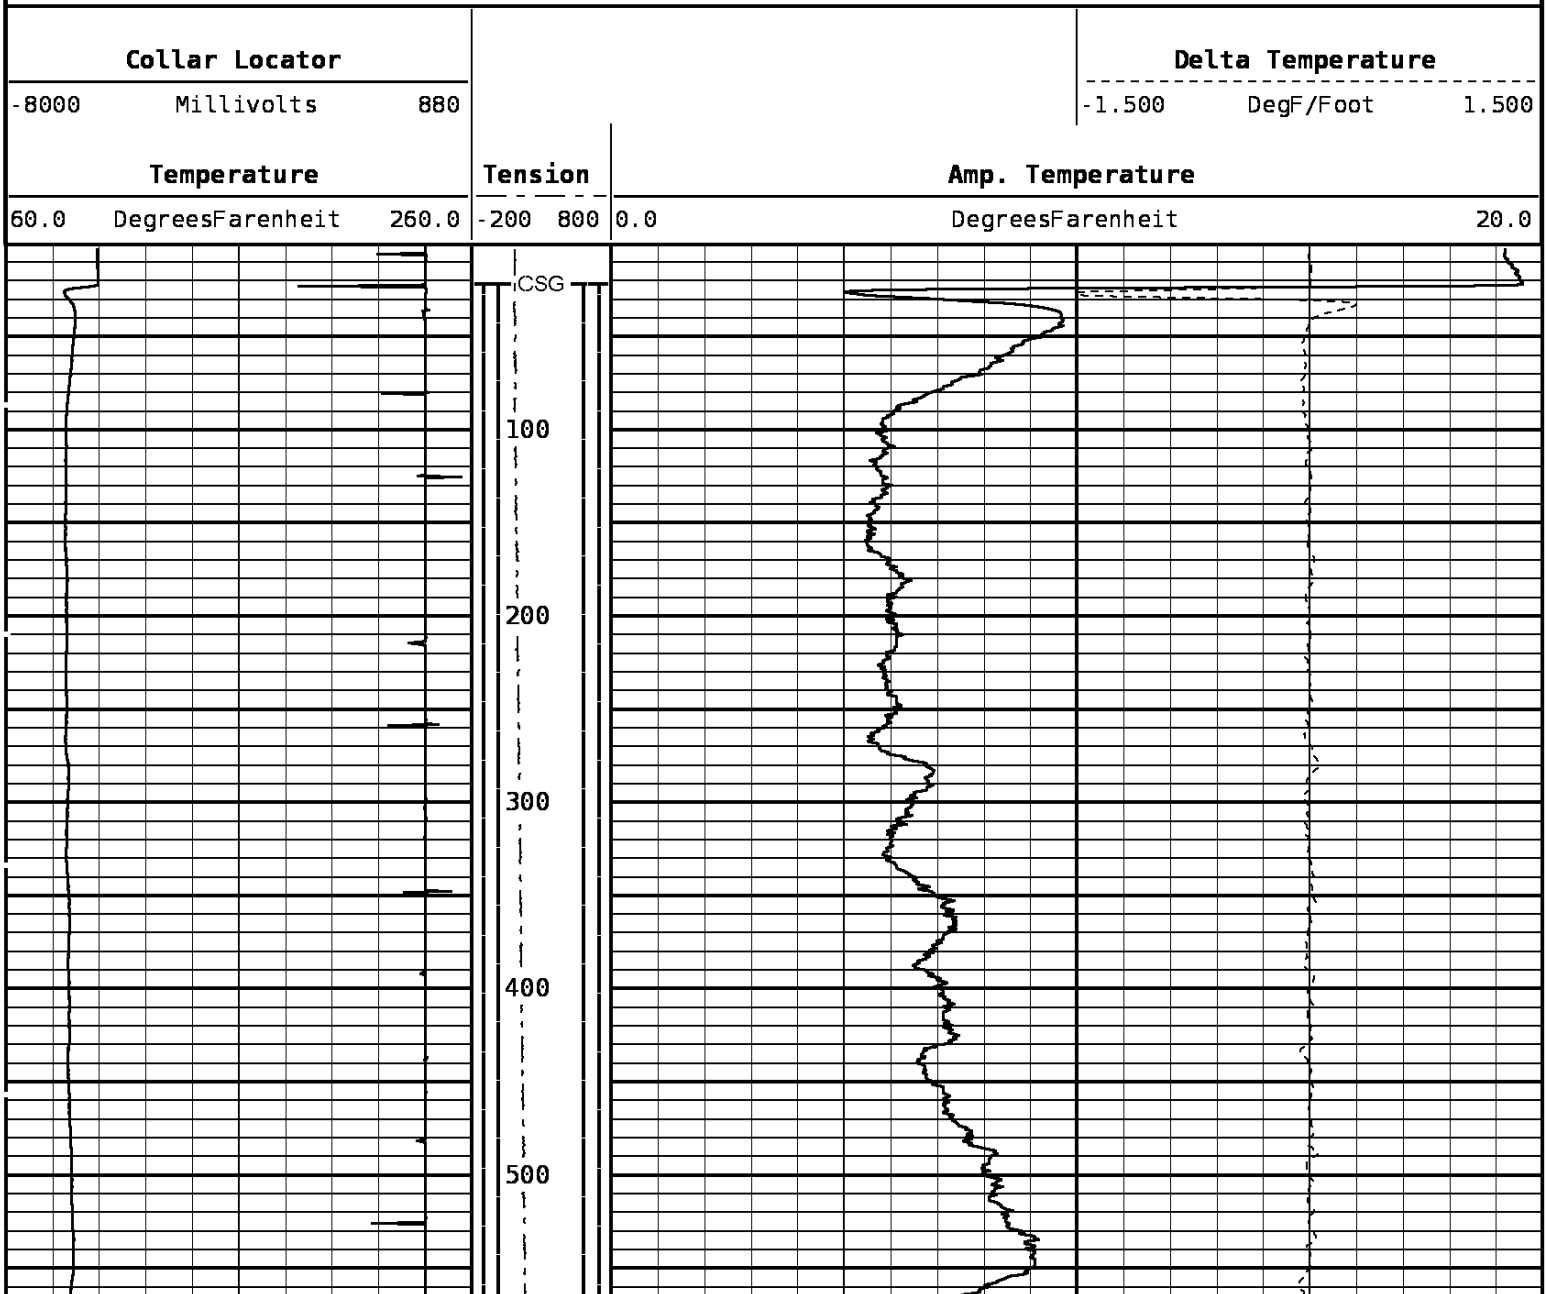


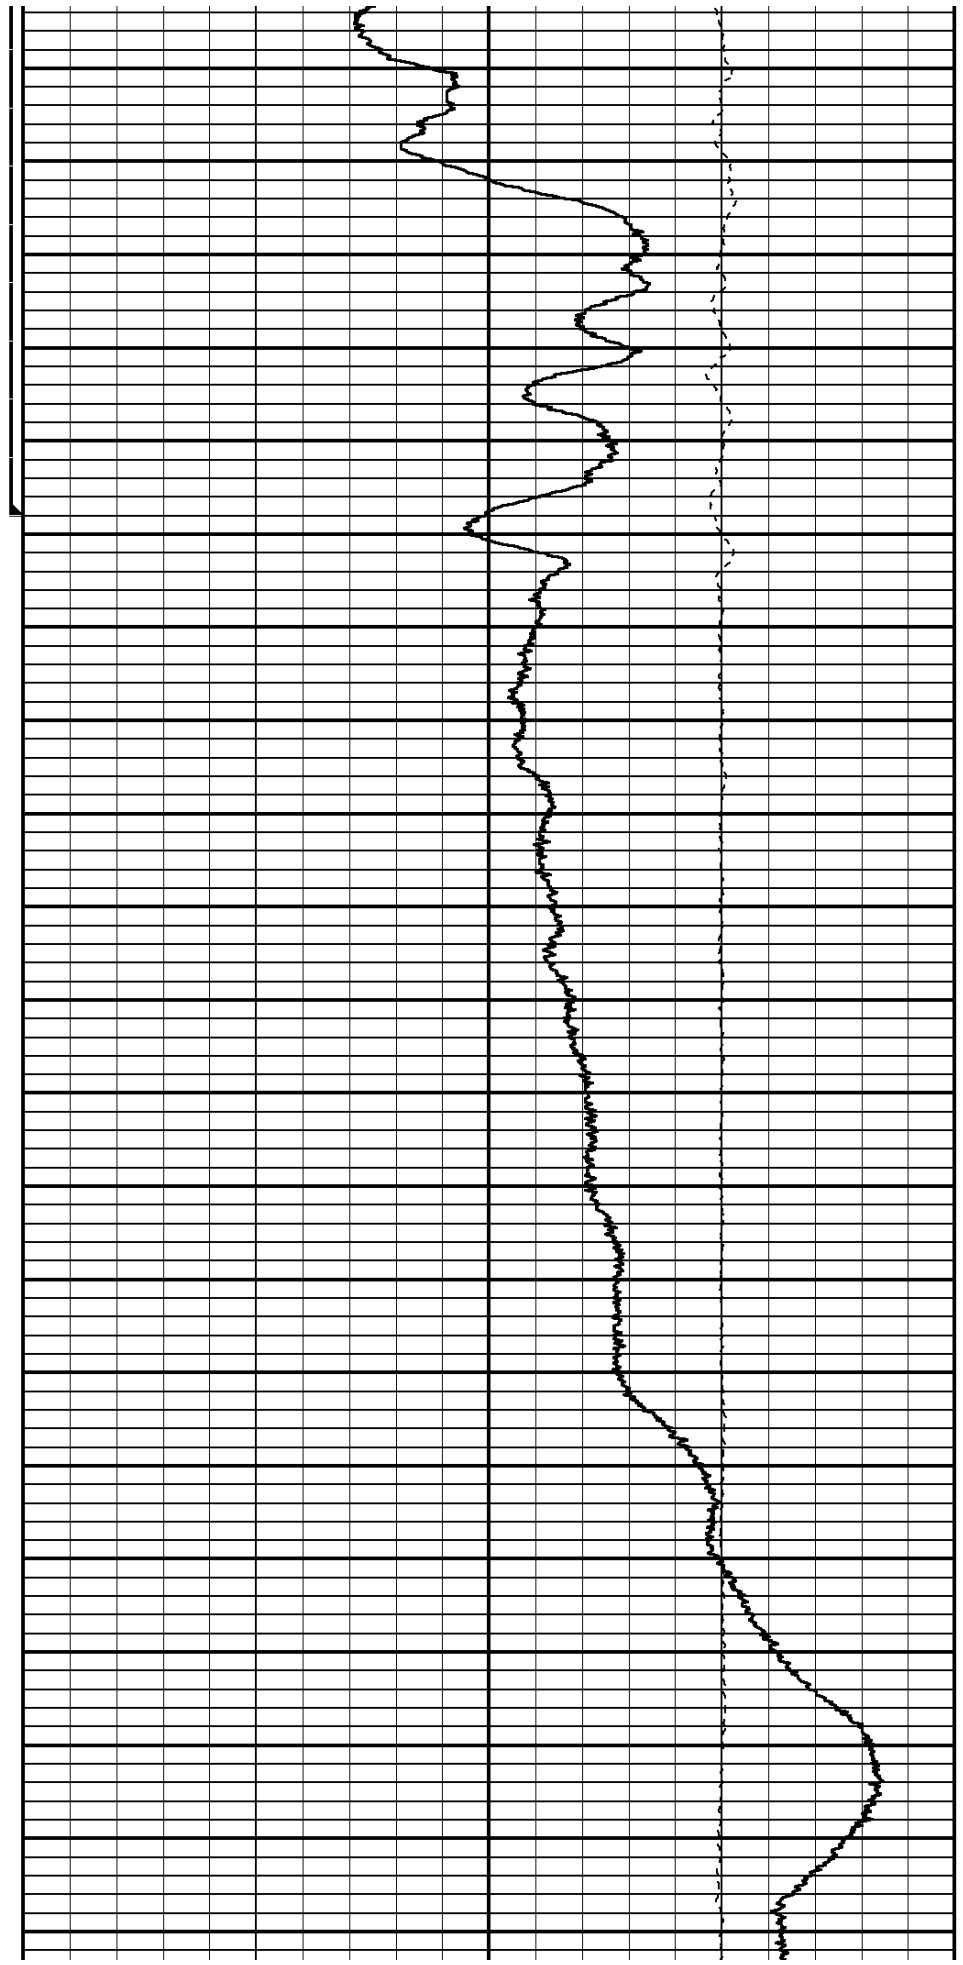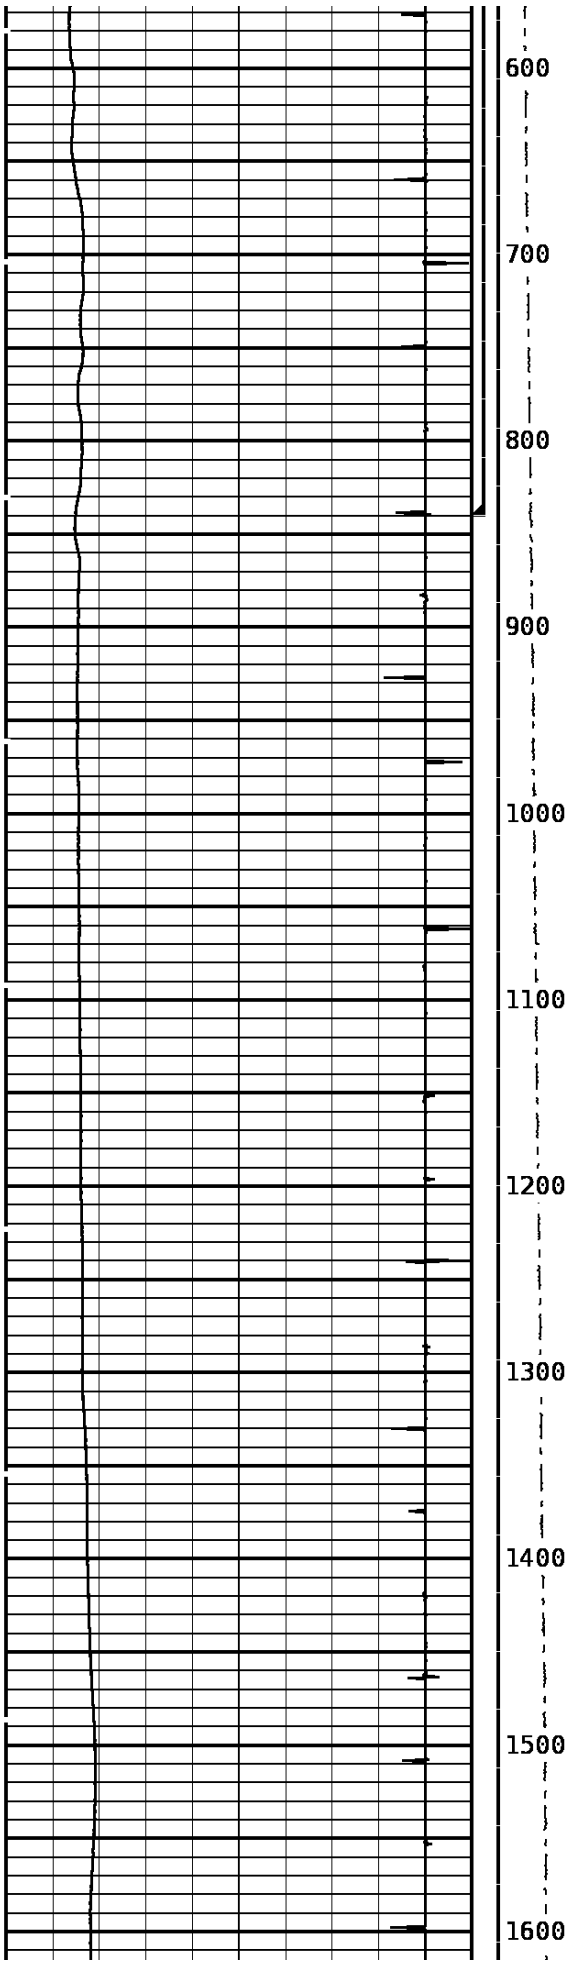


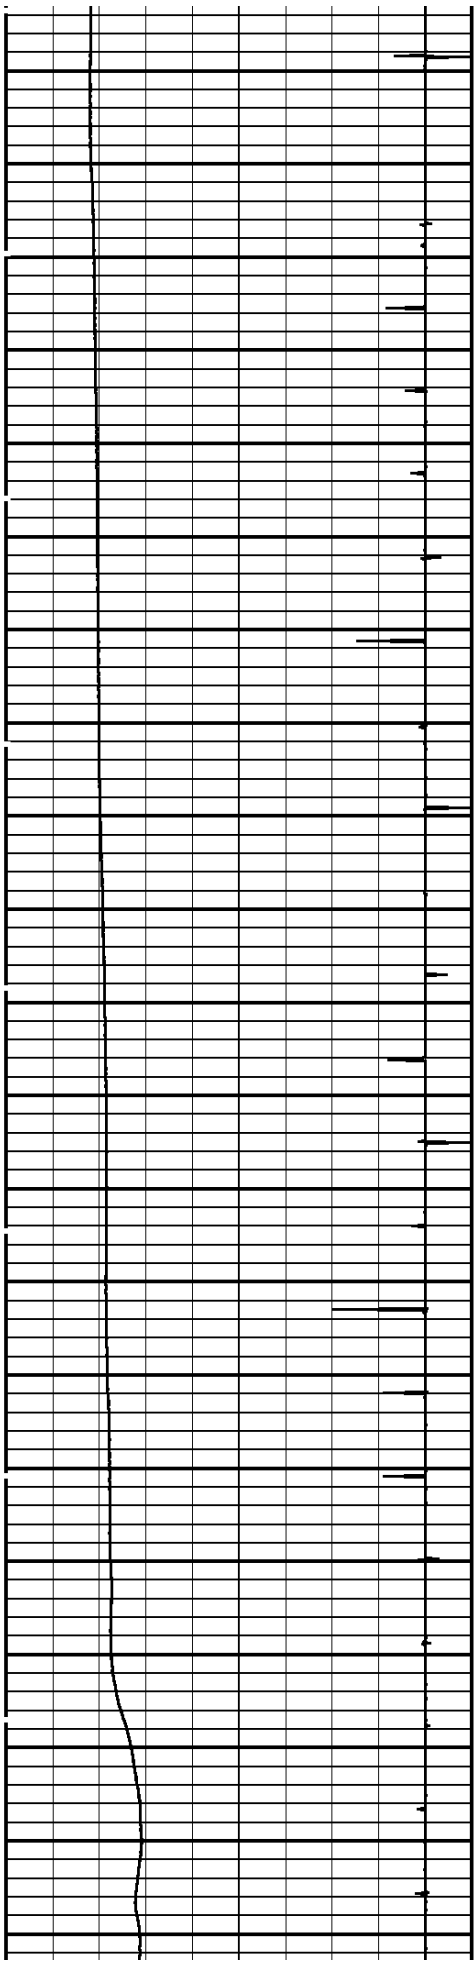




1700
1800
1900
2000
2100
2200
2300
2400
2500
2600

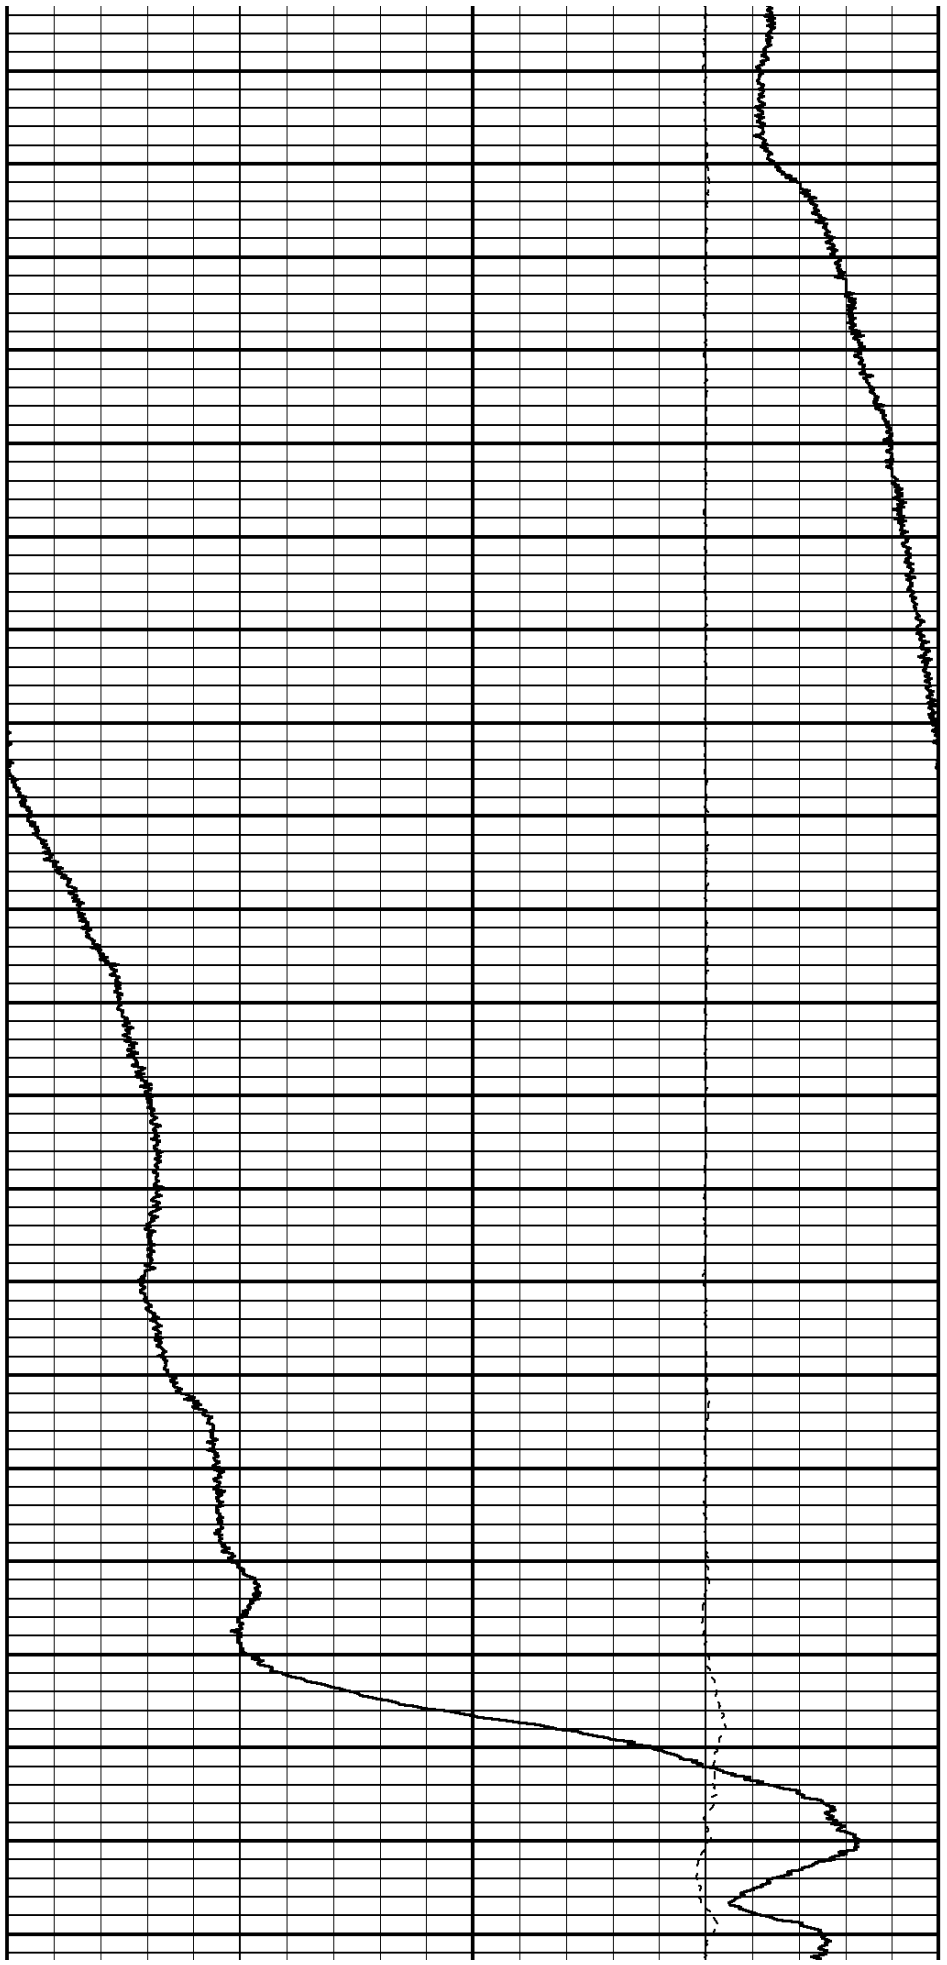


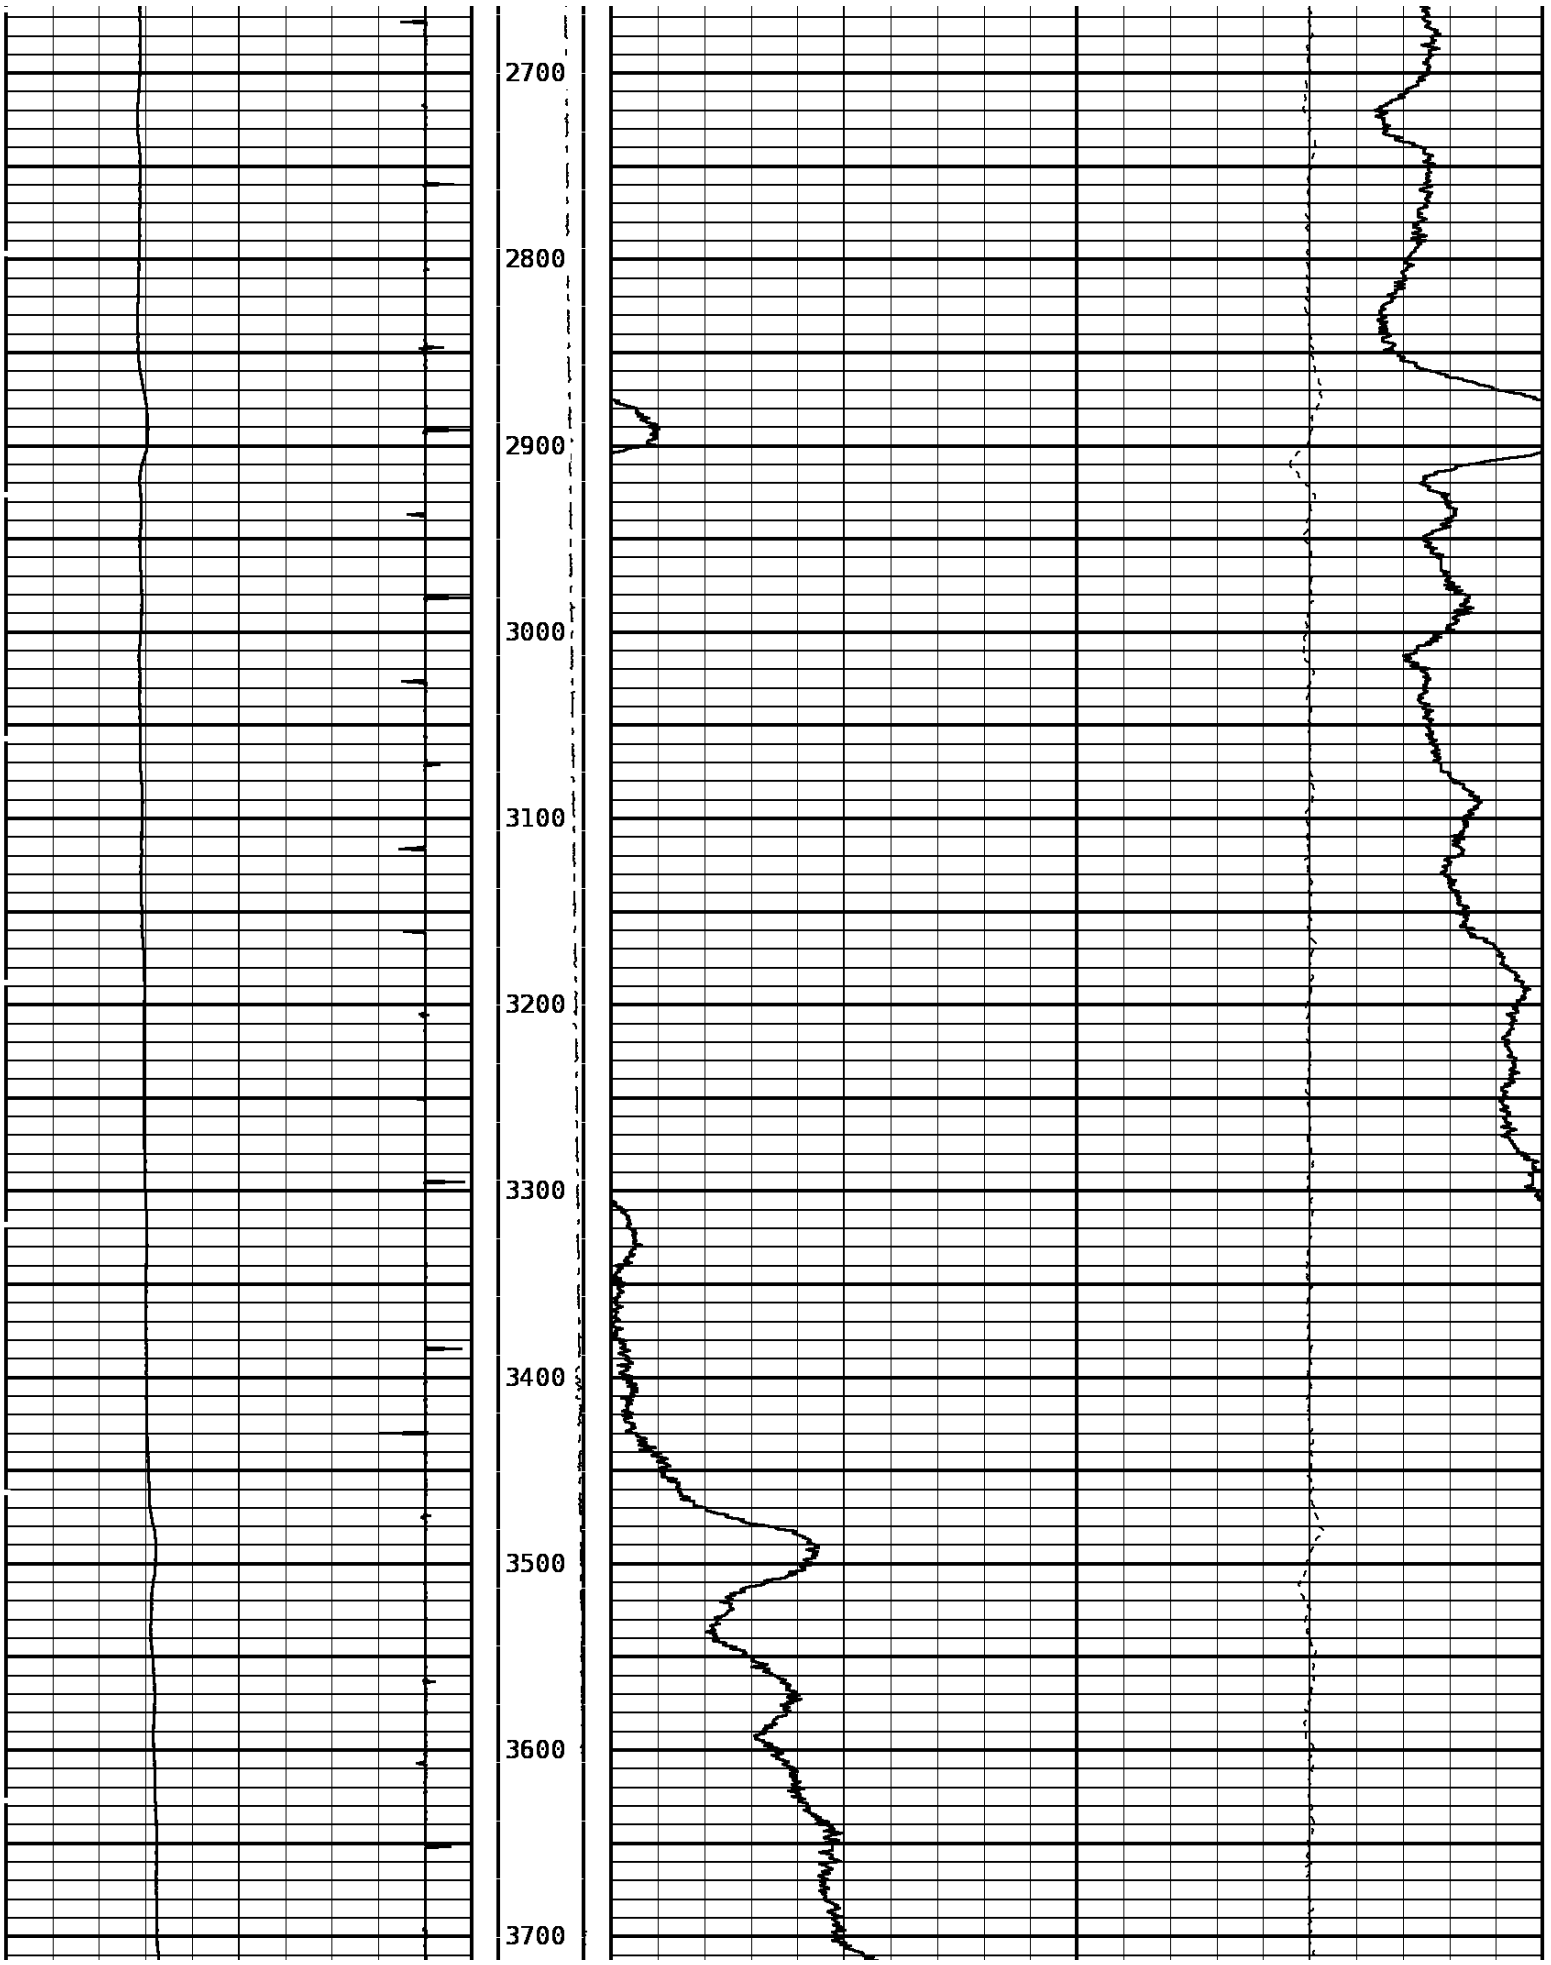

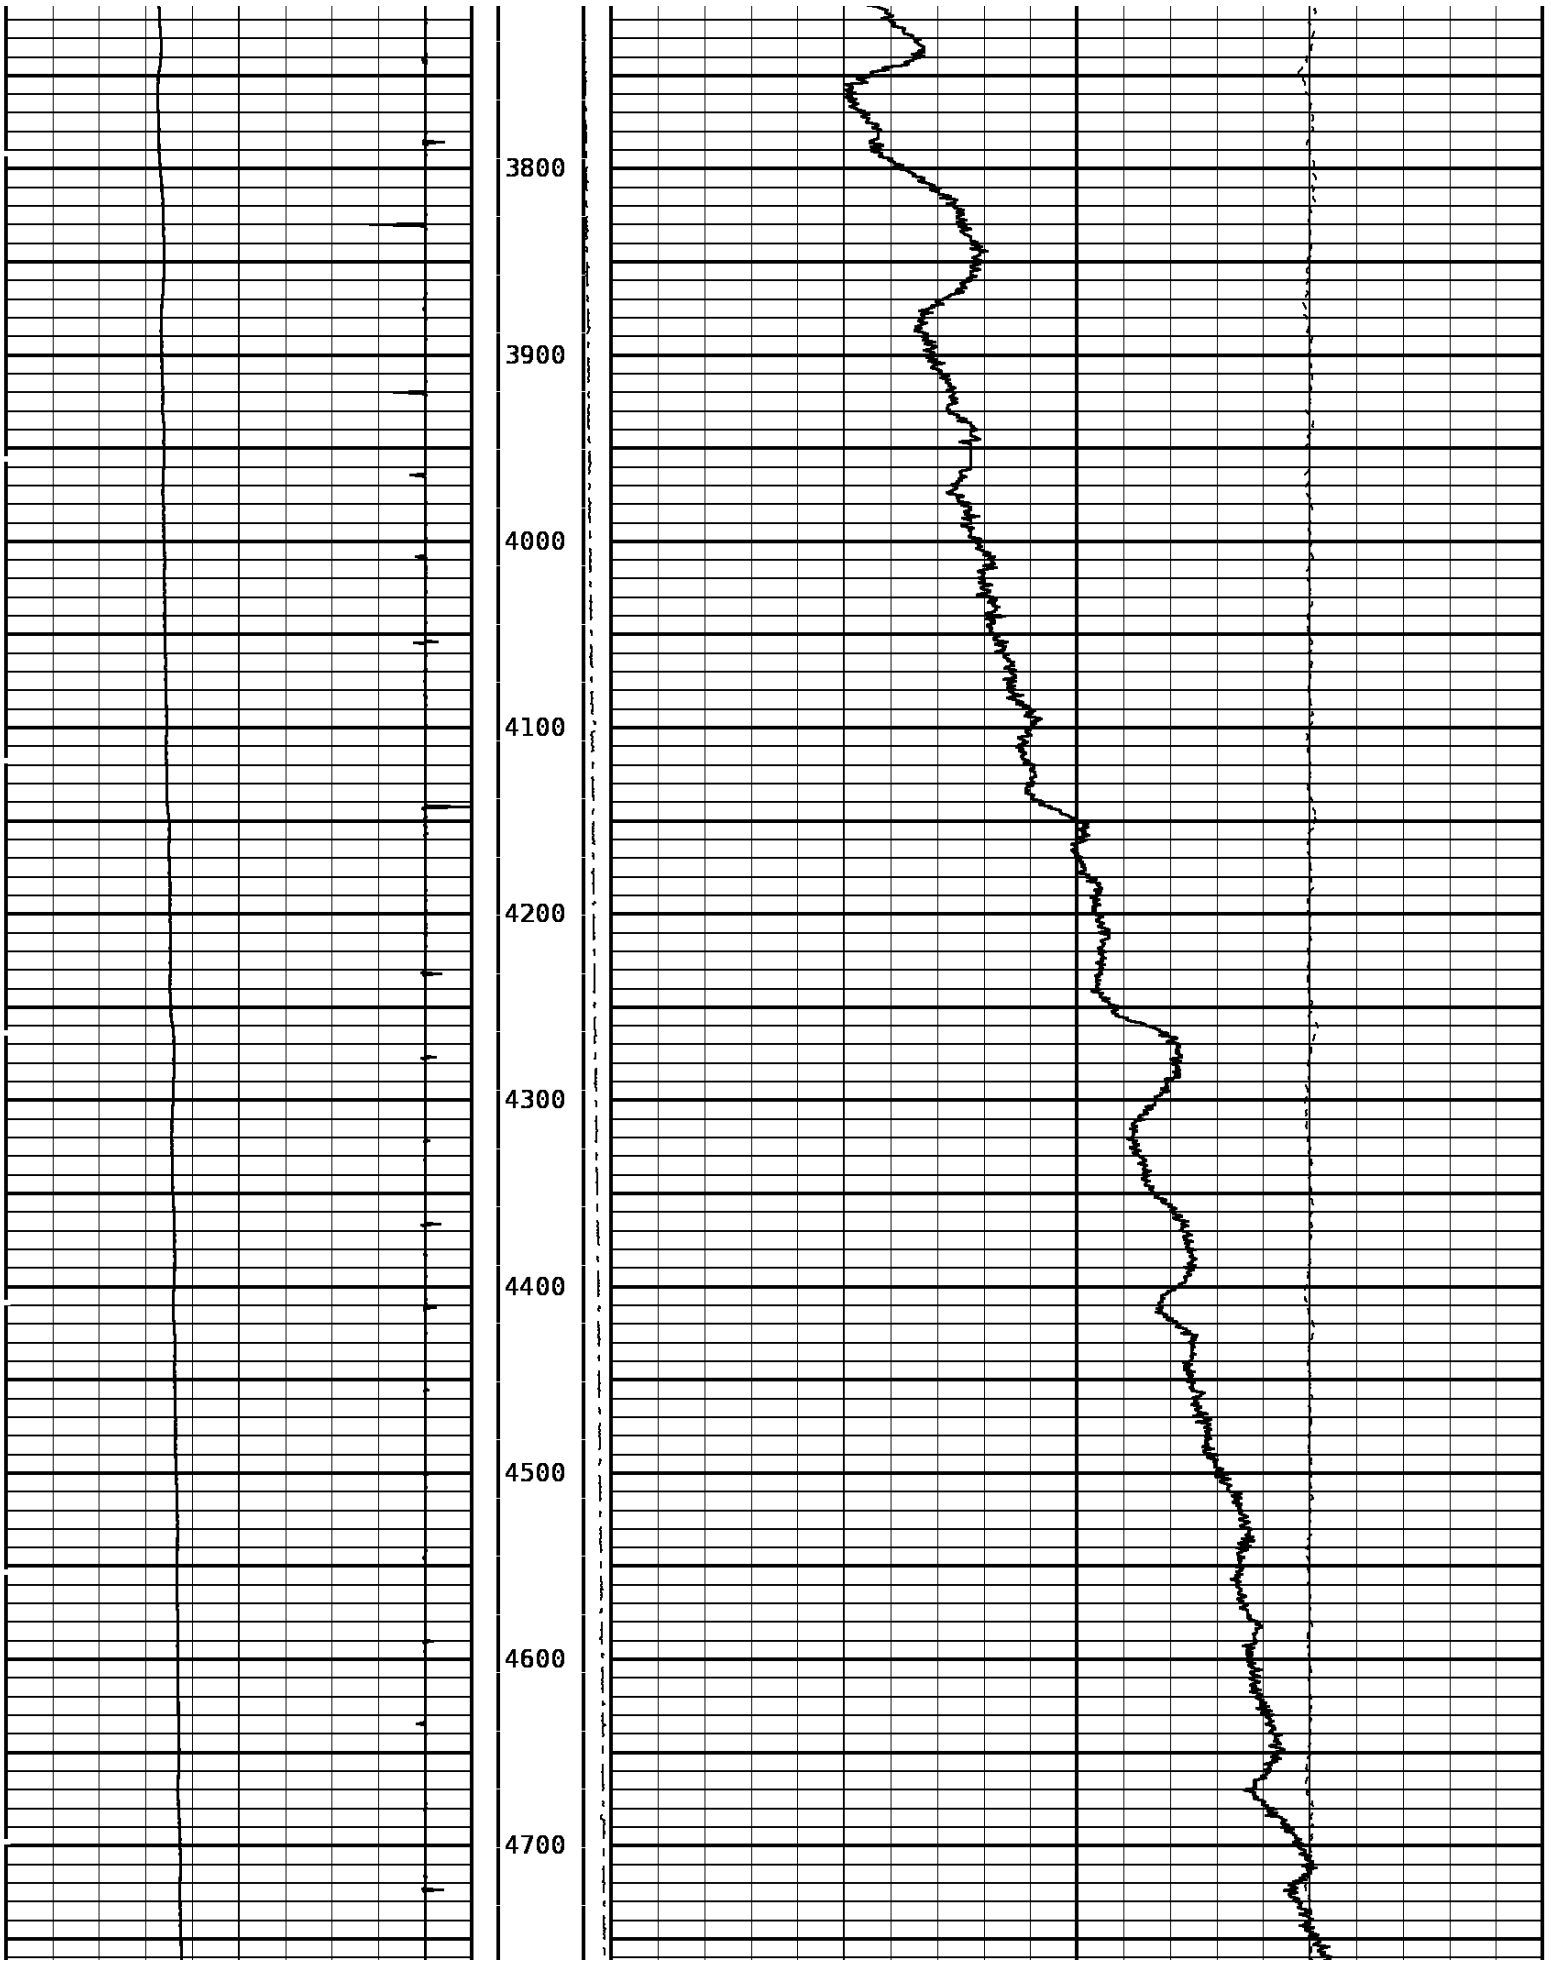

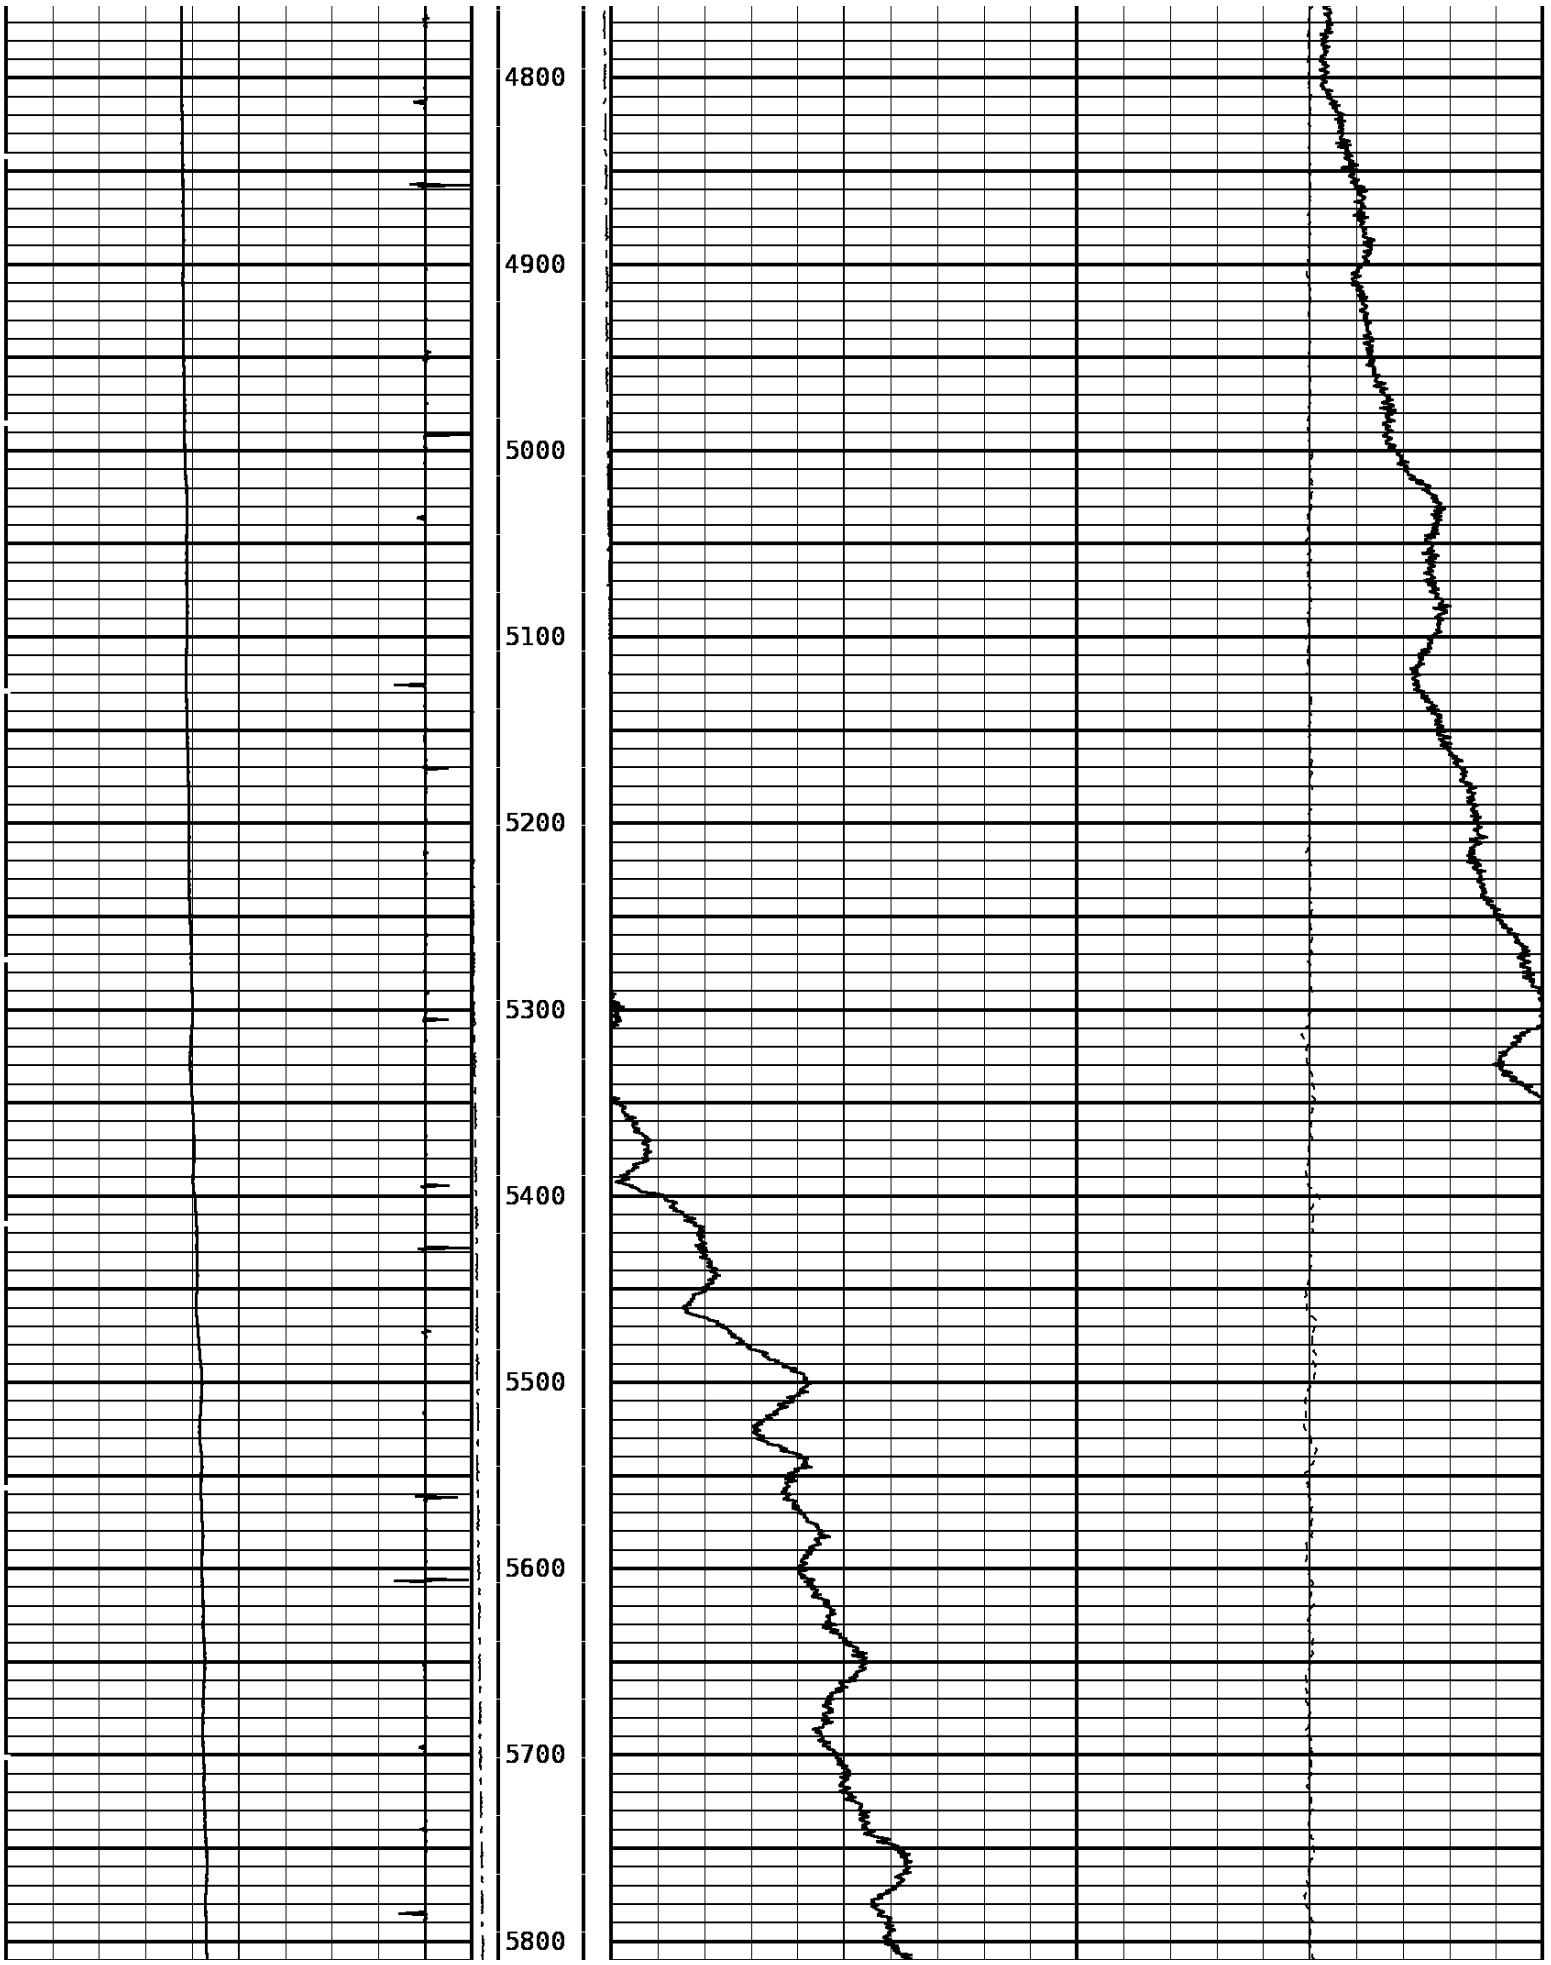

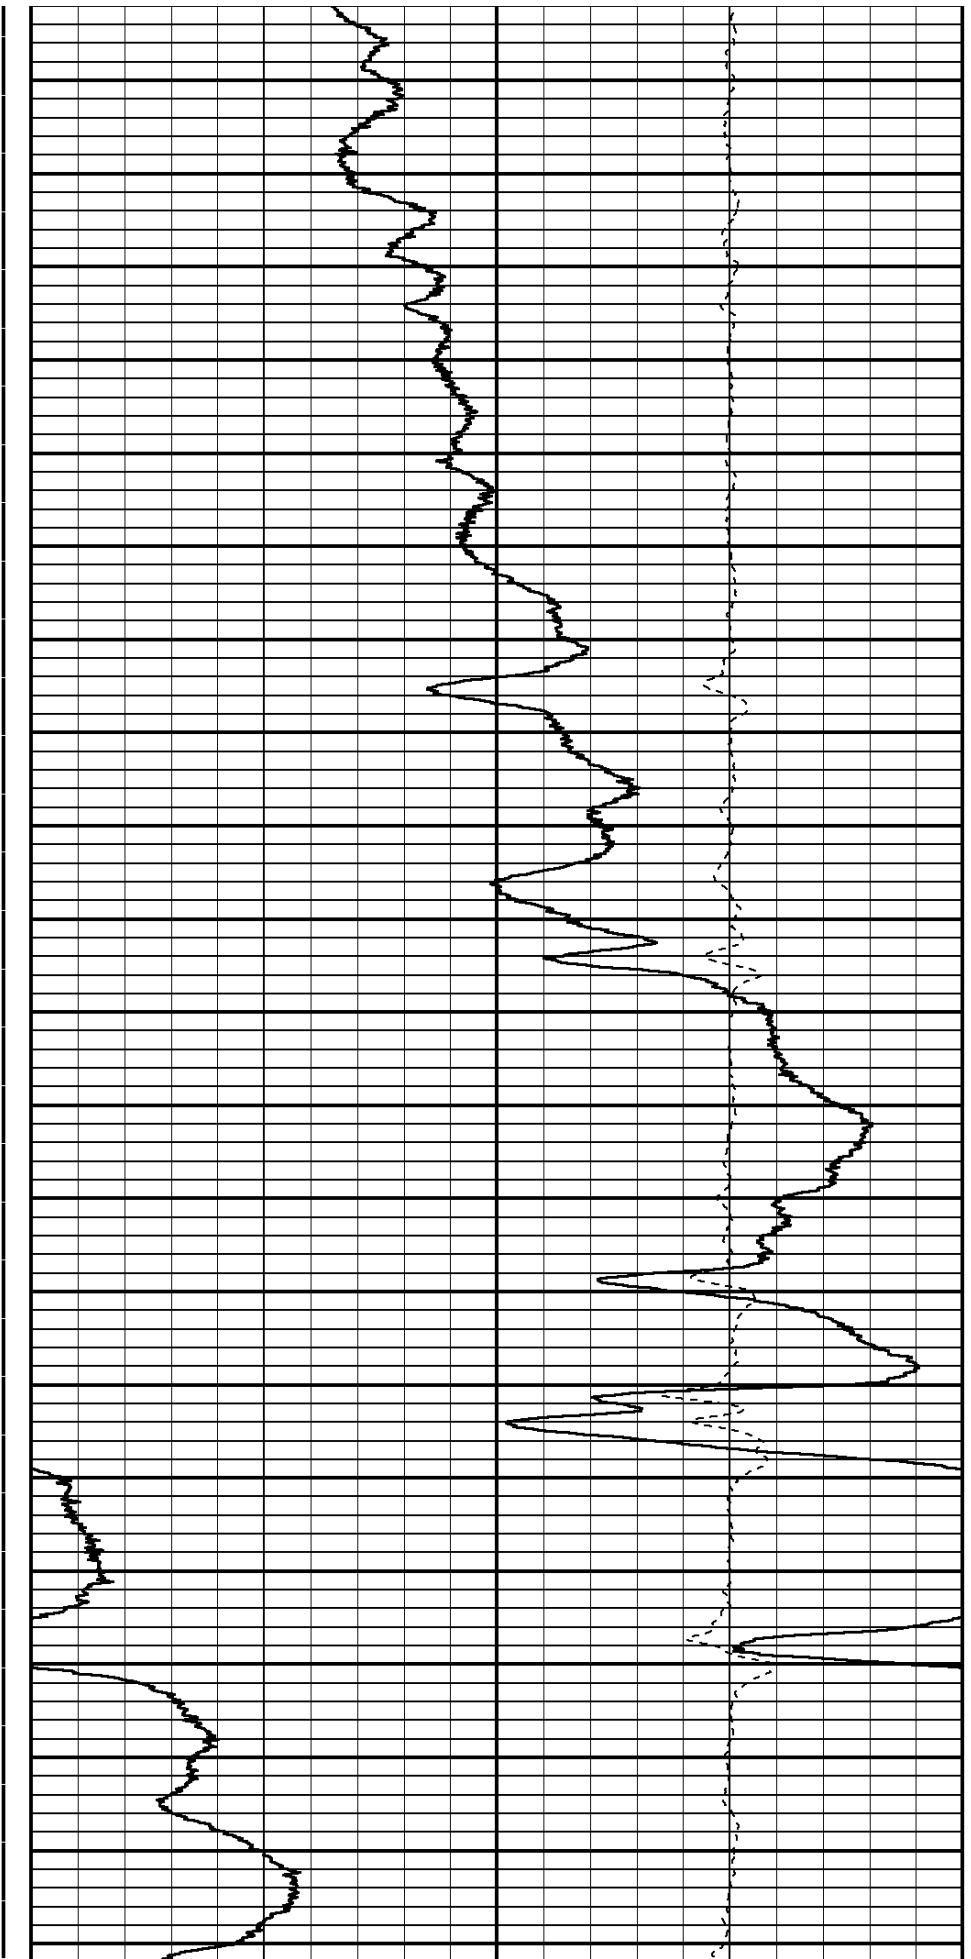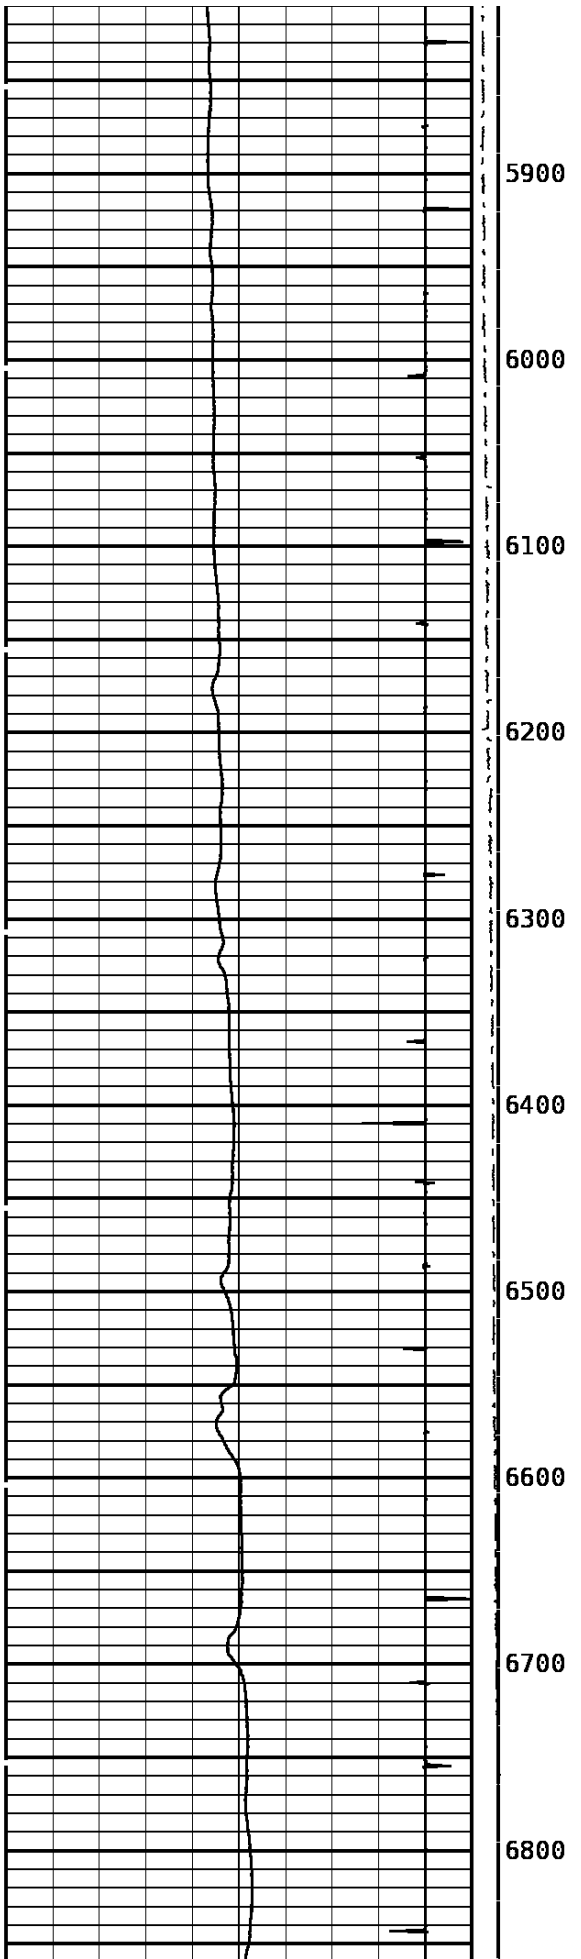

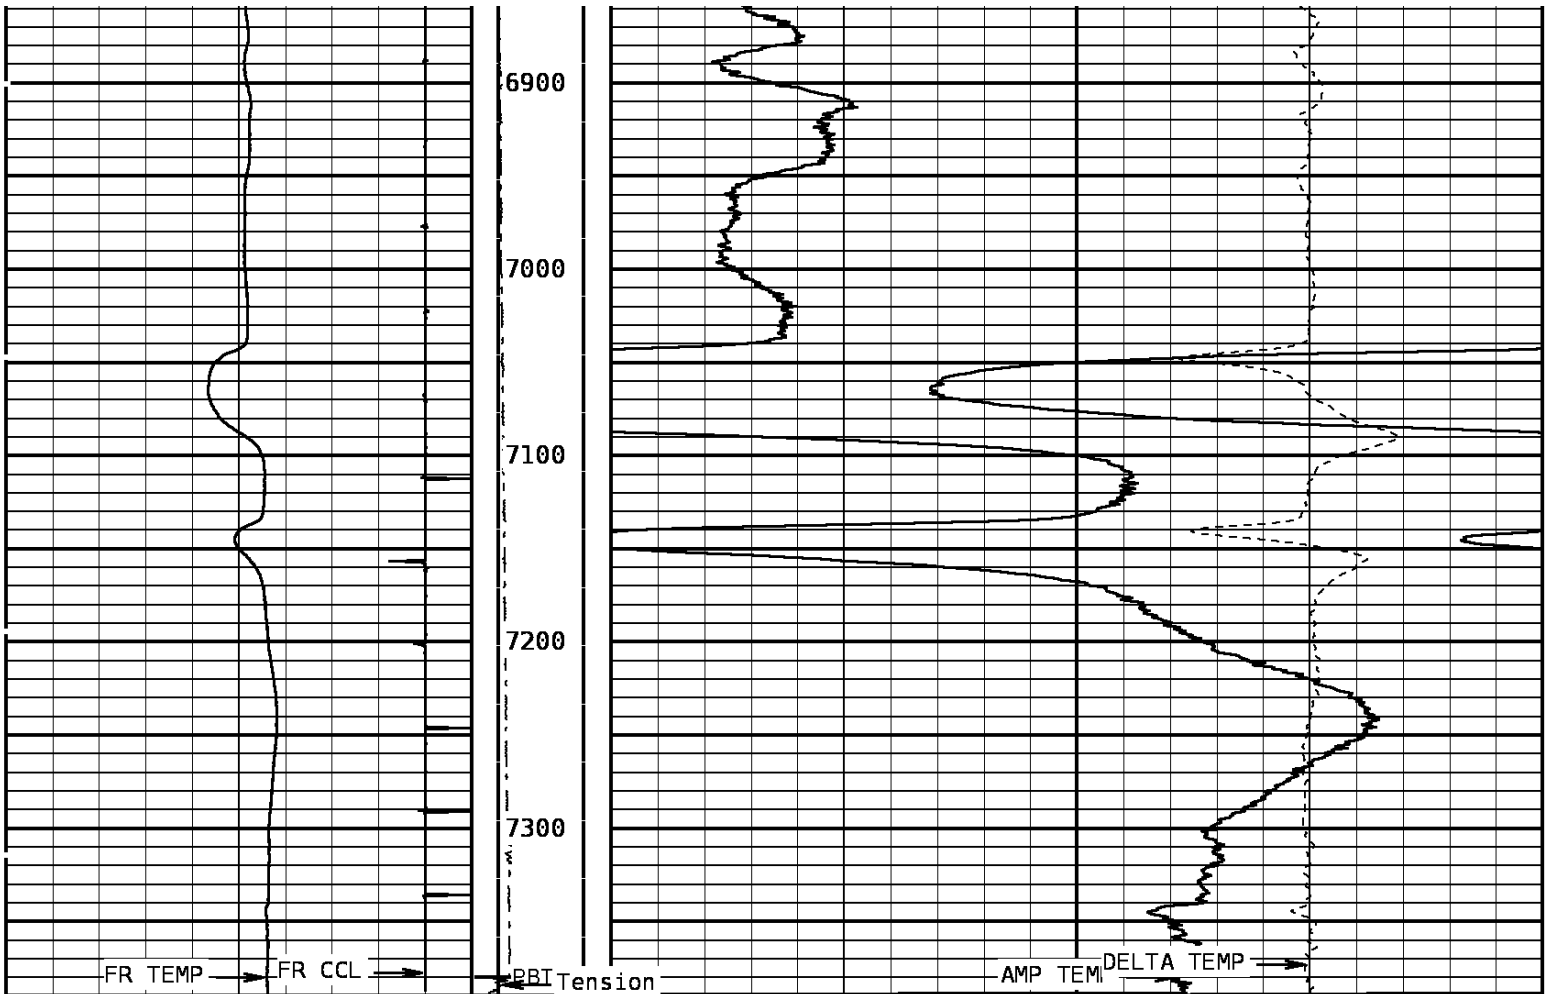

Temperature		Tension		Amp. Temperature	
60.0	DegreesFarenheit	260.0	-200 800 0.0	DegreesFarenheit	20.0
Collar Locator			Delta Temperature		
-8000	Millivolts	880	-----		
			-1.500	DegF/Foot	1.500

START DEPTH: **7390.0** DIRECTION: **UP** DATE: **09/25/2011** TIME: **17:13** MODE: **TRACE PLAYBACK**
 177021 TLTMP

MAIN PASS

DEPTH SCALE: **1":100'** VERSION: **143R 2.0b"**


DEPTH SCALE: **5":100'** VERSION: **143R 2.0b"**



MAIN PASS


177021 TLTMP

FINISH DEPTH: 1.5 Feet DIRECTION: UP DATE: 09/25/2011 TIME: 17:13 MODE: TRACE PLAYBACK

Collar Locator			Delta Temperature		
-8000	Millivolts	880	-1.500	DegF/Foot	1.500
Temperature			Amp. Temperature		
60.0	DegreesFarenheit	260.0	-200 800 0.0	DegreesFarenheit	20.0

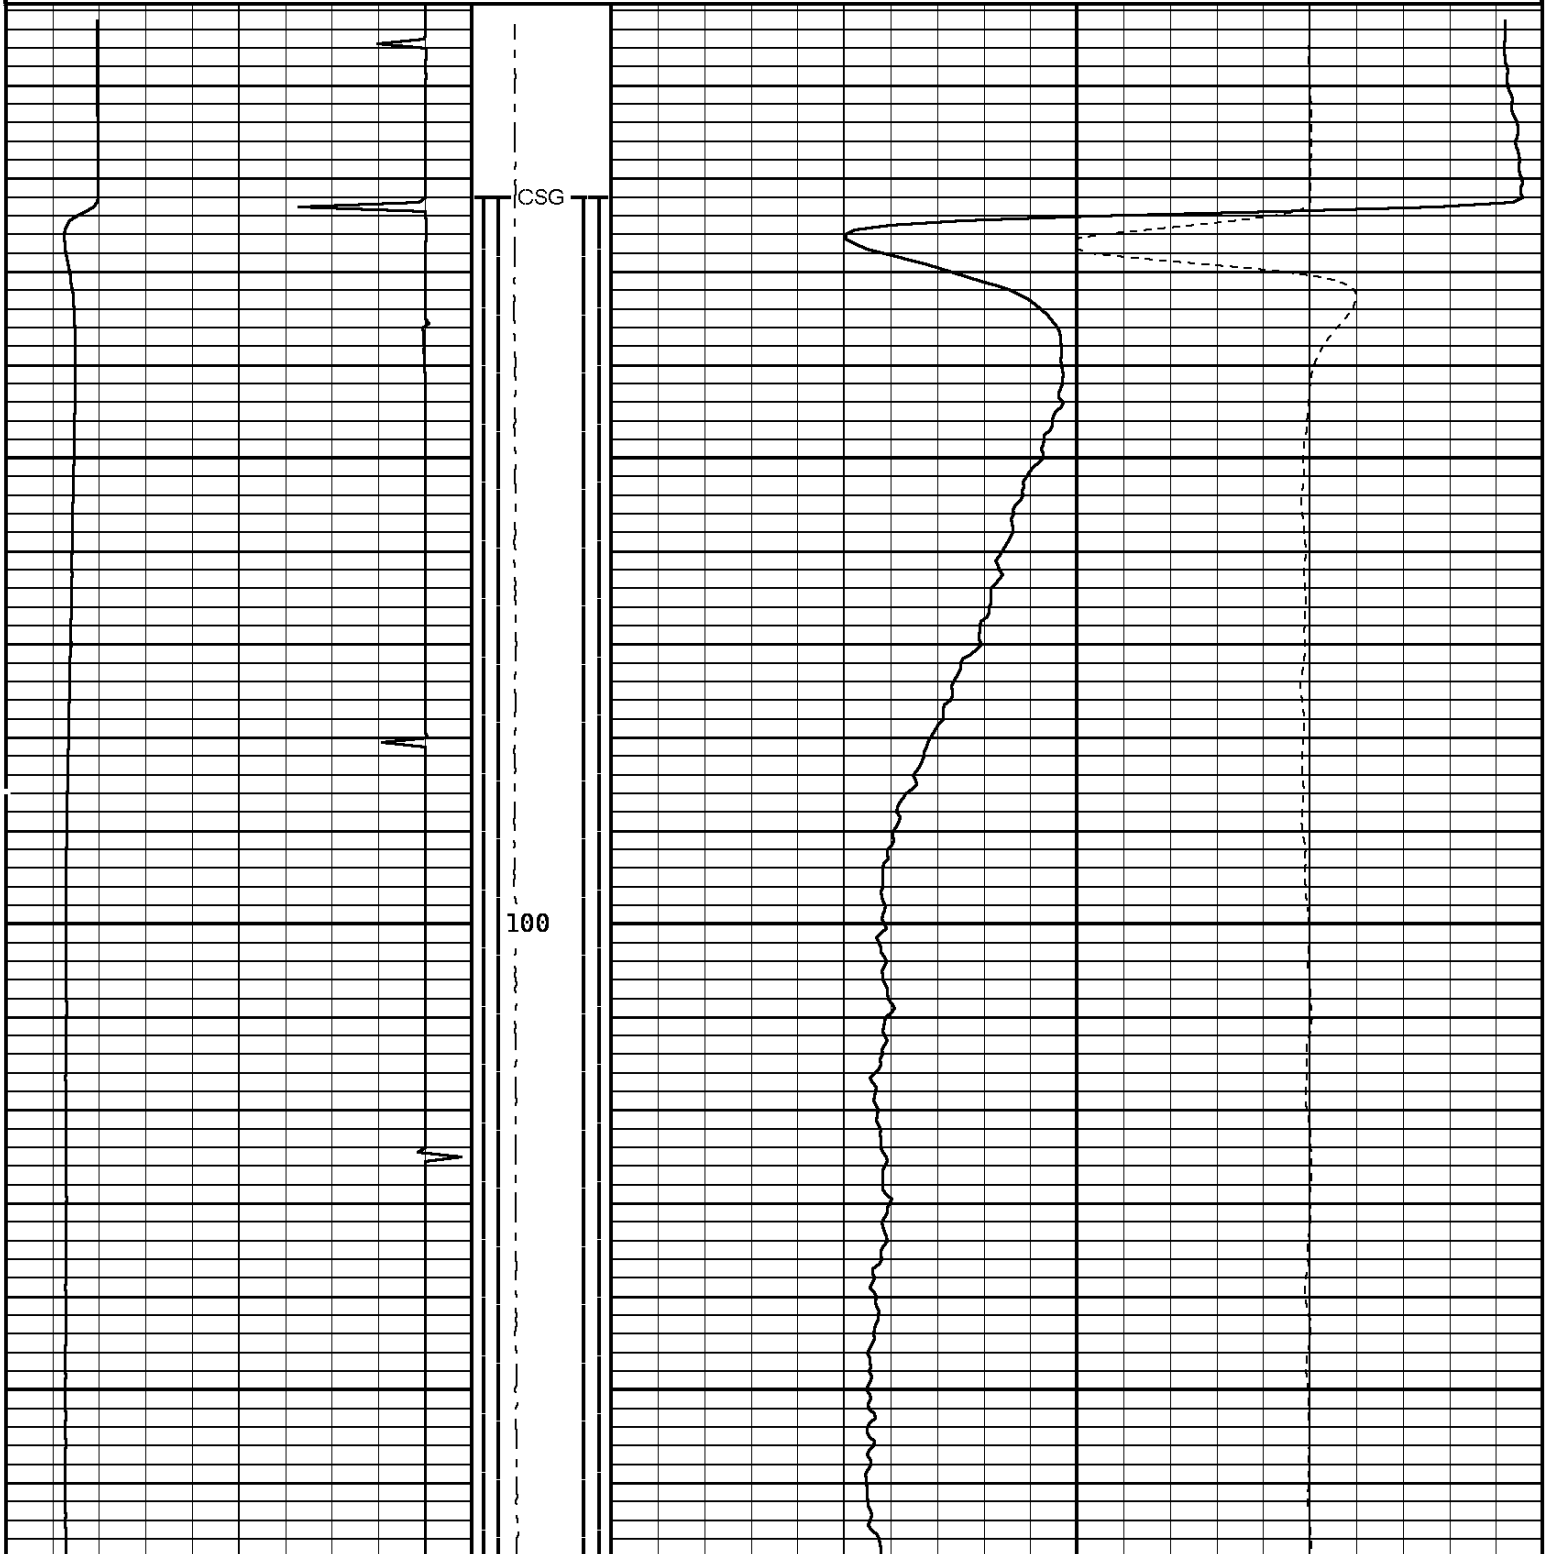


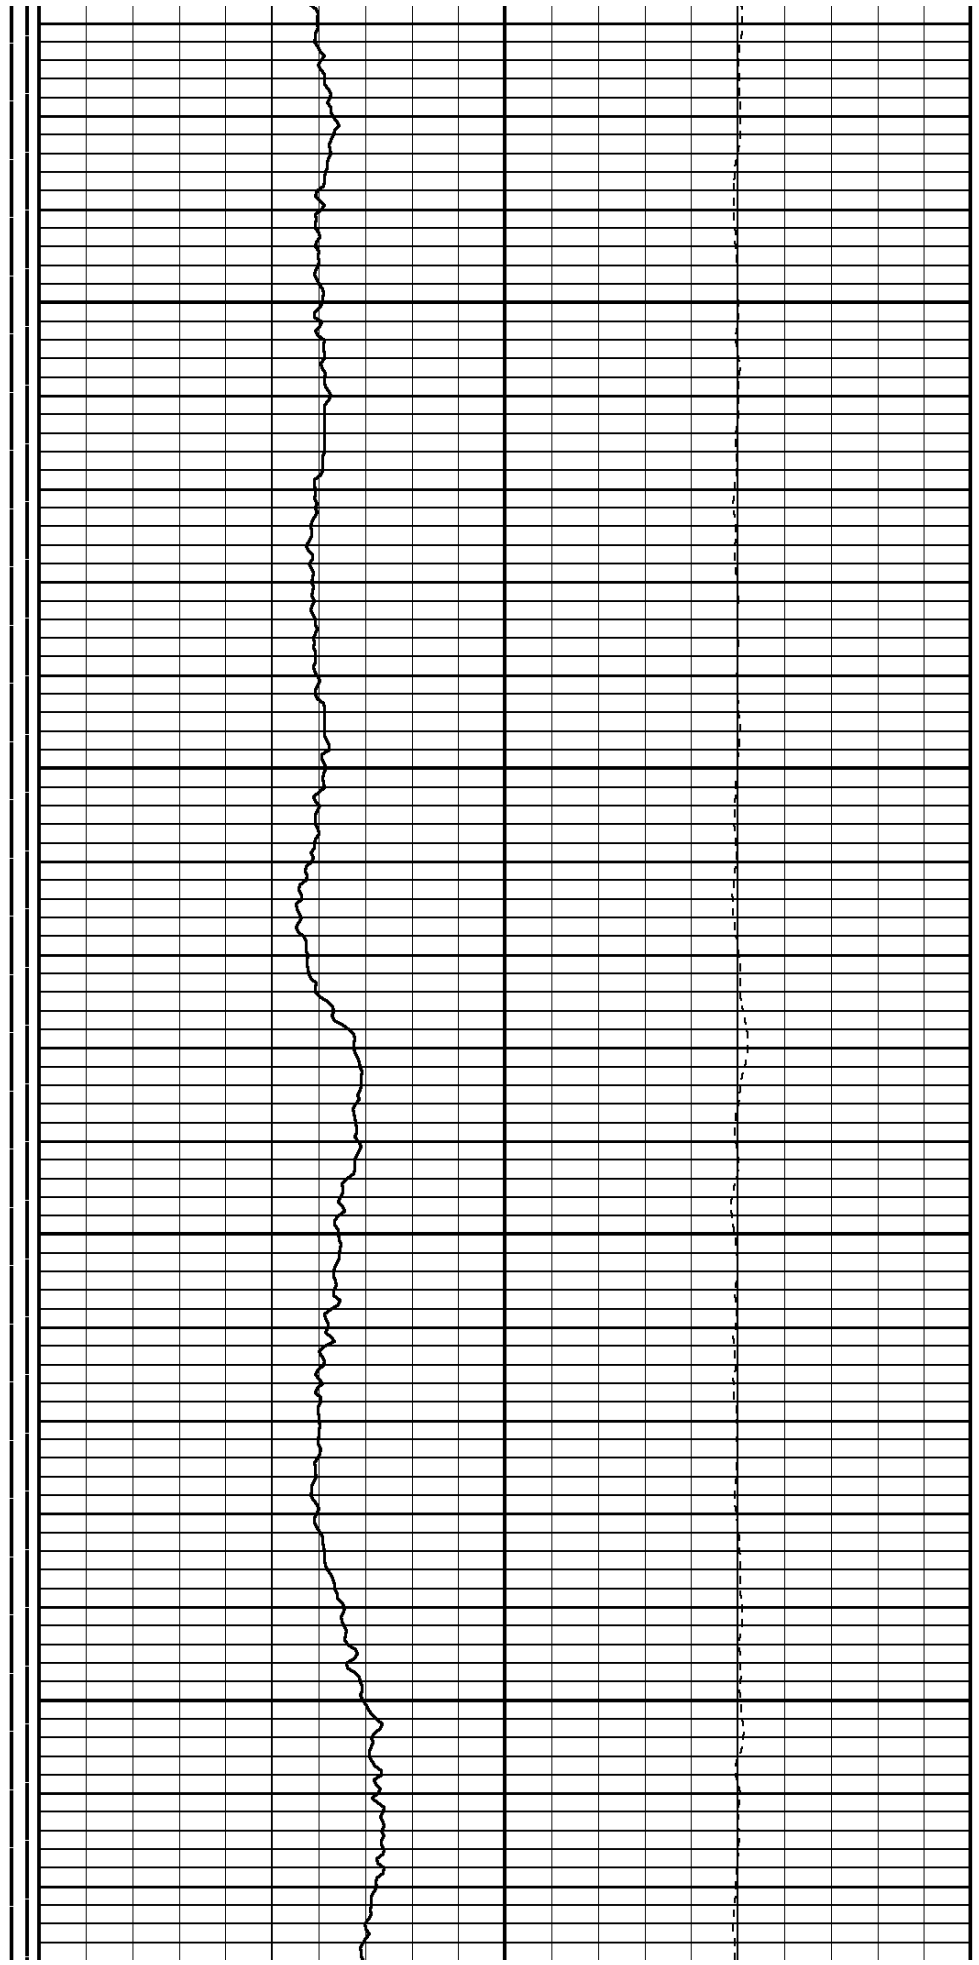
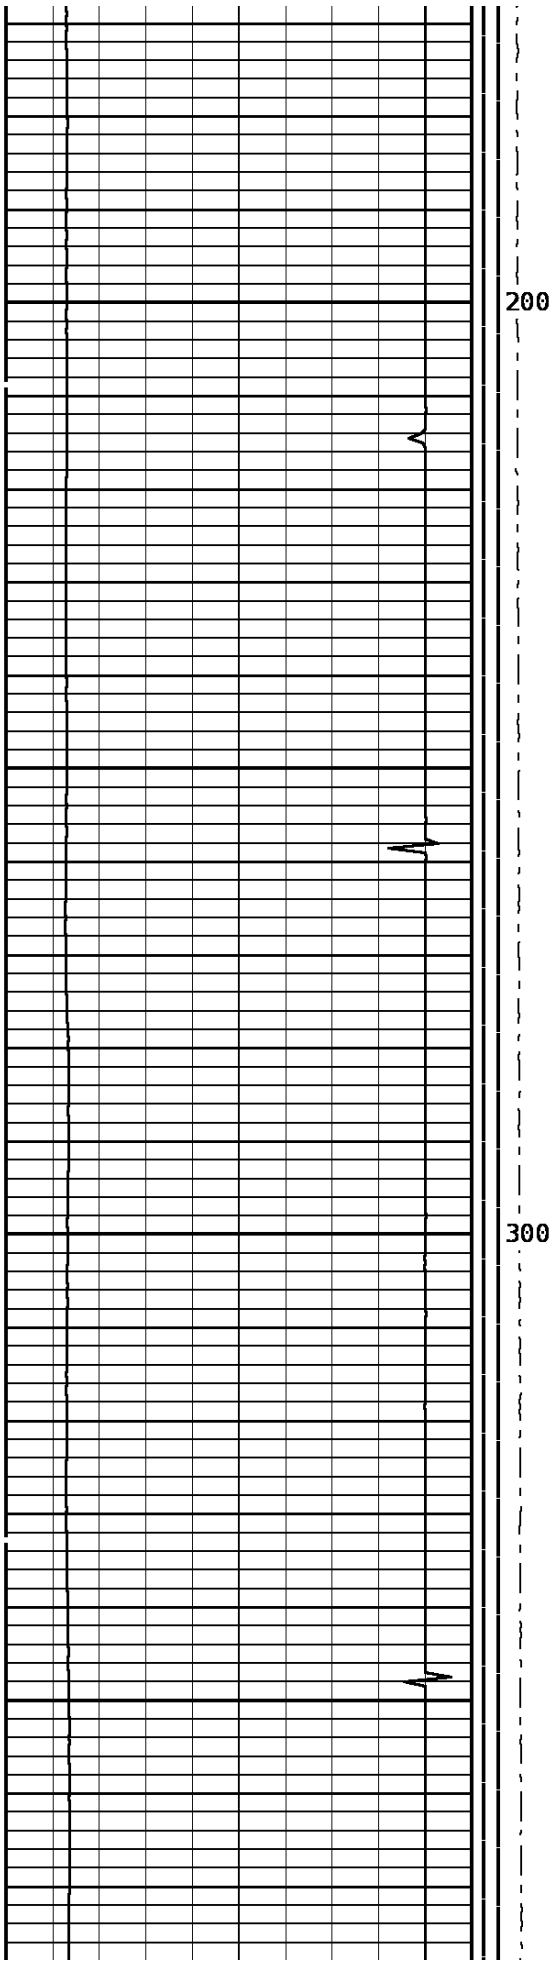


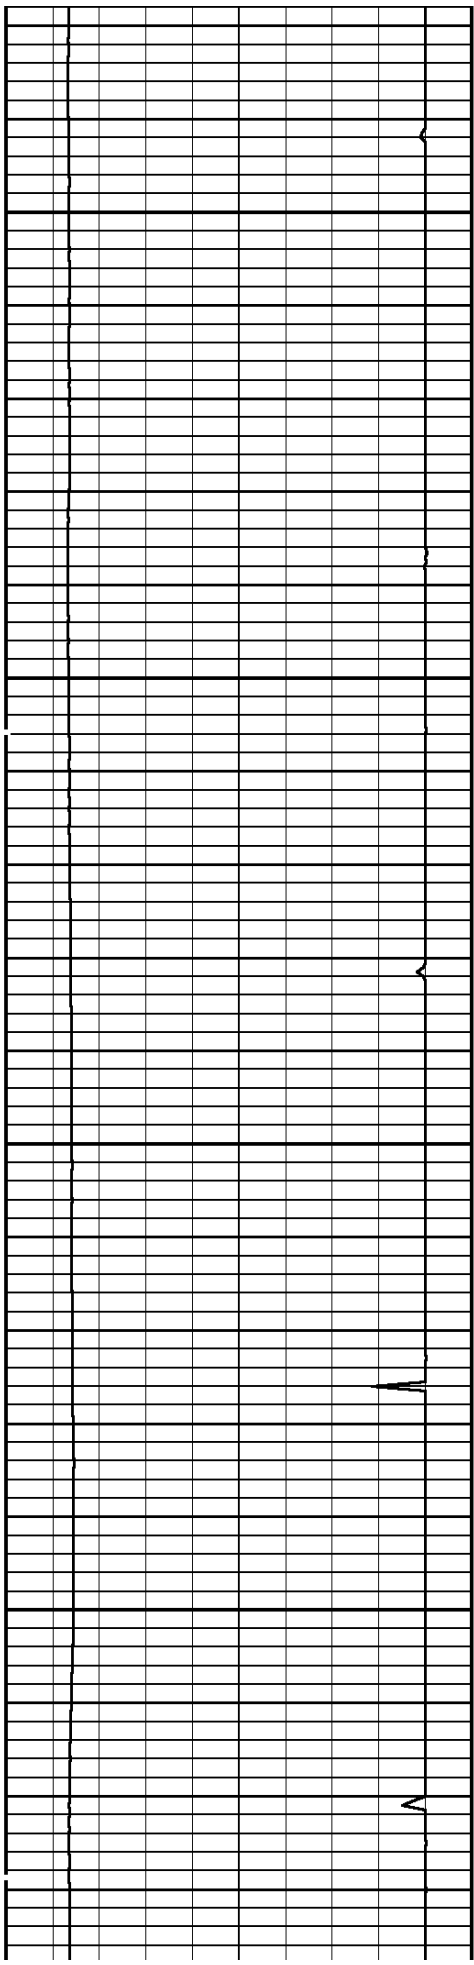


400


500

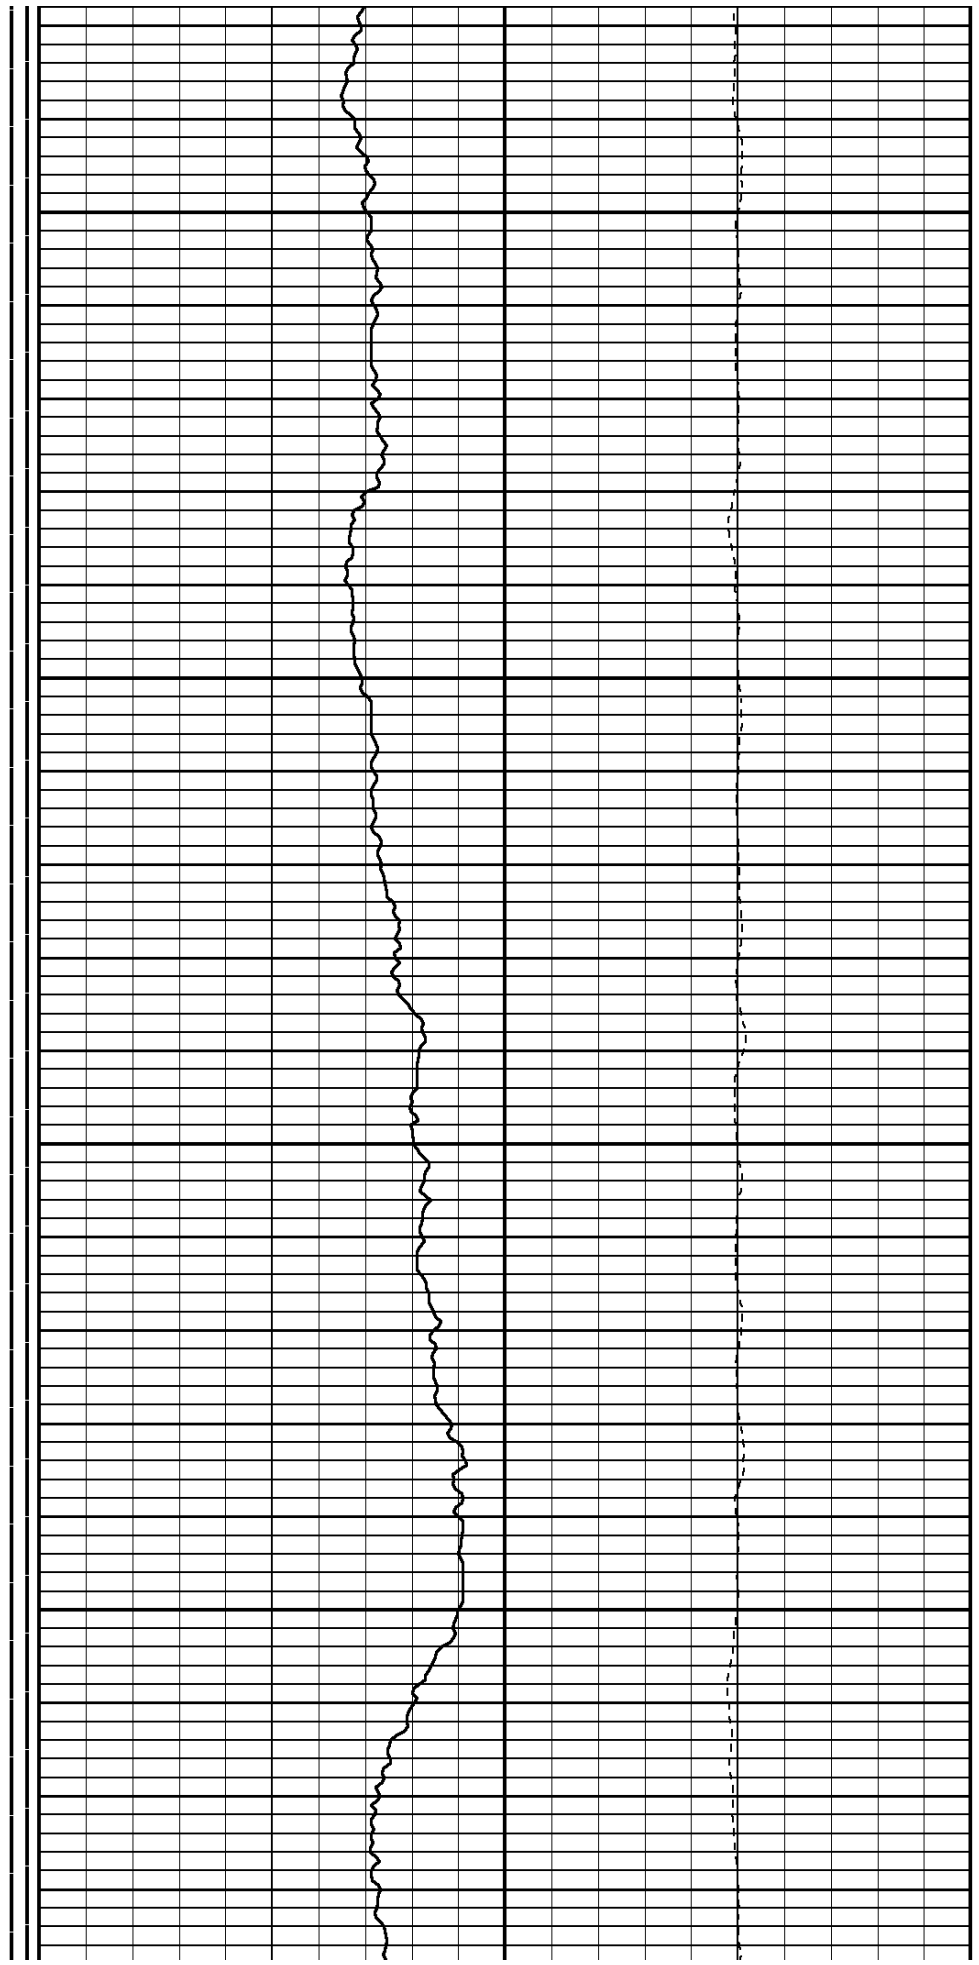


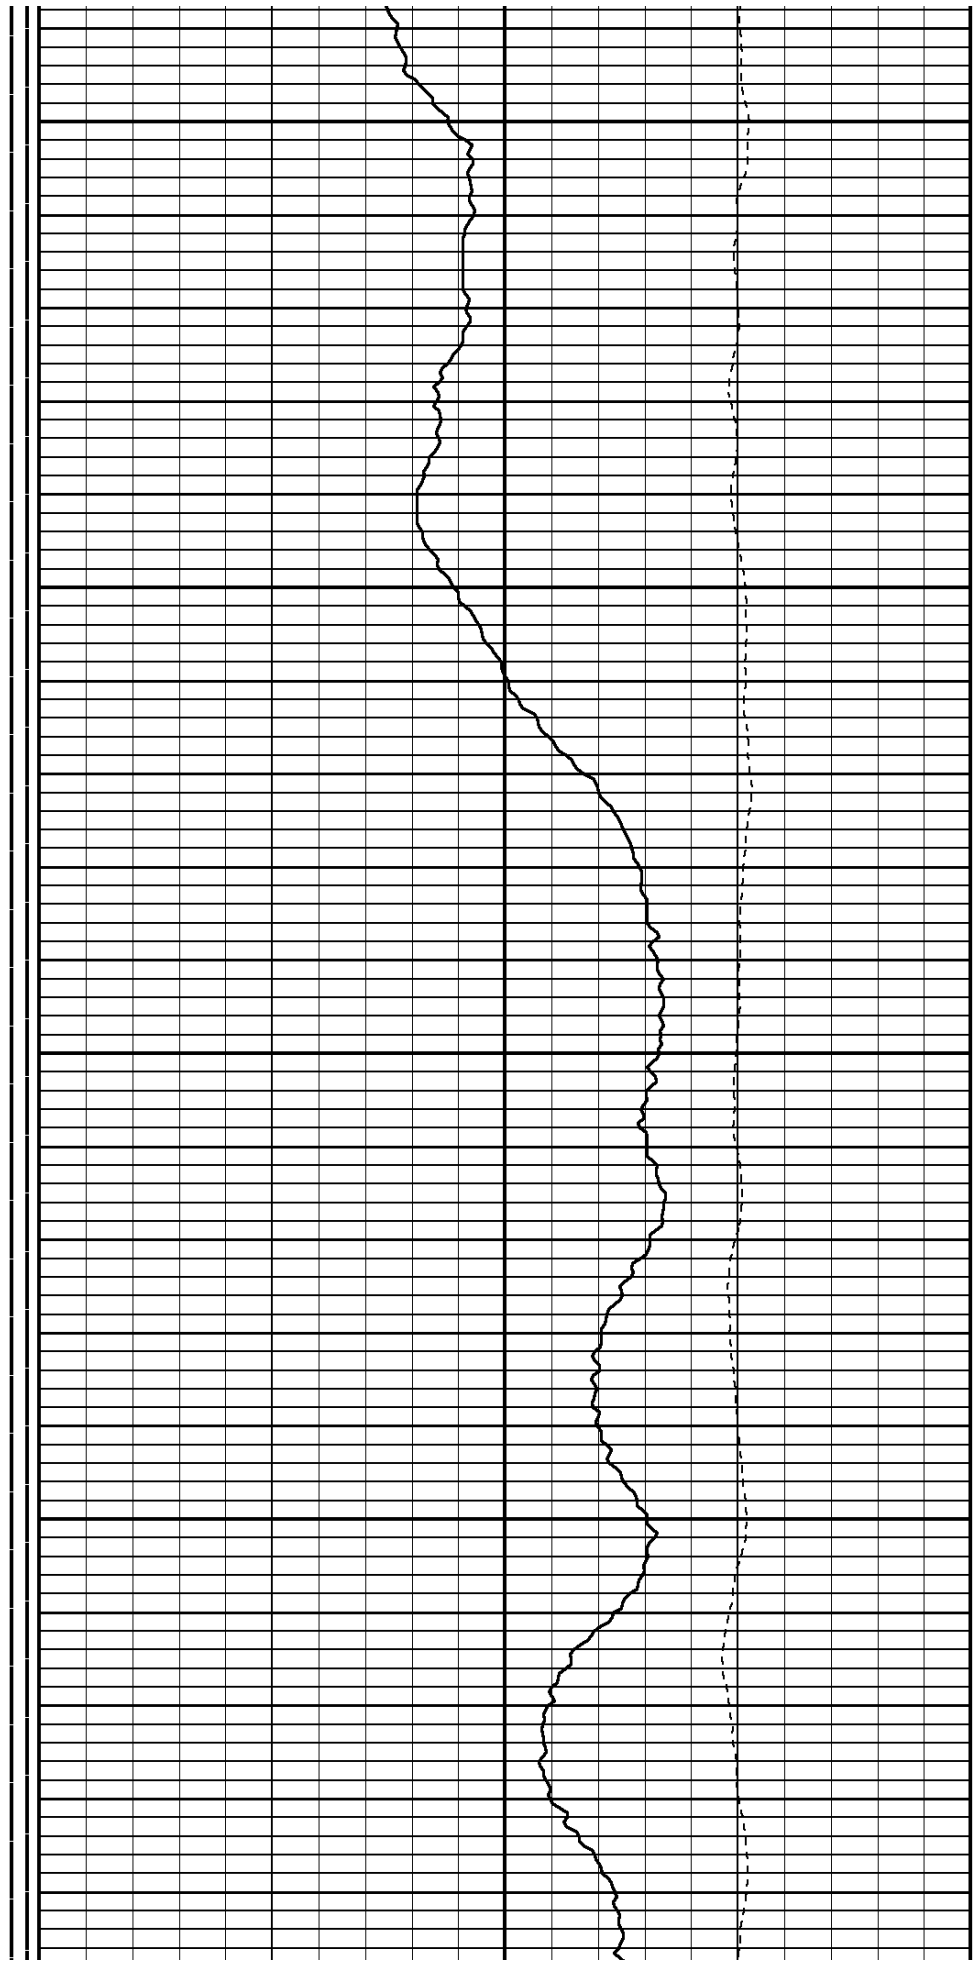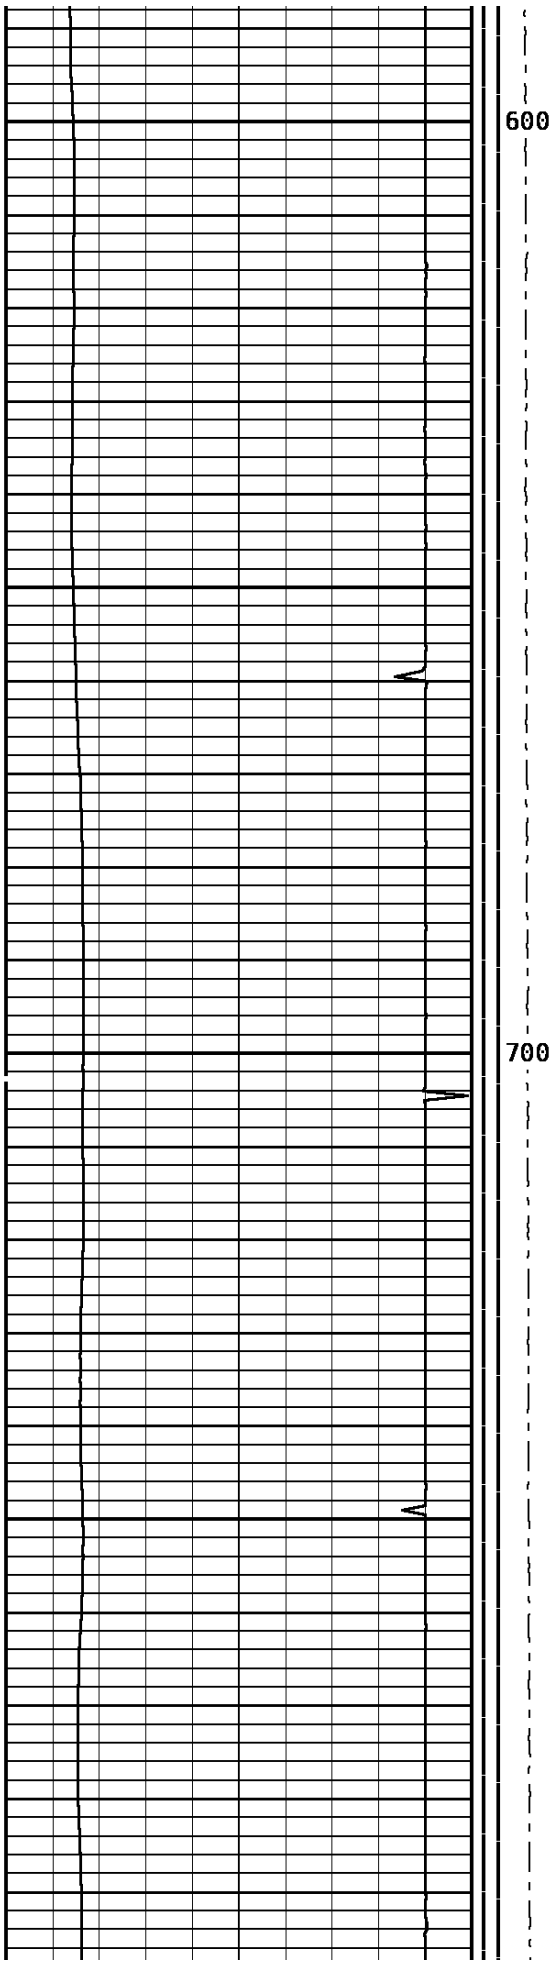

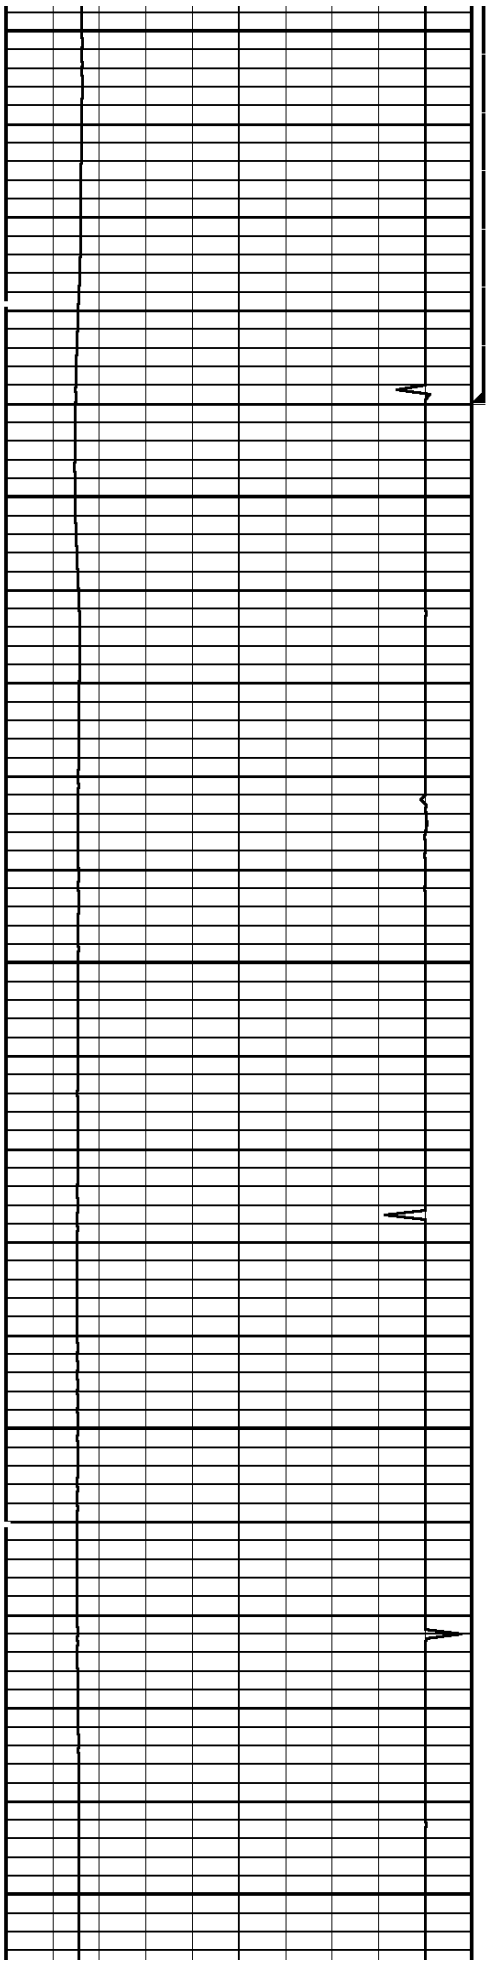


800
900
1000

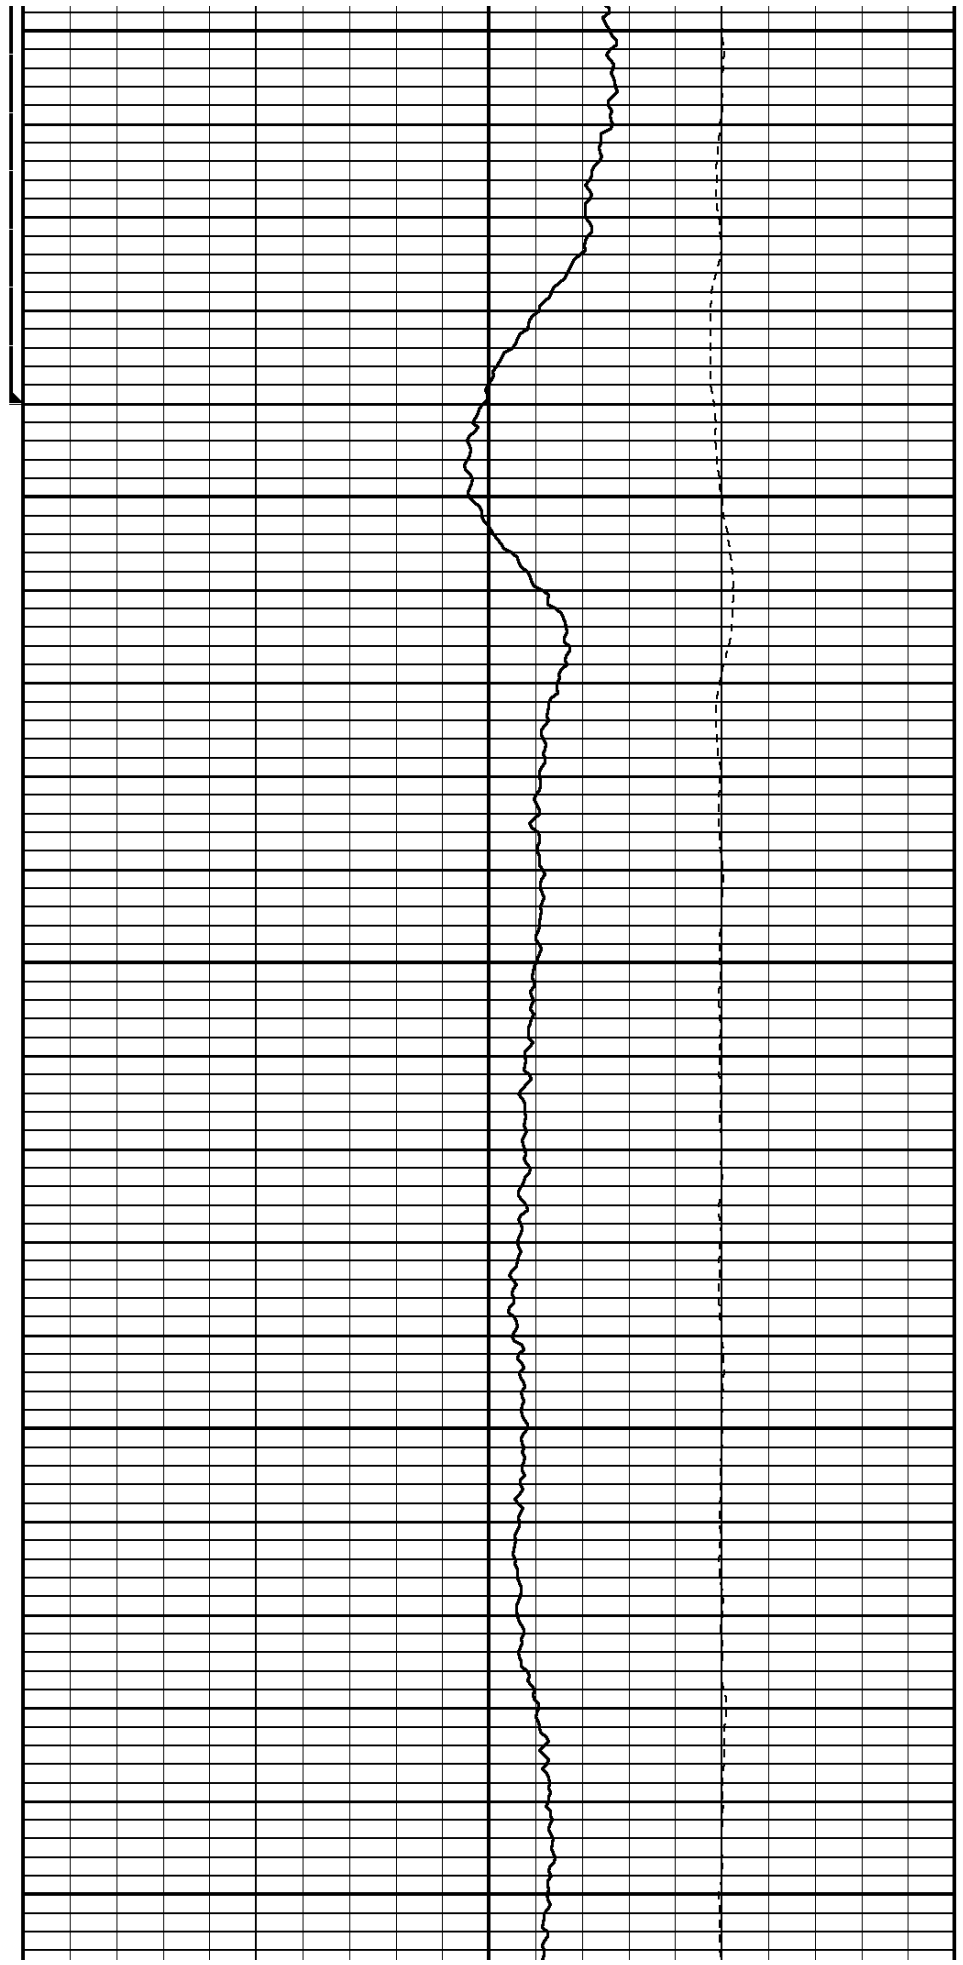


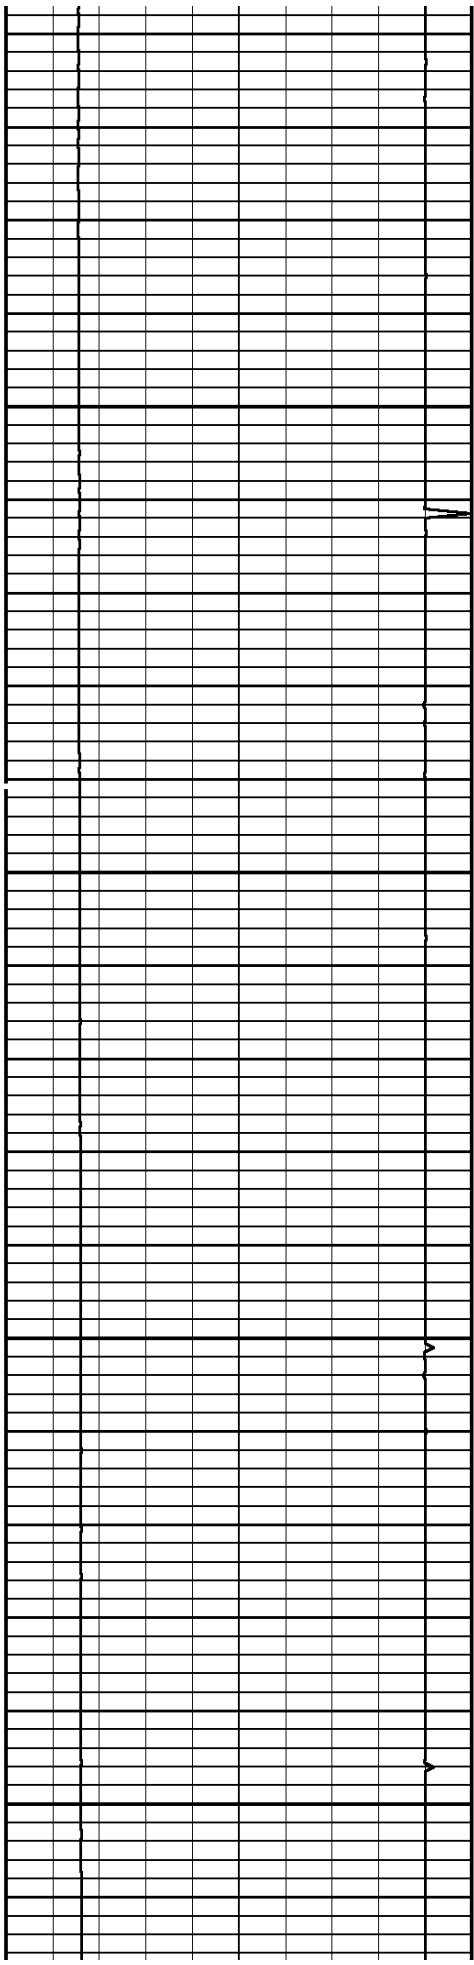

1100


1200

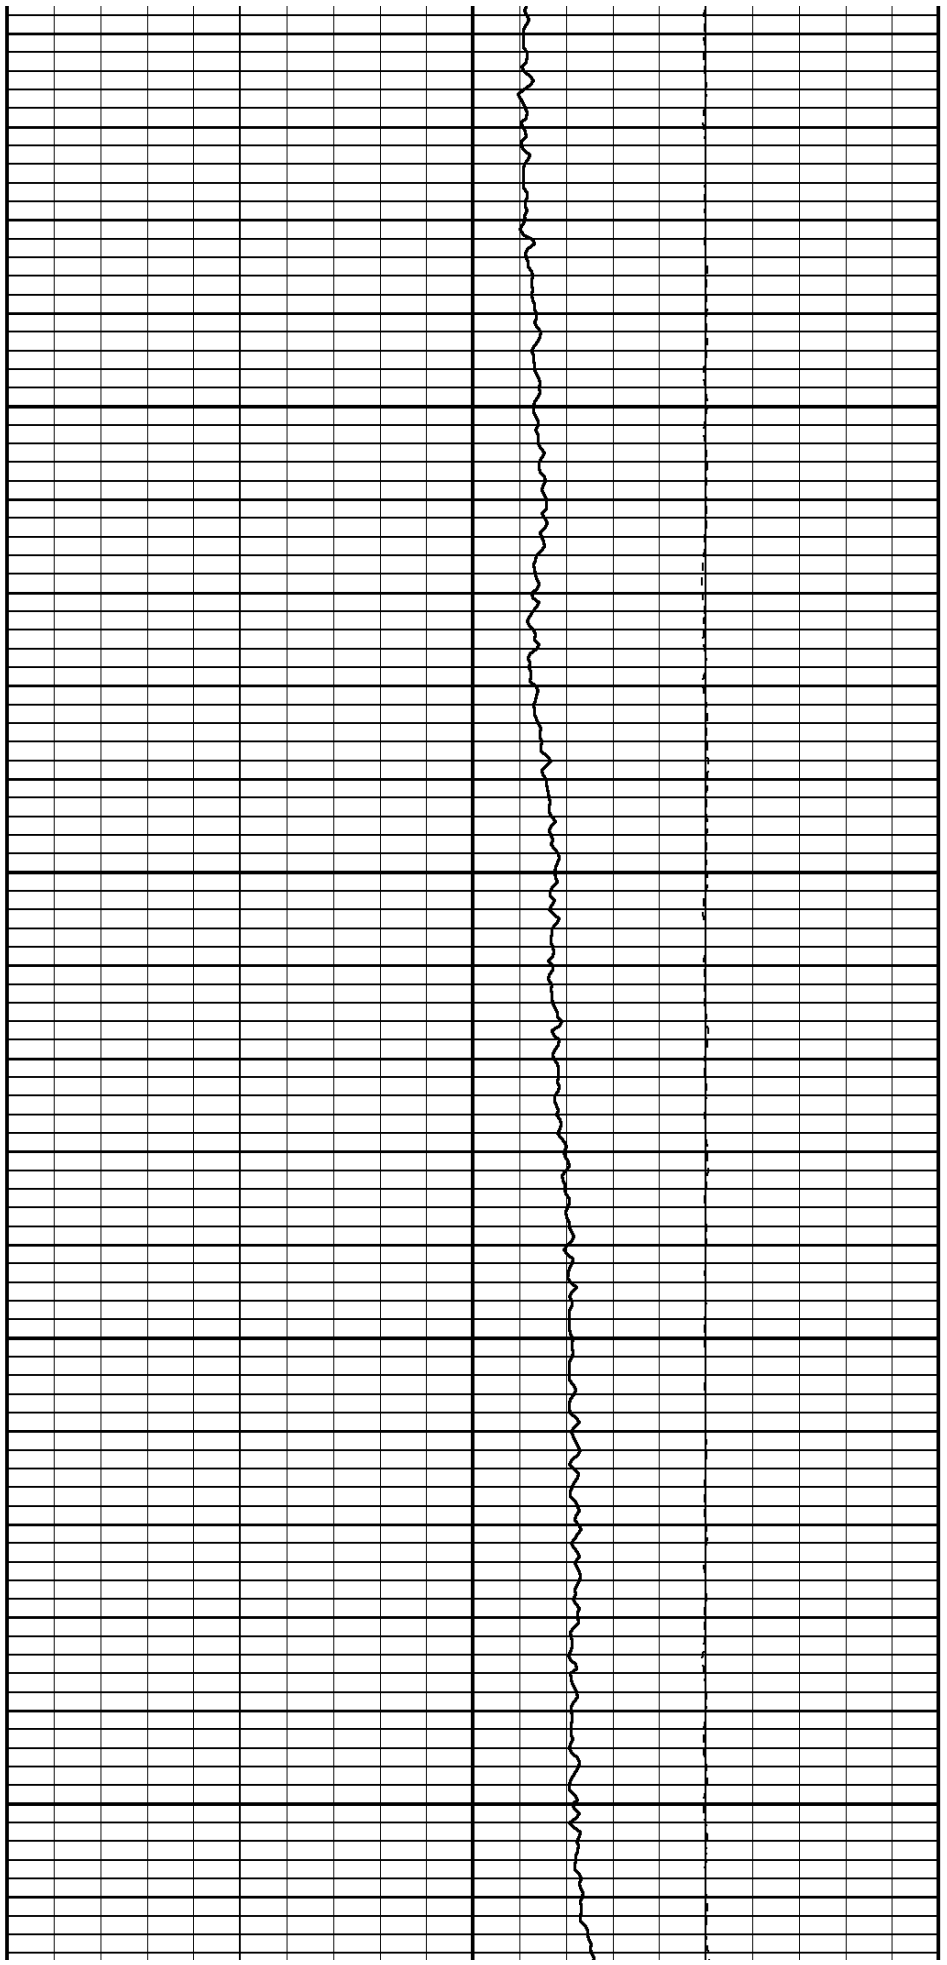


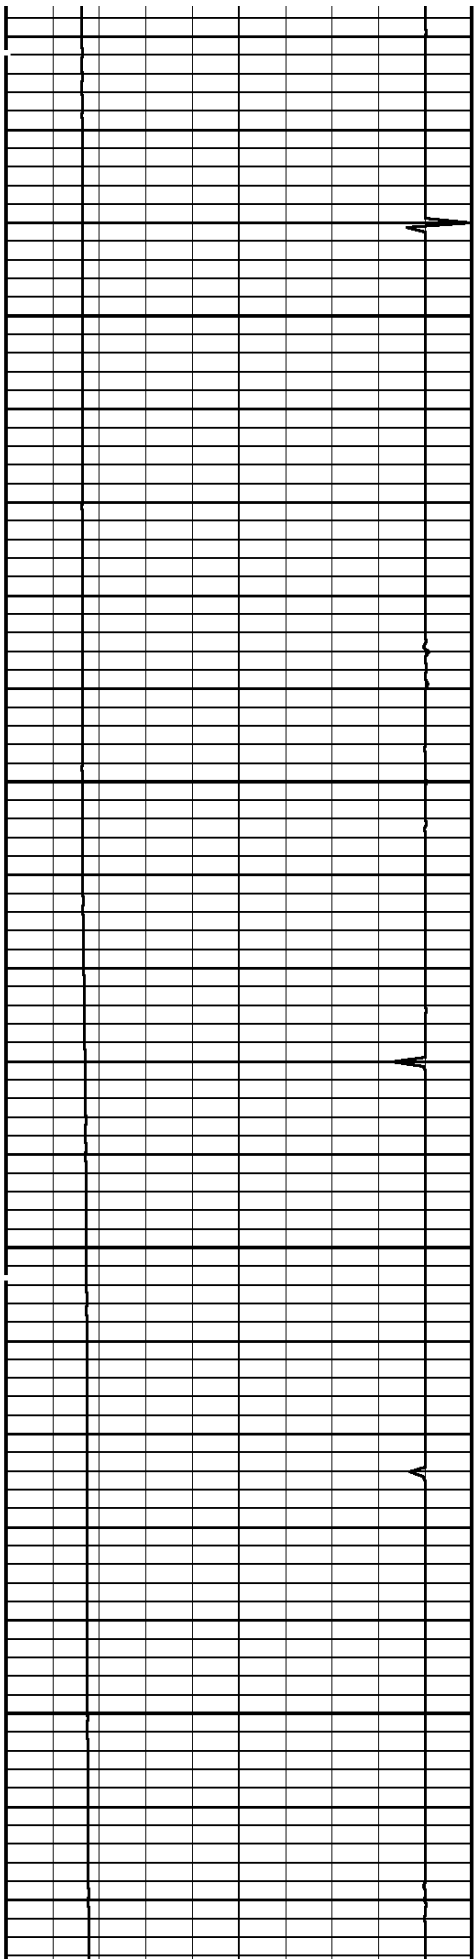

1300


1400

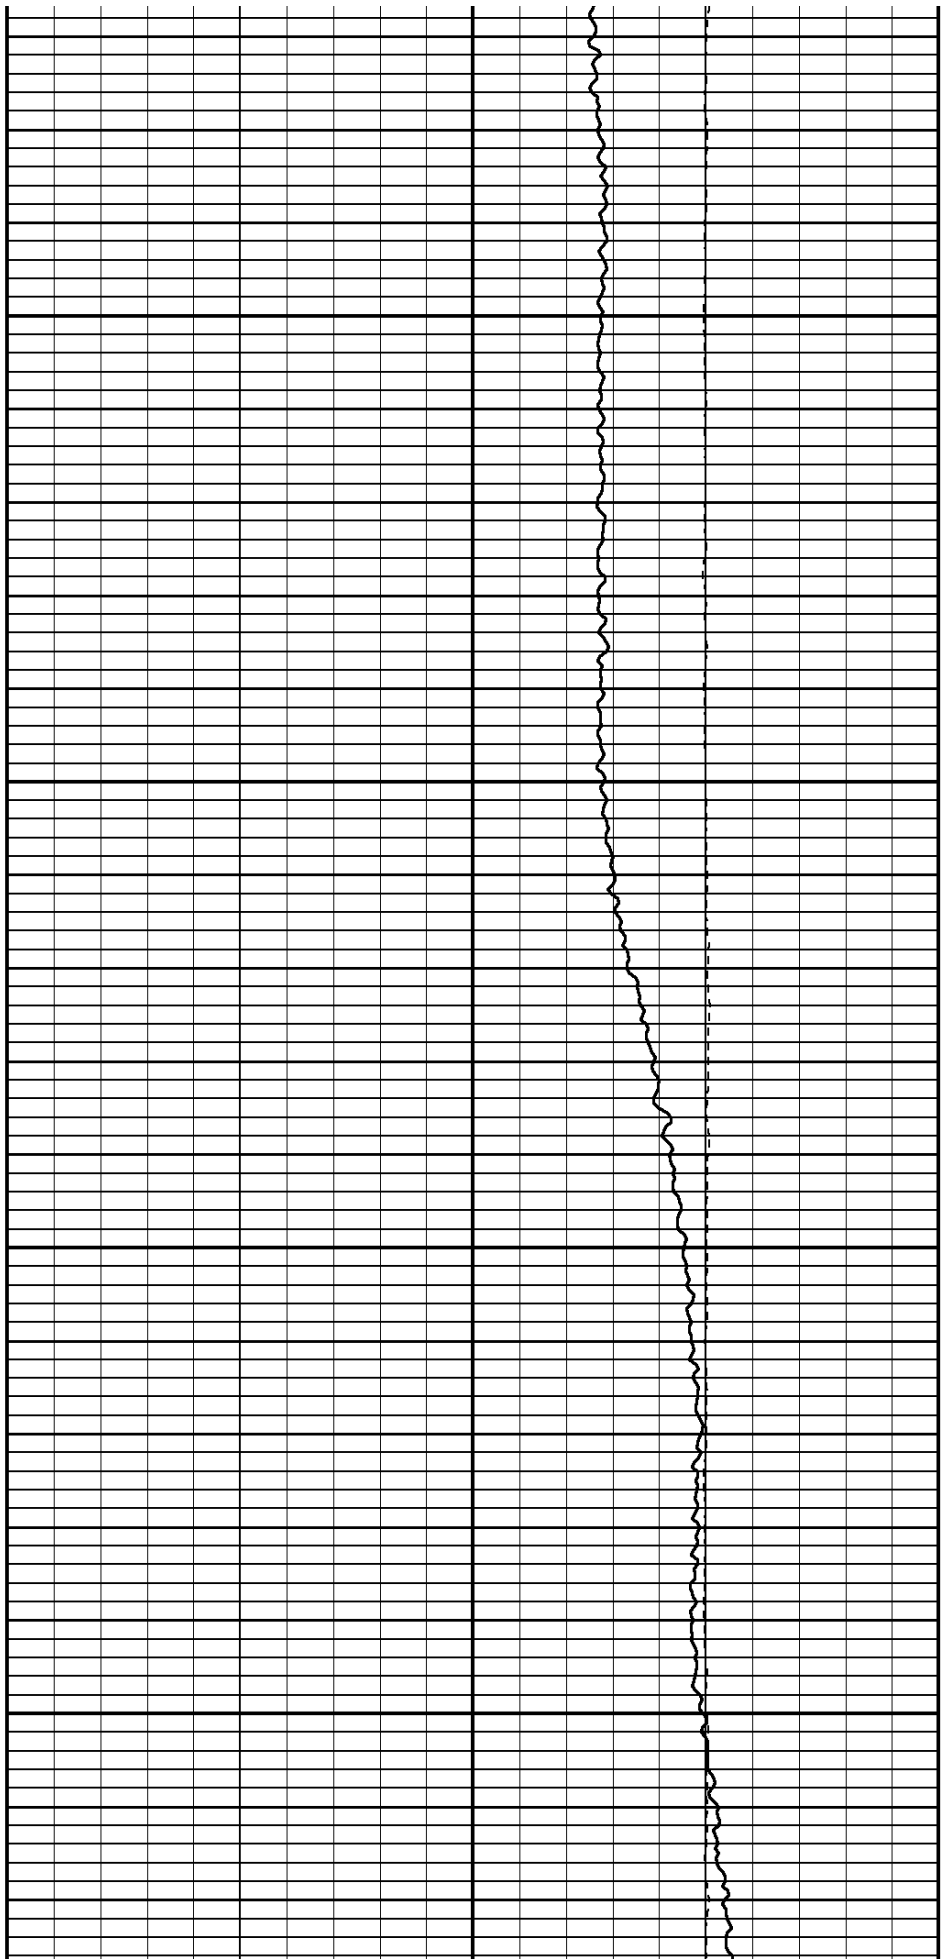


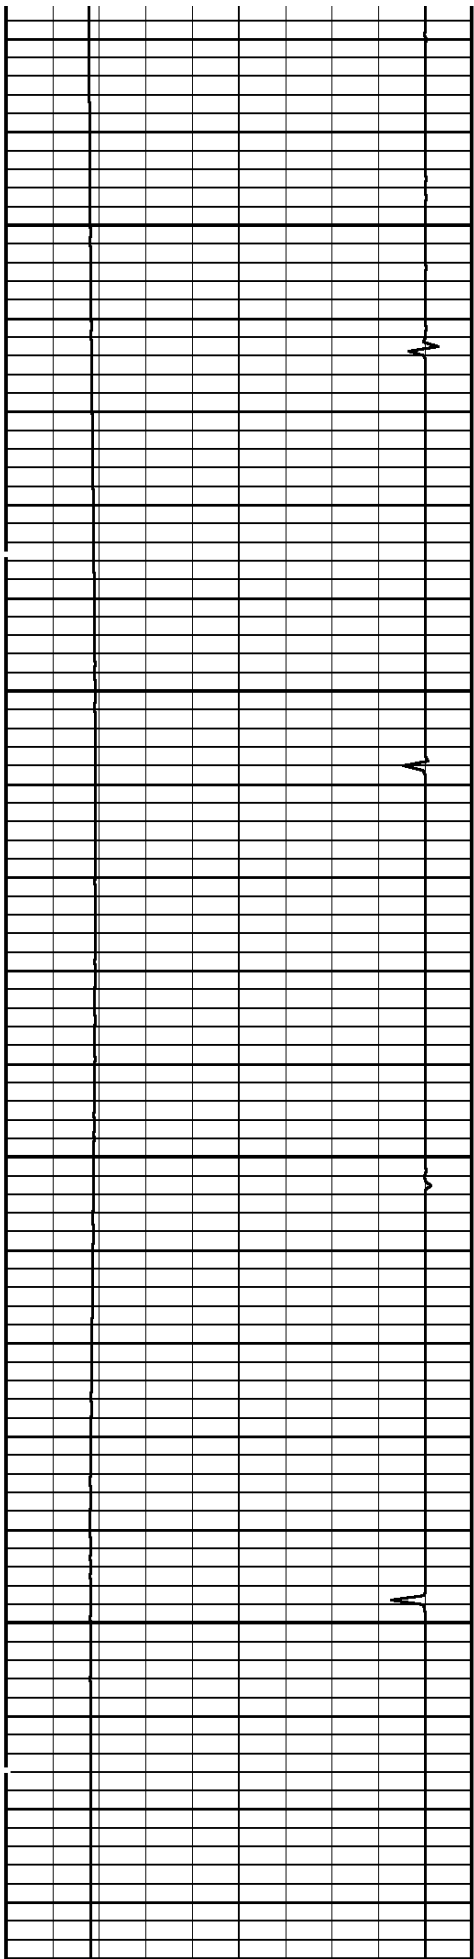

1500


1600

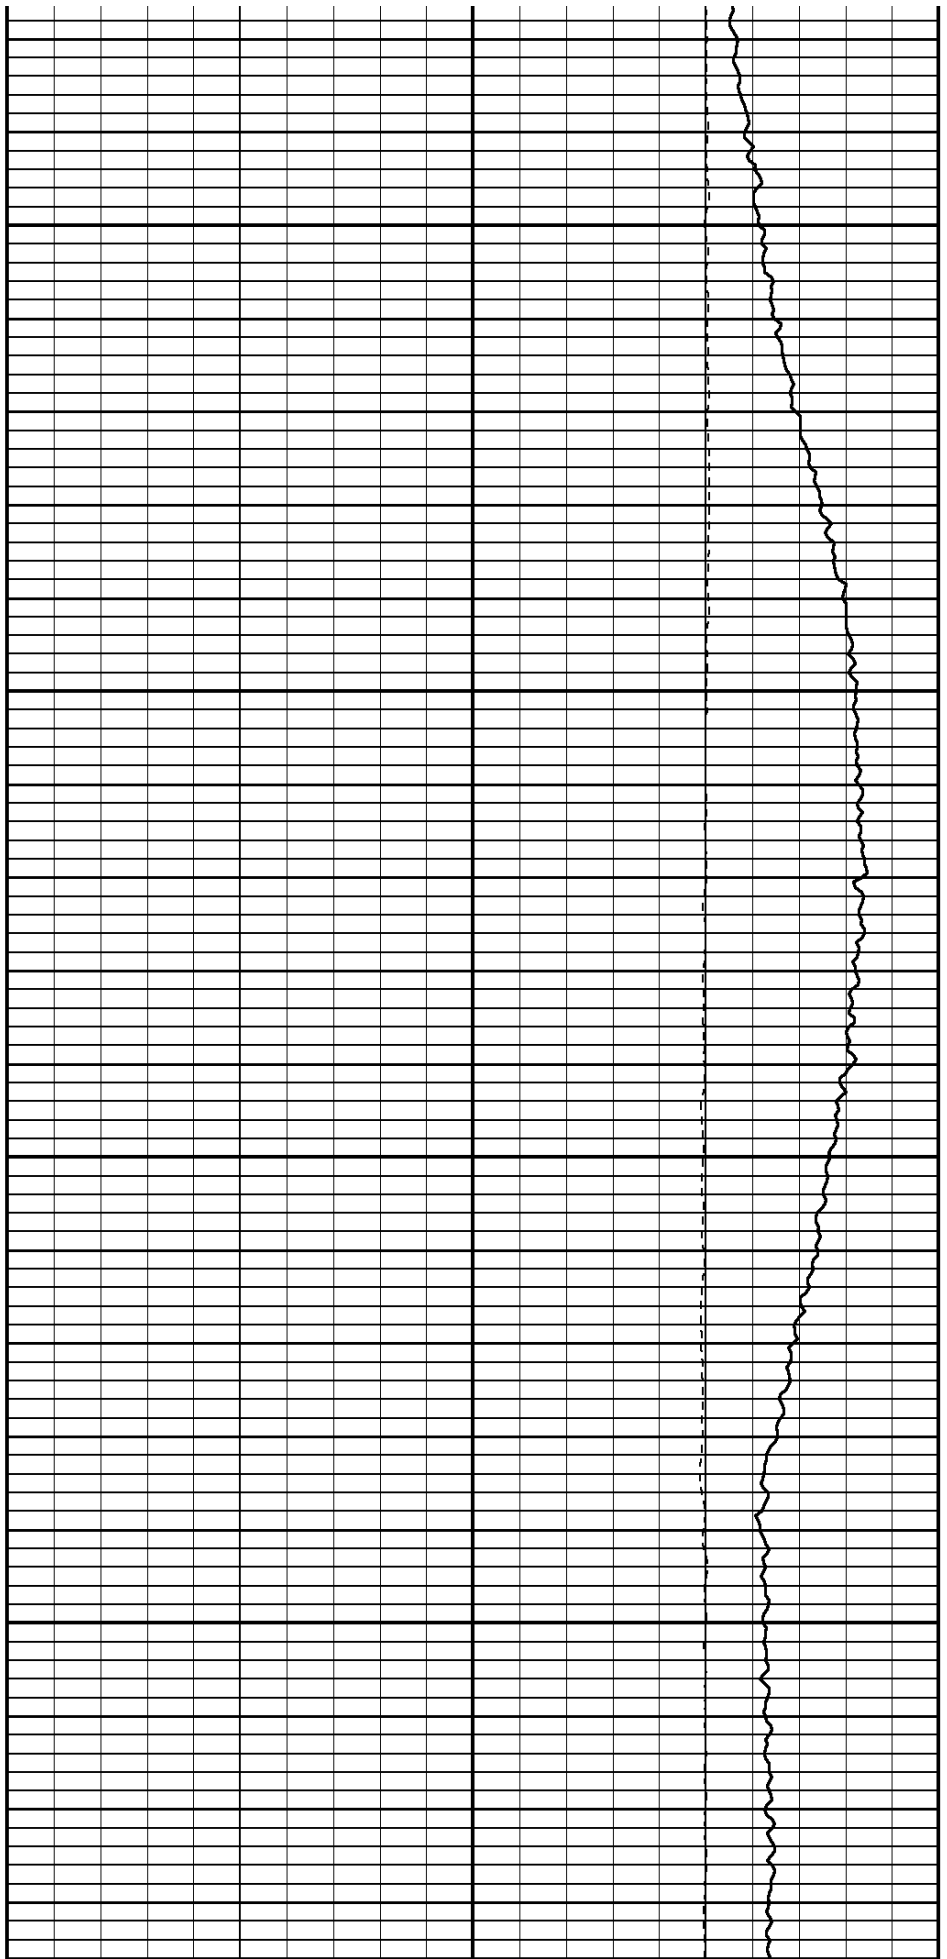


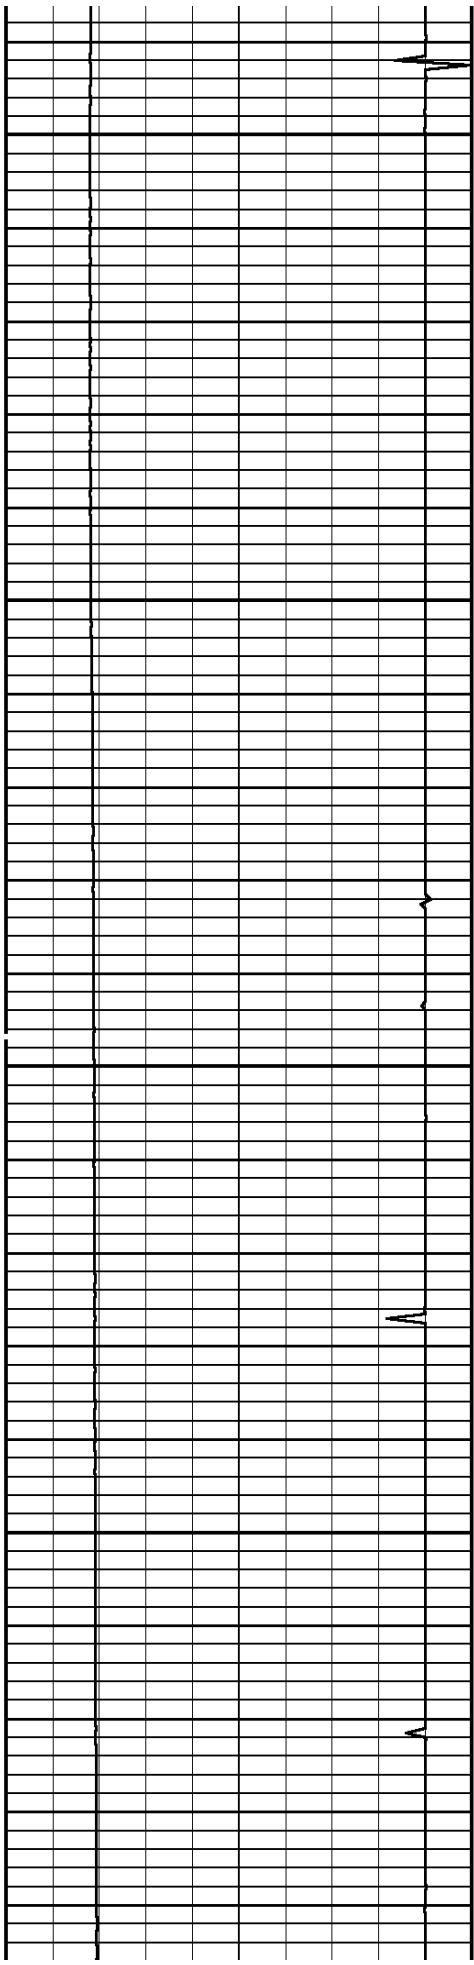

1700


1800

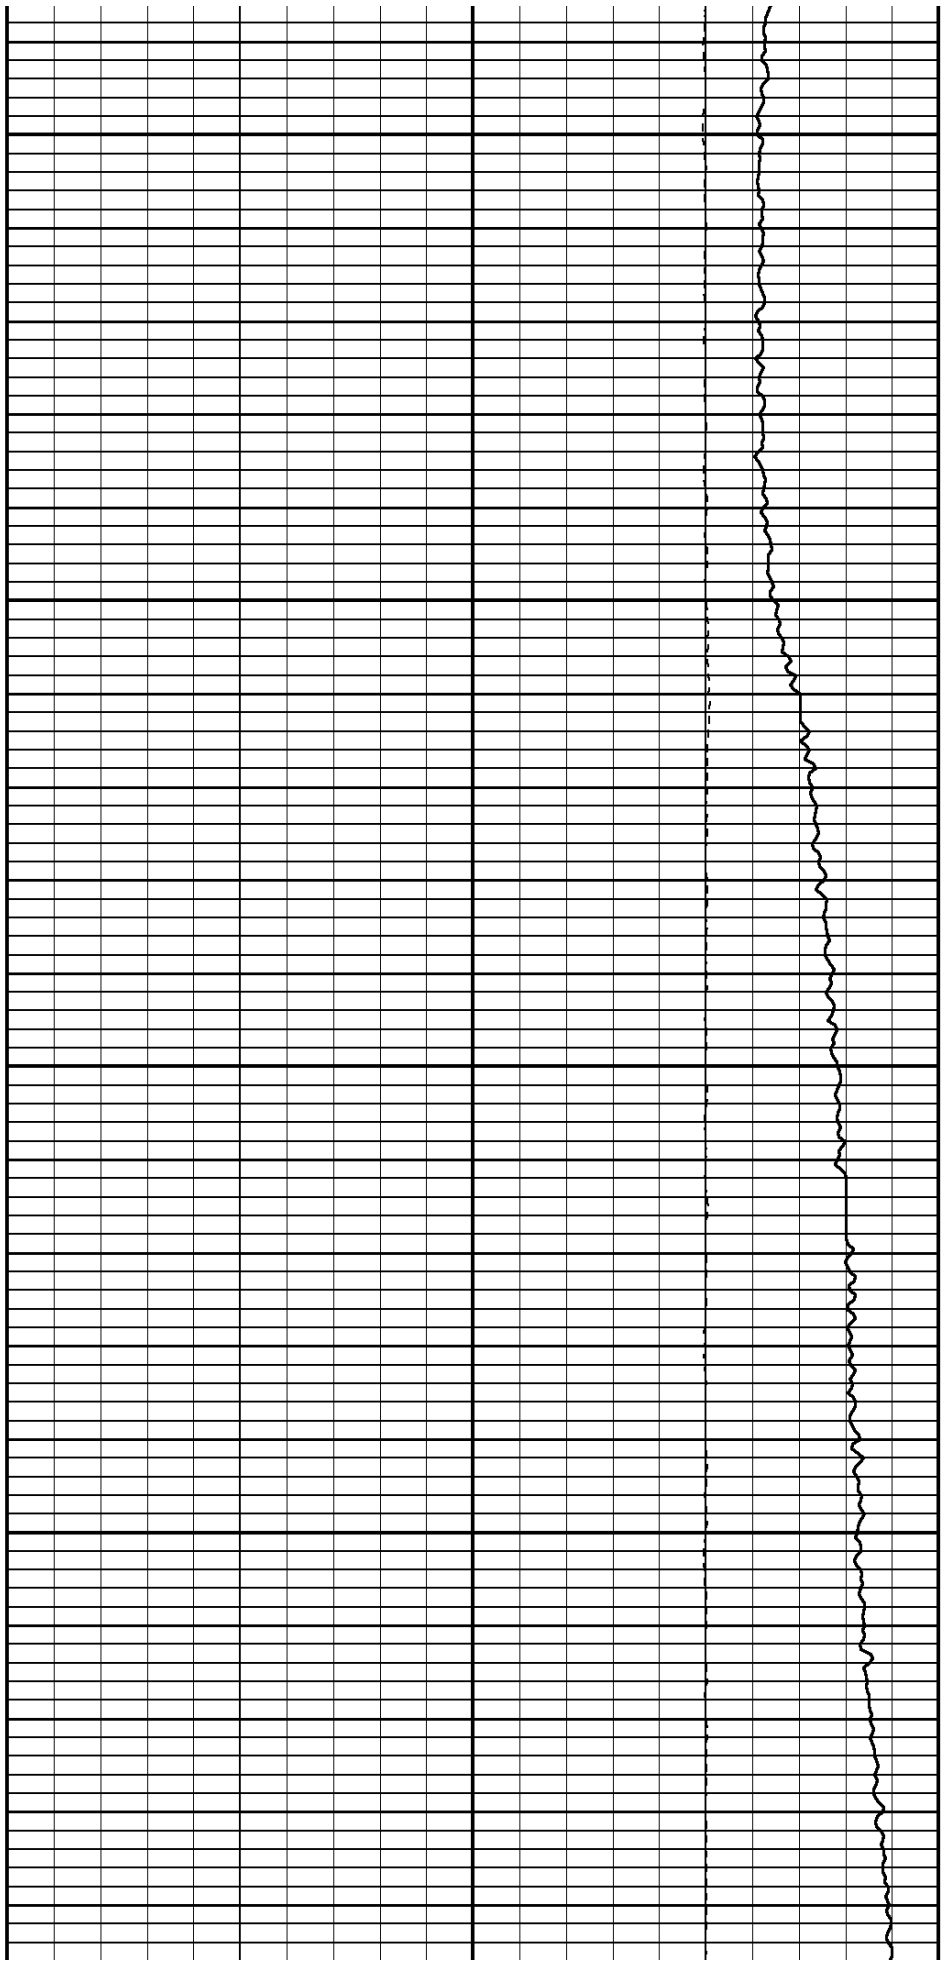


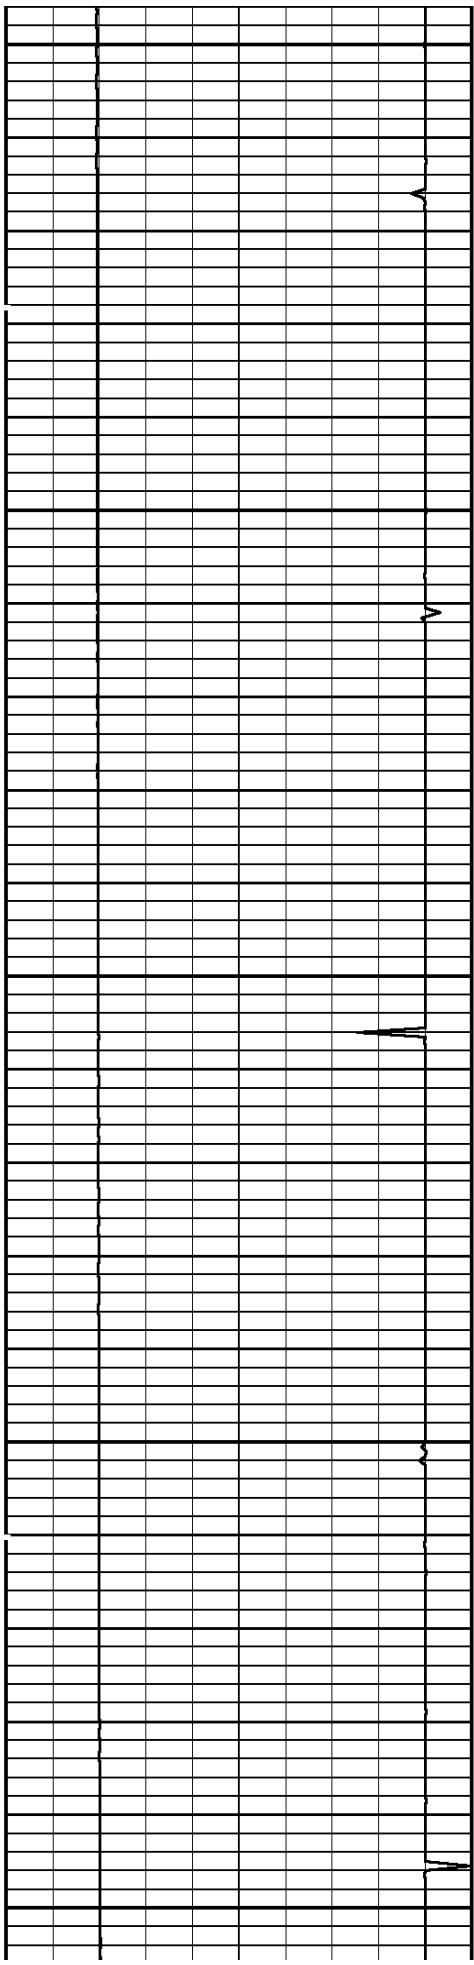

1900


2000

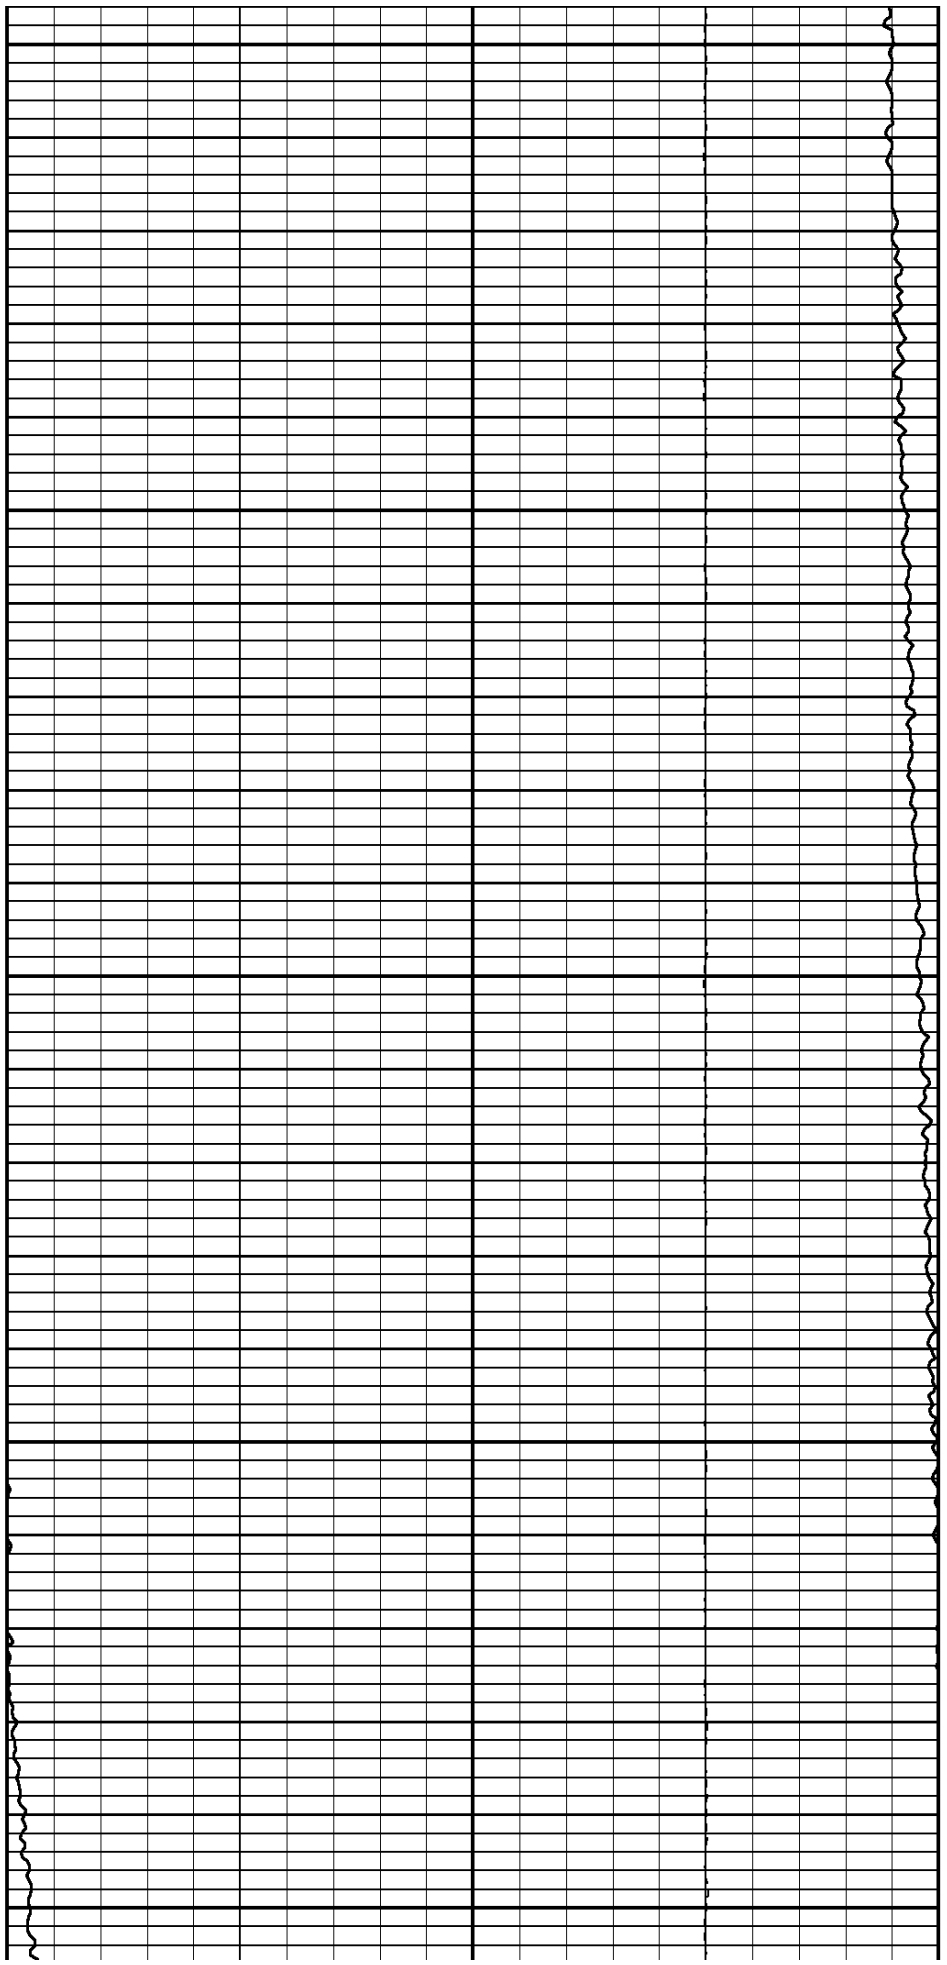


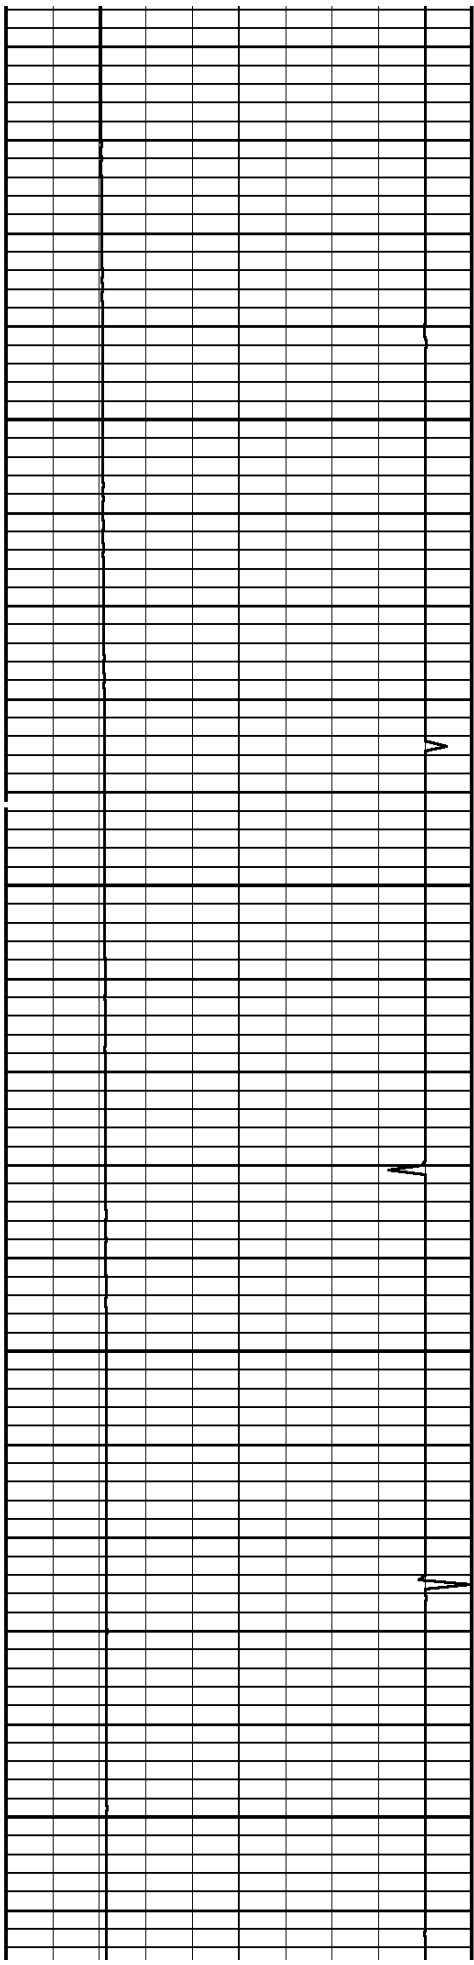

2100


2200

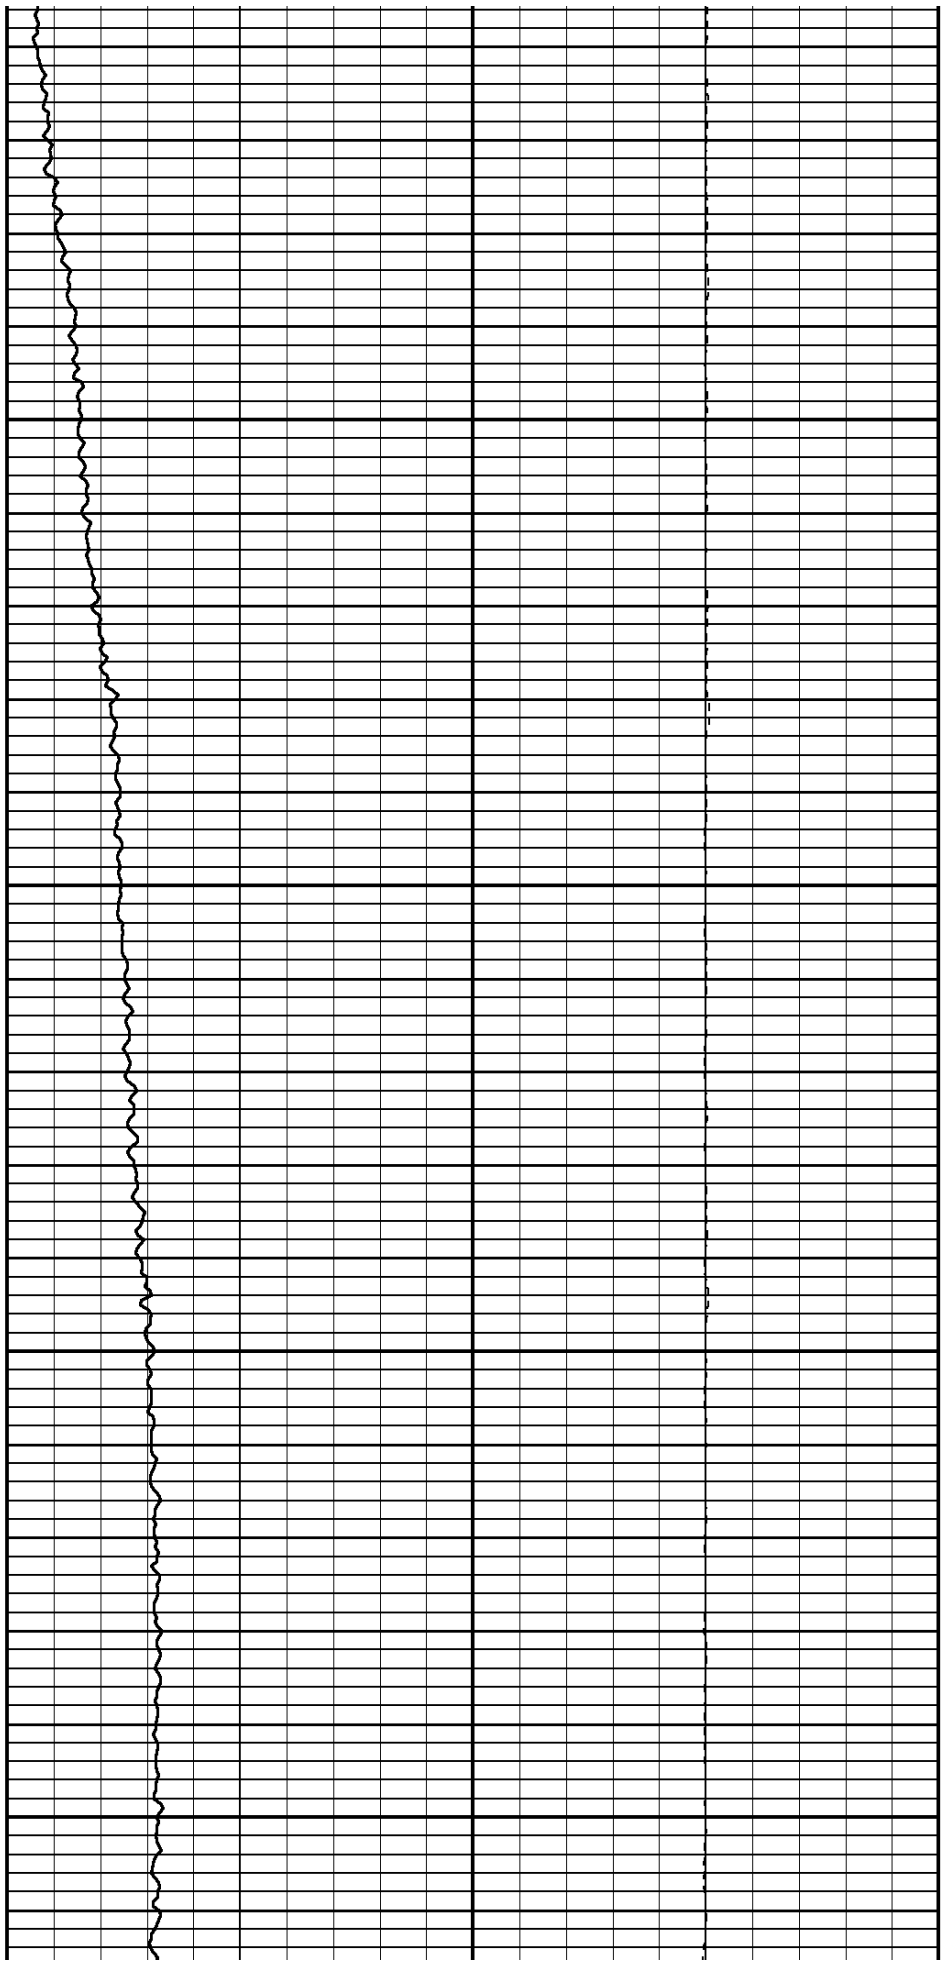


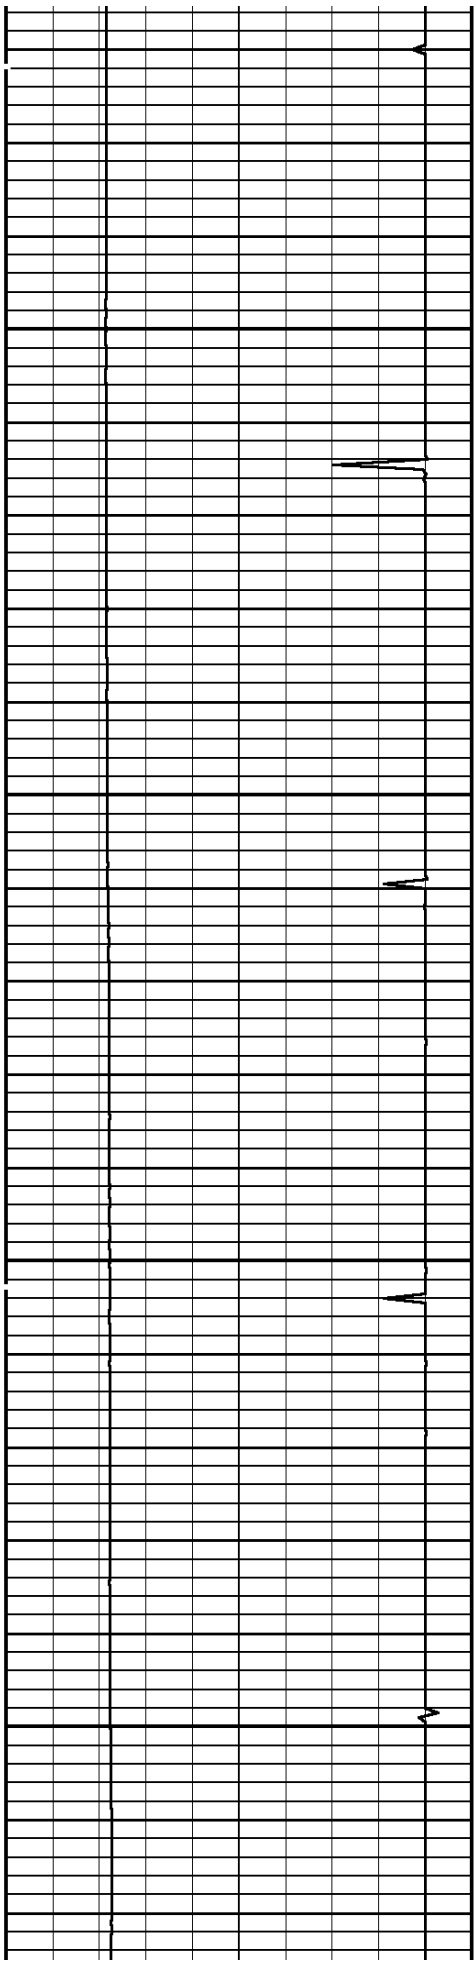

2300


2400

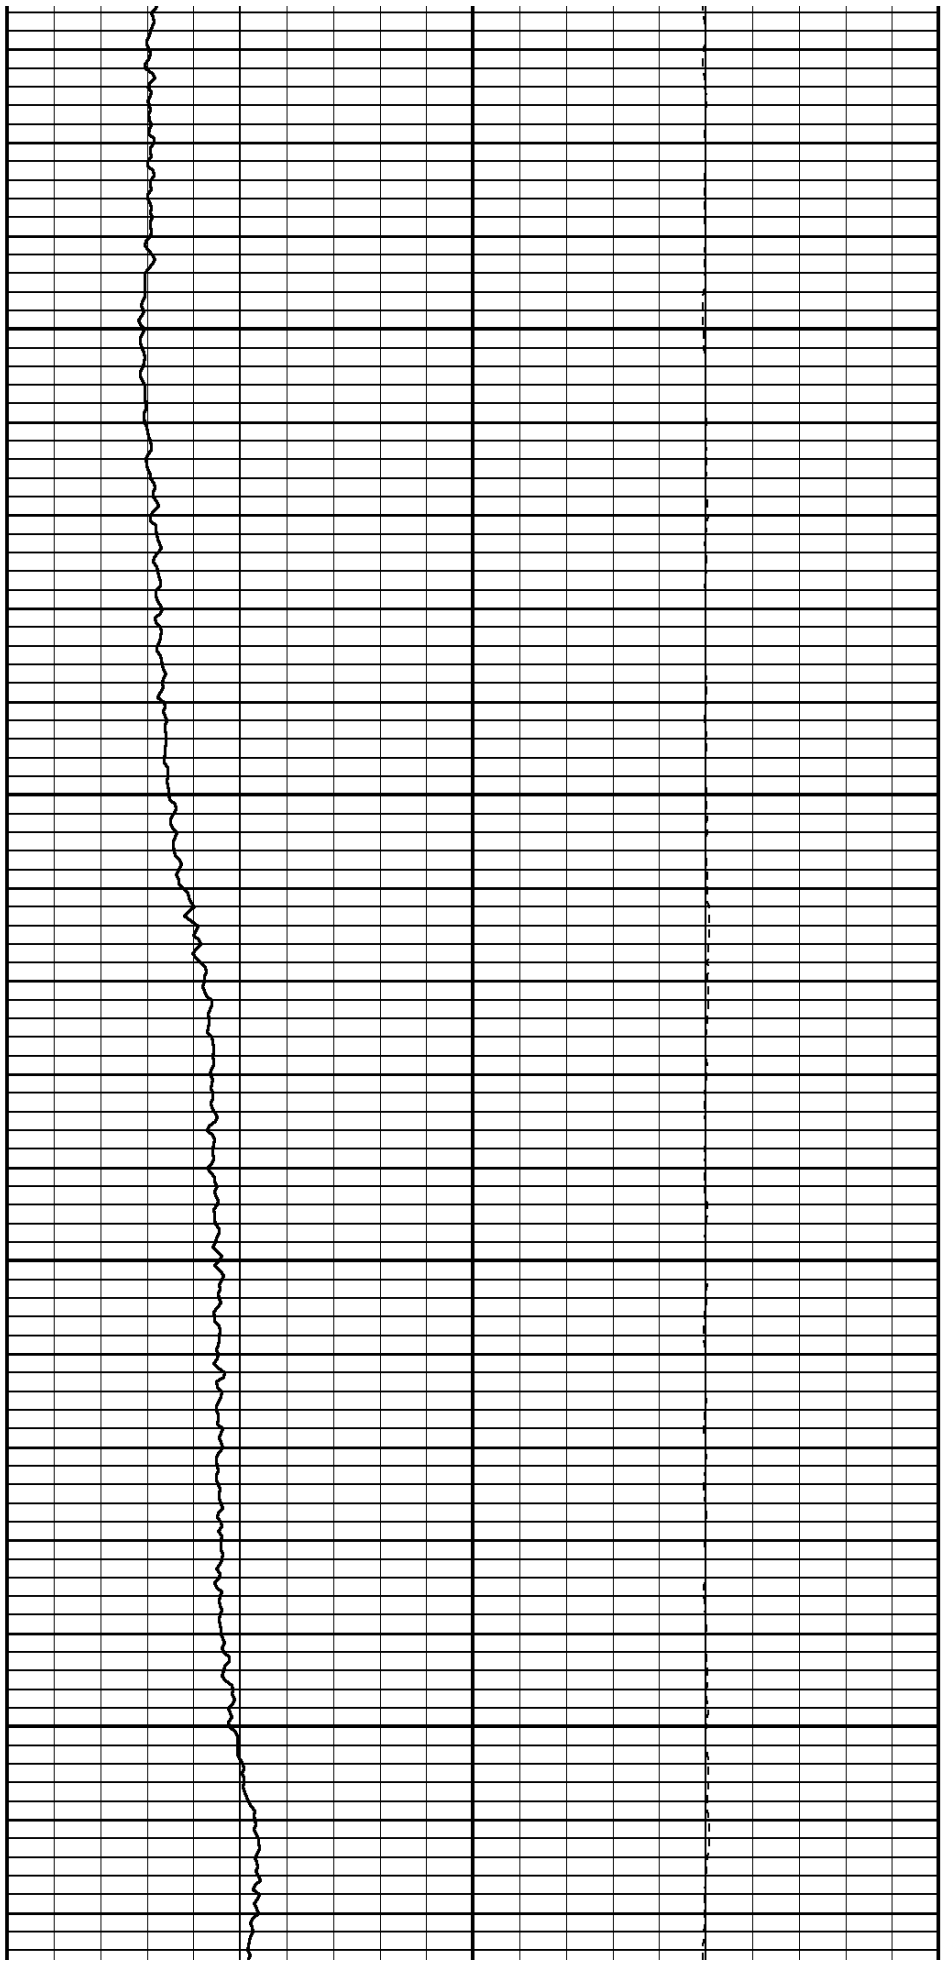


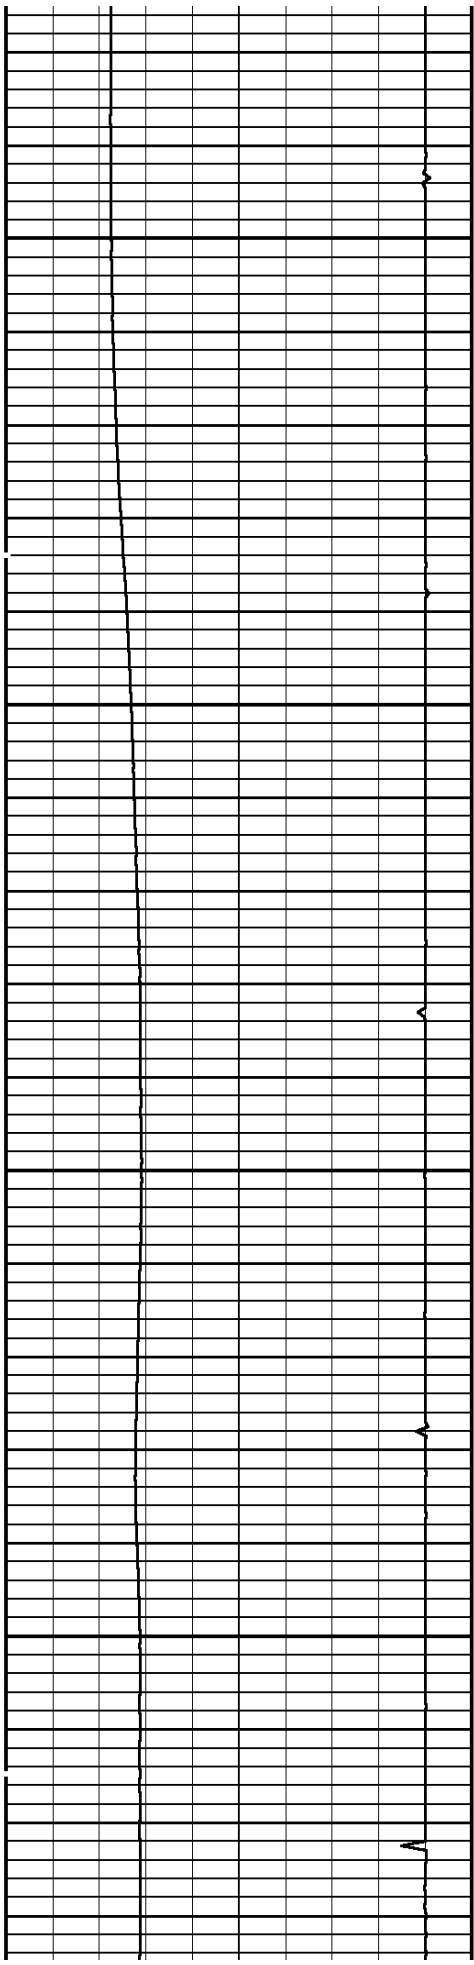

2500


2600

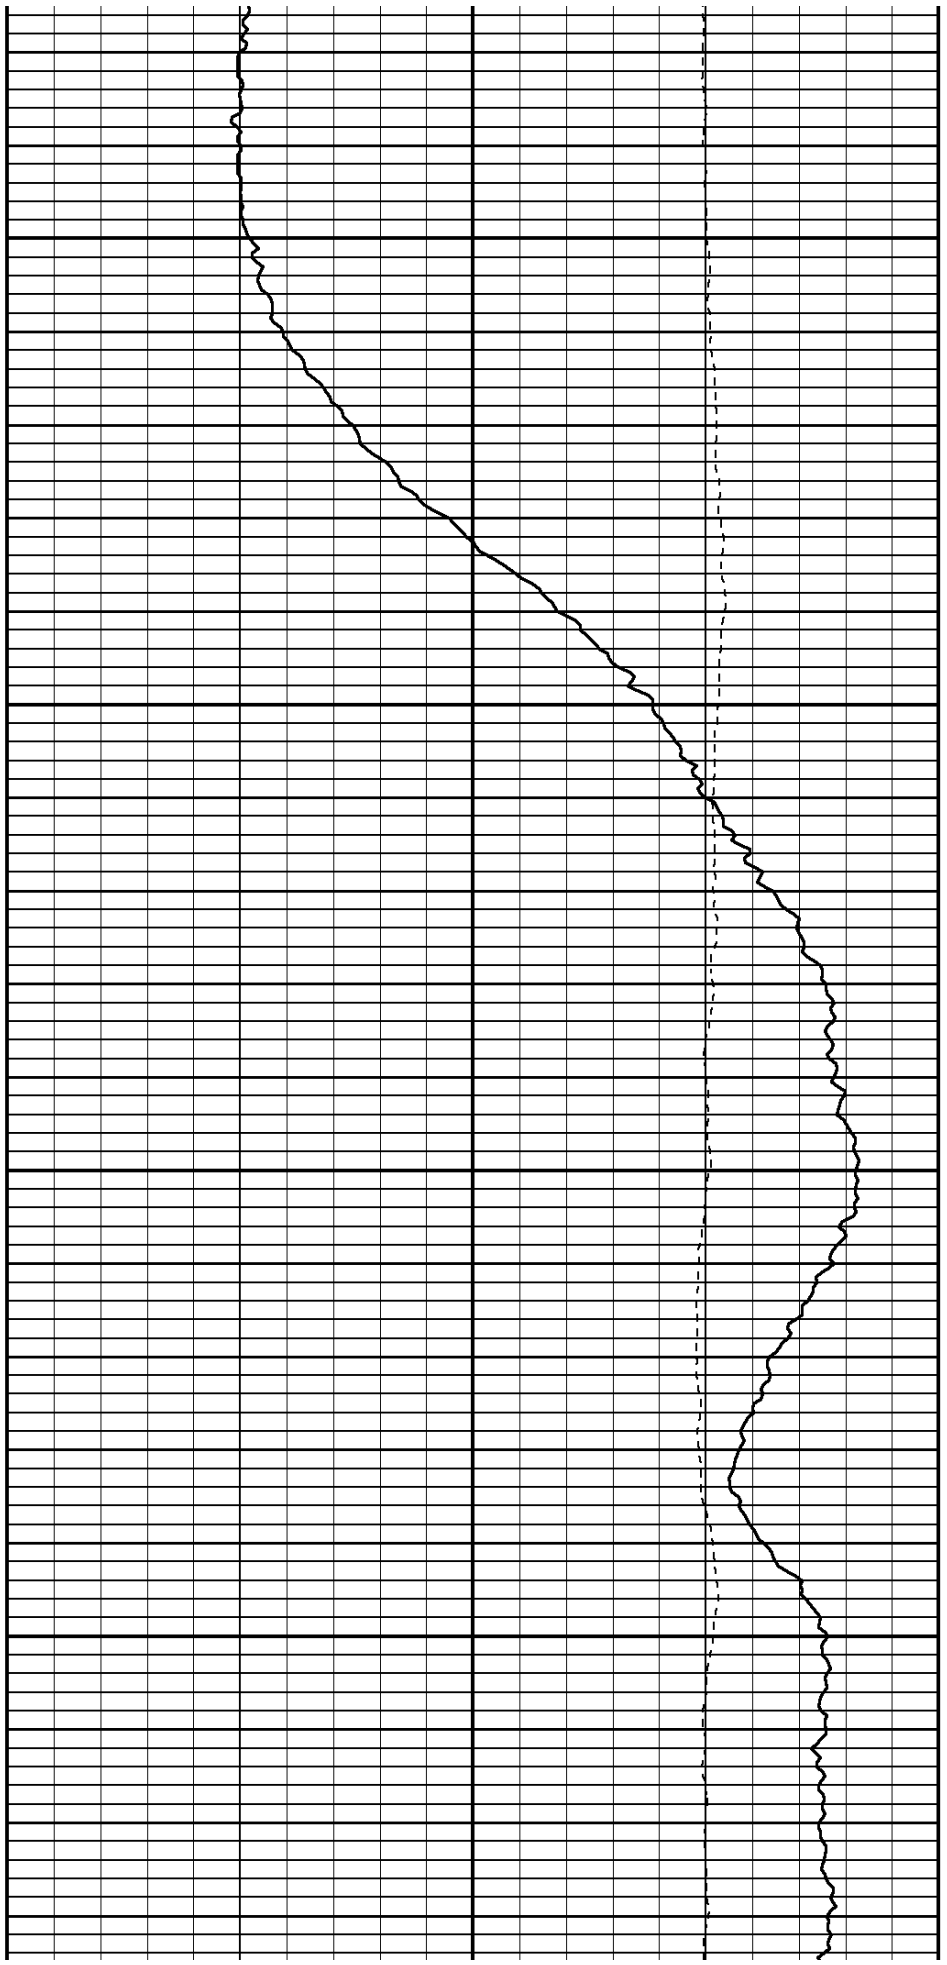


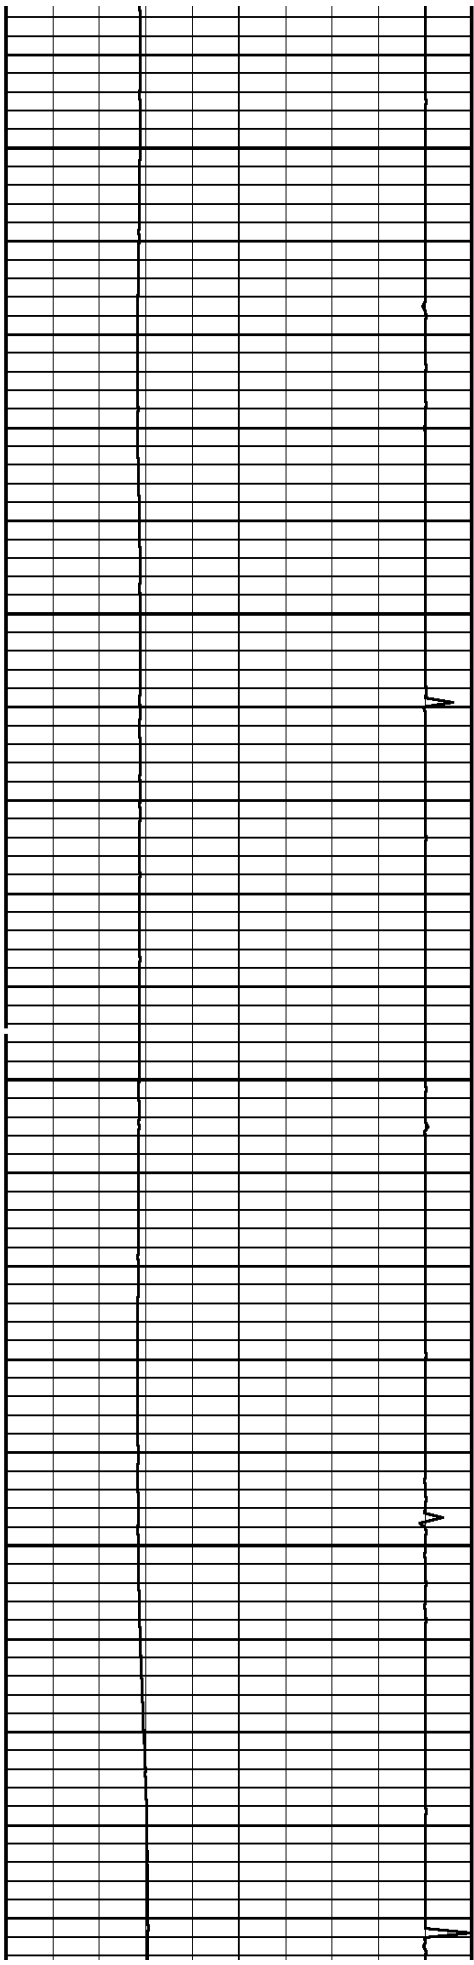

2700

2800

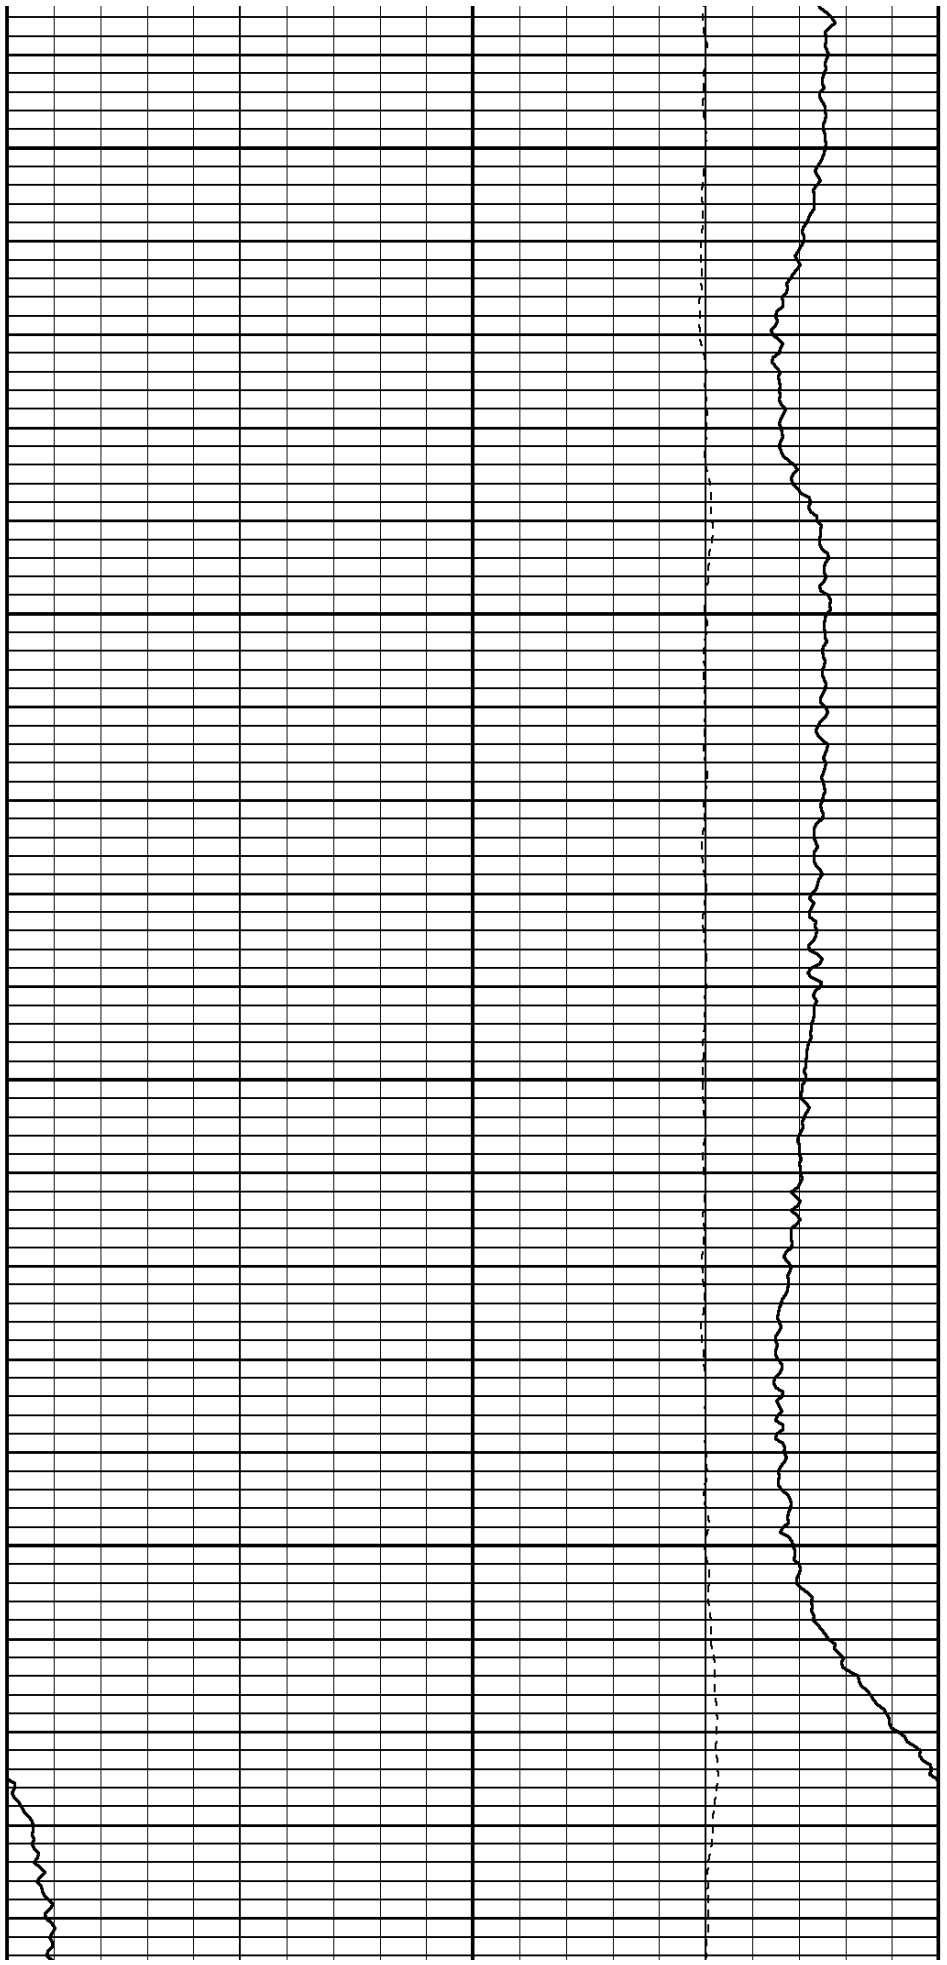


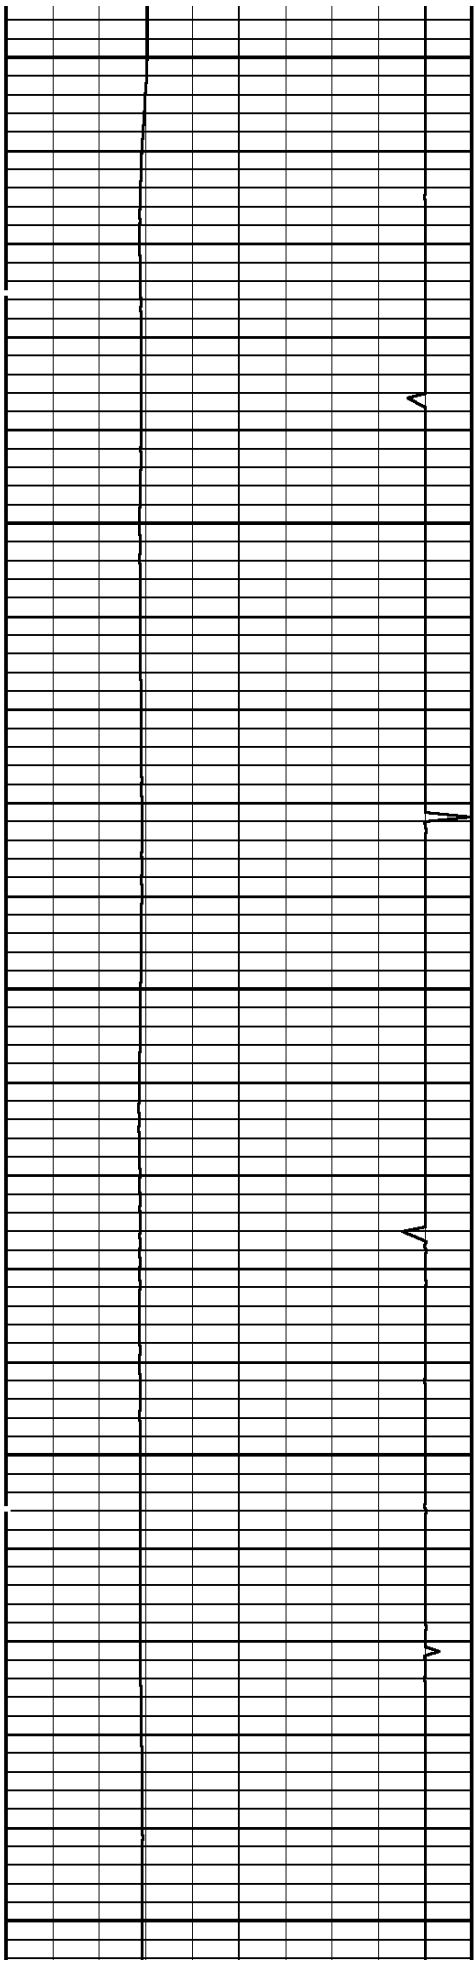


2900

3000


3100

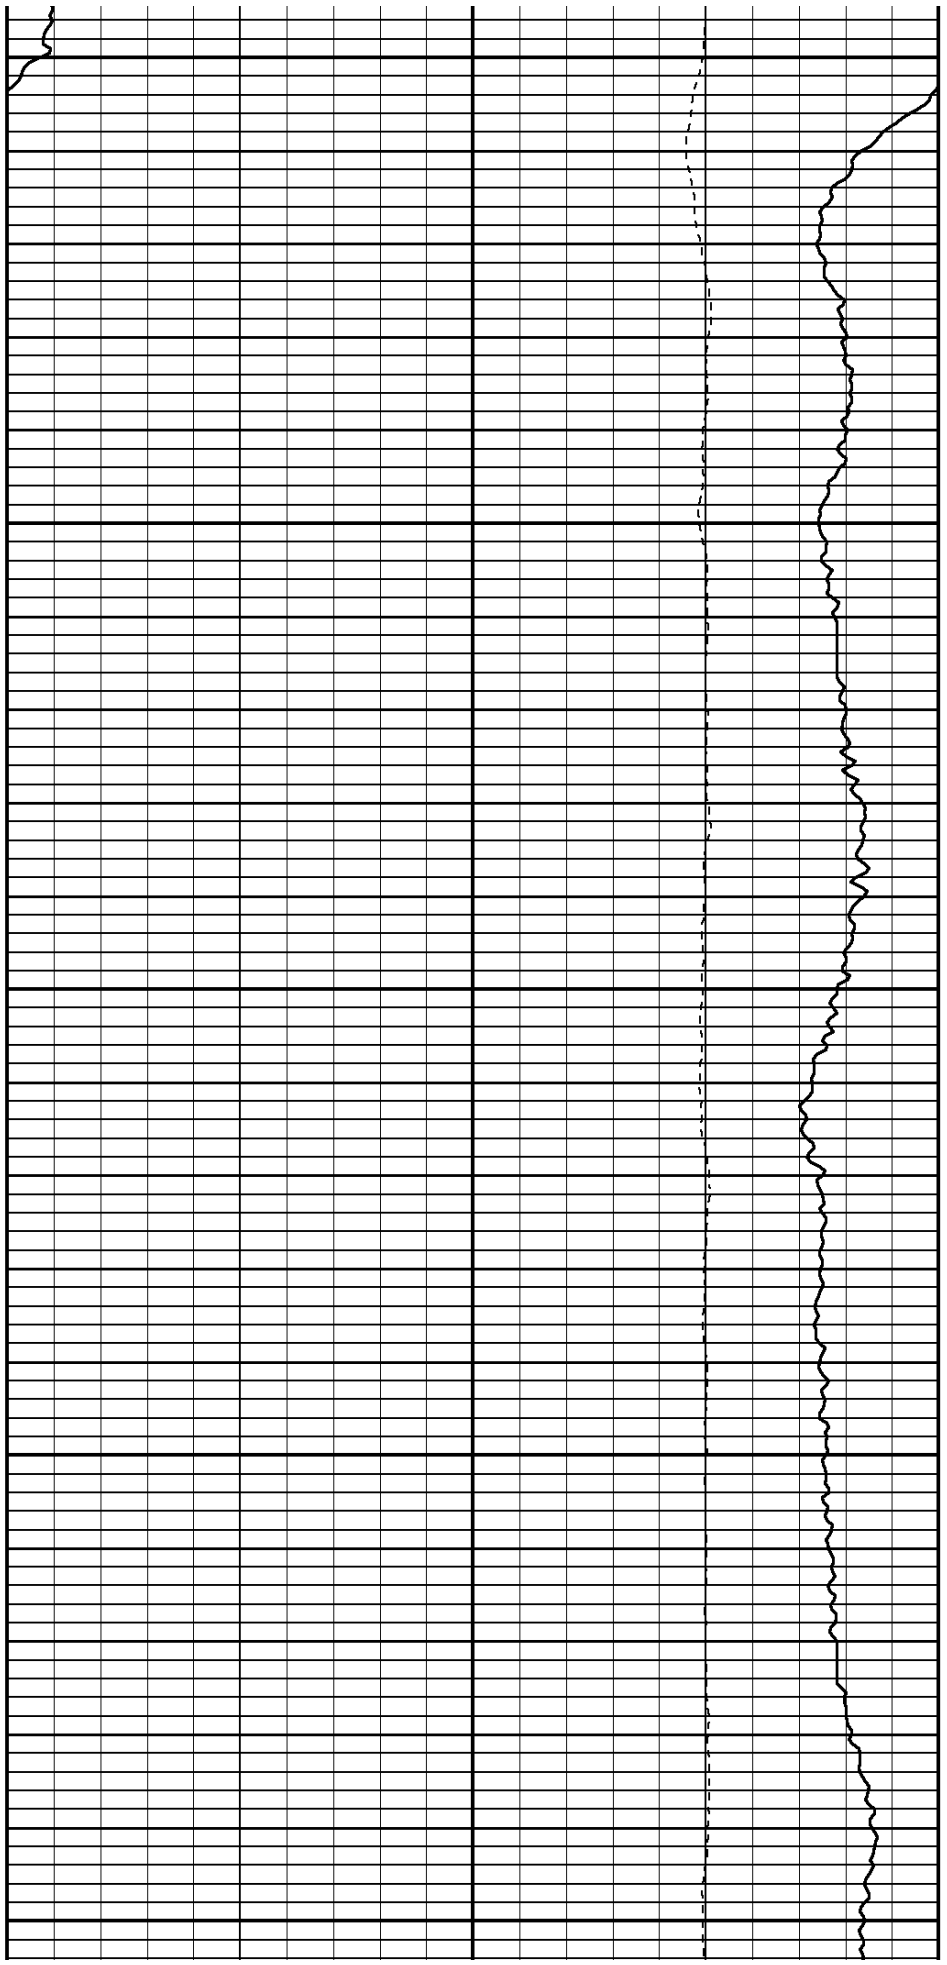


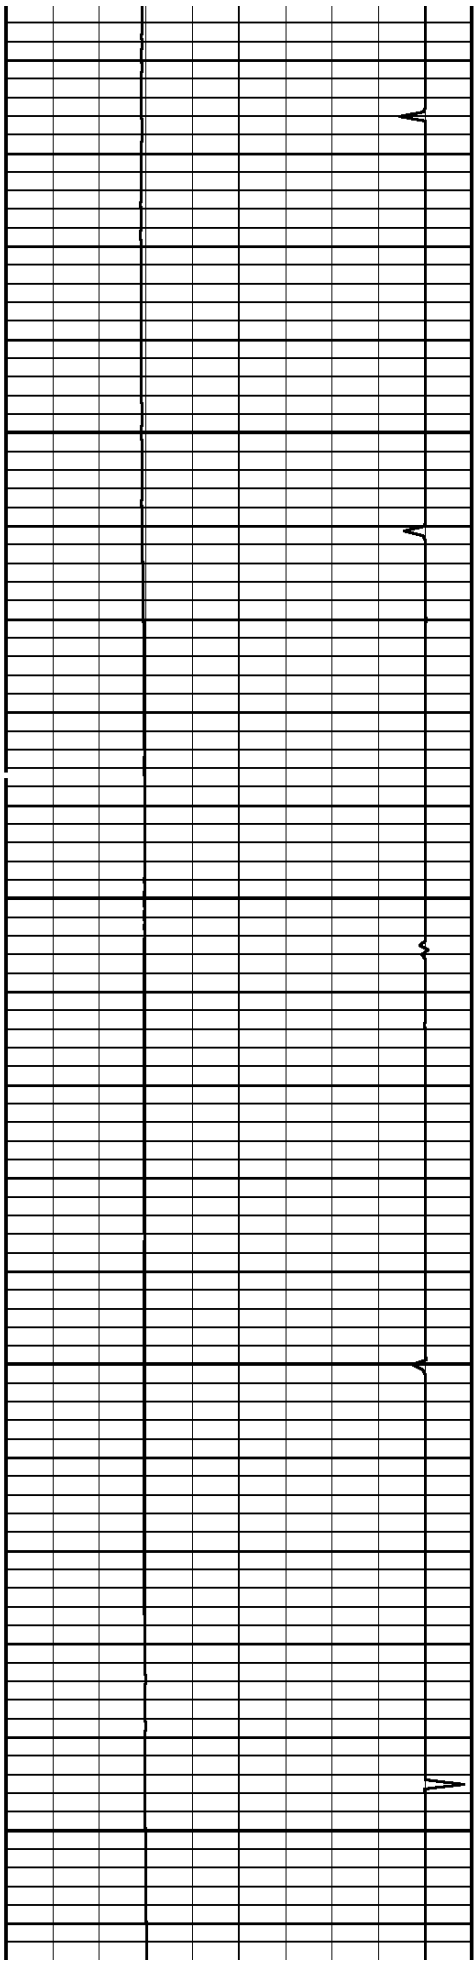

3200


3300

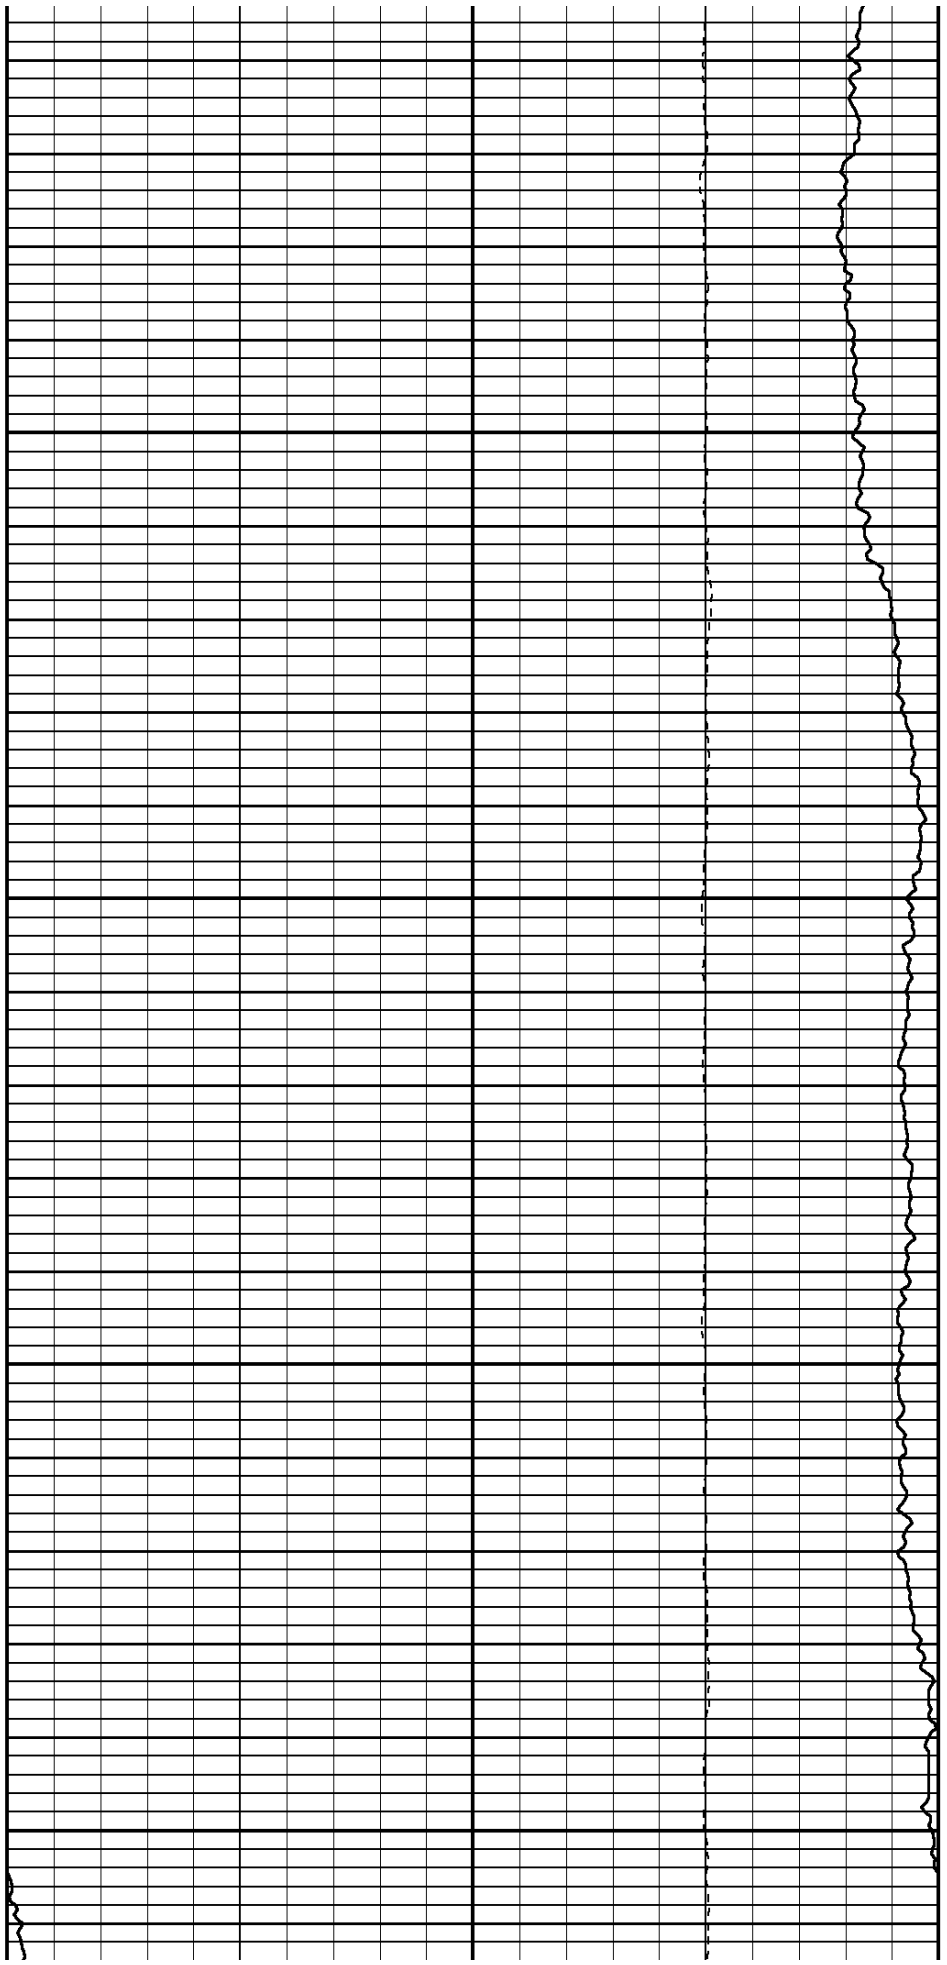


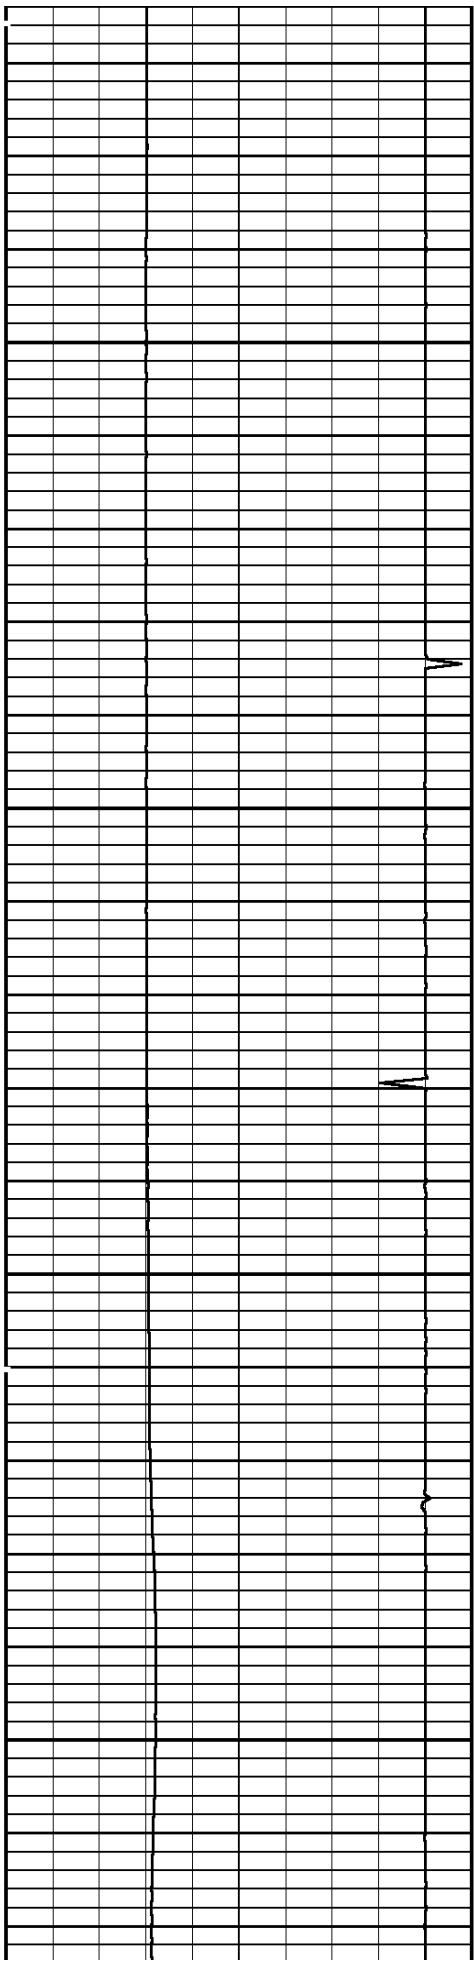

3400


3500

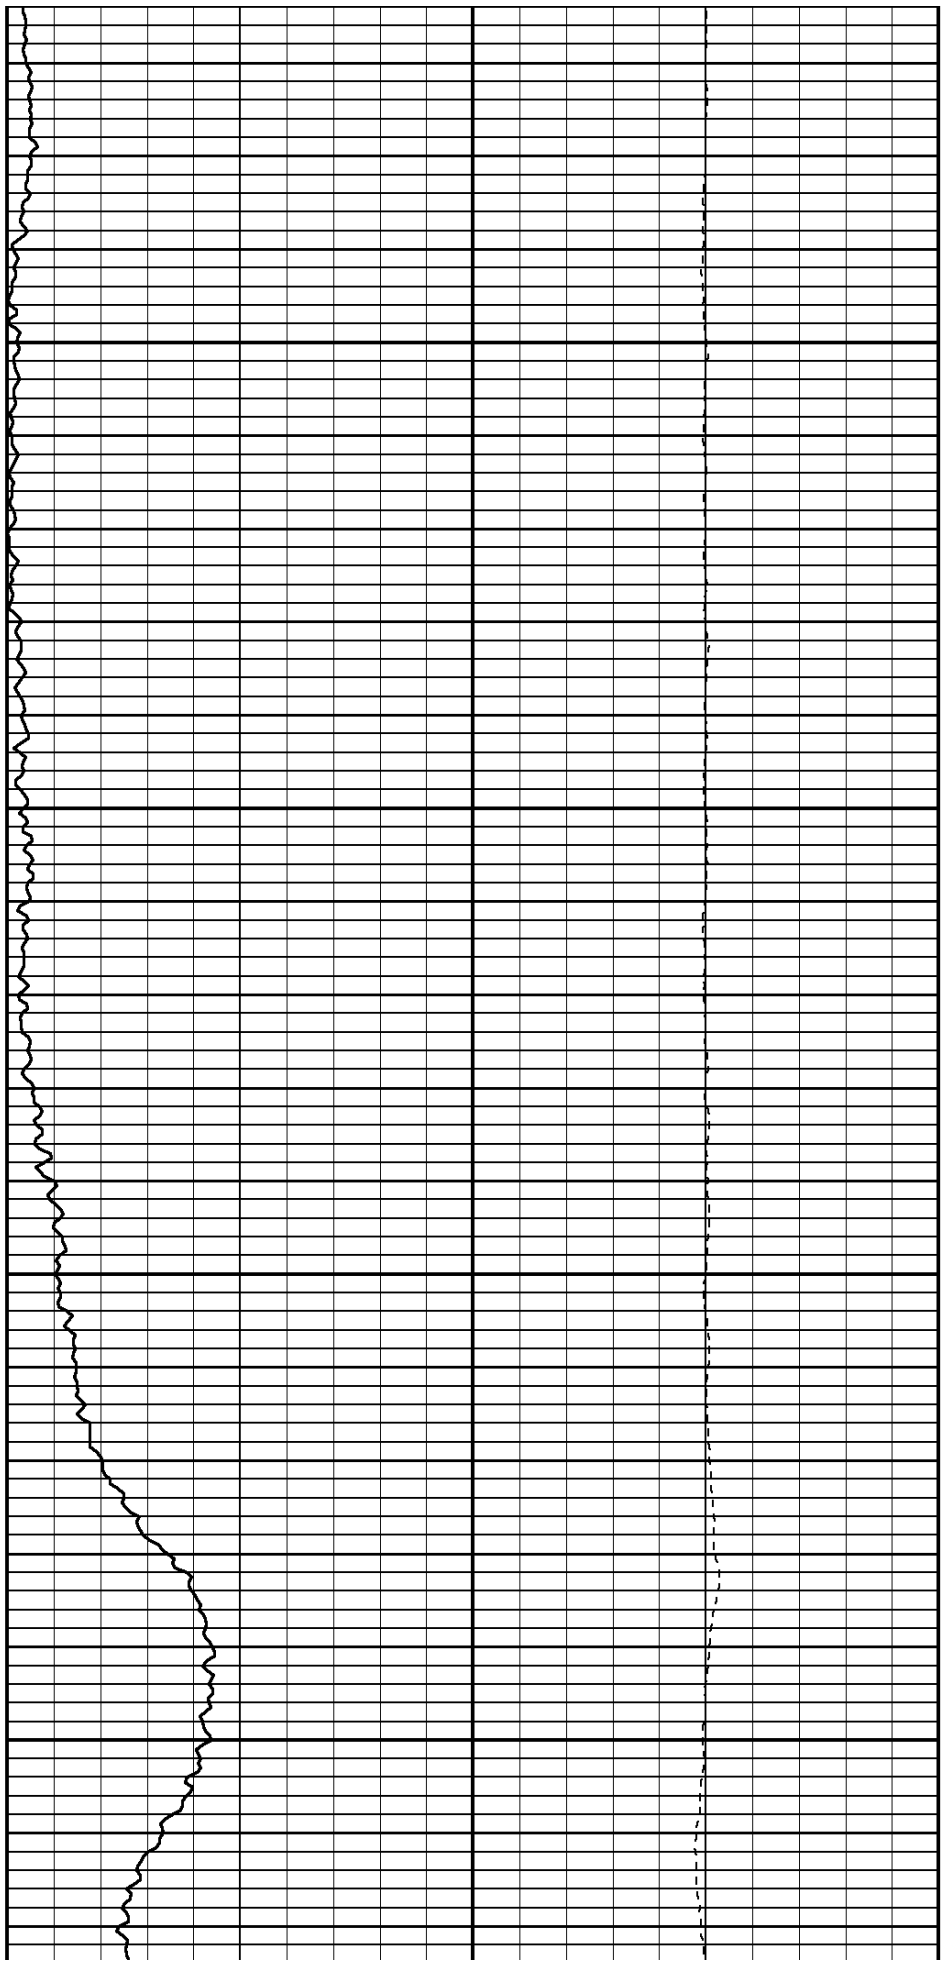


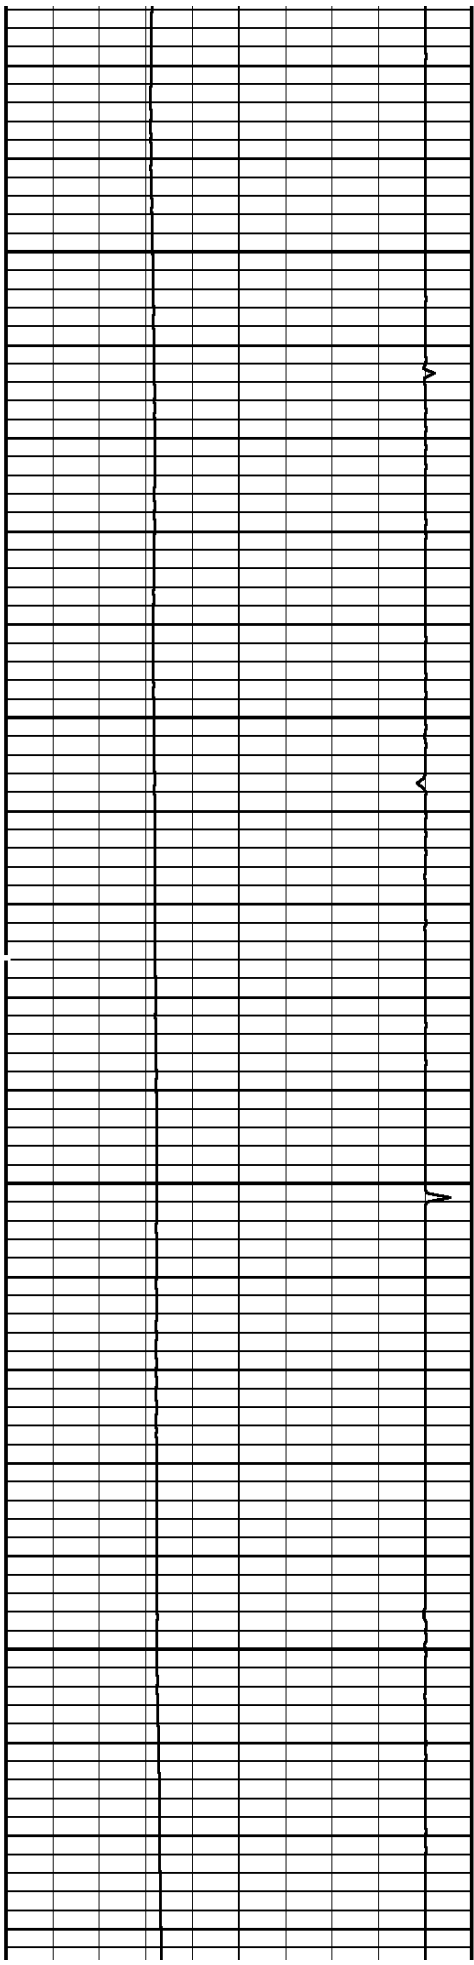

3600


3700

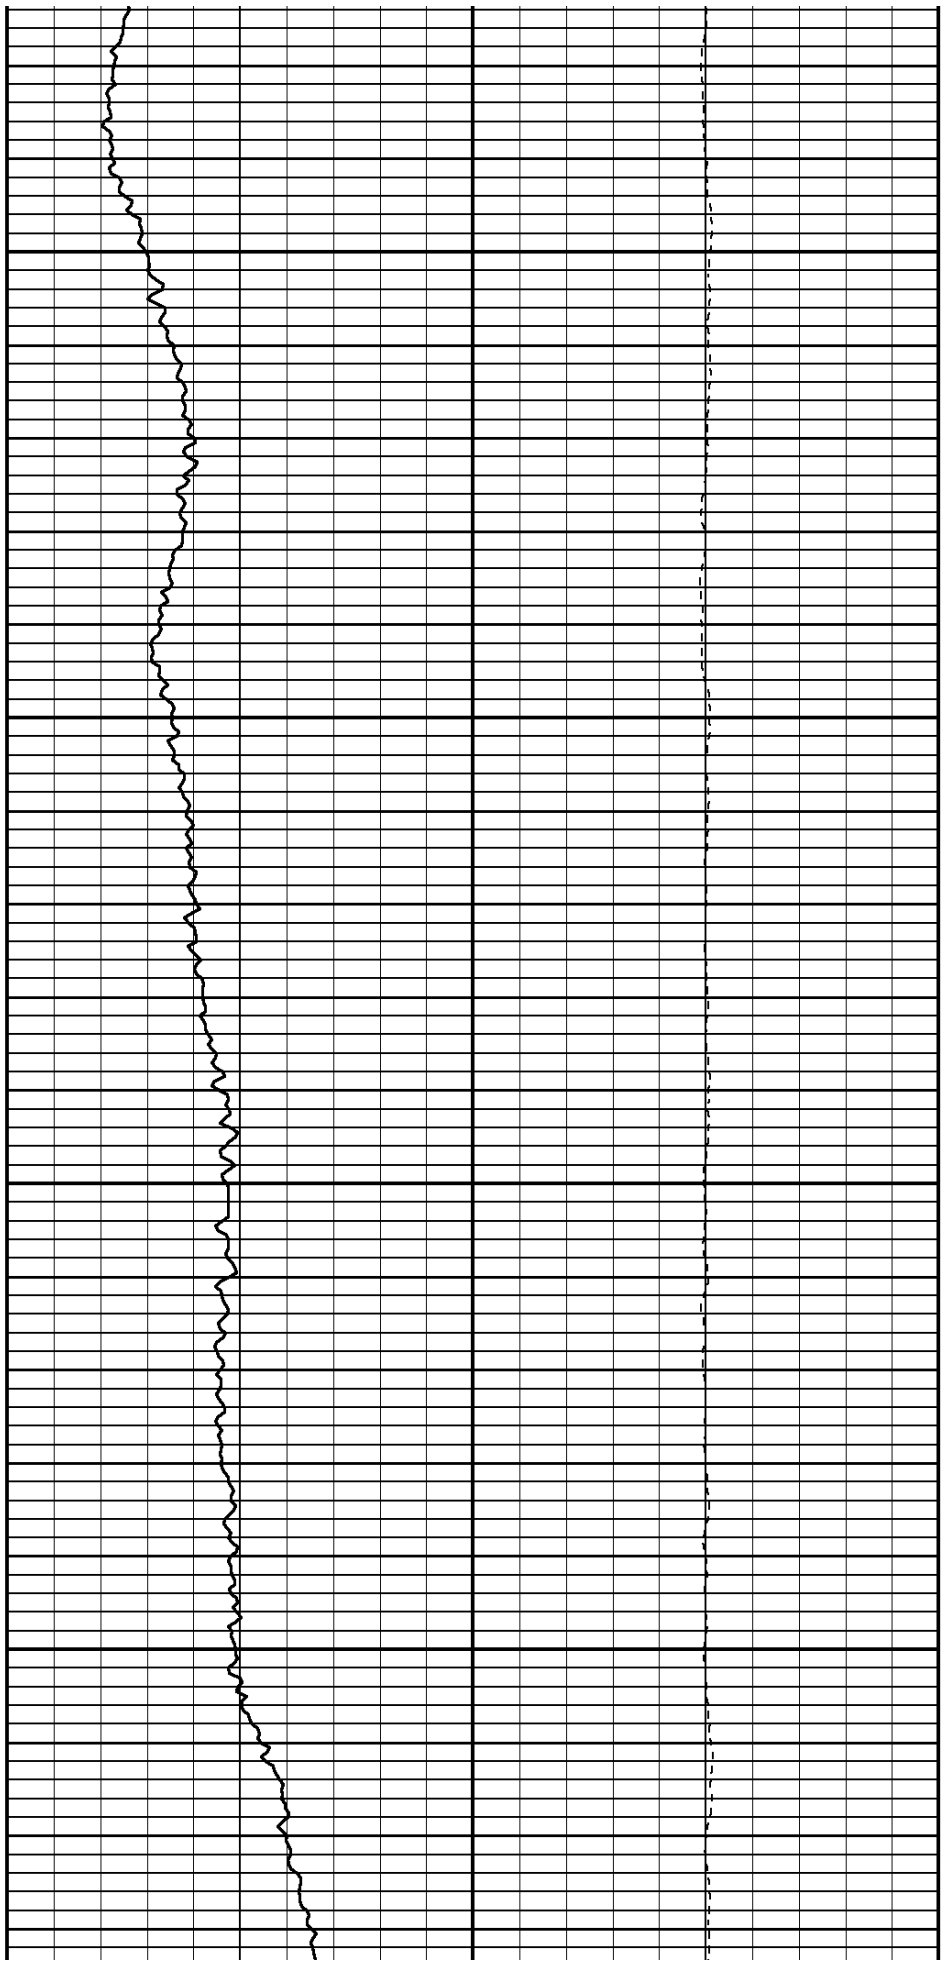


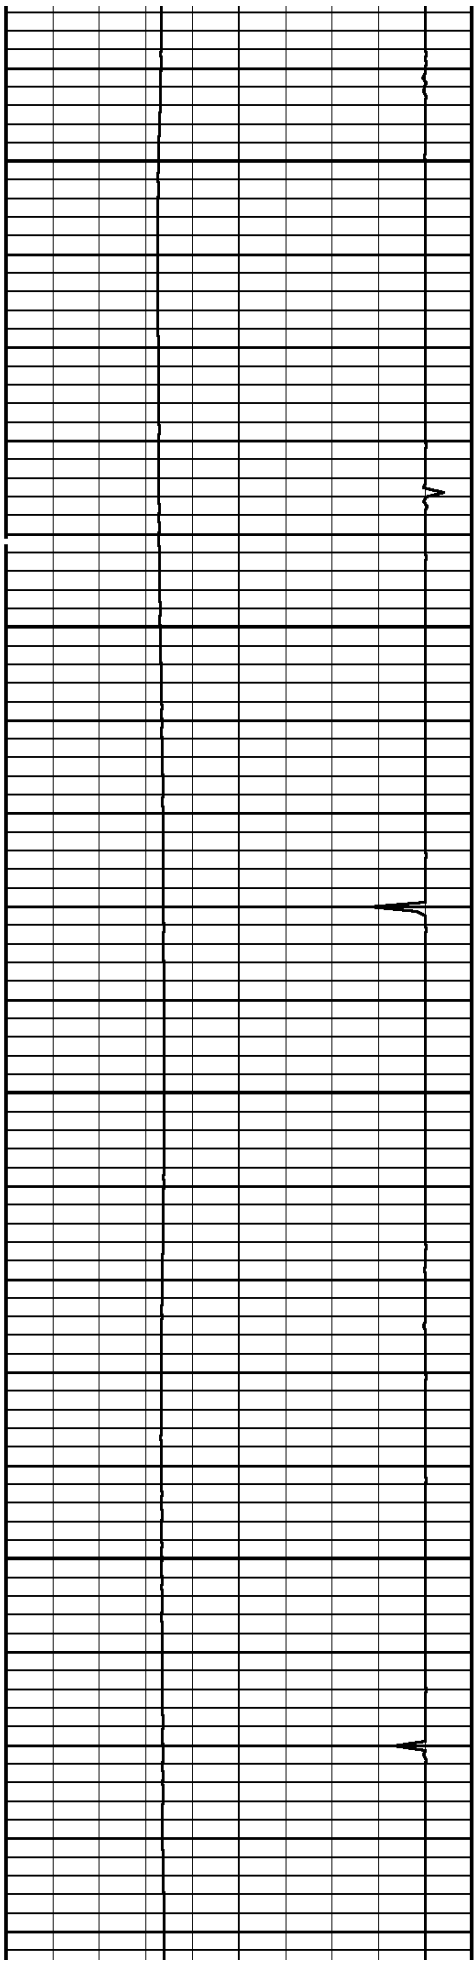

3800


3900

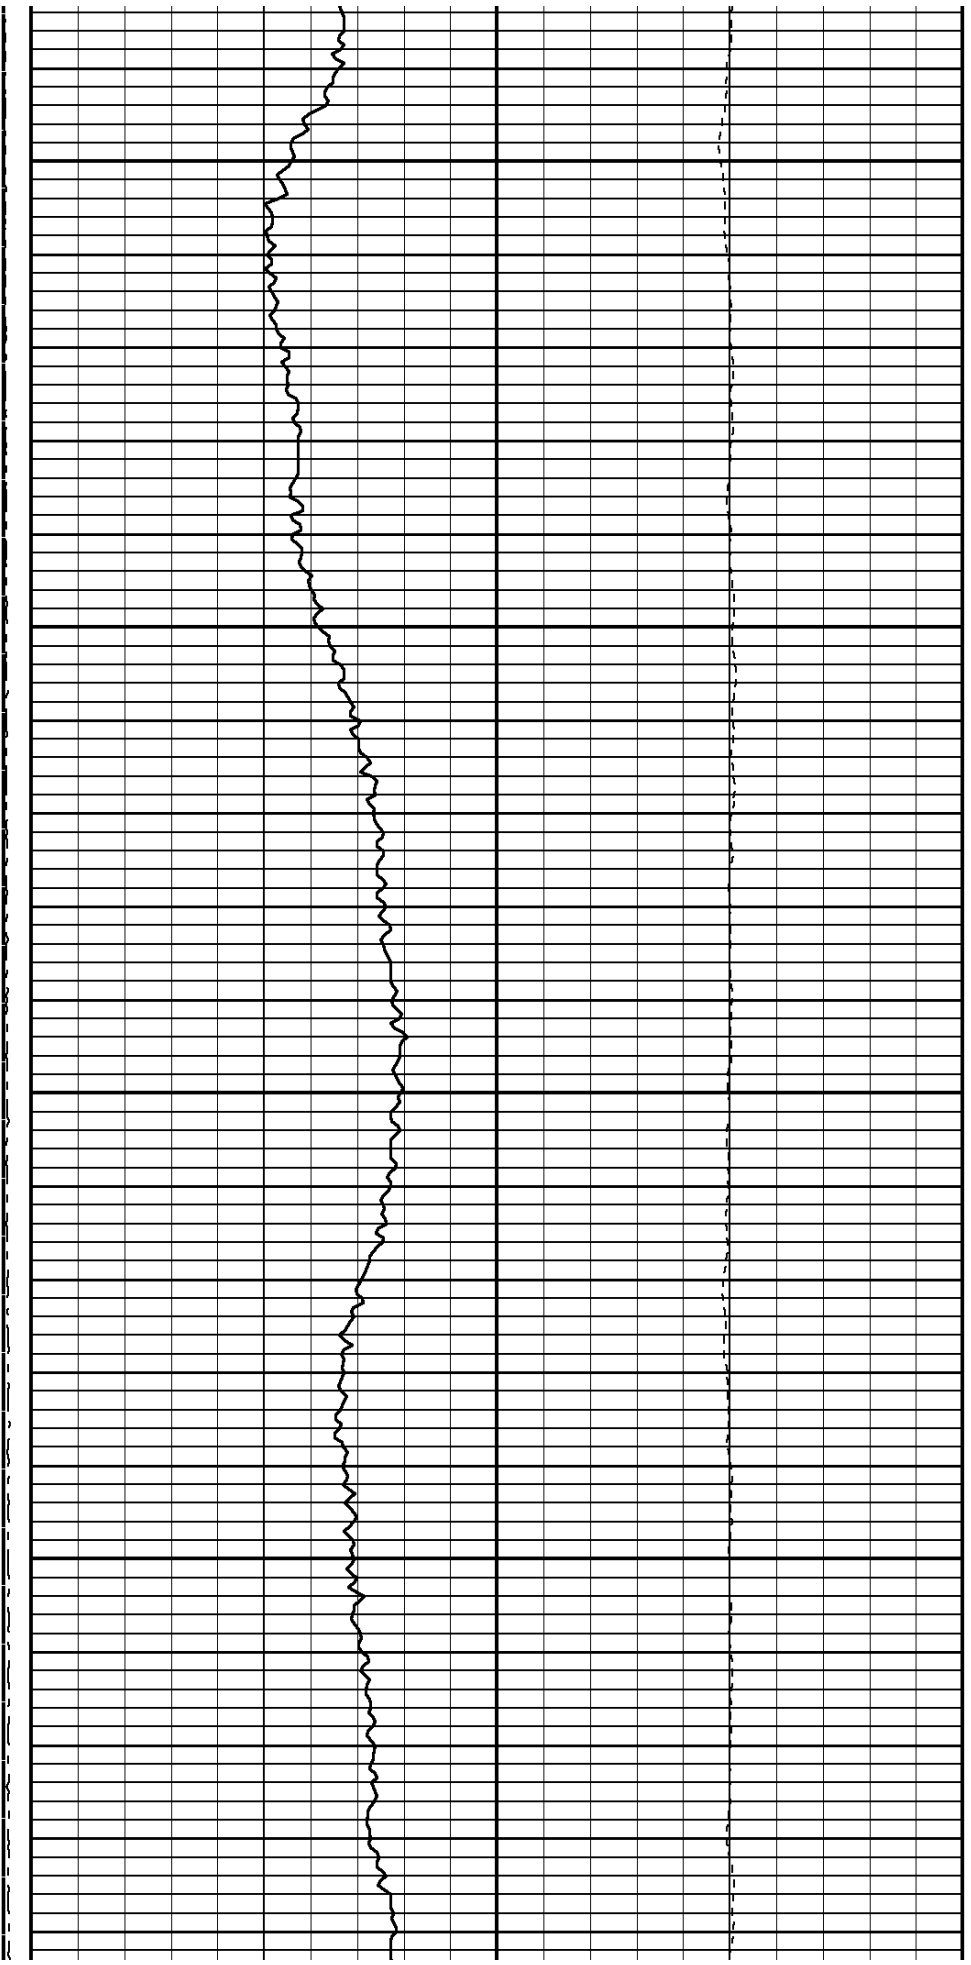


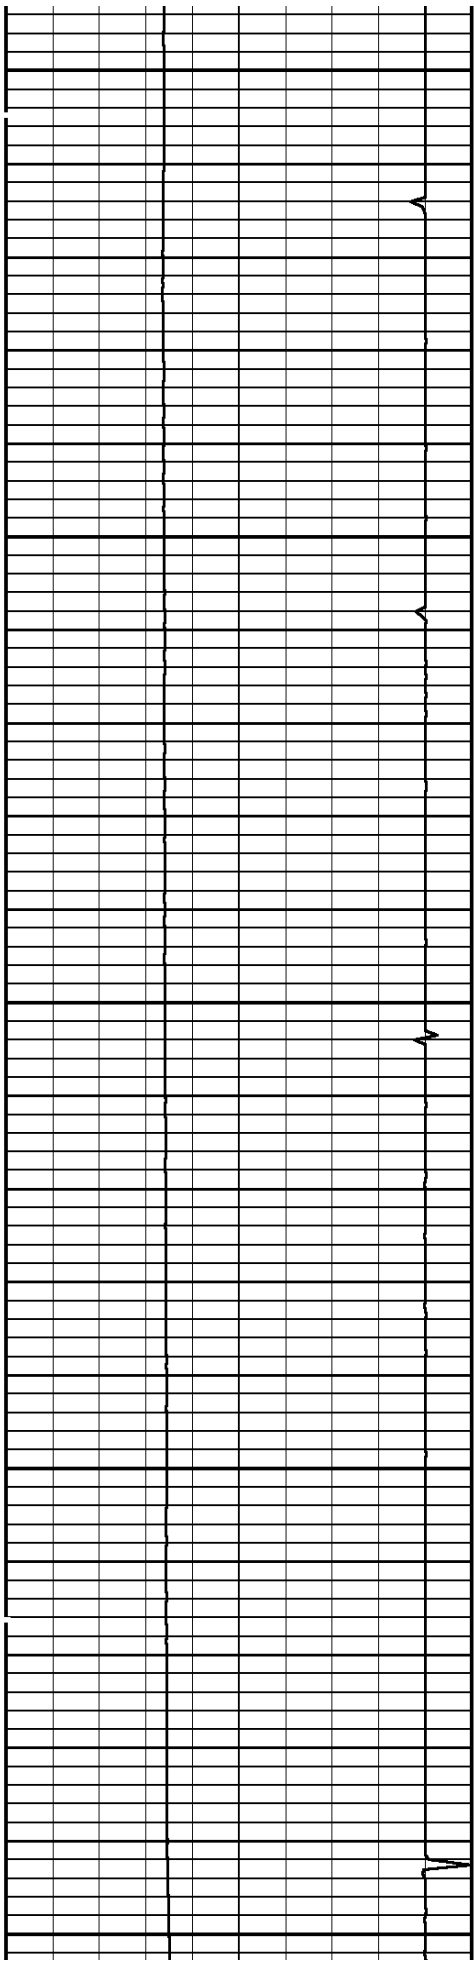

4000


4100

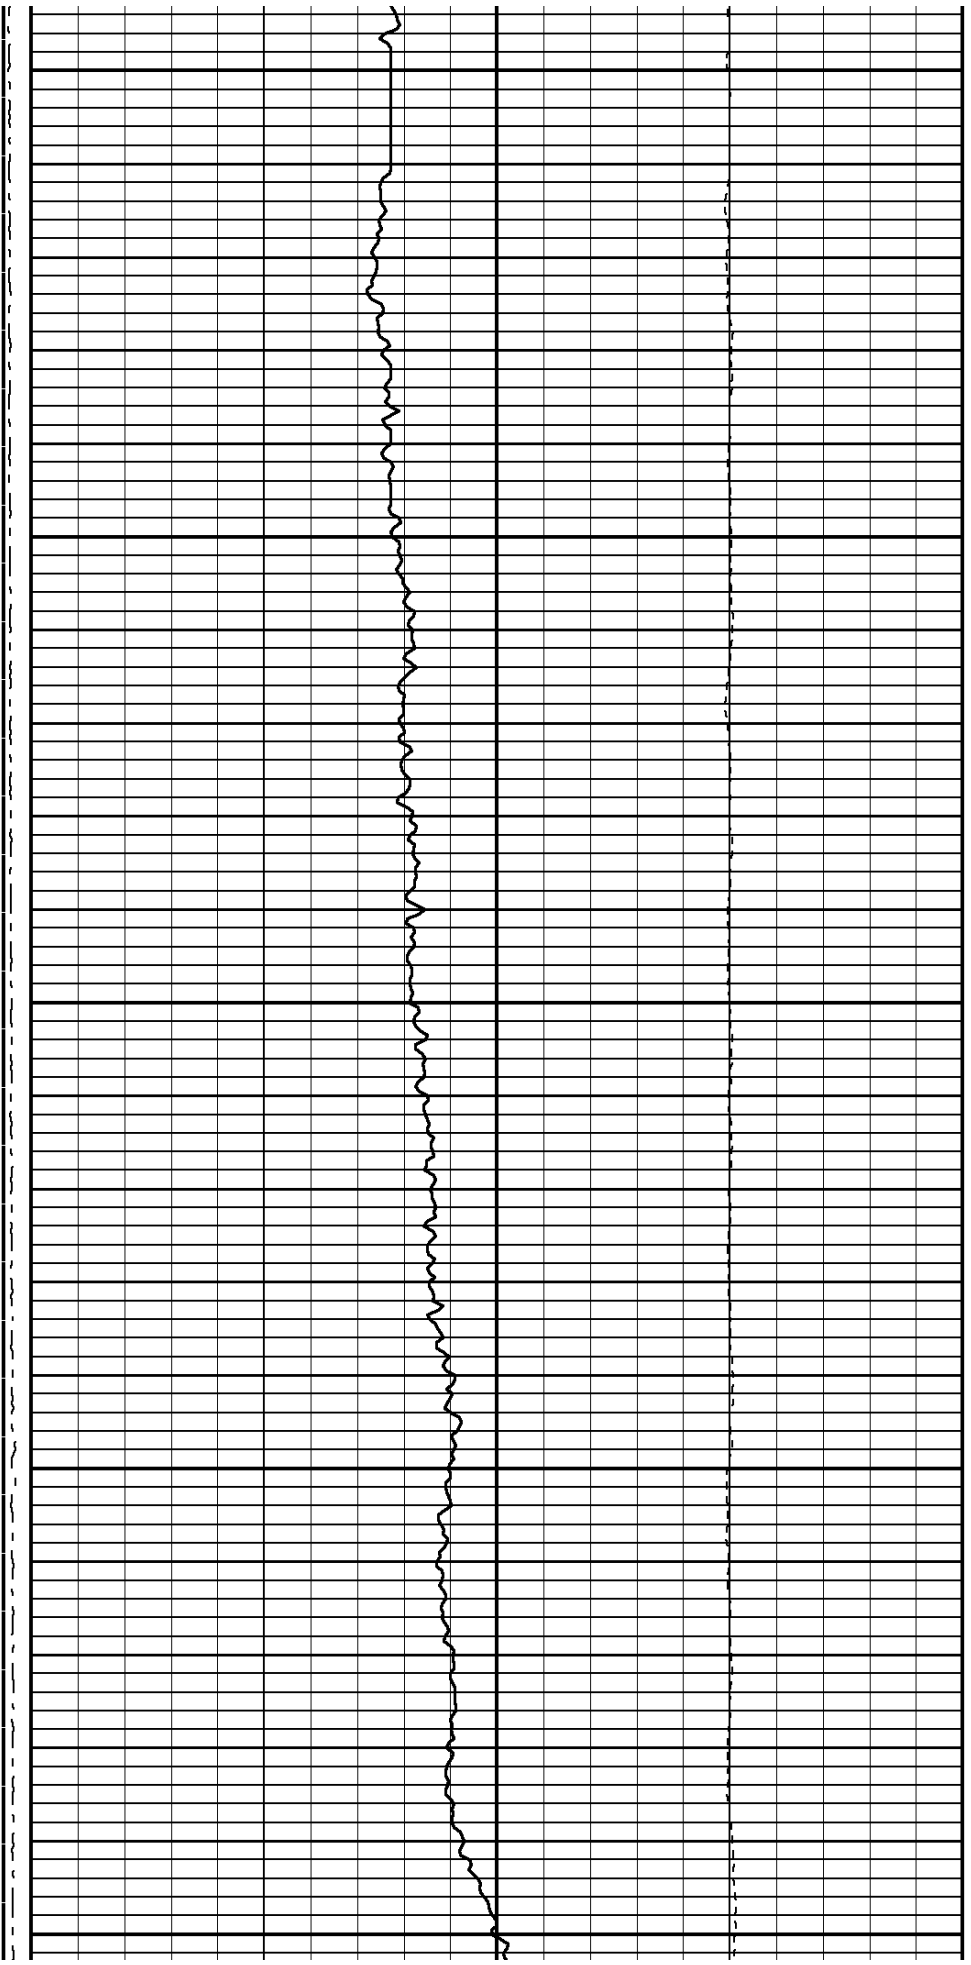


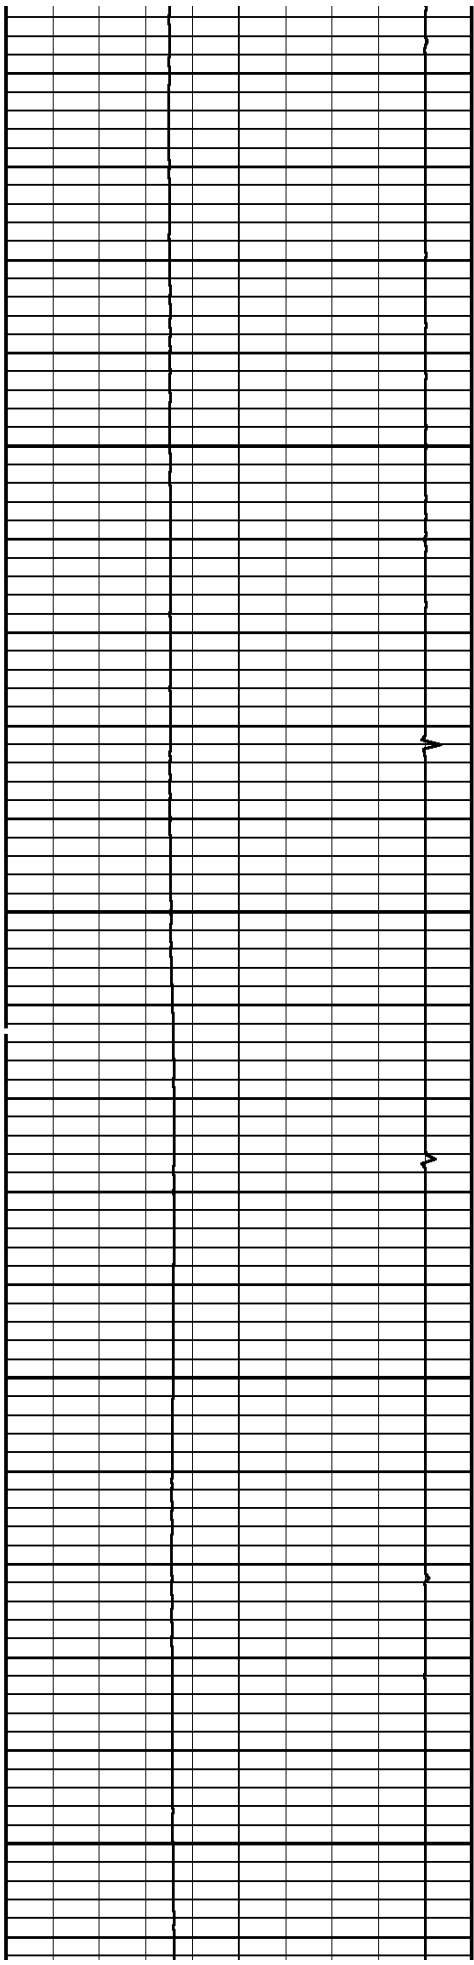

4200


4300

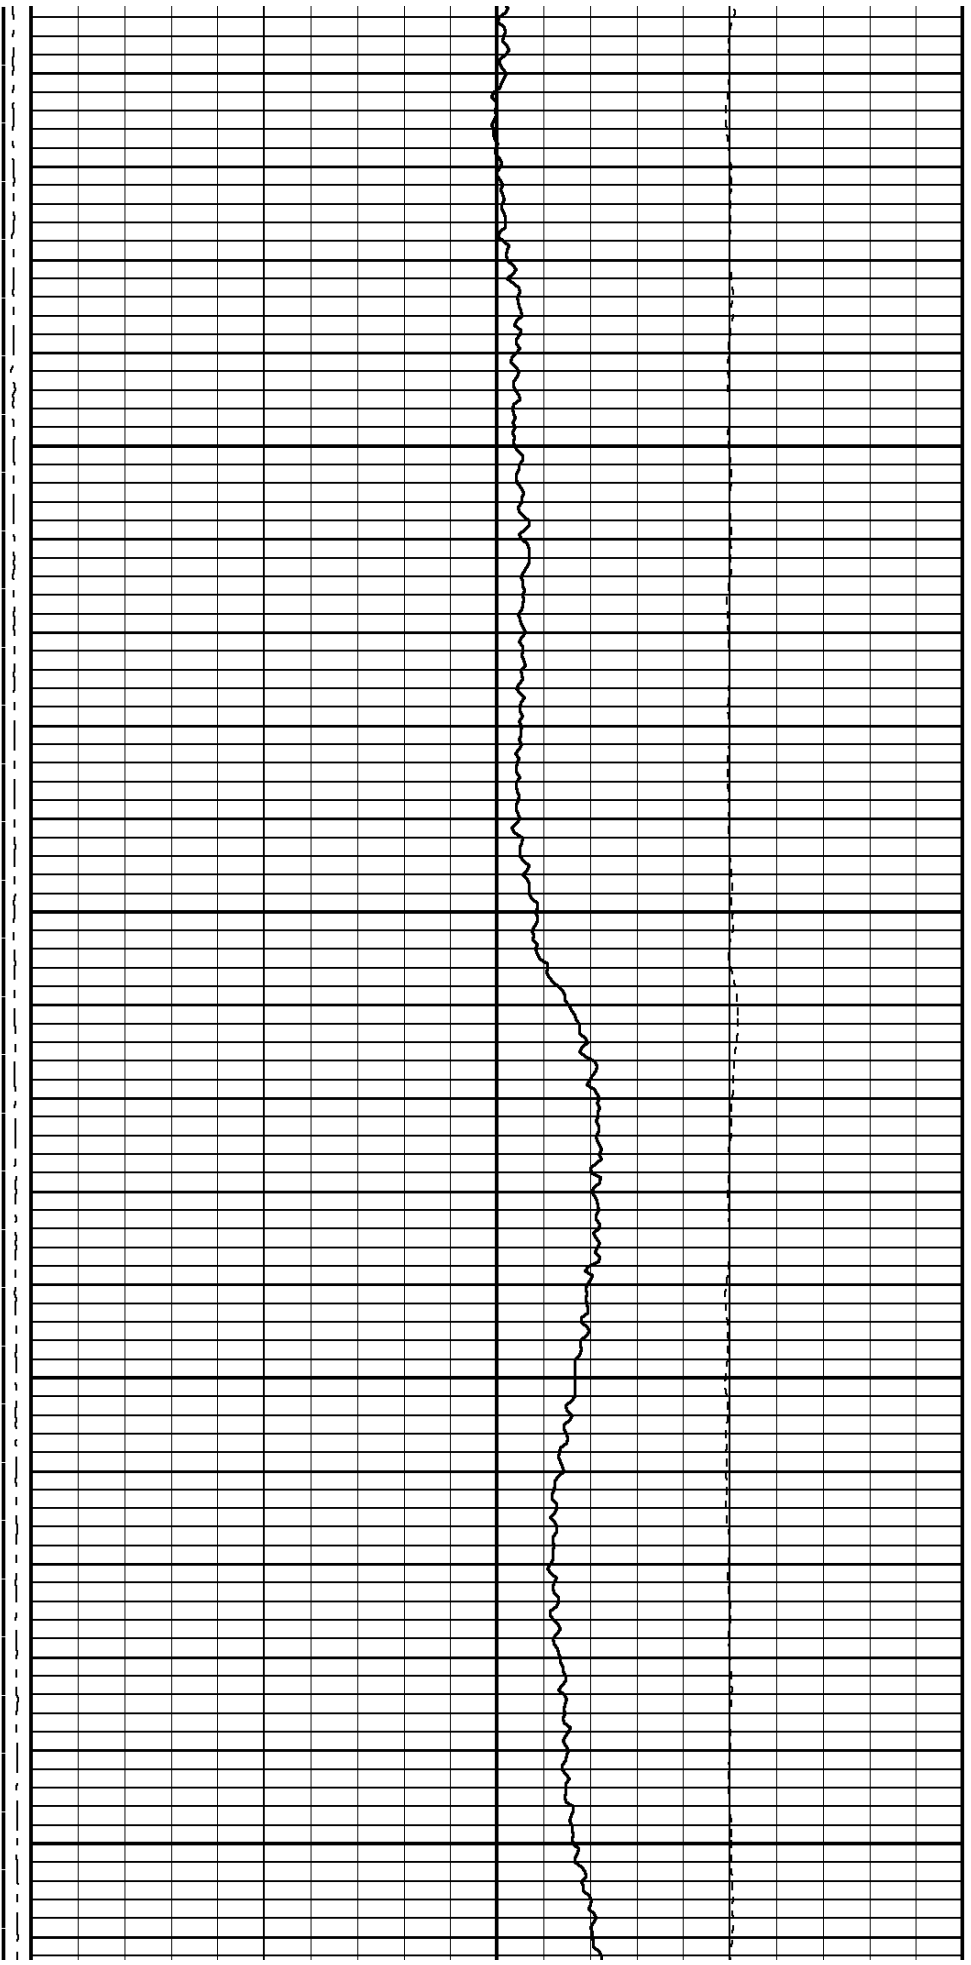


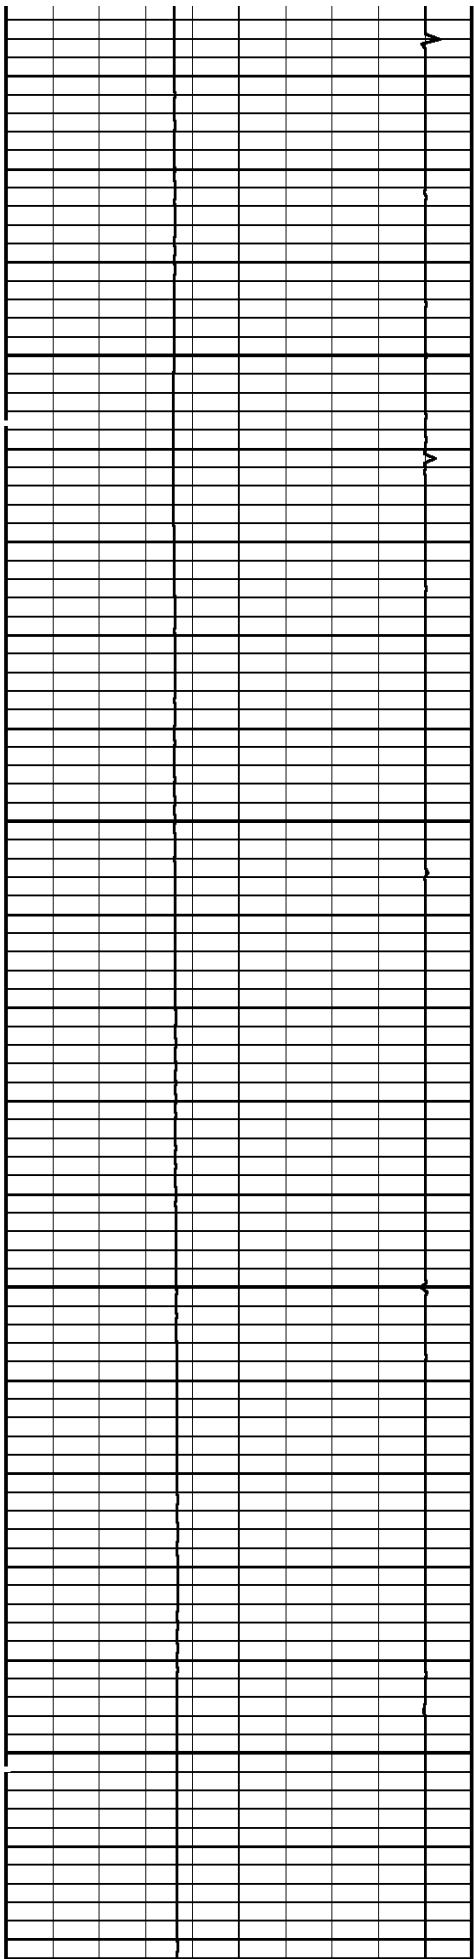

4400


4500

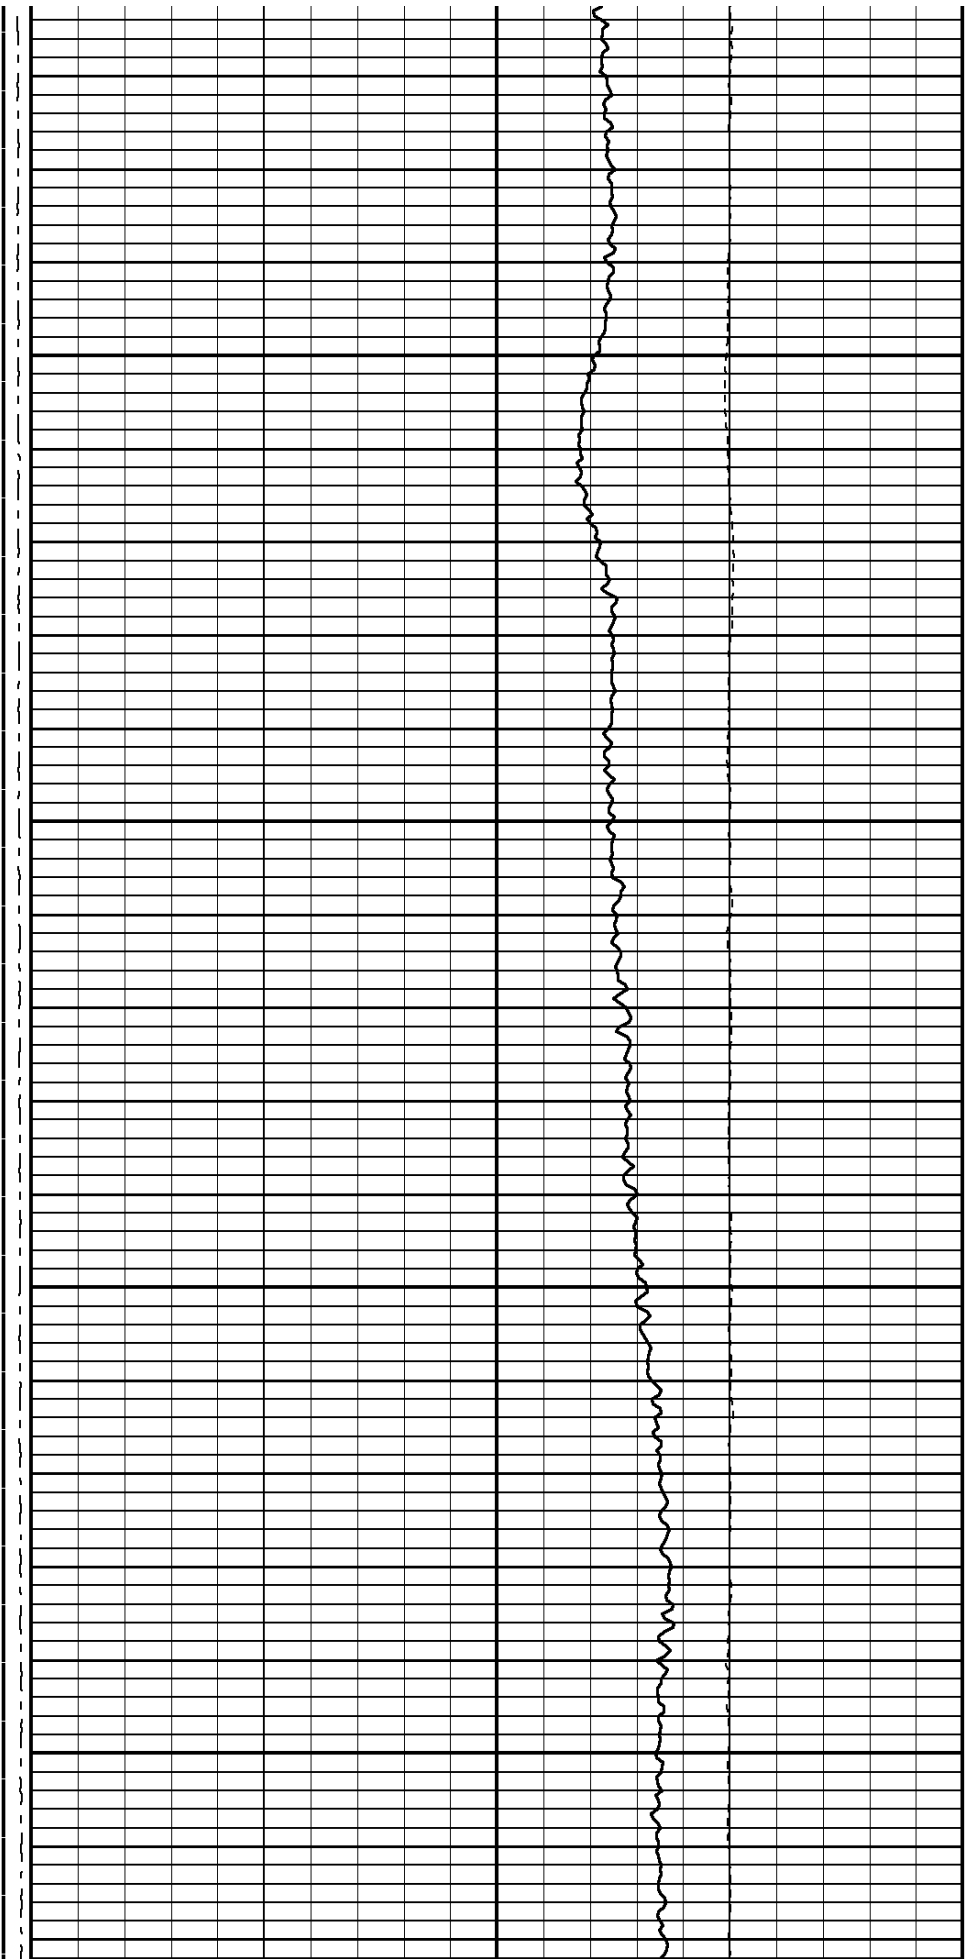


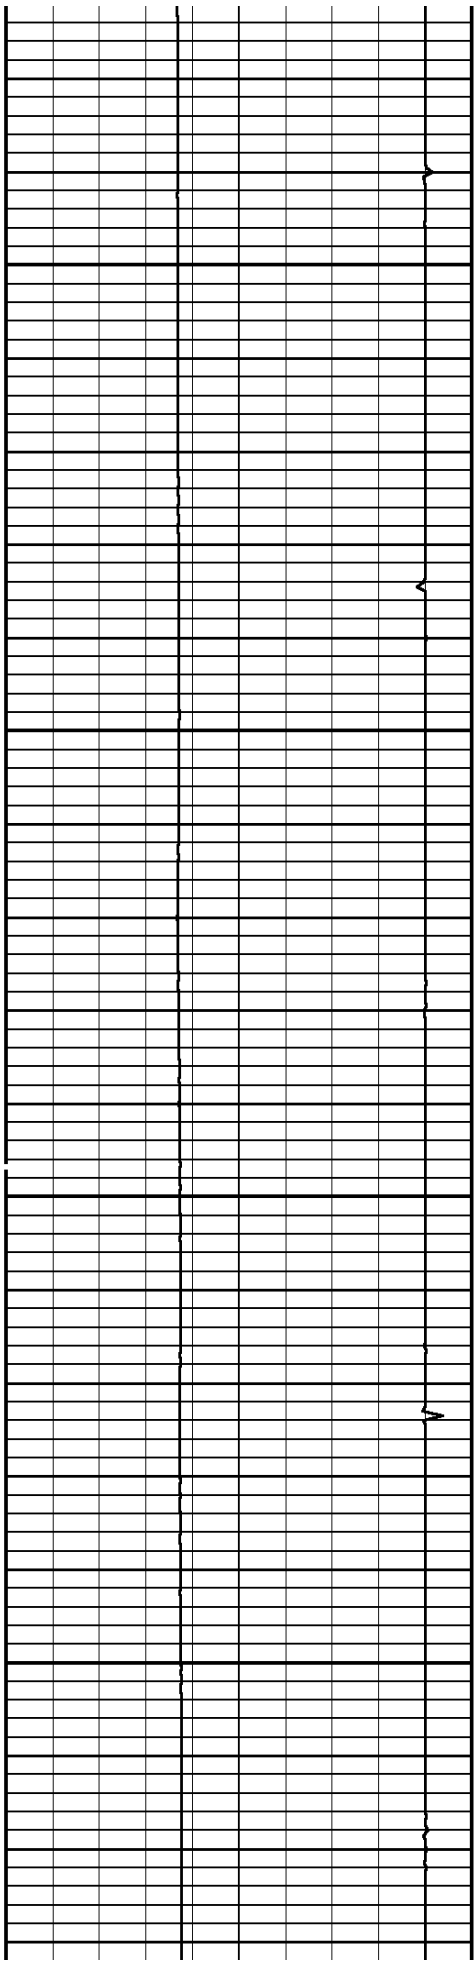

4600


4700

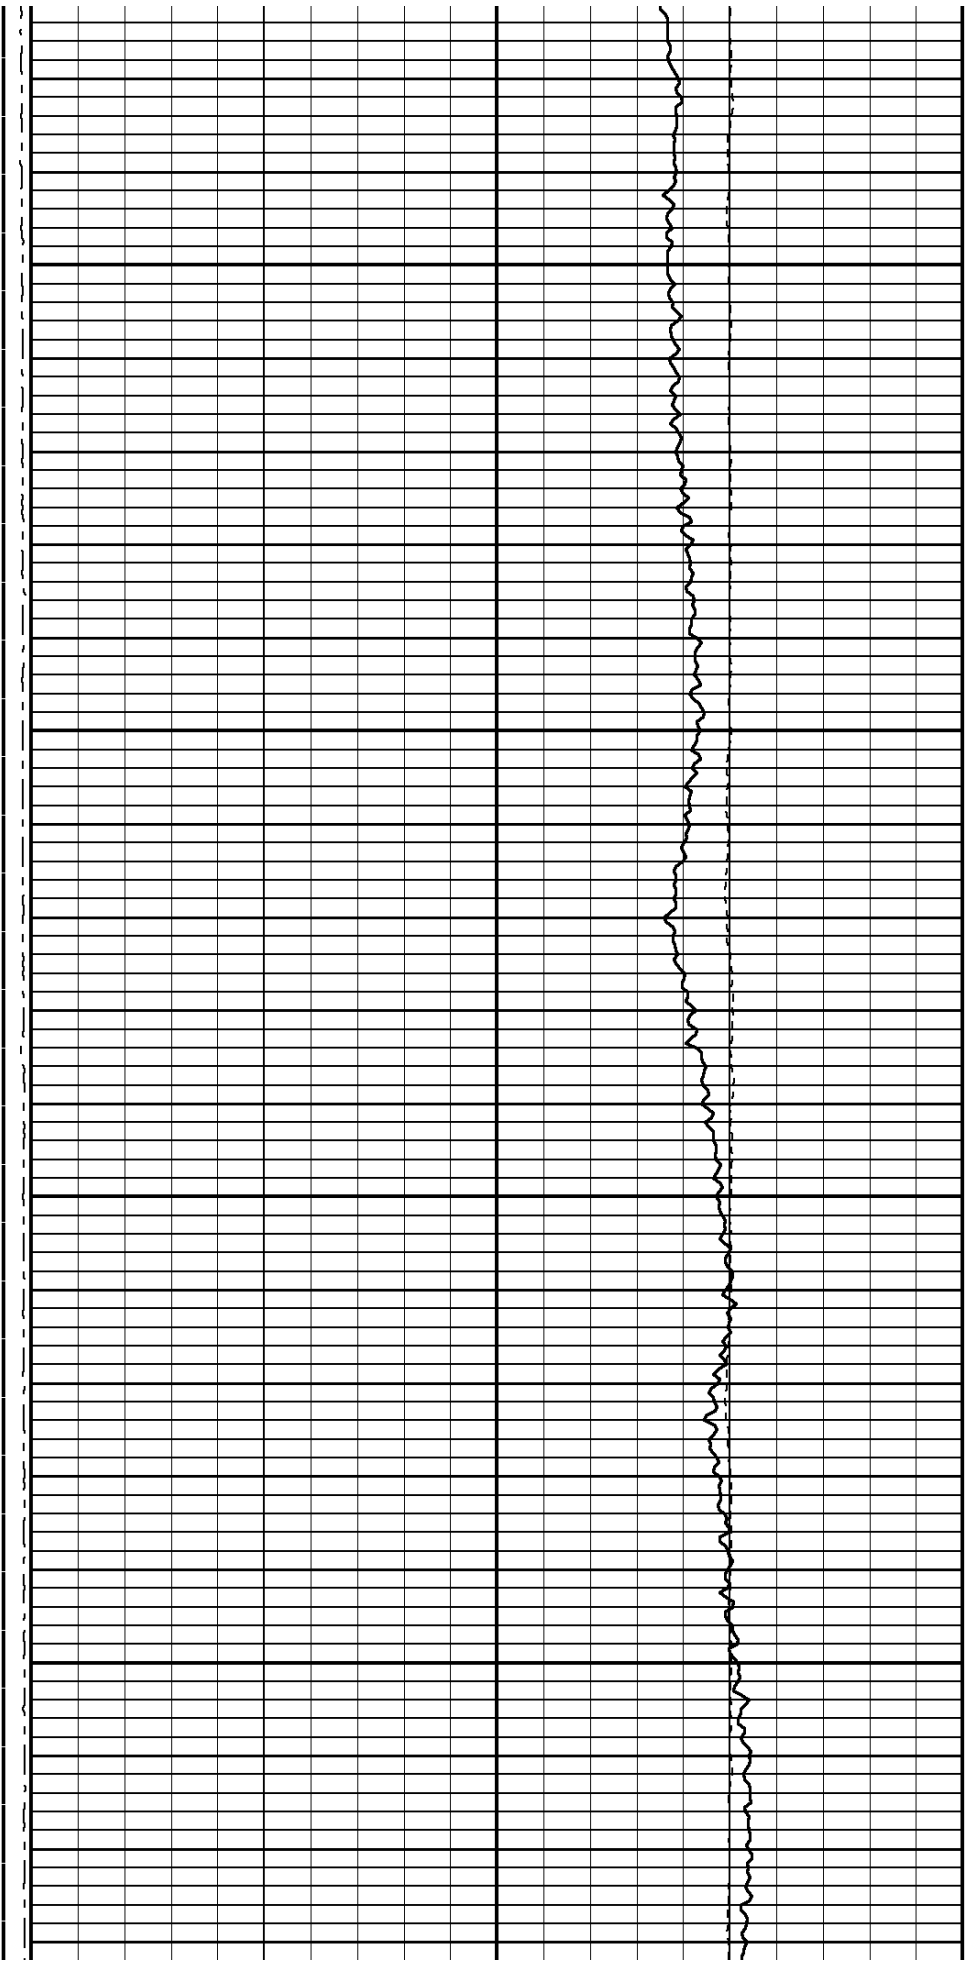


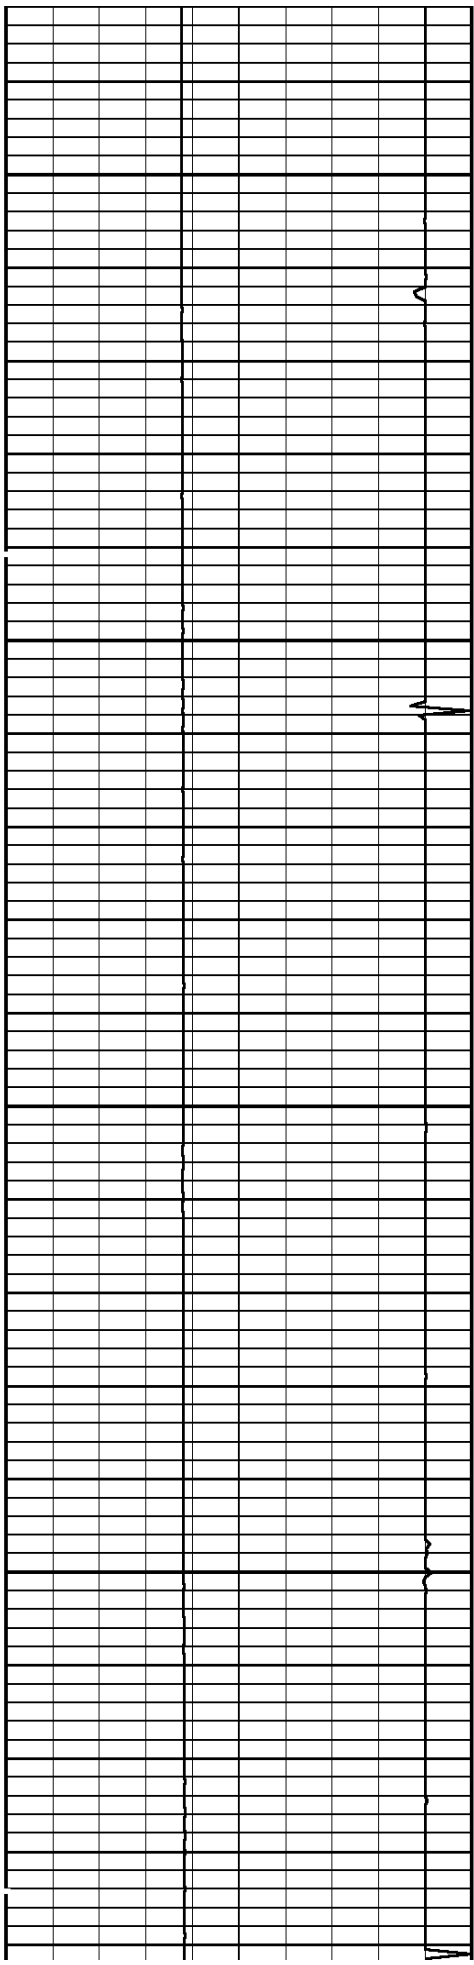

4800

4900

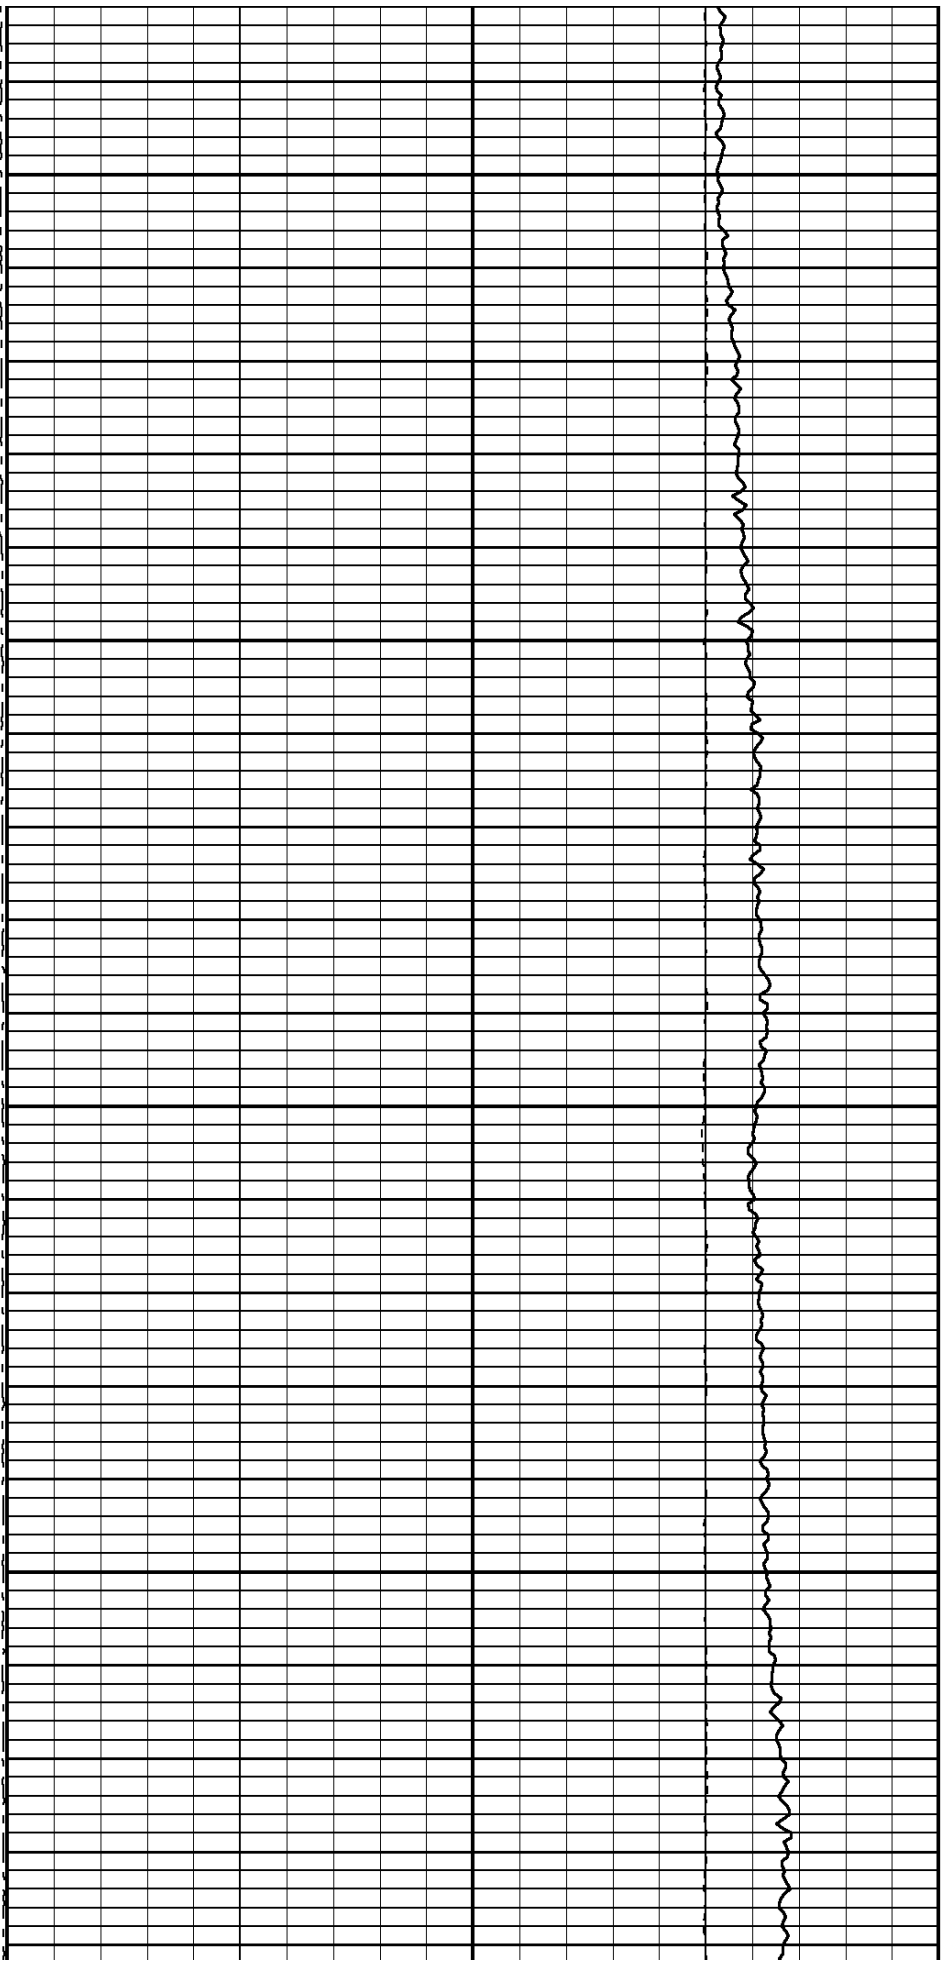


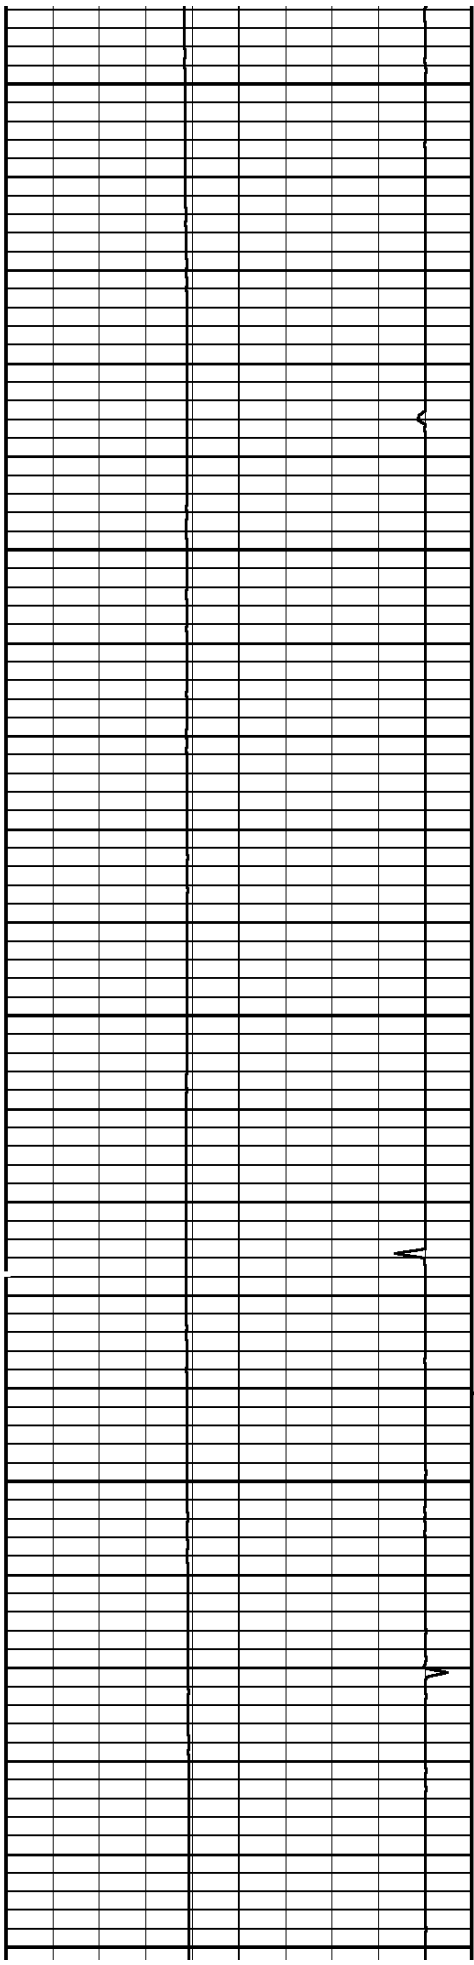


5000

5100


5200

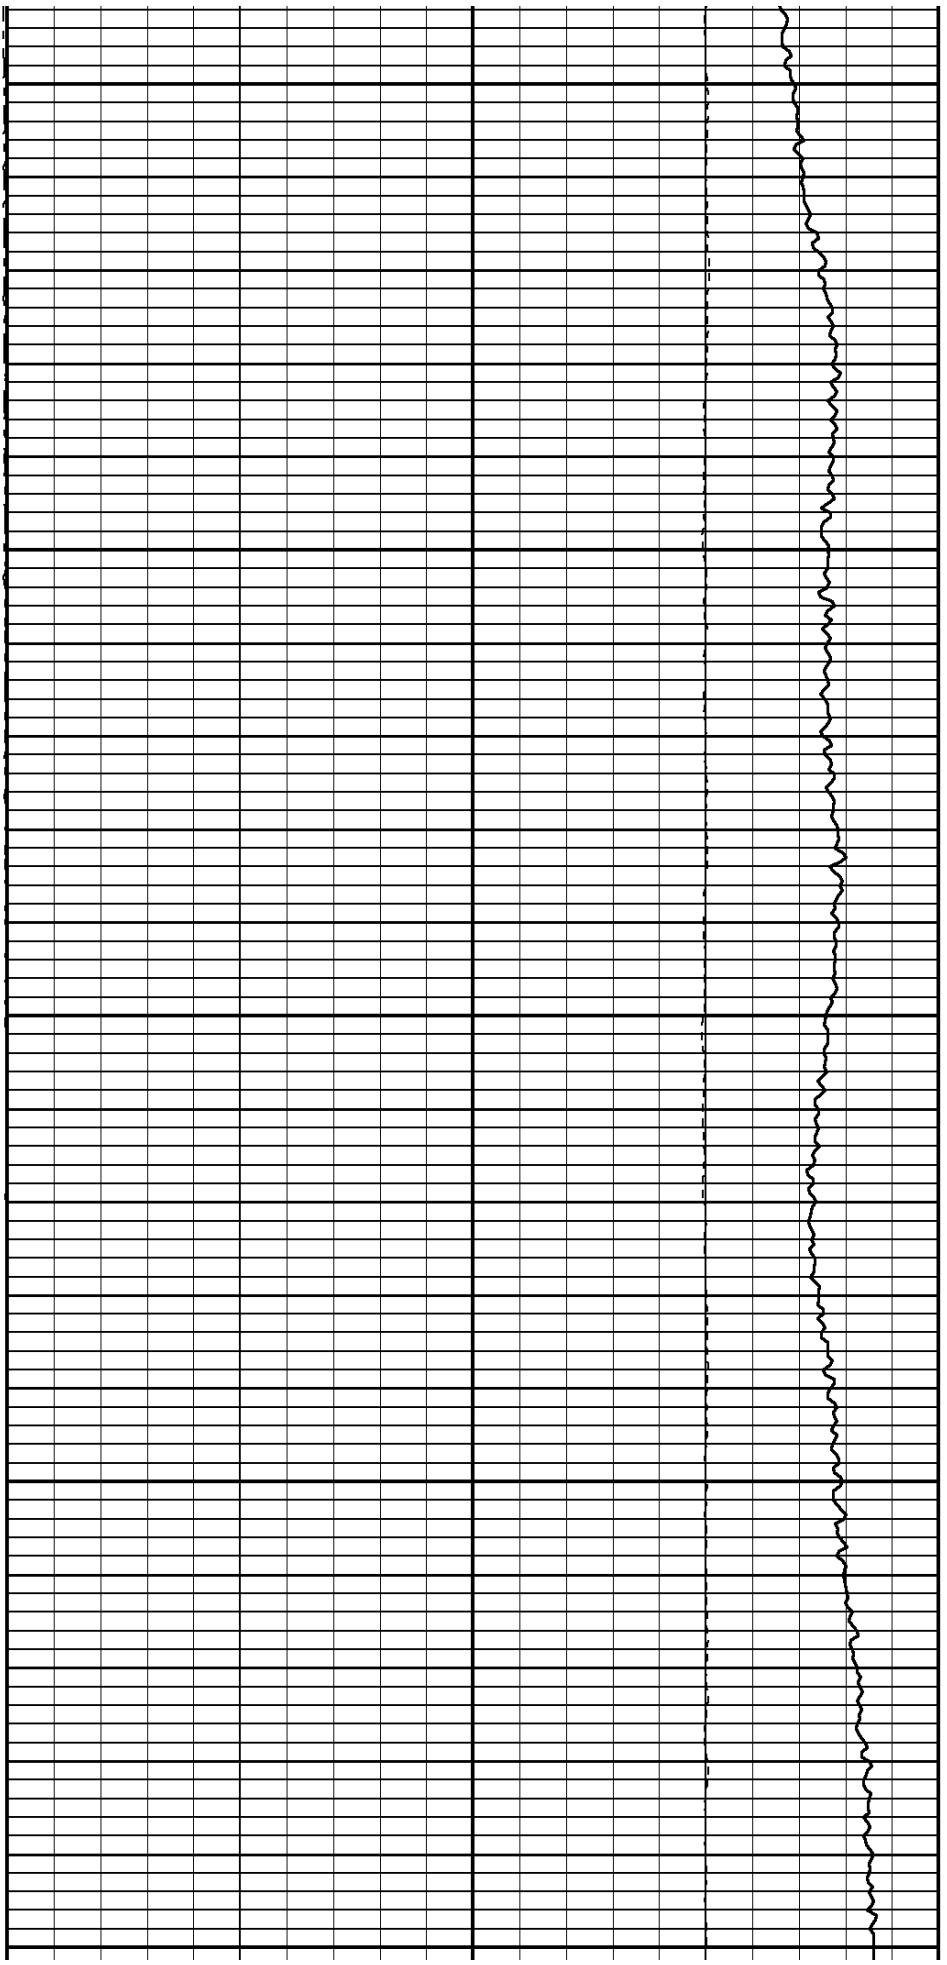


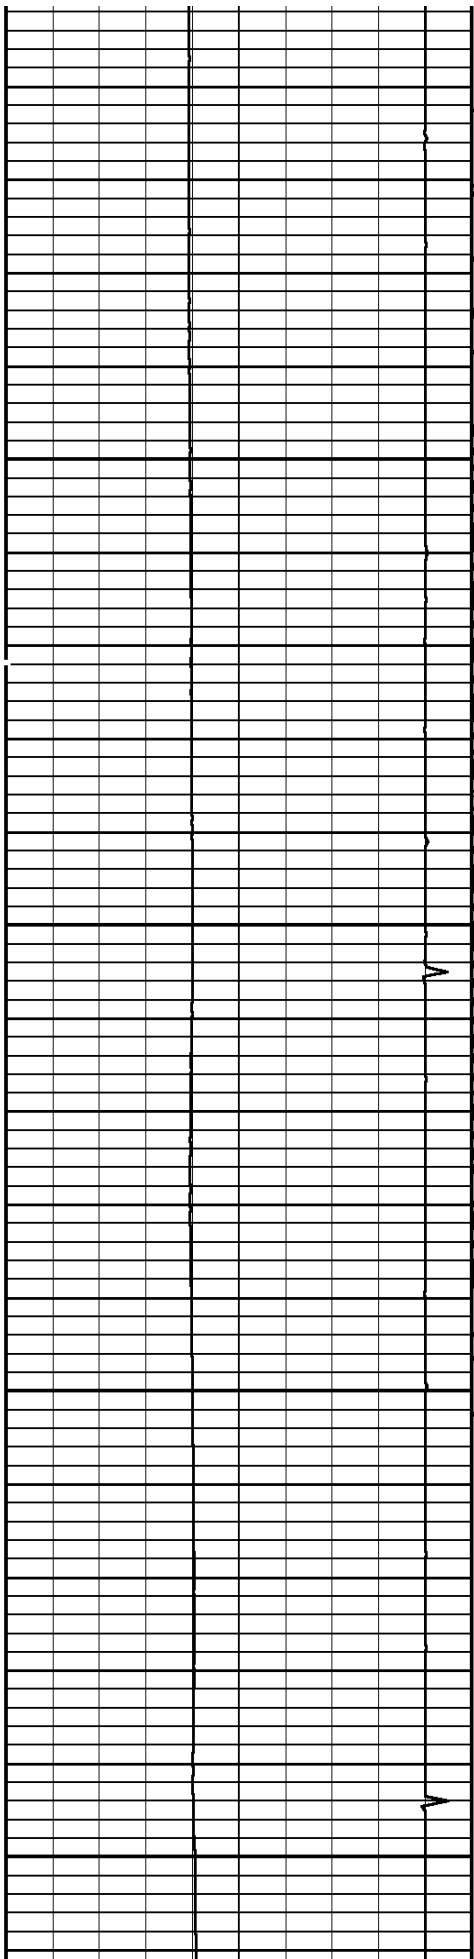

5300


5400

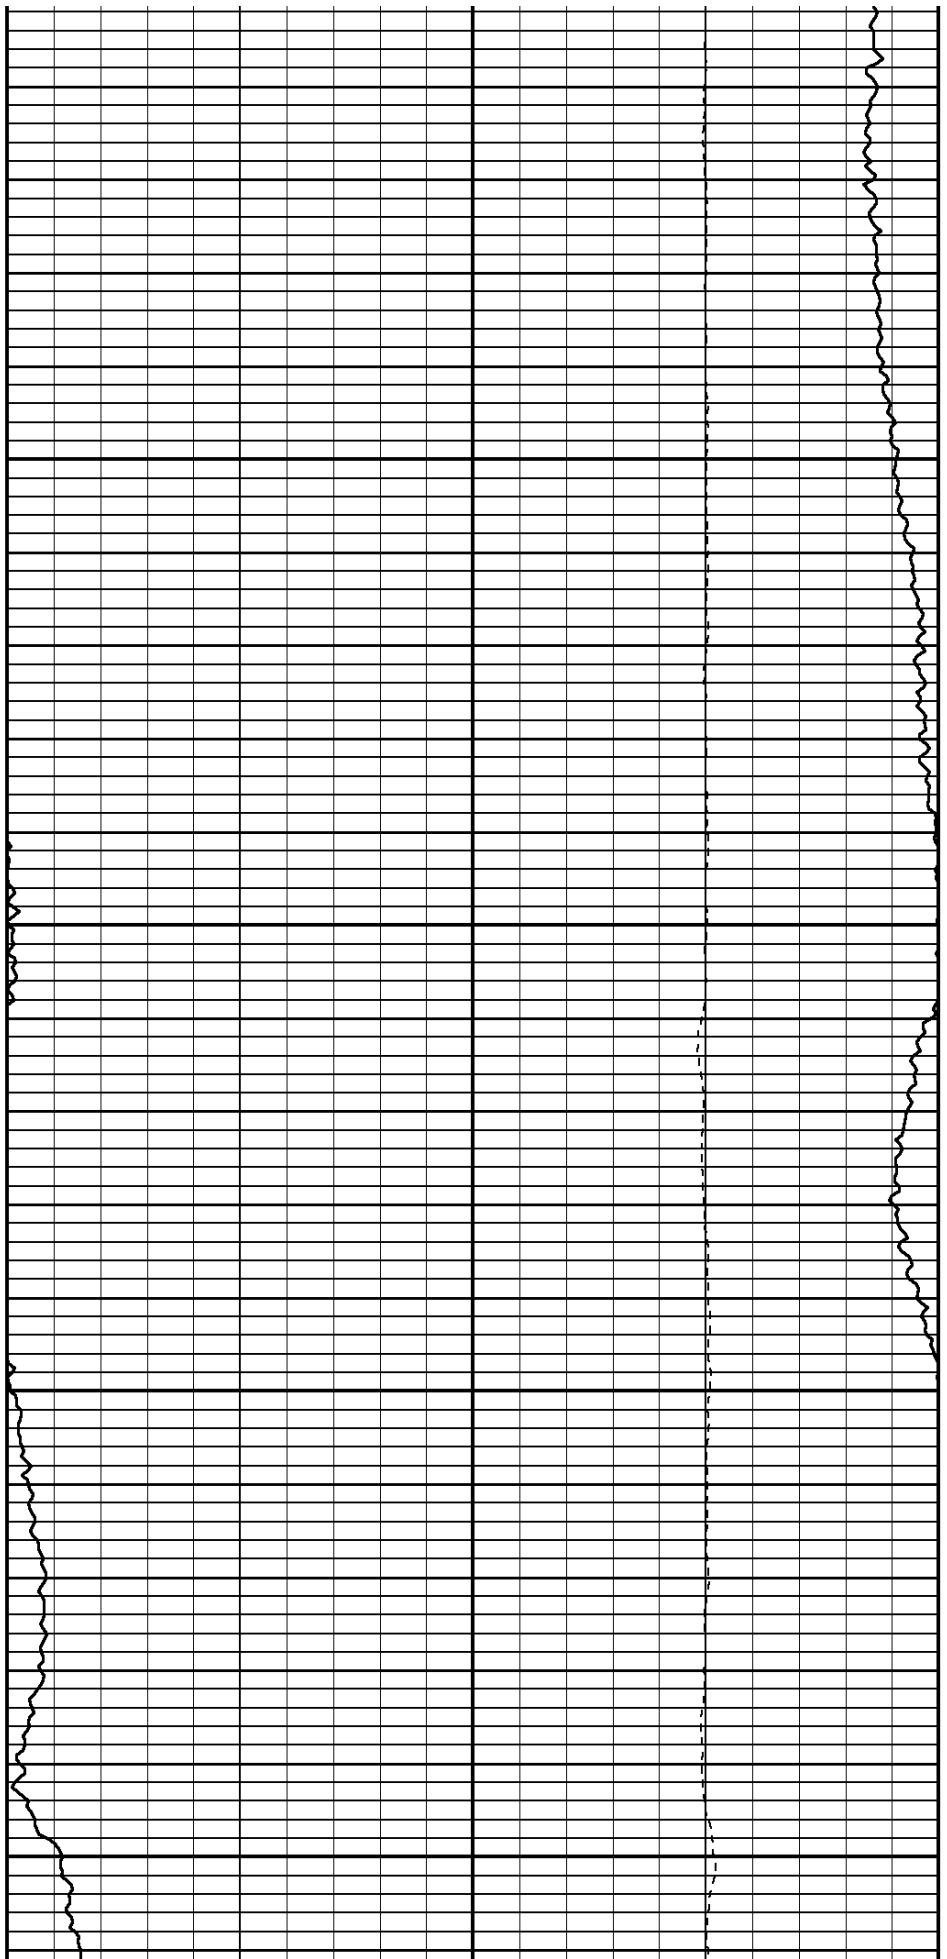


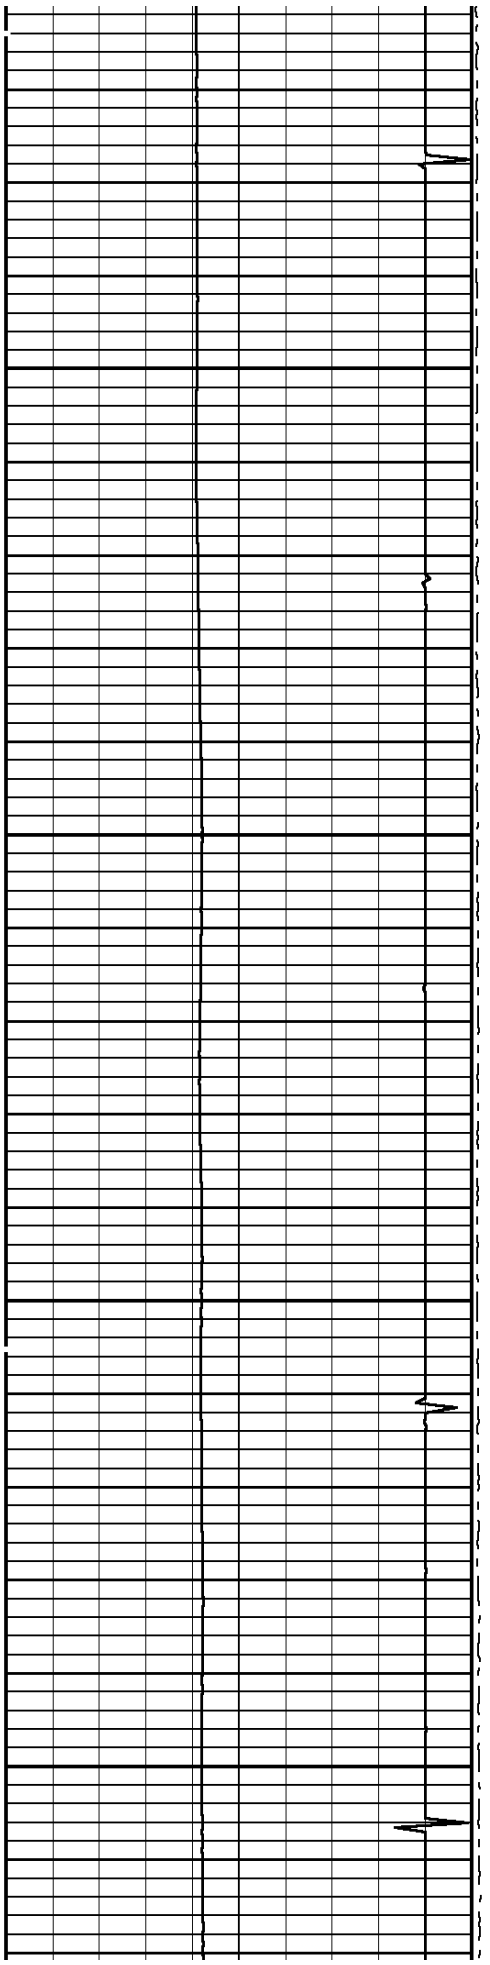

5500


5600

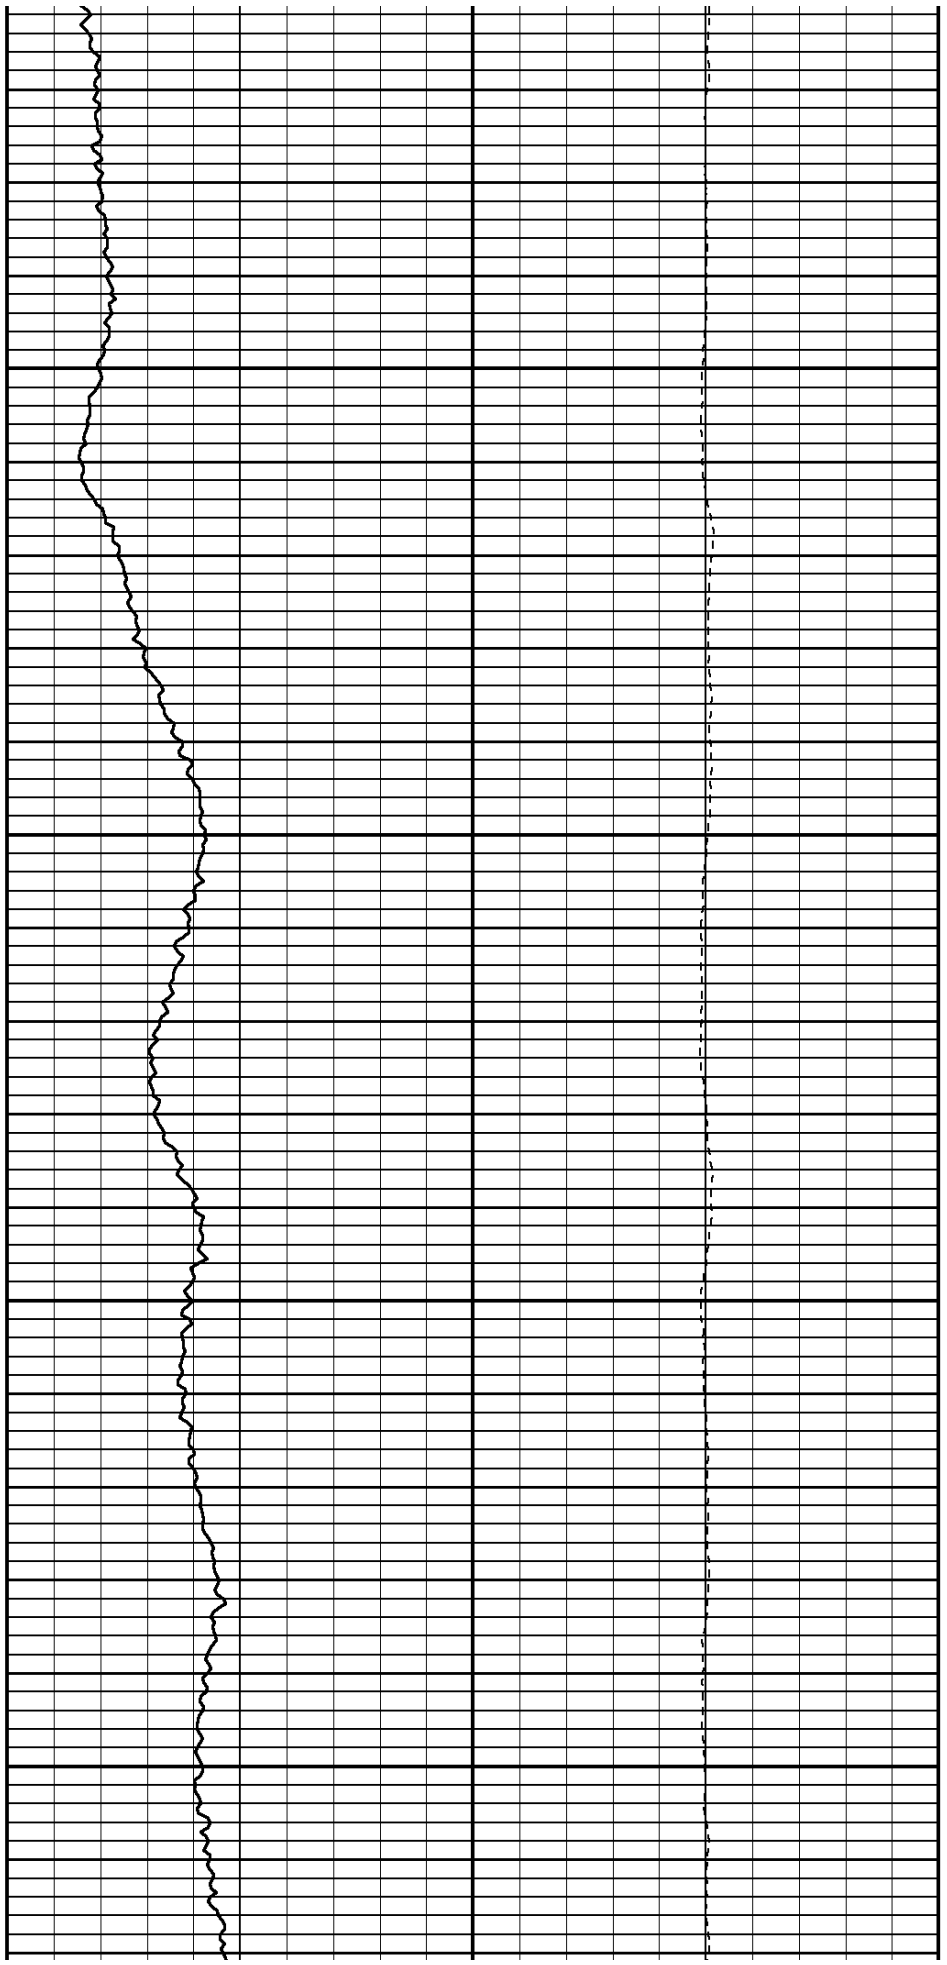


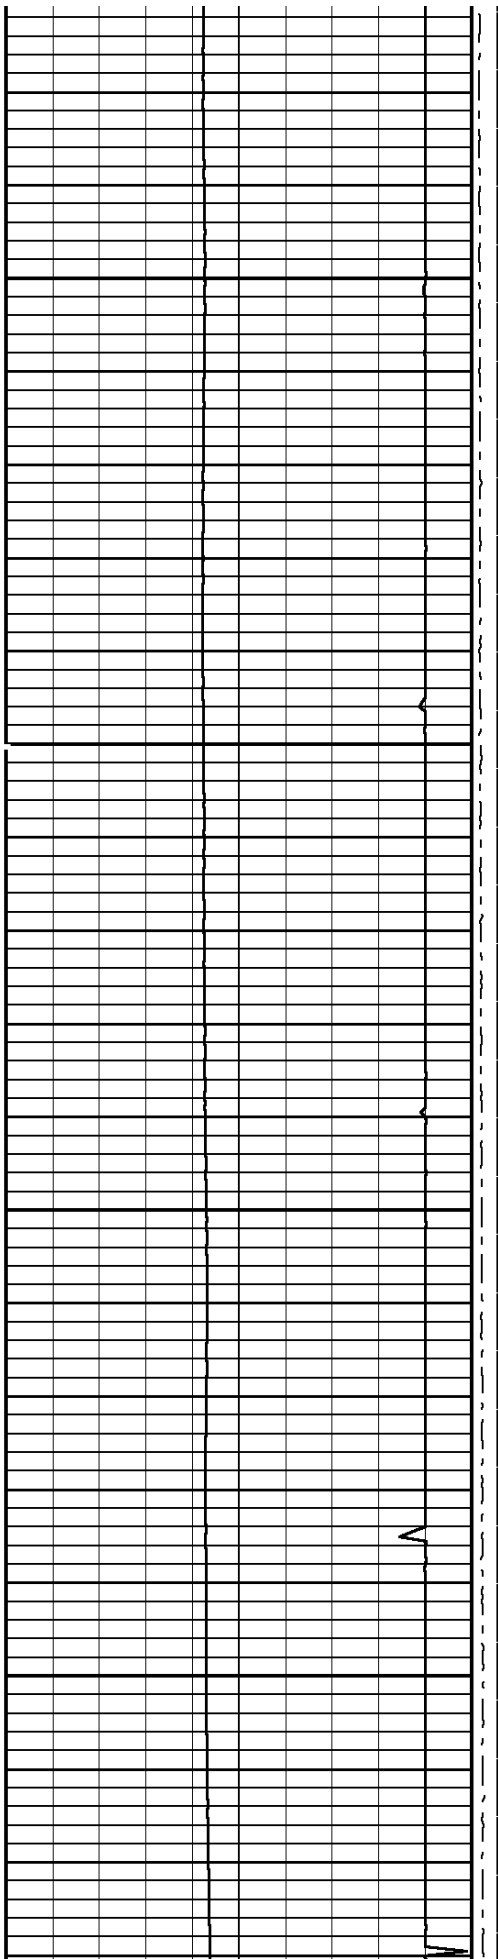

5700


5800

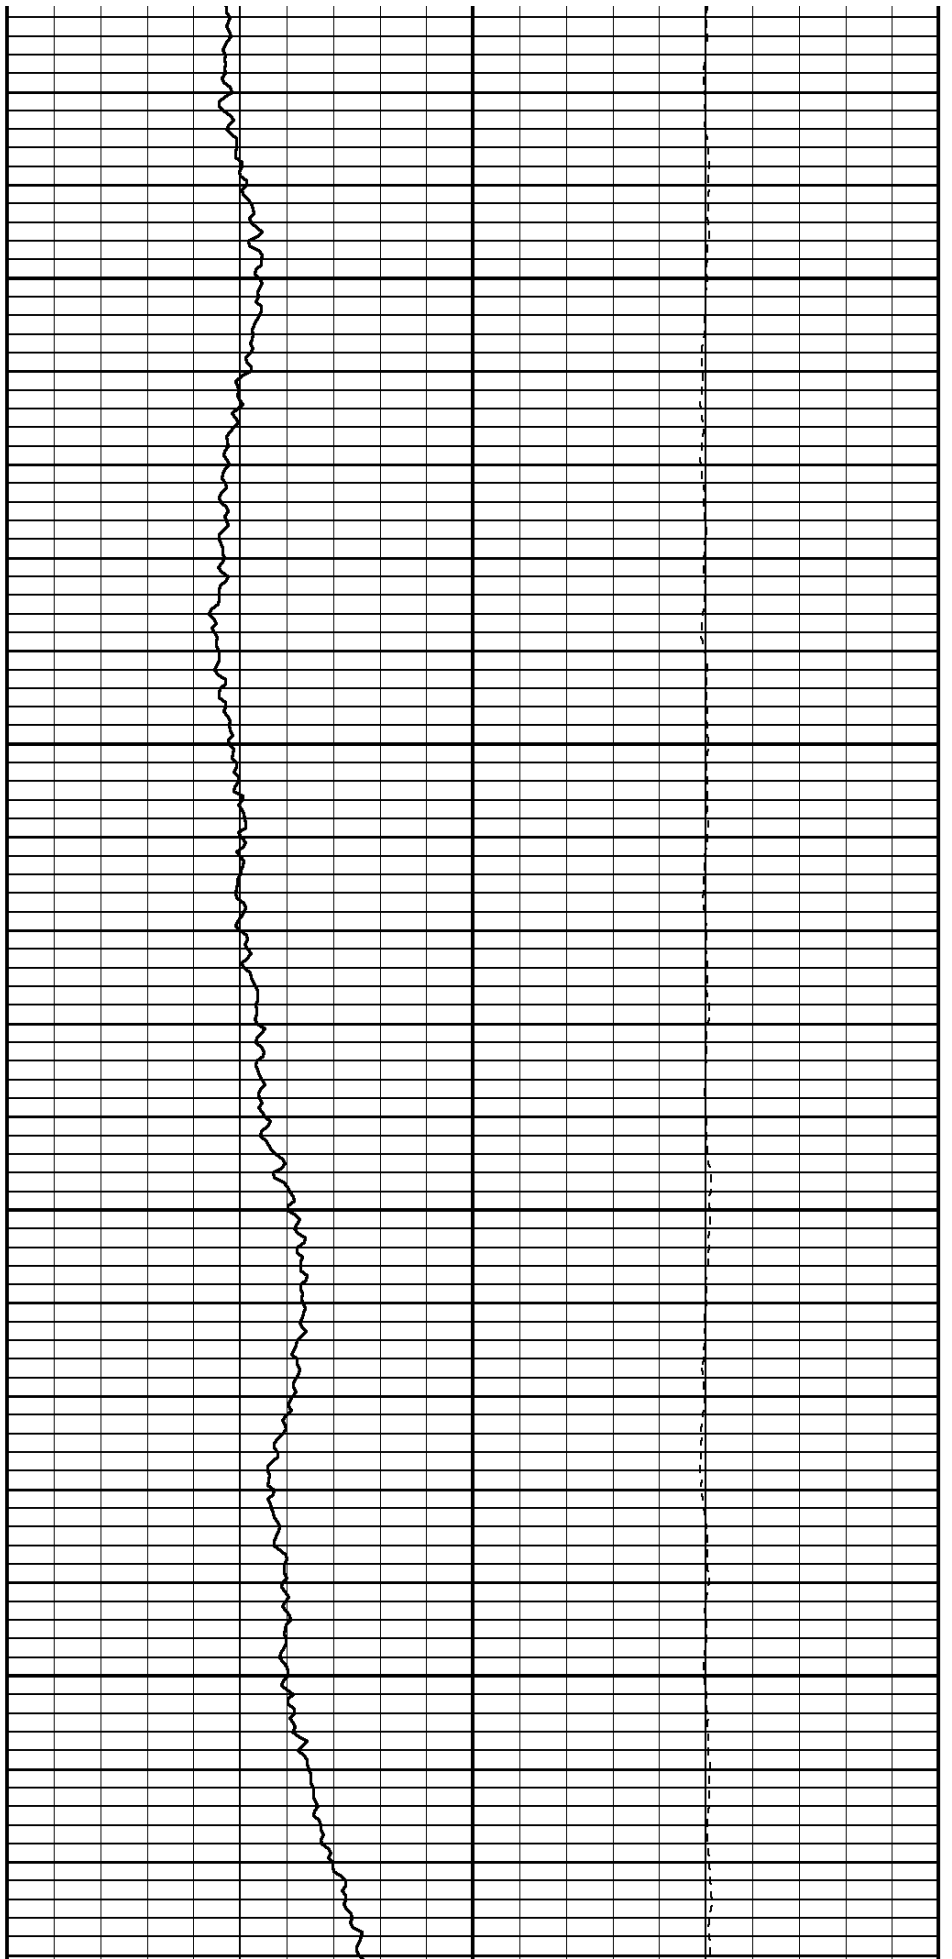


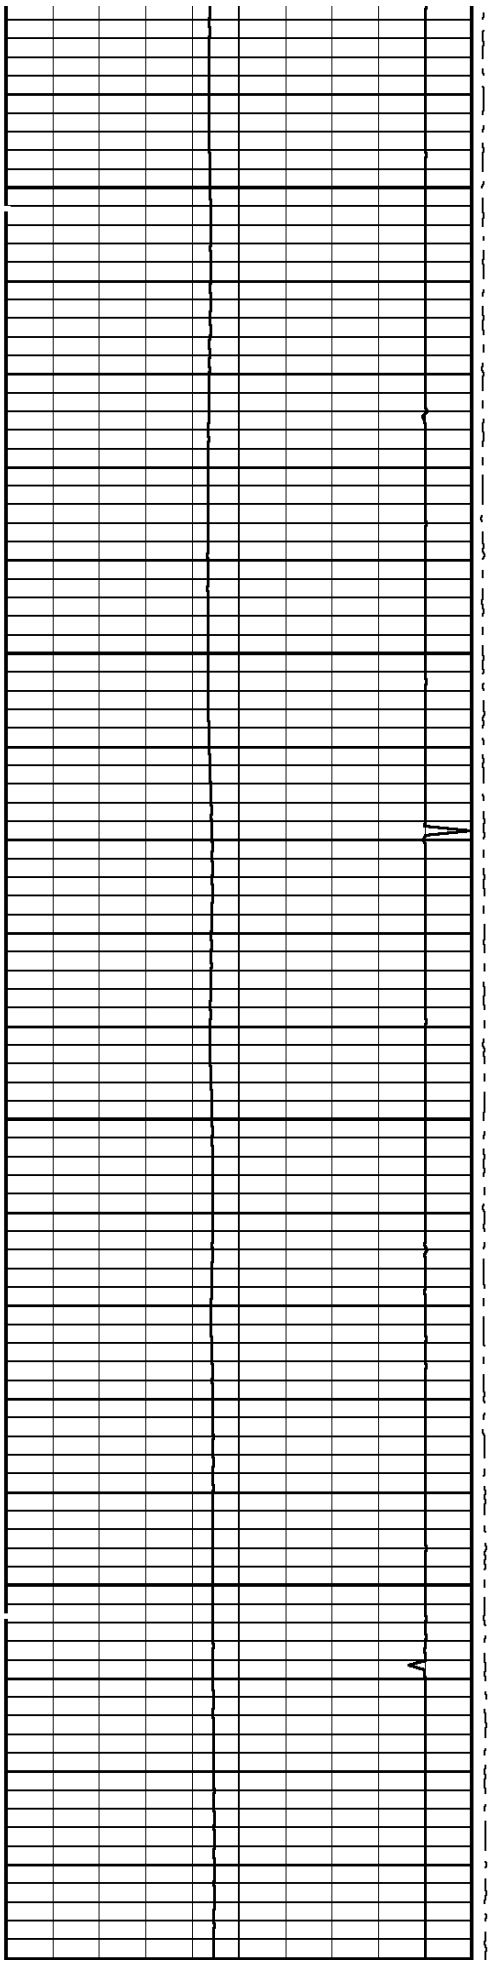

5900


6000

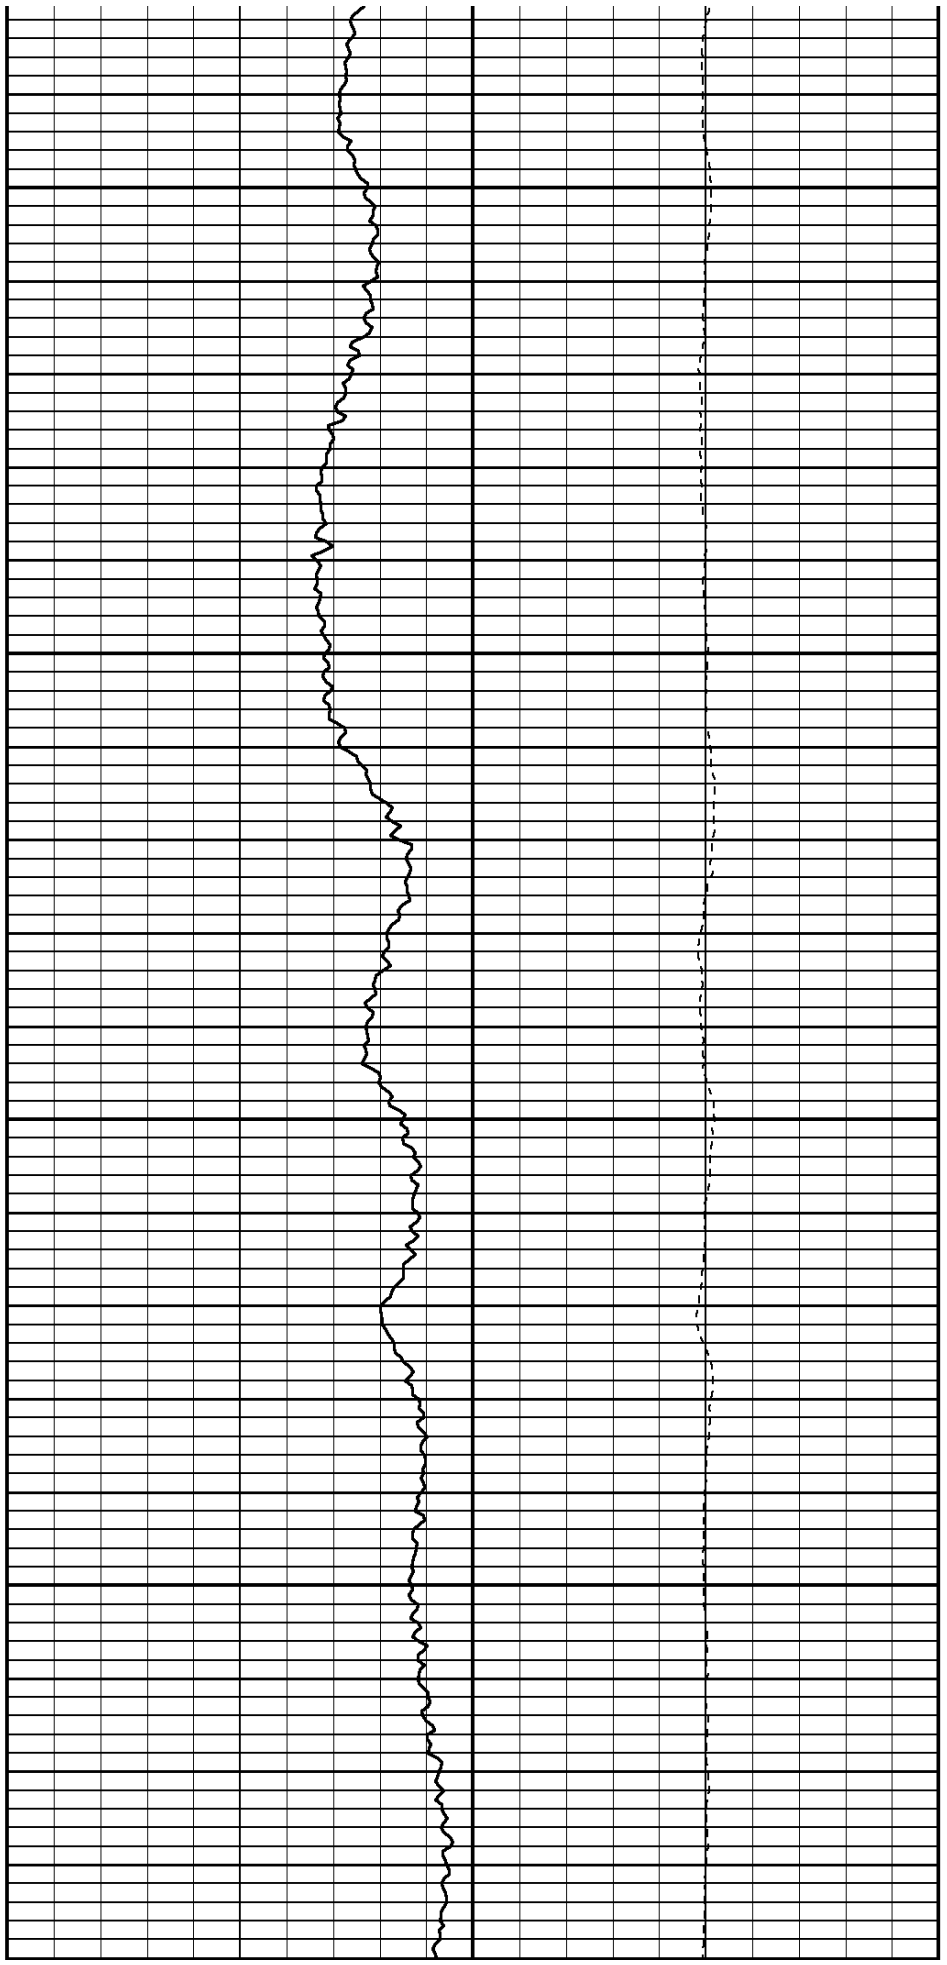


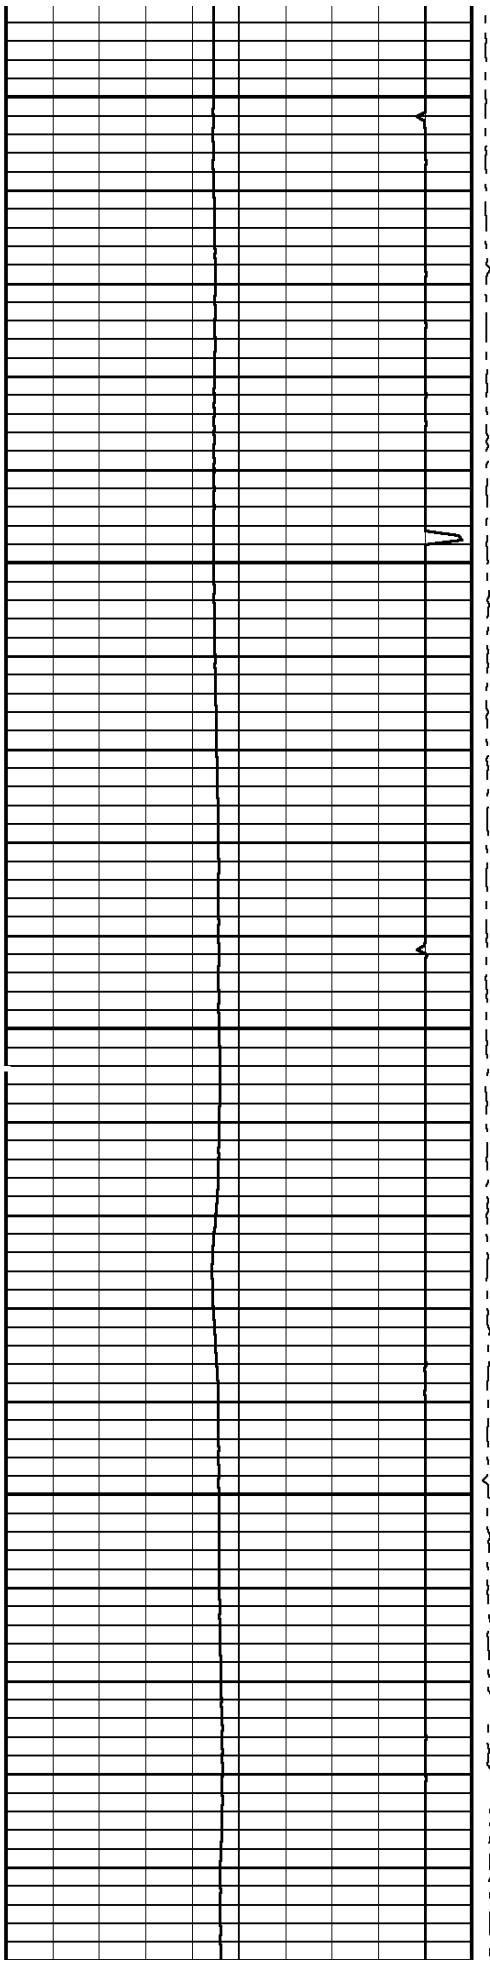

6100


6200

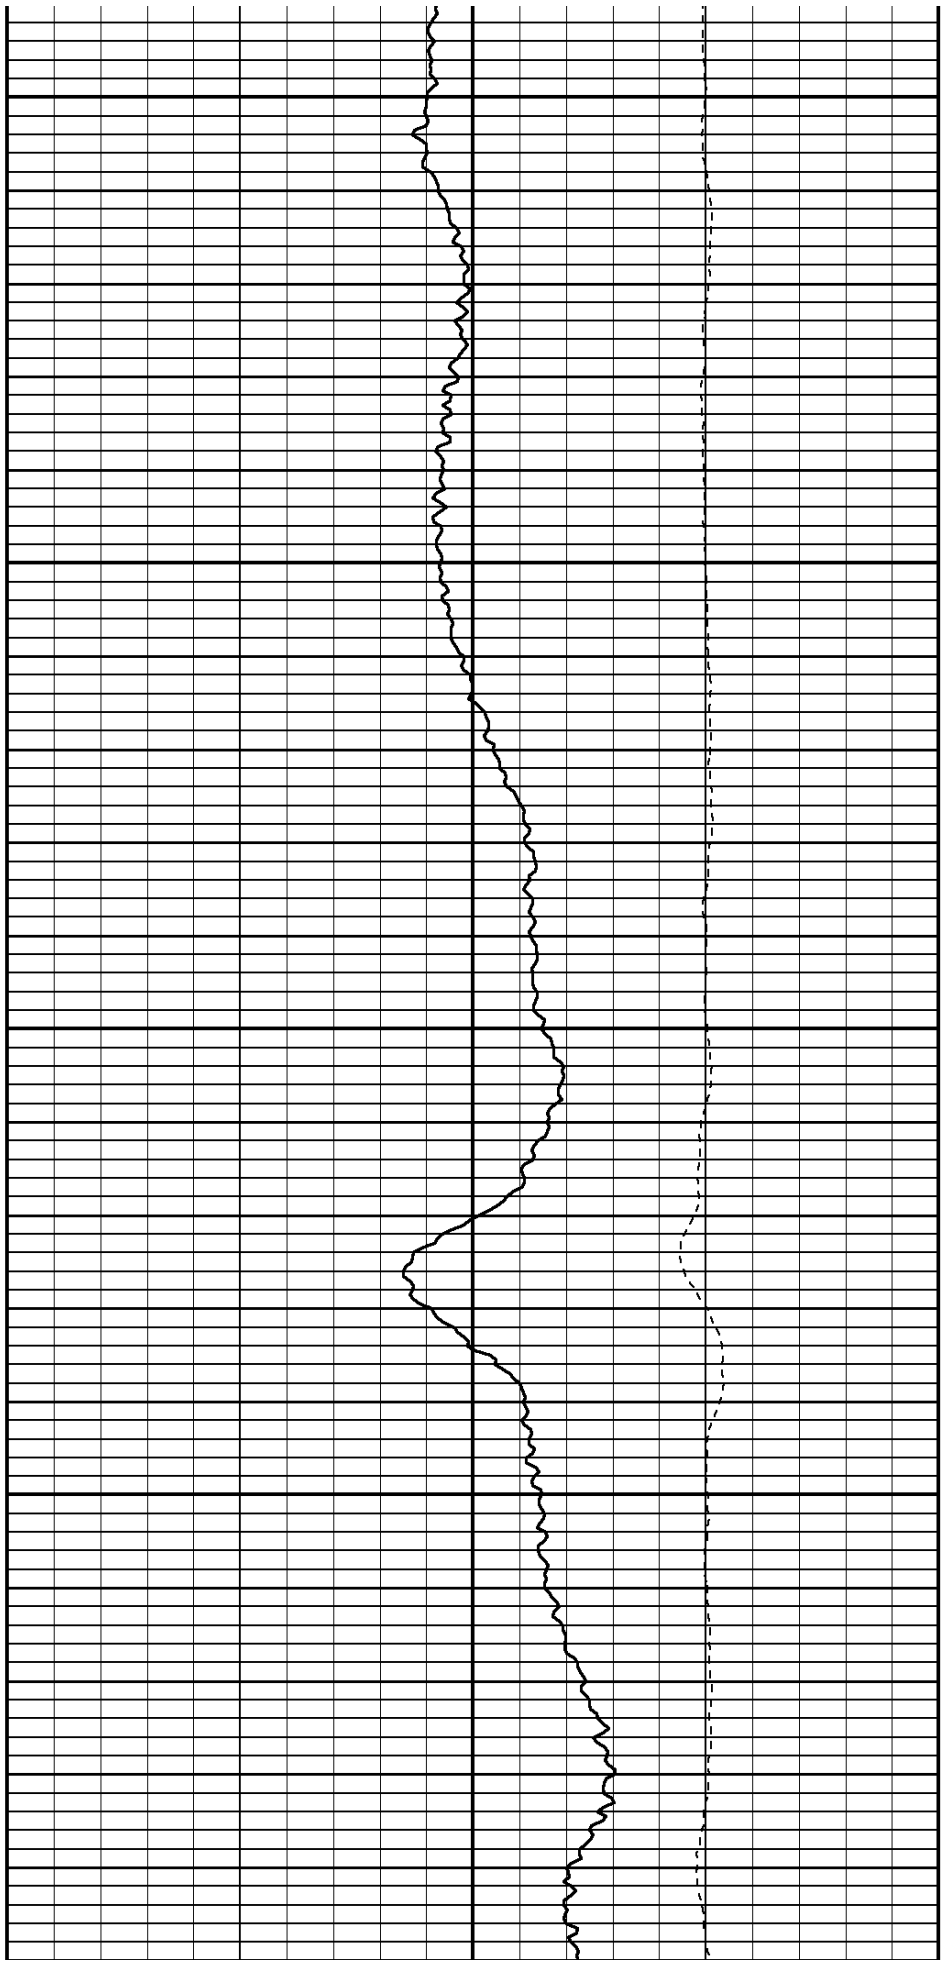


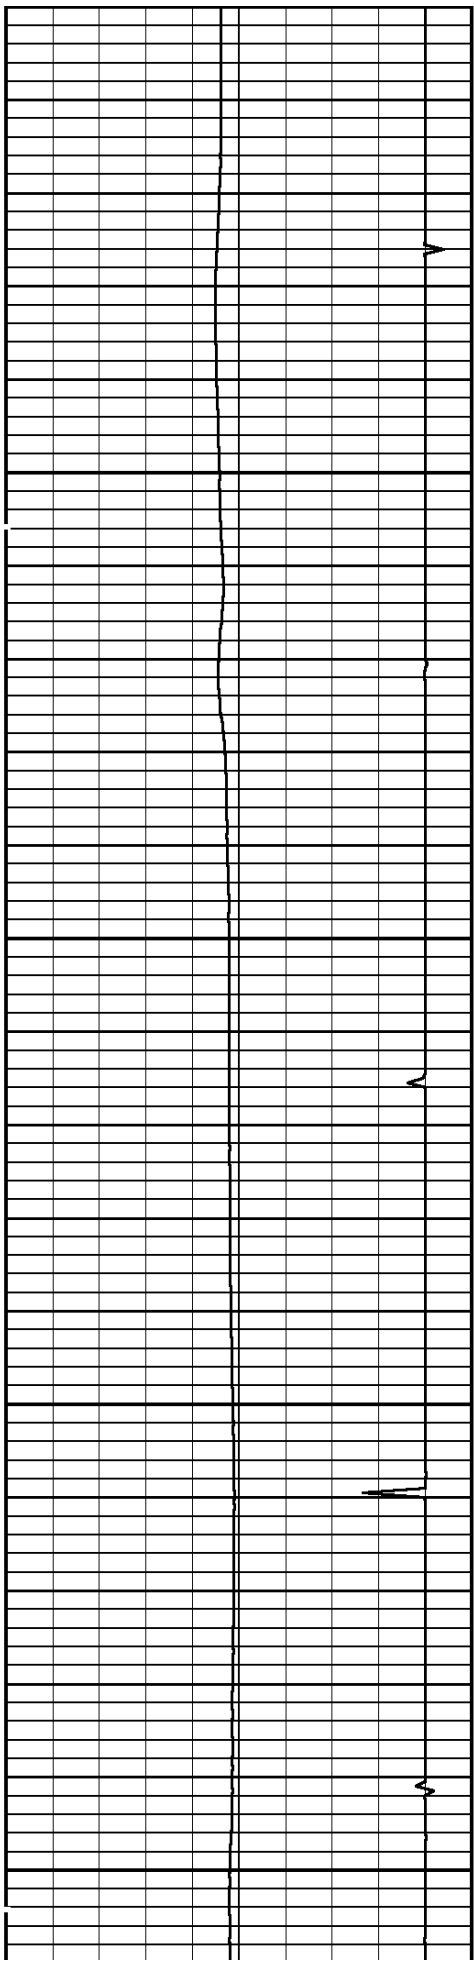

6300


6400

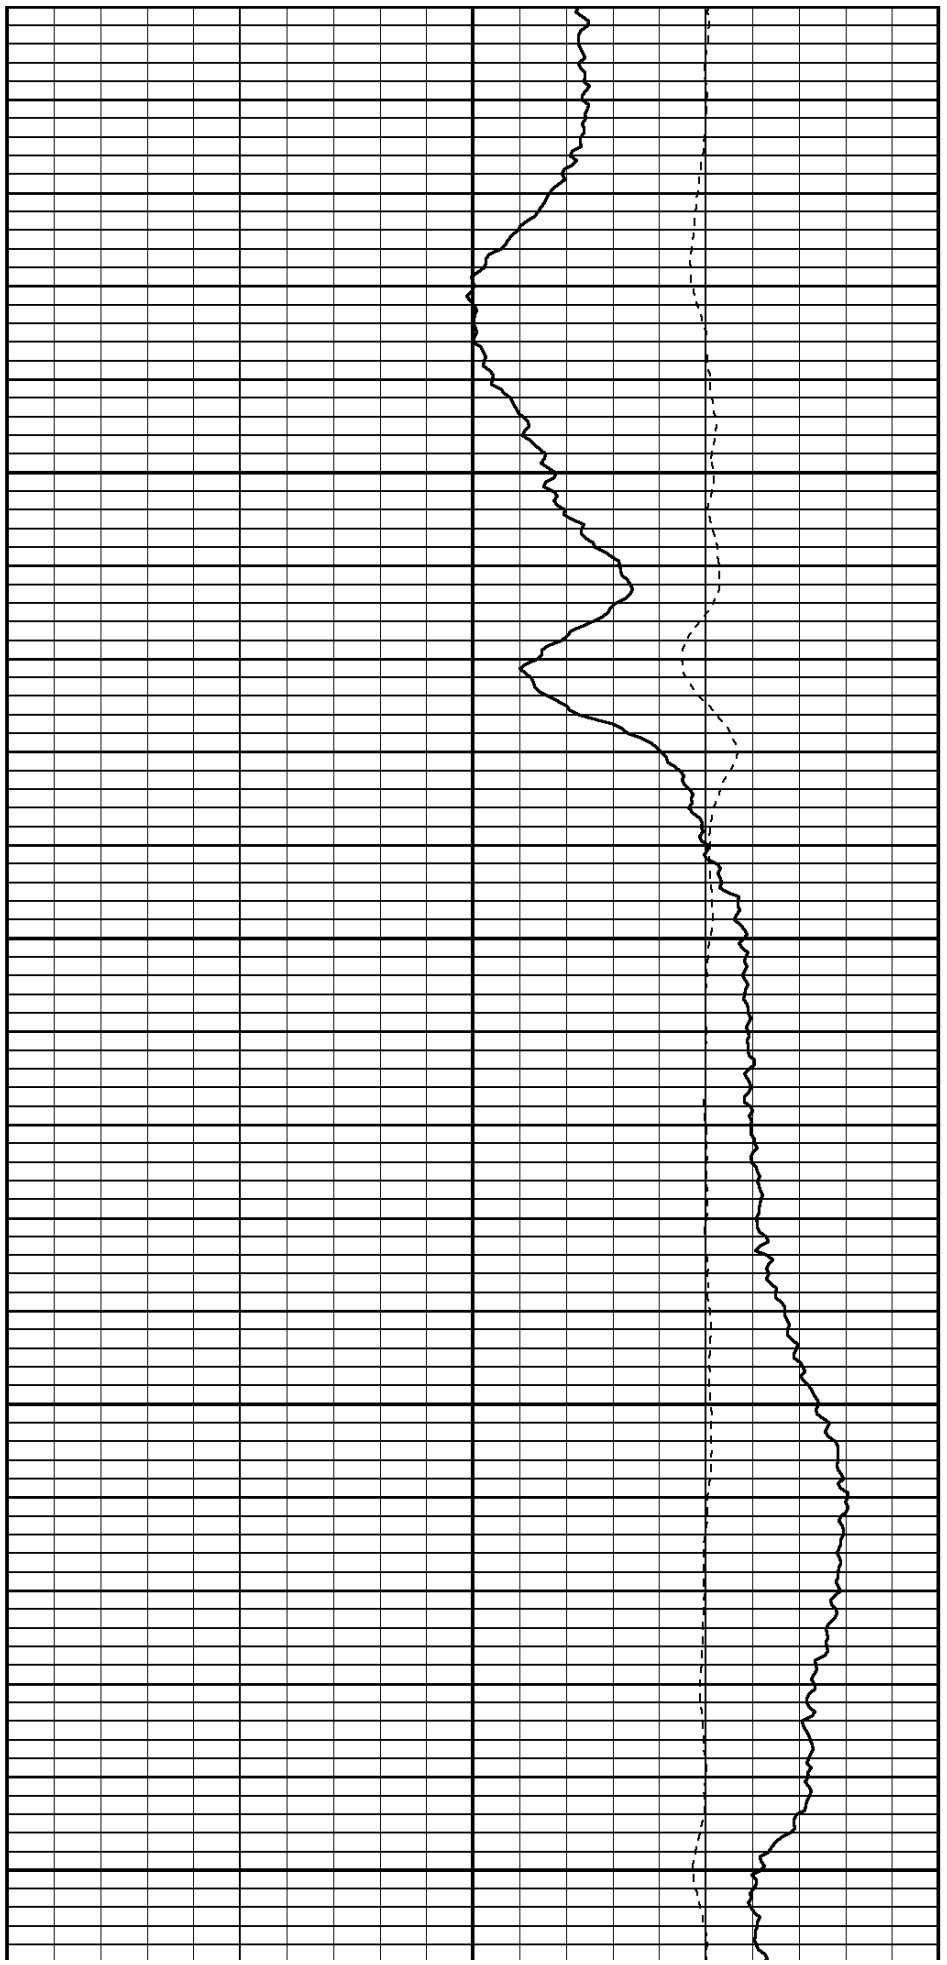


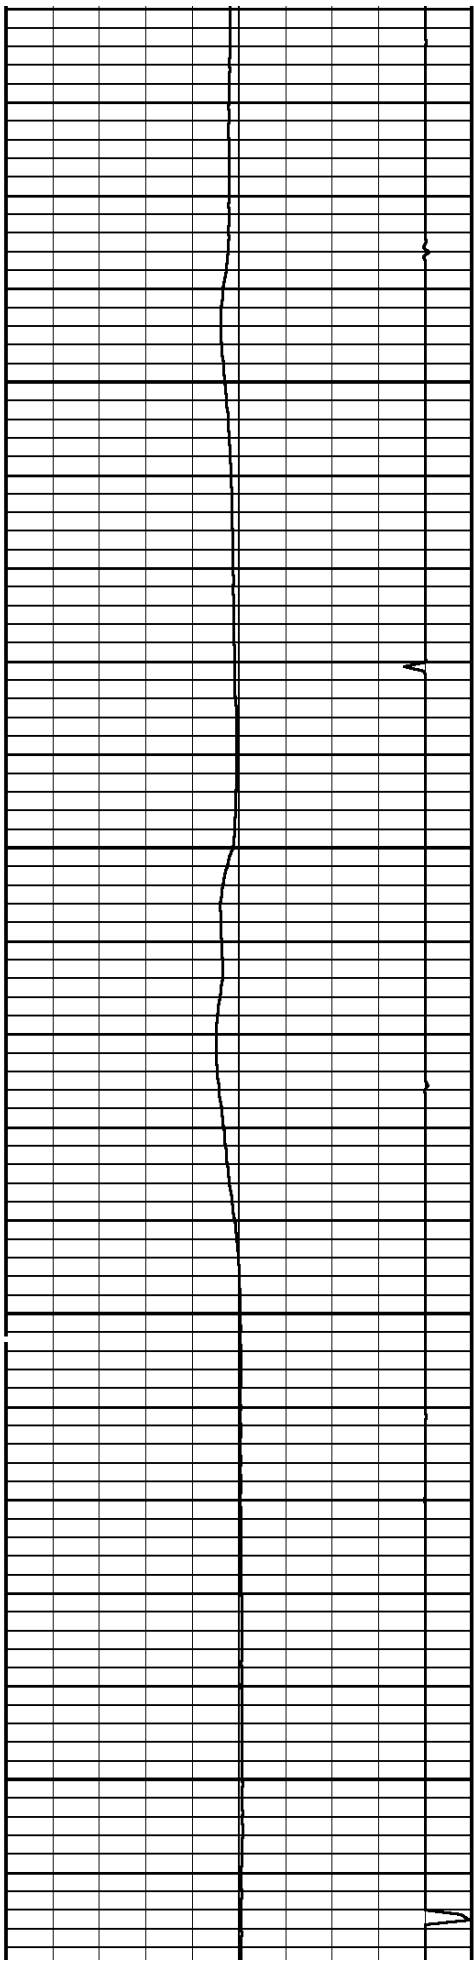

6500


6600

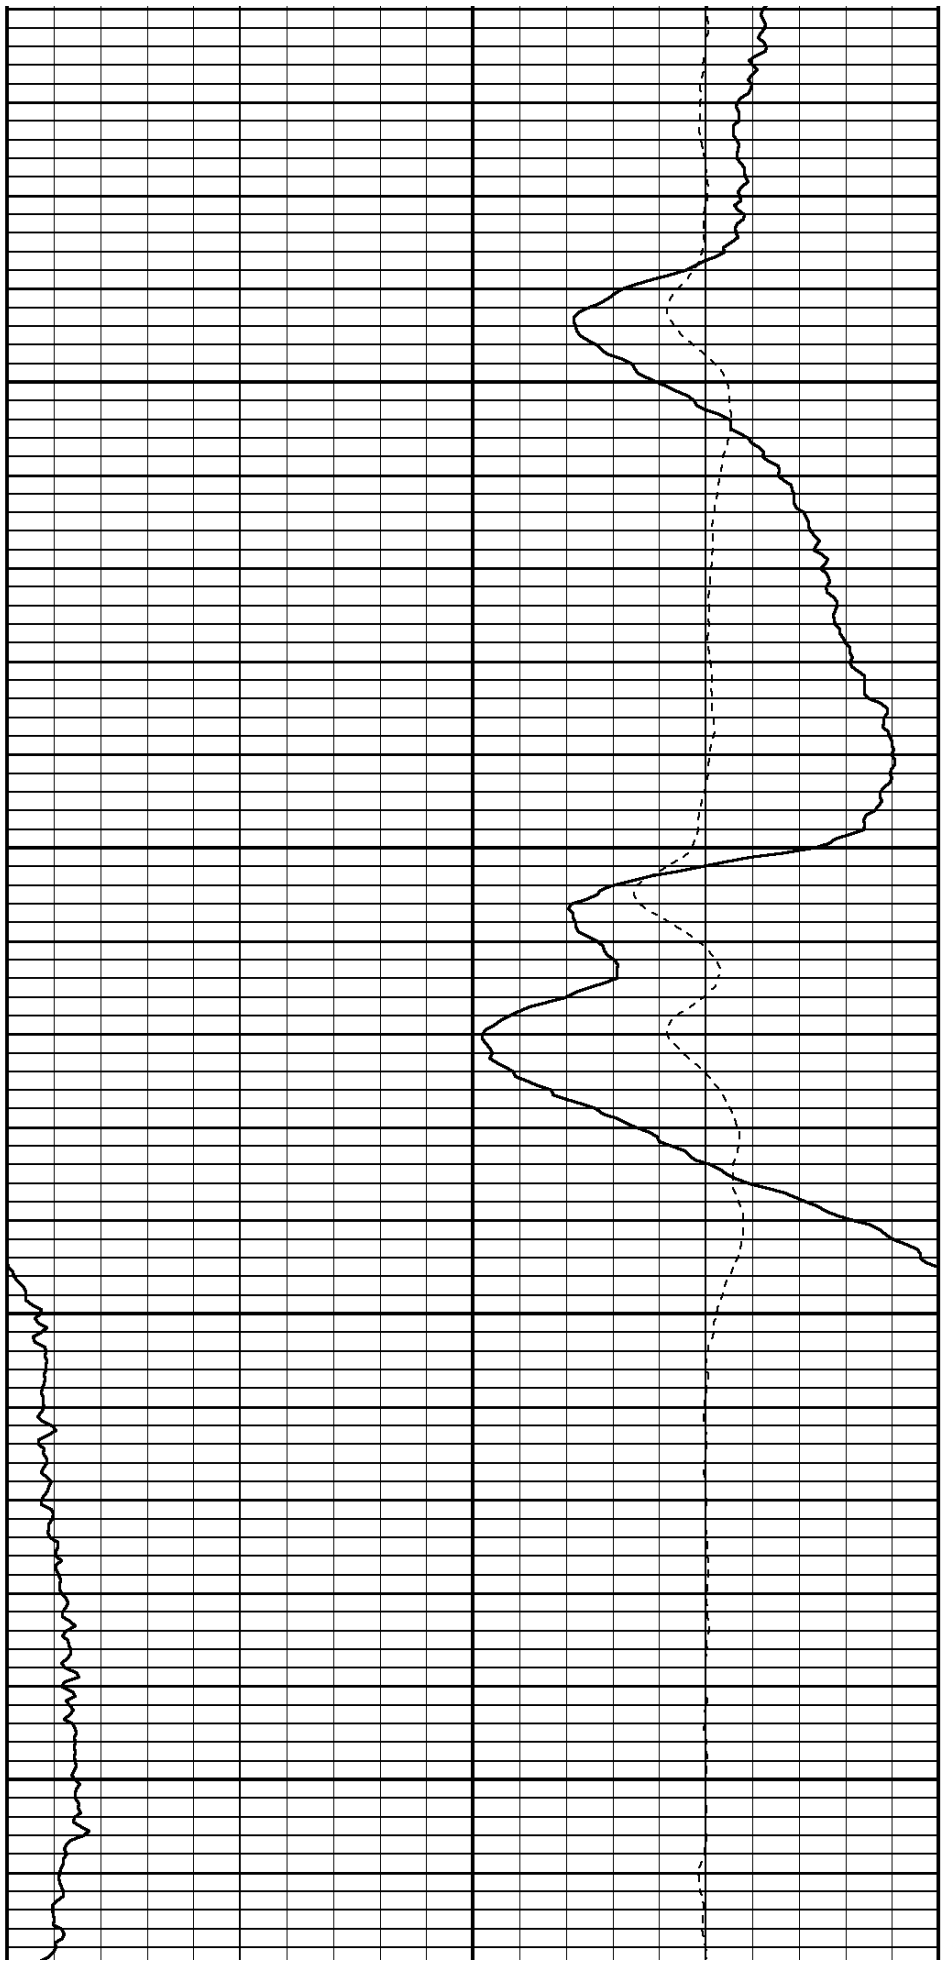


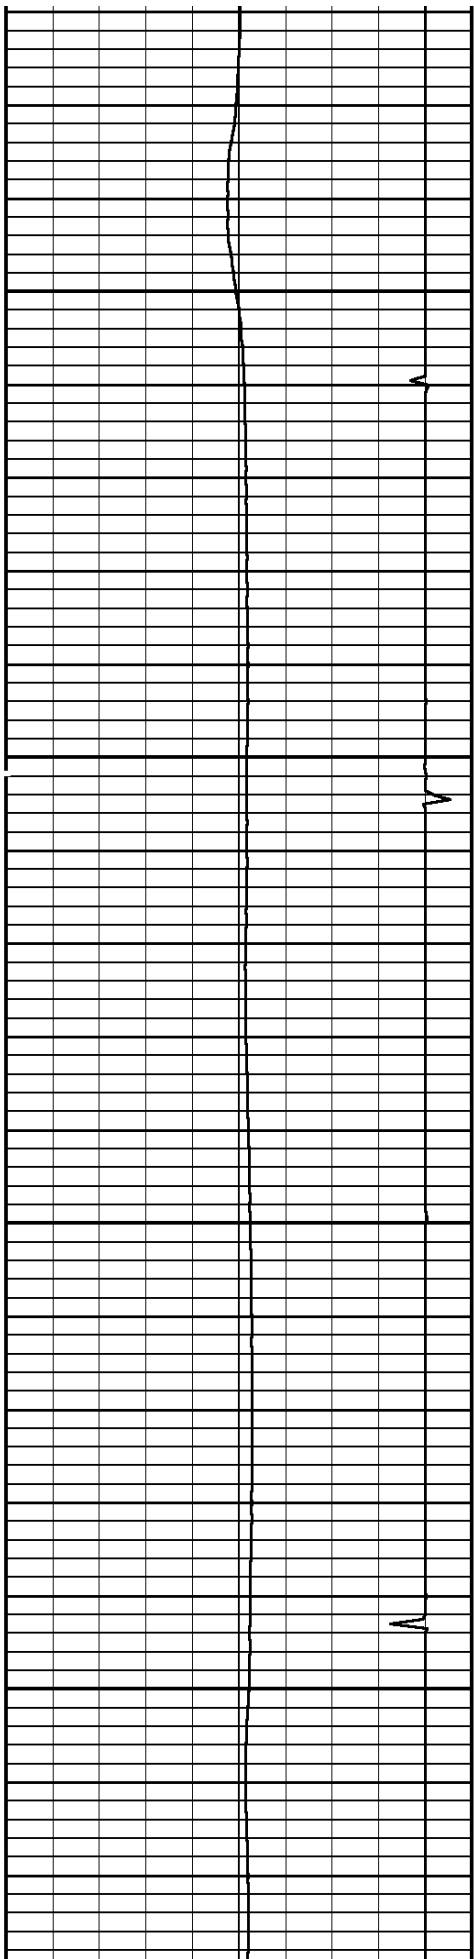

6700


6800

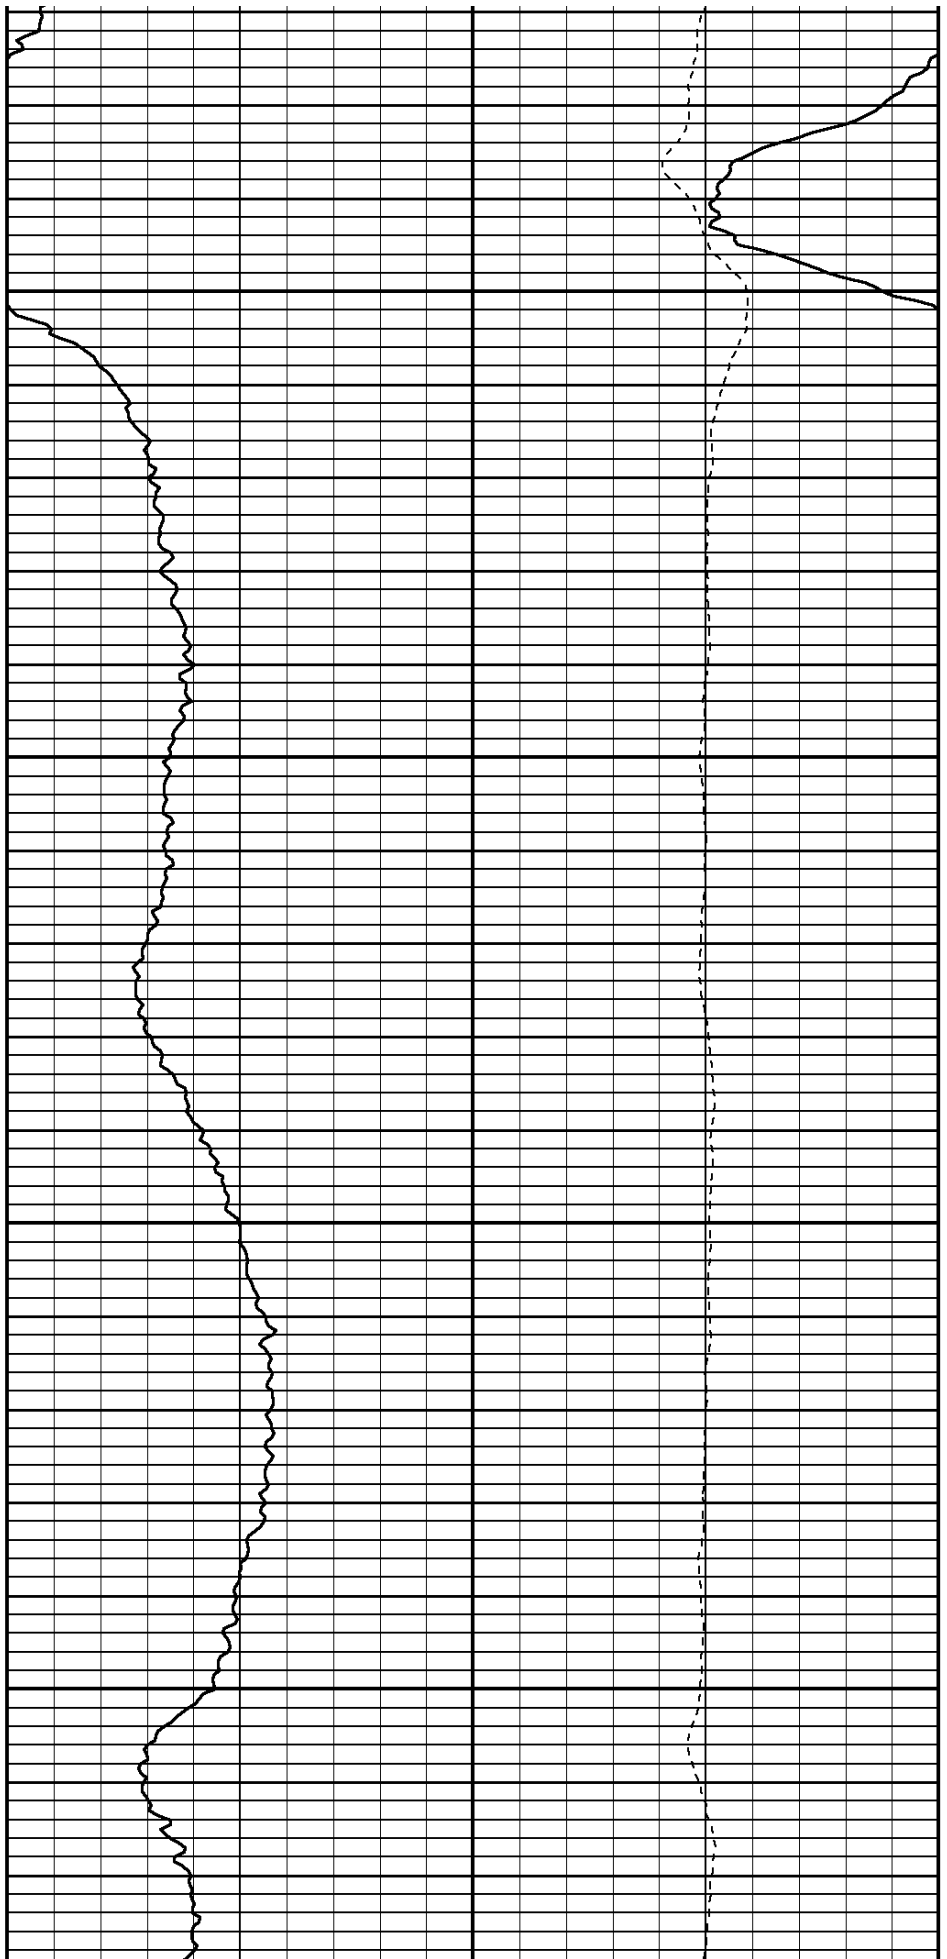


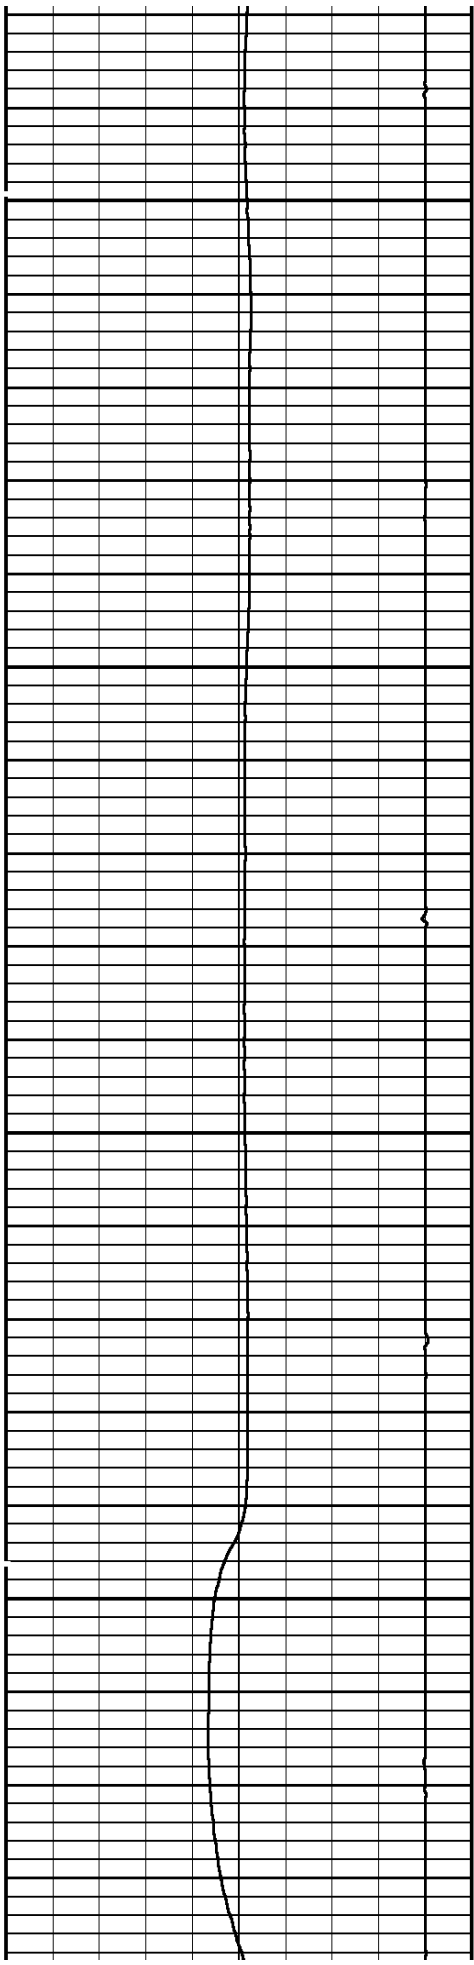

6900


7000

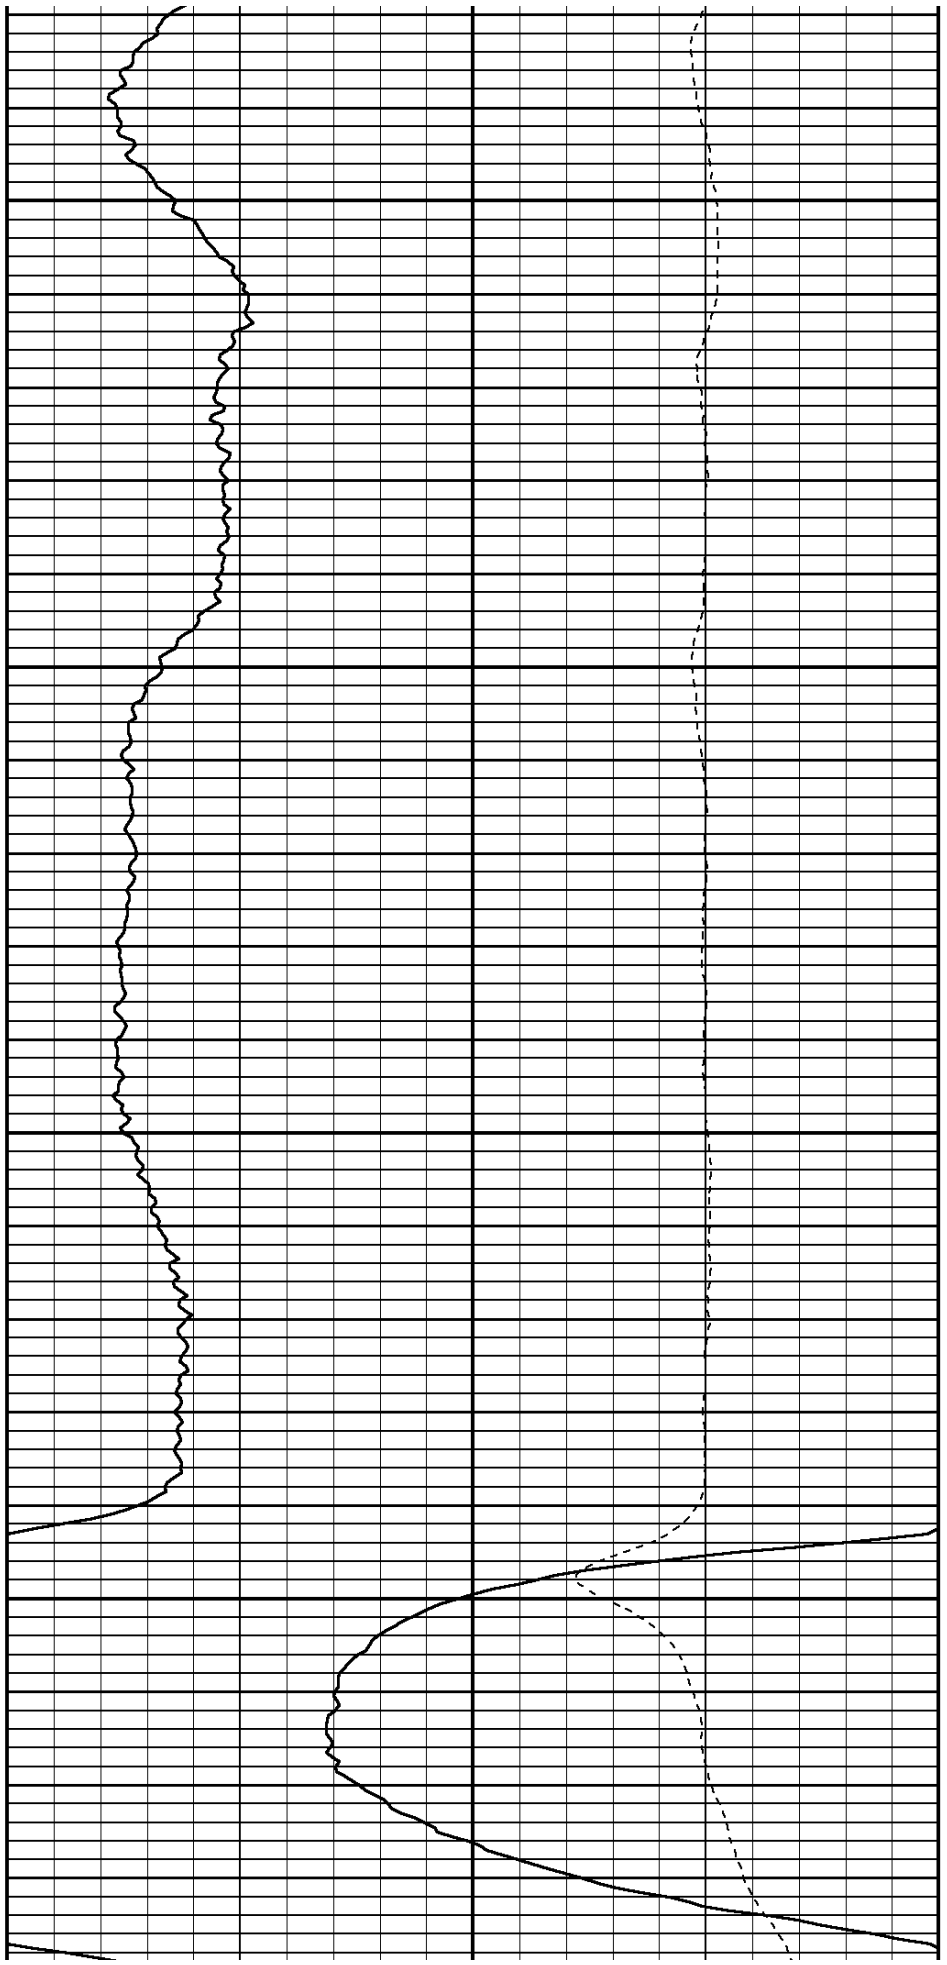


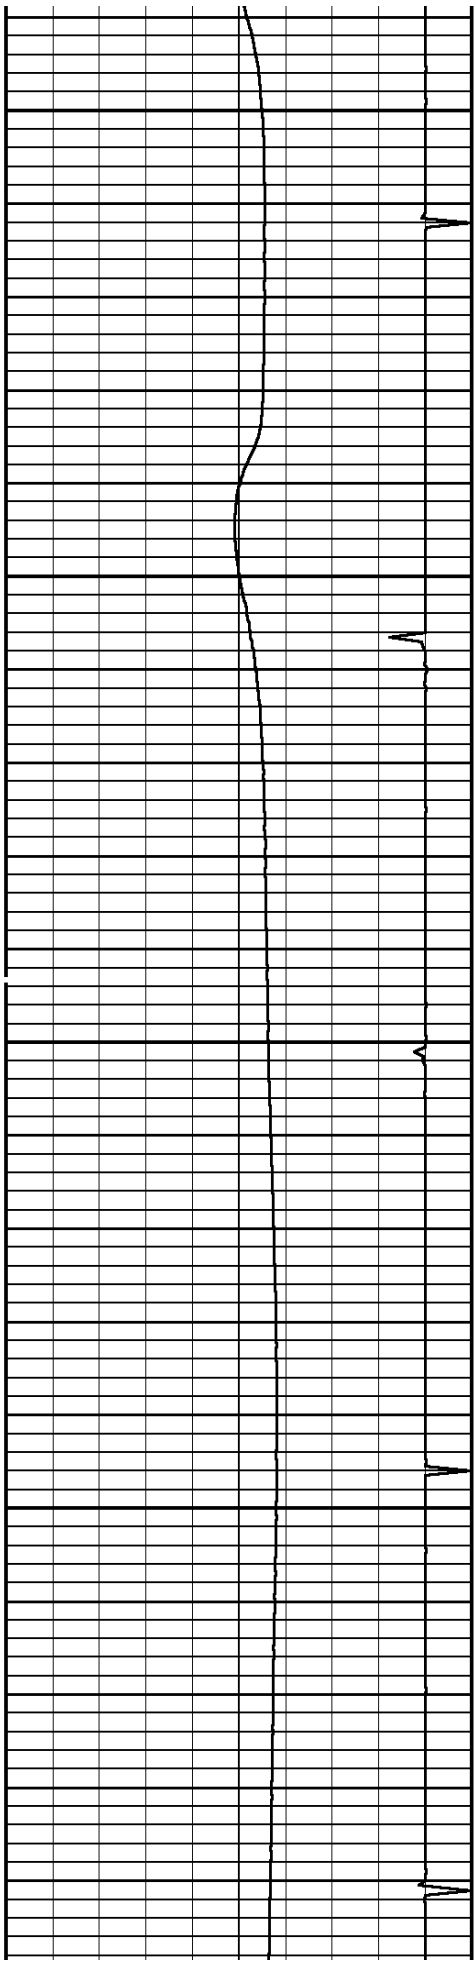

7100

7200

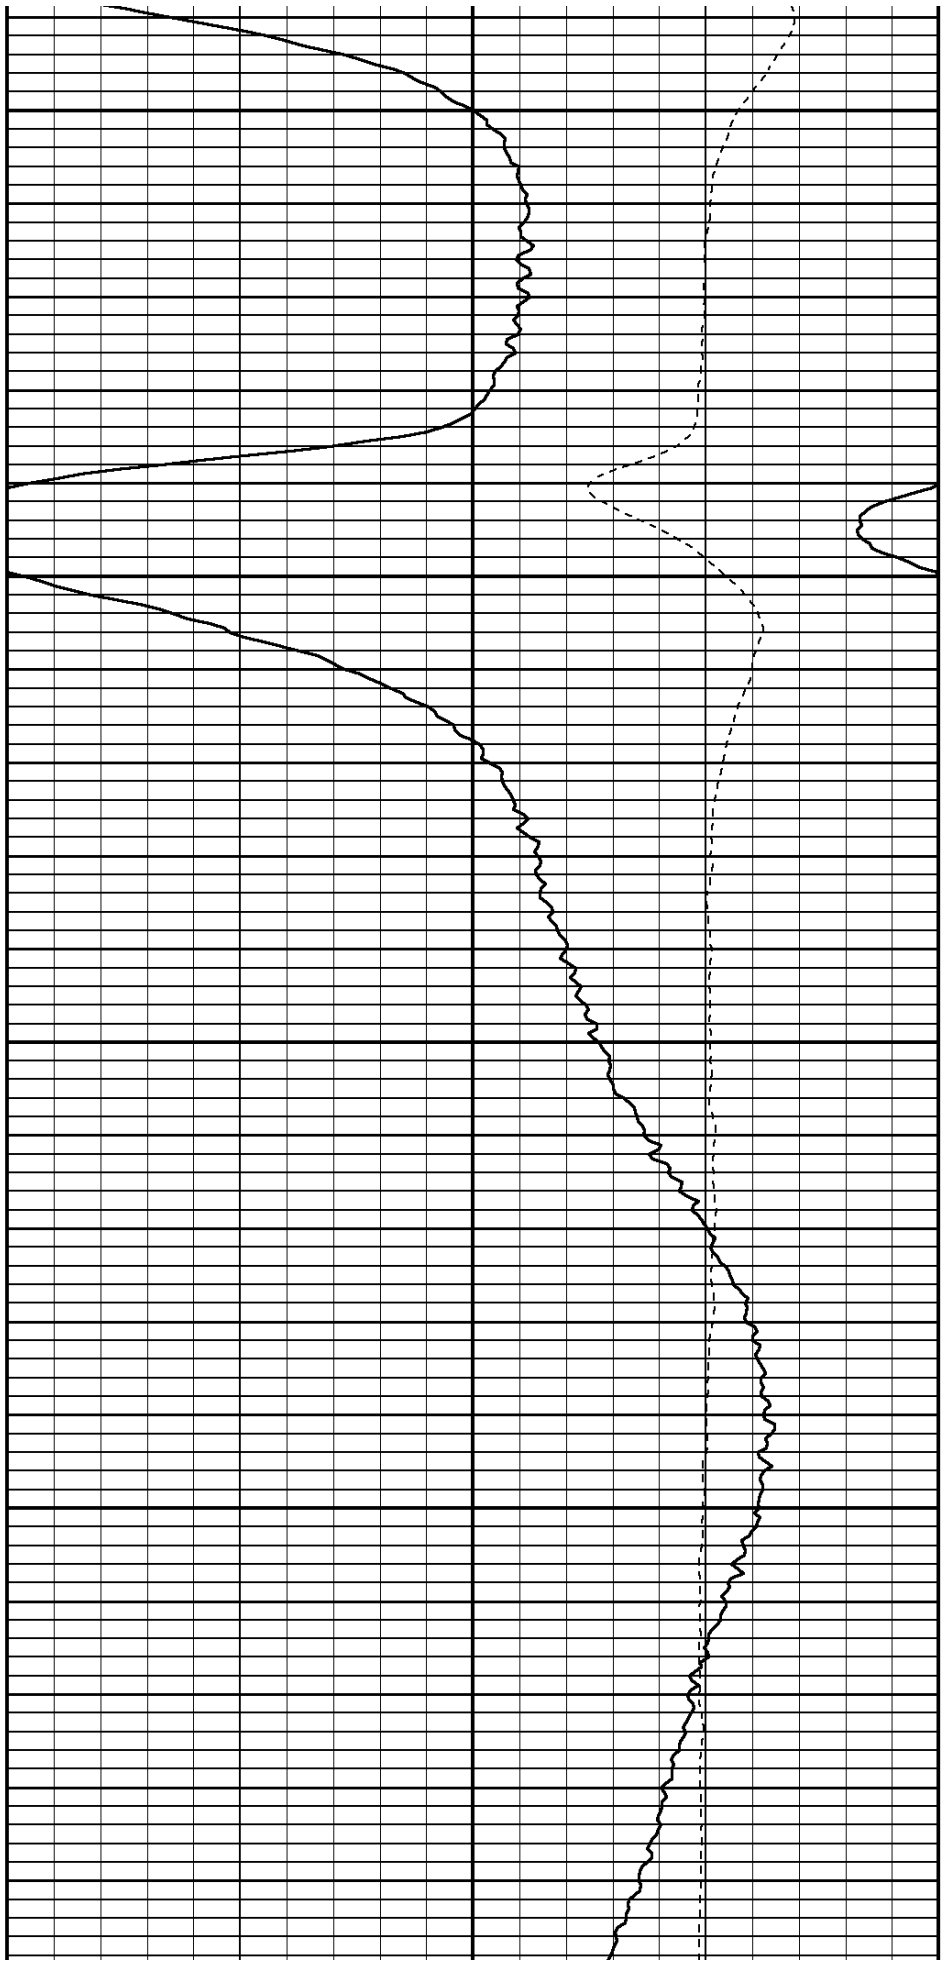

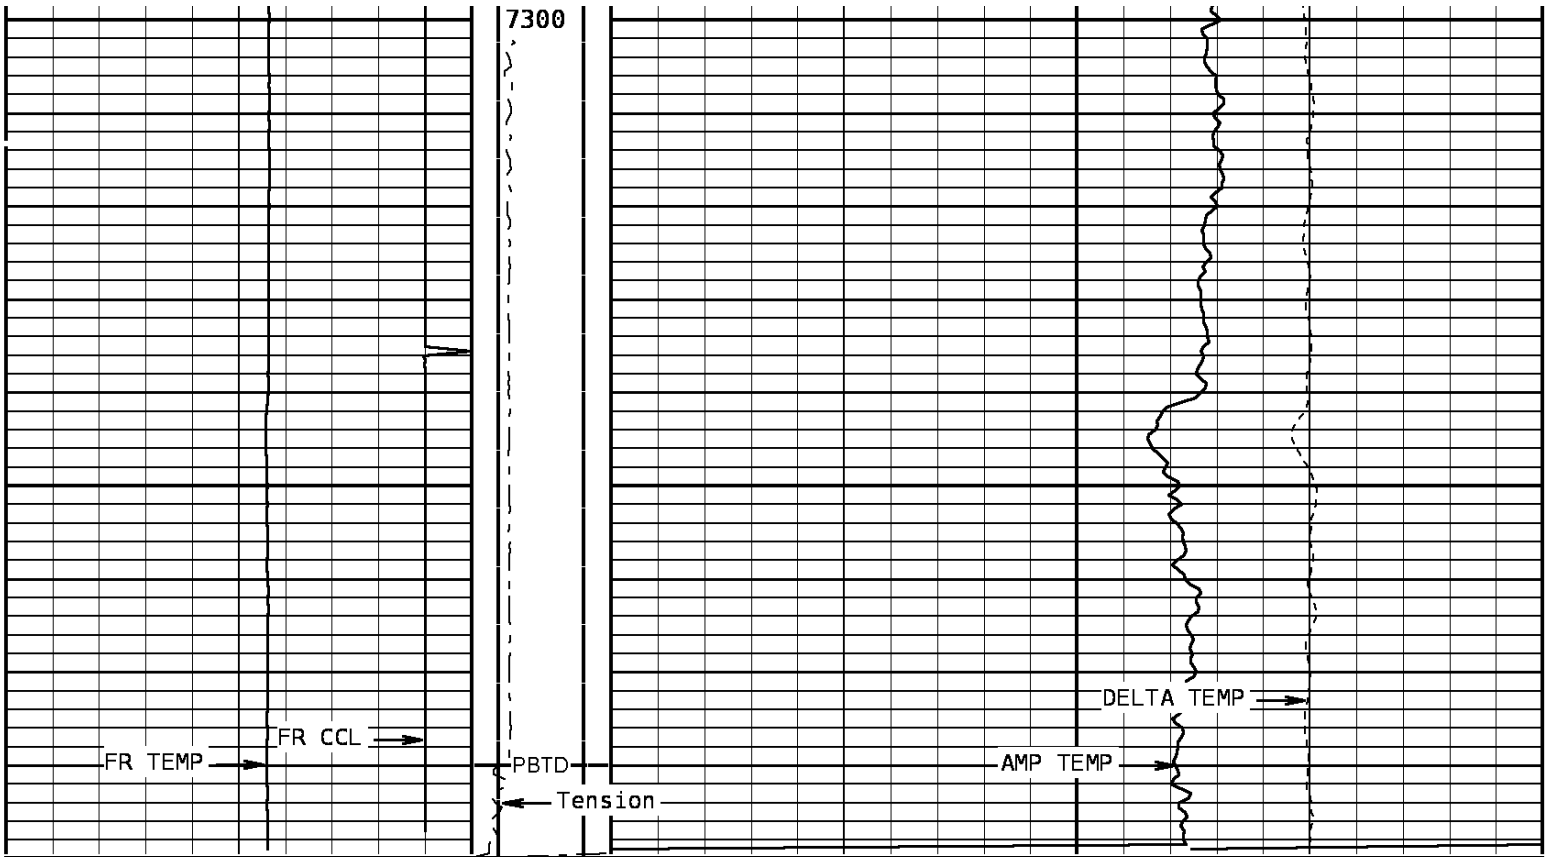

Temperature			Tension		Amp. Temperature			
60.0	DegreesFarenheit	260.0	-200	800	0.0	DegreesFarenheit	20.0	
Collar Locator			Delta Temperature					
-8000	Millivolts	880			-1.500		DegF/Foot	1.500


START DEPTH: **7390.0** DIRECTION: **UP** DATE: **09/25/2011** TIME: **17:13** MODE: **TRACE PLAYBACK**
177021 TLTMP

MAIN PASS

DEPTH SCALE: **5":100'** VERSION: **143R 2.0b"**

Cased Hole Cablehead

Weight 2.2 LBS.
 Length 1.0 FT.
 Max. Diameter 1.44 IN.
 Total Stack Weight 64.5 LBS in air
 Total Stack Length 12.29 FT.



Sinker Bar


Weight 49 LBS.
Length 7.0 FT.
Max. Diameter 1.69 IN.

Casing Collar Locator

Weight 3.1 LBS.
Length 1.79 FT.
Max. Diameter 1.375 IN.

Temperature

Weight 10.2 LBS
Length 2.5 FT.
Max. Diameter 1.375 IN.

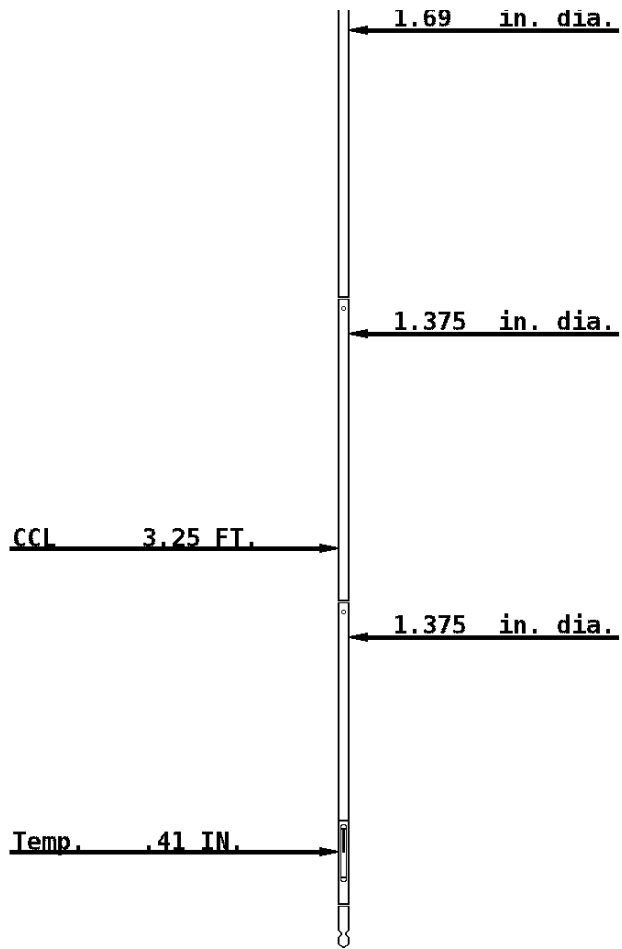

COMPANY BILL BARRETT CORPORATION

WELL KAUFMAN 31B-24-692

FIELD MAMM CREEK

COUNTY GARFIELD

STATE COLORADO



Weatherford®