

Well

Francis Arens 4-6-15

Operator
Location
County
State
Field
Footages
API #

EnCana Oil & Gas (USA) Inc.
SWSE Sec. 15-T4N-R65W
Weld
Colorado
Wattenberg
554' FSL & 2028' FEL
05-123-24250-0000

Spud Date: 11-21-2006
TD Date: 11-27-2006

Log Tops

Sussex	4326'
Sussex Mkr.	4426'
Sharon Spgs	6780'
Niobrara	6820'
Codell	7108'
J Sand	7584'

CFP

Set @ 7000'. 12-15-06
Drilled out on 02-05-07

CFP

Set @ 7210'. 12-10-06
Drilled out on 02-05-07

CFP


Set @ 6990'. 11-26-11
Drilled out on 12-30-11

CIBP

Set @ 7180'. 11-26-11

Production Tubing

2-3/8" tubing, set @ 7050'
1/3/12

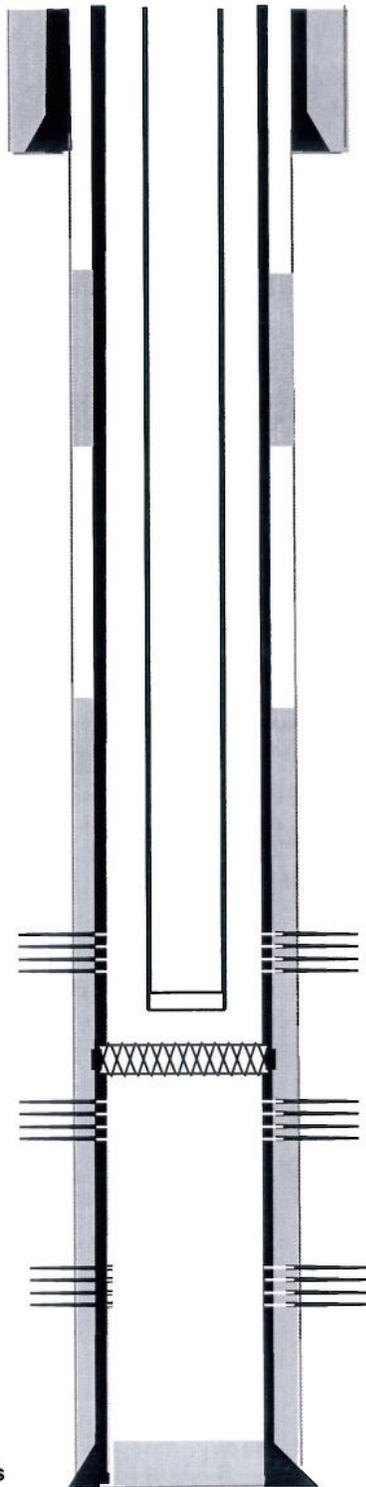

Surface Casing and Cement

8 5/8" , 24#, landed @ 579' cemented with 260 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , 11.6#, landed @ 7772' , cemented with 280 sxs

DV Tool

Set @ 4856' , cemented above DV tool with 210 sxs

Niobrara Refrac

Frac'd 6820'-6836' , 6920'-6934' w/ 182,404 gal frac fluid and 249,480# sand. 11-26-11

Codell Refrac

Frac'd 7108' - 7126' w/ 113,168 gal frac fluid and 220,000# sand. 11-26-11

Perf'd the Niobrara from 6820'-6836' , 6920'-6934' @ 2 spf, 60 holes

Frac'd the Niobrara with 147,250 gal frac fluid and 250,200# sand. 12-15-06

Perf'd the Codell from 7108' - 7126' @ 4 spf, 72 holes

Frac'd the Codell with 114,114 gal frac fluid and 250,120# sand. 12-15-06

Perf'd the J Sand 7586'-7590' , 7596'-7606' , 7620'-7646' @ 2 spf, 80 holes

Frac'd the J Sand with 161,498 gal frac fluid and 250,040# sand. 12-10-06

7785' — Driller's TD