

HALLIBURTON

DUAL SPACED NEUTRON
SPECTRAL DENSITY
ARRAY COMPENSATED
TRUE RESISTIVITY

LARAMIE ENERGY HAWXHURST 19-13A BRUSH CREEK MESA CO				COMPANY	LARAMIE ENERGY	
				WELL	HAWXHURST 19-13A	
				FIELD	BRUSH CREEK	
				COUNTY	MESA	STATE CO
API No. 05077101660000 Location SHL SEC 24, 1349' FSL AND 602' FEL, T9S R95W BHL SEC 19, 1080' FSL AND 647' FWL, T9S R94W				Other Services: RWCH		
COMPANY	WELL	FIELD	COUNTY	STATE	CO	
Permanent Datum	GL	Elev. 6354.0 ft				
Log measured from	KB	21.0 ft above perm. Datum				
Drilling measured from	KB	G.L. 6354.0 ft				
Date	16-Oct-11	05-Oct-11				
Run No.	TWO	ONE				
Depth - Driller	10625.00 ft	6636.00 ft				
Depth - Logger	10630.0 ft	6633.0 ft				
Bottom - Logged Interval	10627.0 ft					
Top - Logged Interval	6510.0 ft					
Casing - Driller	7.000 in @ 6514.0 ft	9.625 in @ 1547.0 ft				
Casing - Logger	6510.0 ft	1542.0 ft				
Bit Size	6.250 in	8.750 in				
Type Fluid in Hole	WBM	WBM				
Density	11.5 ppq	9.6 ppq	60.00 s/qt			
PH	9.00 pH	6.2 cphn	9.50 pH	7.0 cphn		
Source of Sample	FLOW LINE	MUD TANK				
Rm @ Meas. Temperature	2.380 ohmm @ 75.00 degF	1.480 ohmm @ 72.00 degF				
Rmf @ Meas. Temperature	1.48 ohmm @ 75.00 degF	1.24 ohmm @ 75.00 degF				
Rmc @ Meas. Temperature	3.609 ohmm @ 75.00 degF	1.242 ohmm @ 75.00 degF				
Source Rmf	CHART	CHART				
Rm @ BHT	0.79 ohmm @ 240.0 degF	0.61 ohmm @ 185.0 degF				
Time Since Circulation	10.8 hr	10.0 hr				
Time on Bottom	16-Oct-11 21:17	05-Oct-11 12:04				
Max Rec. Temperature	240.0 degF @ 10625.0 ft	185.0 degF @ 6633.0 ft				
Equipment	11014853	GJ, CO	11014853	GJ, CO		
Recorded By	B. DRAKE	J. KRONABLE				
Witnessed By	K. CLAUSSEN	KELLY CLAUSSEN				

Fold here

Service Ticket No.: 8512723						API Serial No.: 05077101660000						PGM Version: WL INSITE R3.4.0 (Build 4)											
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE												RESISTIVITY SCALE CHANGES											
Date		Sample No.										Type Log		Depth		Scale Up Hole		Scale Down Hole					
Depth-Driller																							
Type Fluid in Hole																							
Density		Viscosity																					
Ph		Fluid Loss																					
Source of Sample												RESISTIVITY EQUIPMENT DATA											
Rm @ Meas. Temp				@		@				Run No.		Tool Type & No.		Pad Type		Tool Pos.		Other					
Rmf @ Meas. Temp.				@		@				TWO		ACRT-		N/A		FREE		N/A					
Rmc @ Meas. Temp.				@		@						I777S201											
Source Rmf		Rmc																					
Rm @ BHT				@		@																	
Rmf @ BHT				@		@																	
Rmc @ BHT				@		@																	
EQUIPMENT DATA																							
GAMMA				ACOUSTIC								DENSITY				NEUTRON							
Run No.		TWO		Run No.				Run No.		TWO		Run No.		TWO									
Serial No.		11602915		Serial No.				Serial No.		10950493		Serial No.		10981426									
Model No.		GTET		Model No.				Model No.		SDLT-I		Model No.		DSNT-I									
Diameter		3.625"		No. of Cent.				Diameter		4.5"		Diameter		3.625"									
Detector Model No.		102-A		Spacing				Log Type		GAM-GAM		Log Type		THERM-THERM									
Type		SCINT						Source Type		Cs-137		Source Type		Am241Be									
Length		8"		LSA [Y/N]				Serial No.		18265GW		Serial No.		DSN-362									
Distance to Source		10'		FWDA [Y/N]				Strength		1.5 Ci		Strength		15 Ci									
LOGGING DATA																							

Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
Rwa / CrossPlot	RMFR	Rmf Reference	0.10	ohmm
Rwa / CrossPlot	TMFR	Rmf Ref Temp	75.00	degF
Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position for Gamma Ray Tools.	Eccentered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Sandstone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.680	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	0.00	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	

BOTTOM

Data: LARA_HAWX19_13A\0003 TRIPLE_ACRt004 16-Oct-11 21:17 Up 10640.3f

Date: 16-Oct-11 22:35:43

HALLIBURTON

Plot Time: 16-Oct-11 22:42:18
Plot Range: 6494 ft to 10645.2 ft
Data: LARA_HAWX19_13A\Well Based\MAIN_TDI*
Plot File: \\COMP_TDI\Q_COMPOSITE_9N_RM_NOBLE

2150 TO 2500 5" = 100'


Track 1


Depth Track


Track 2


Track 5


Track 3

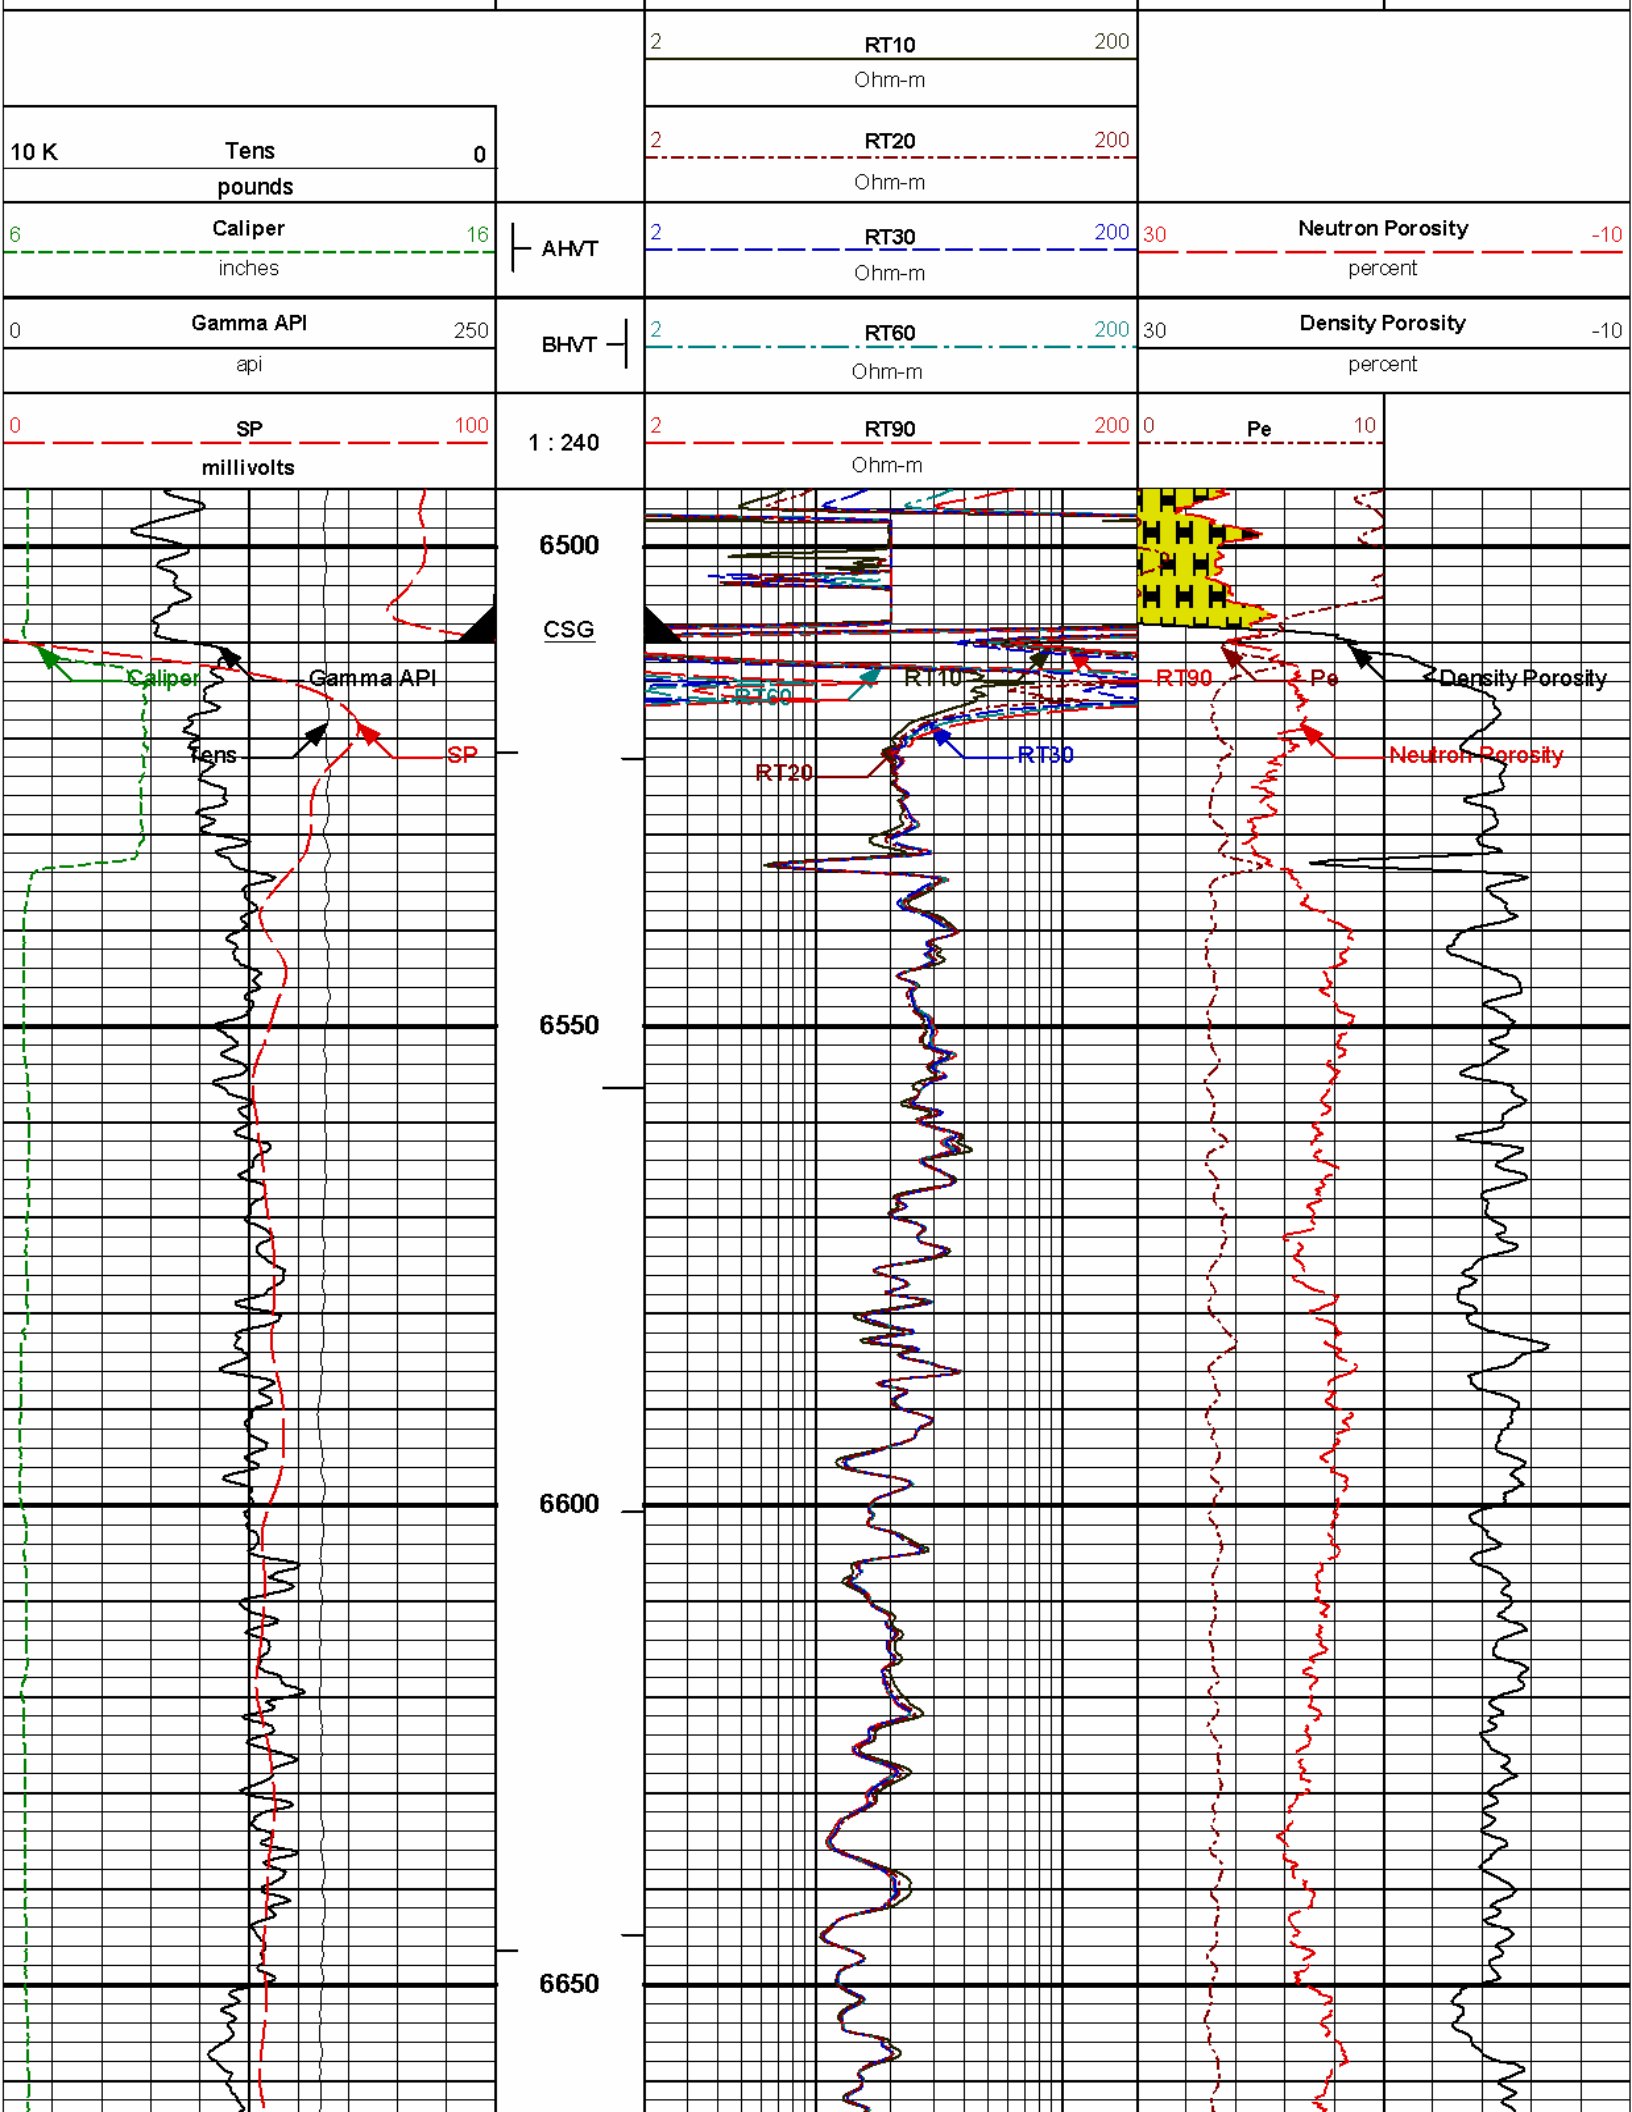


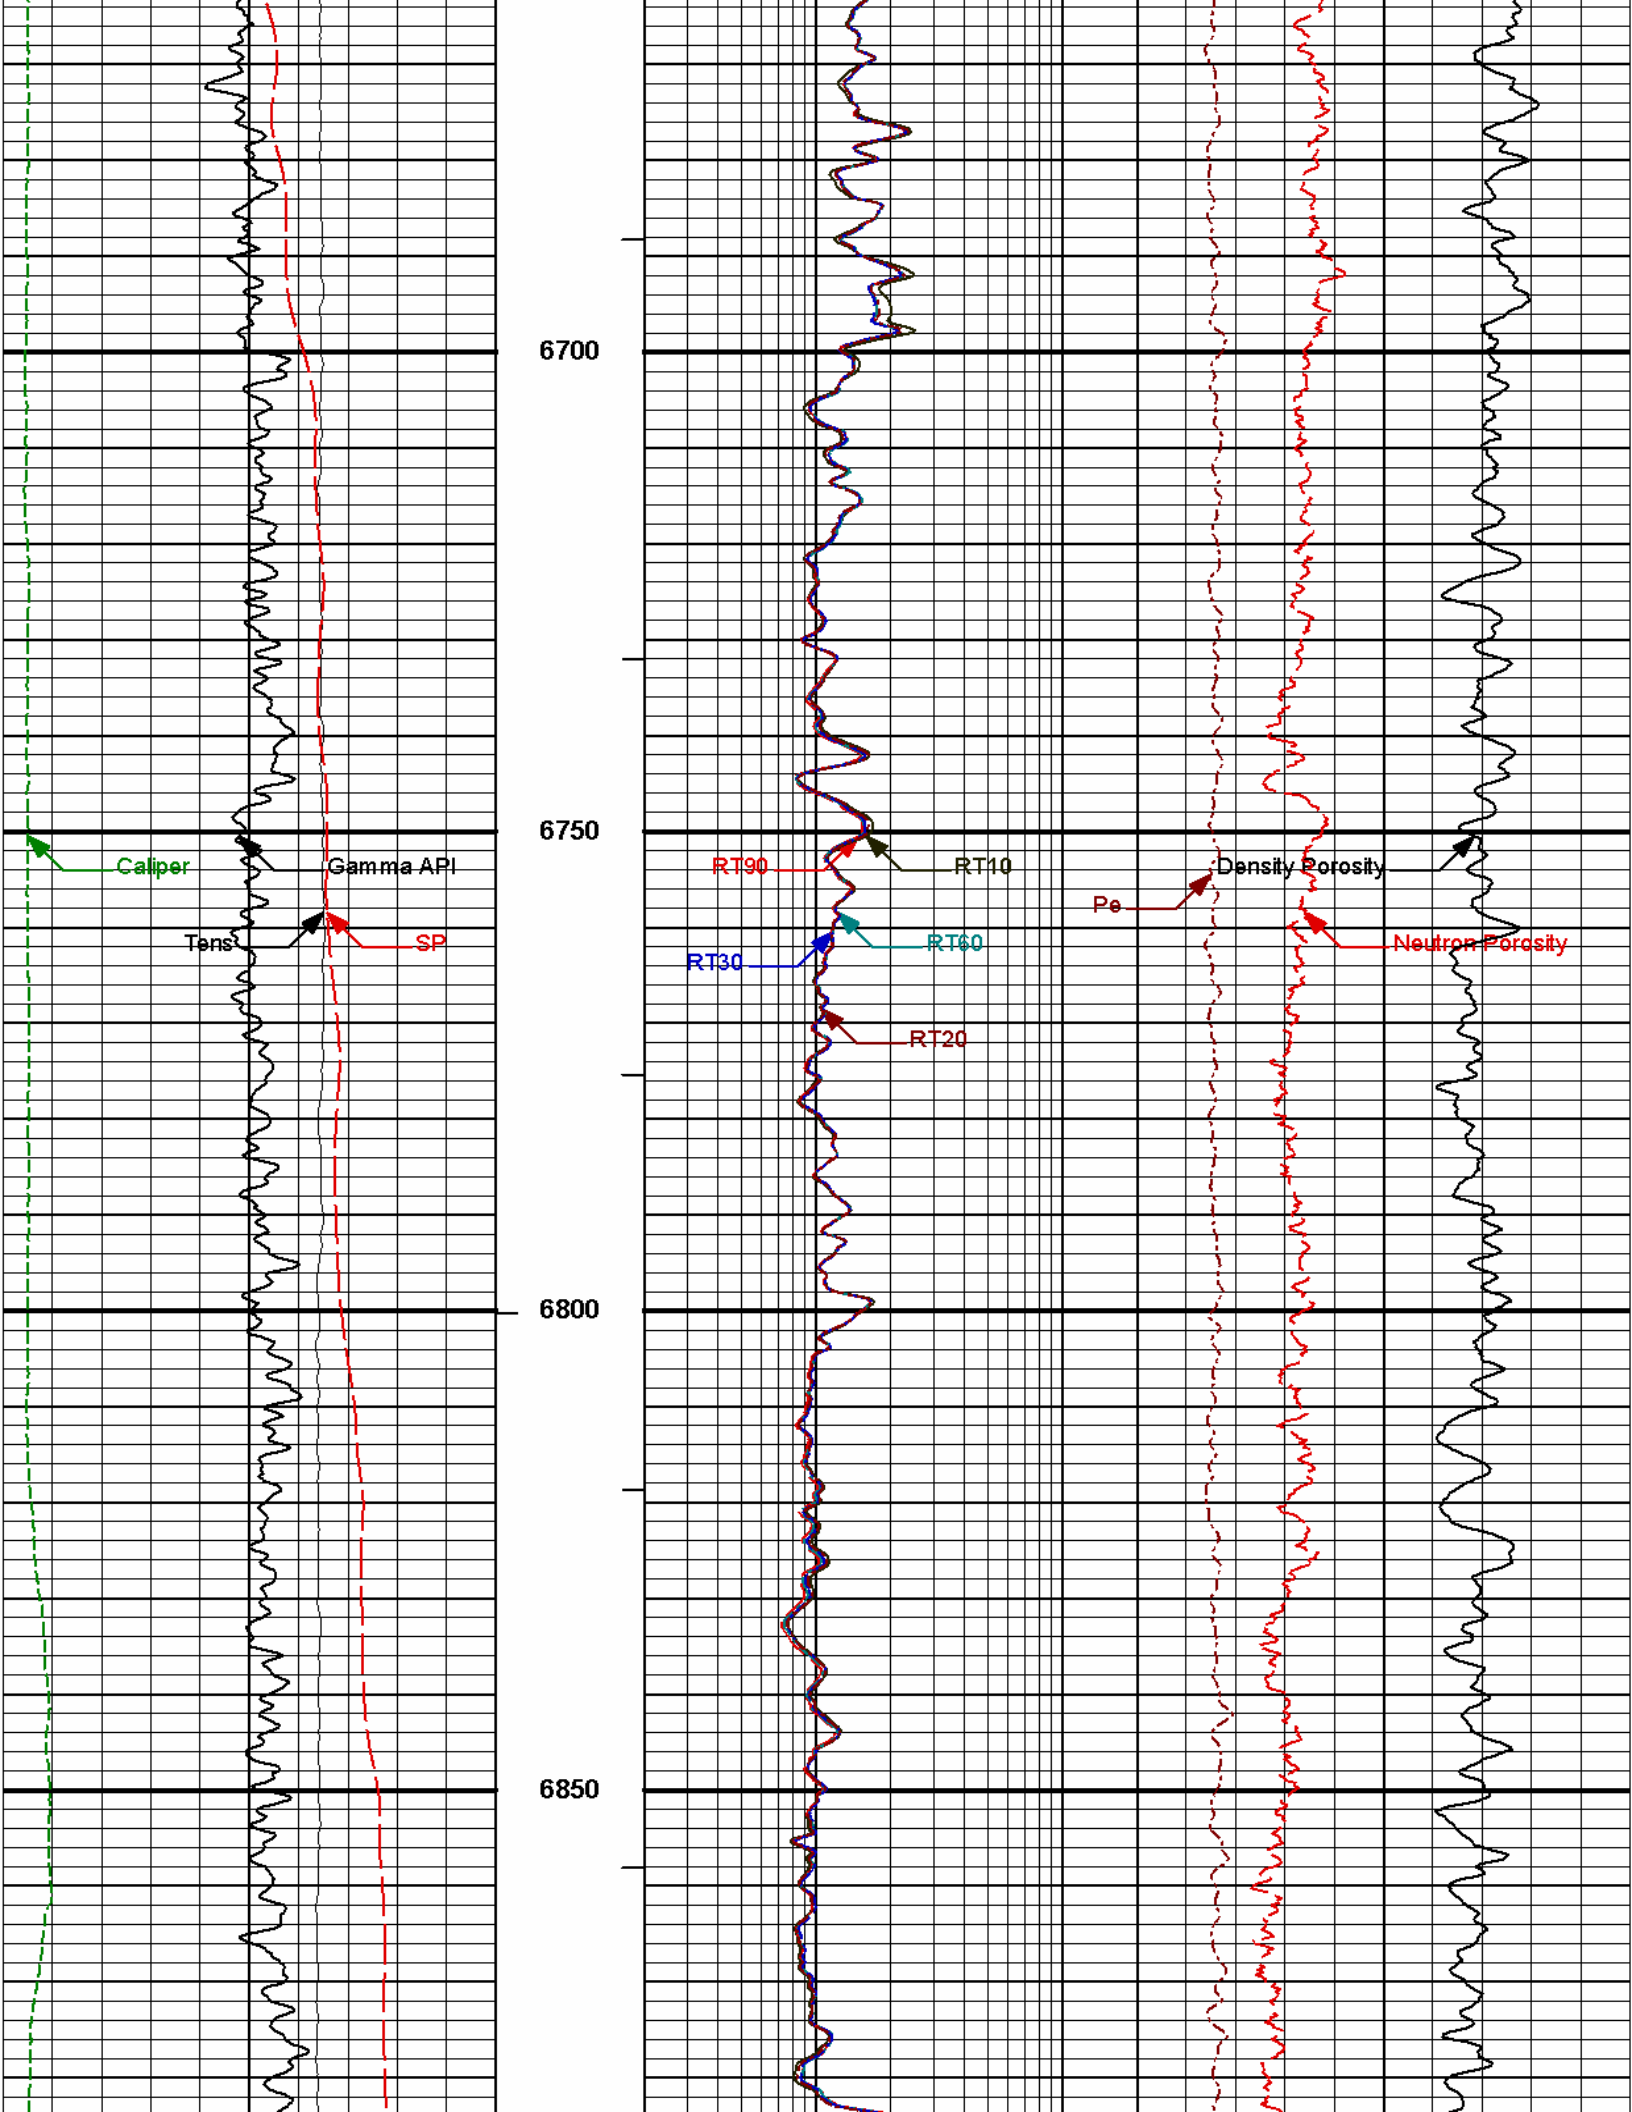


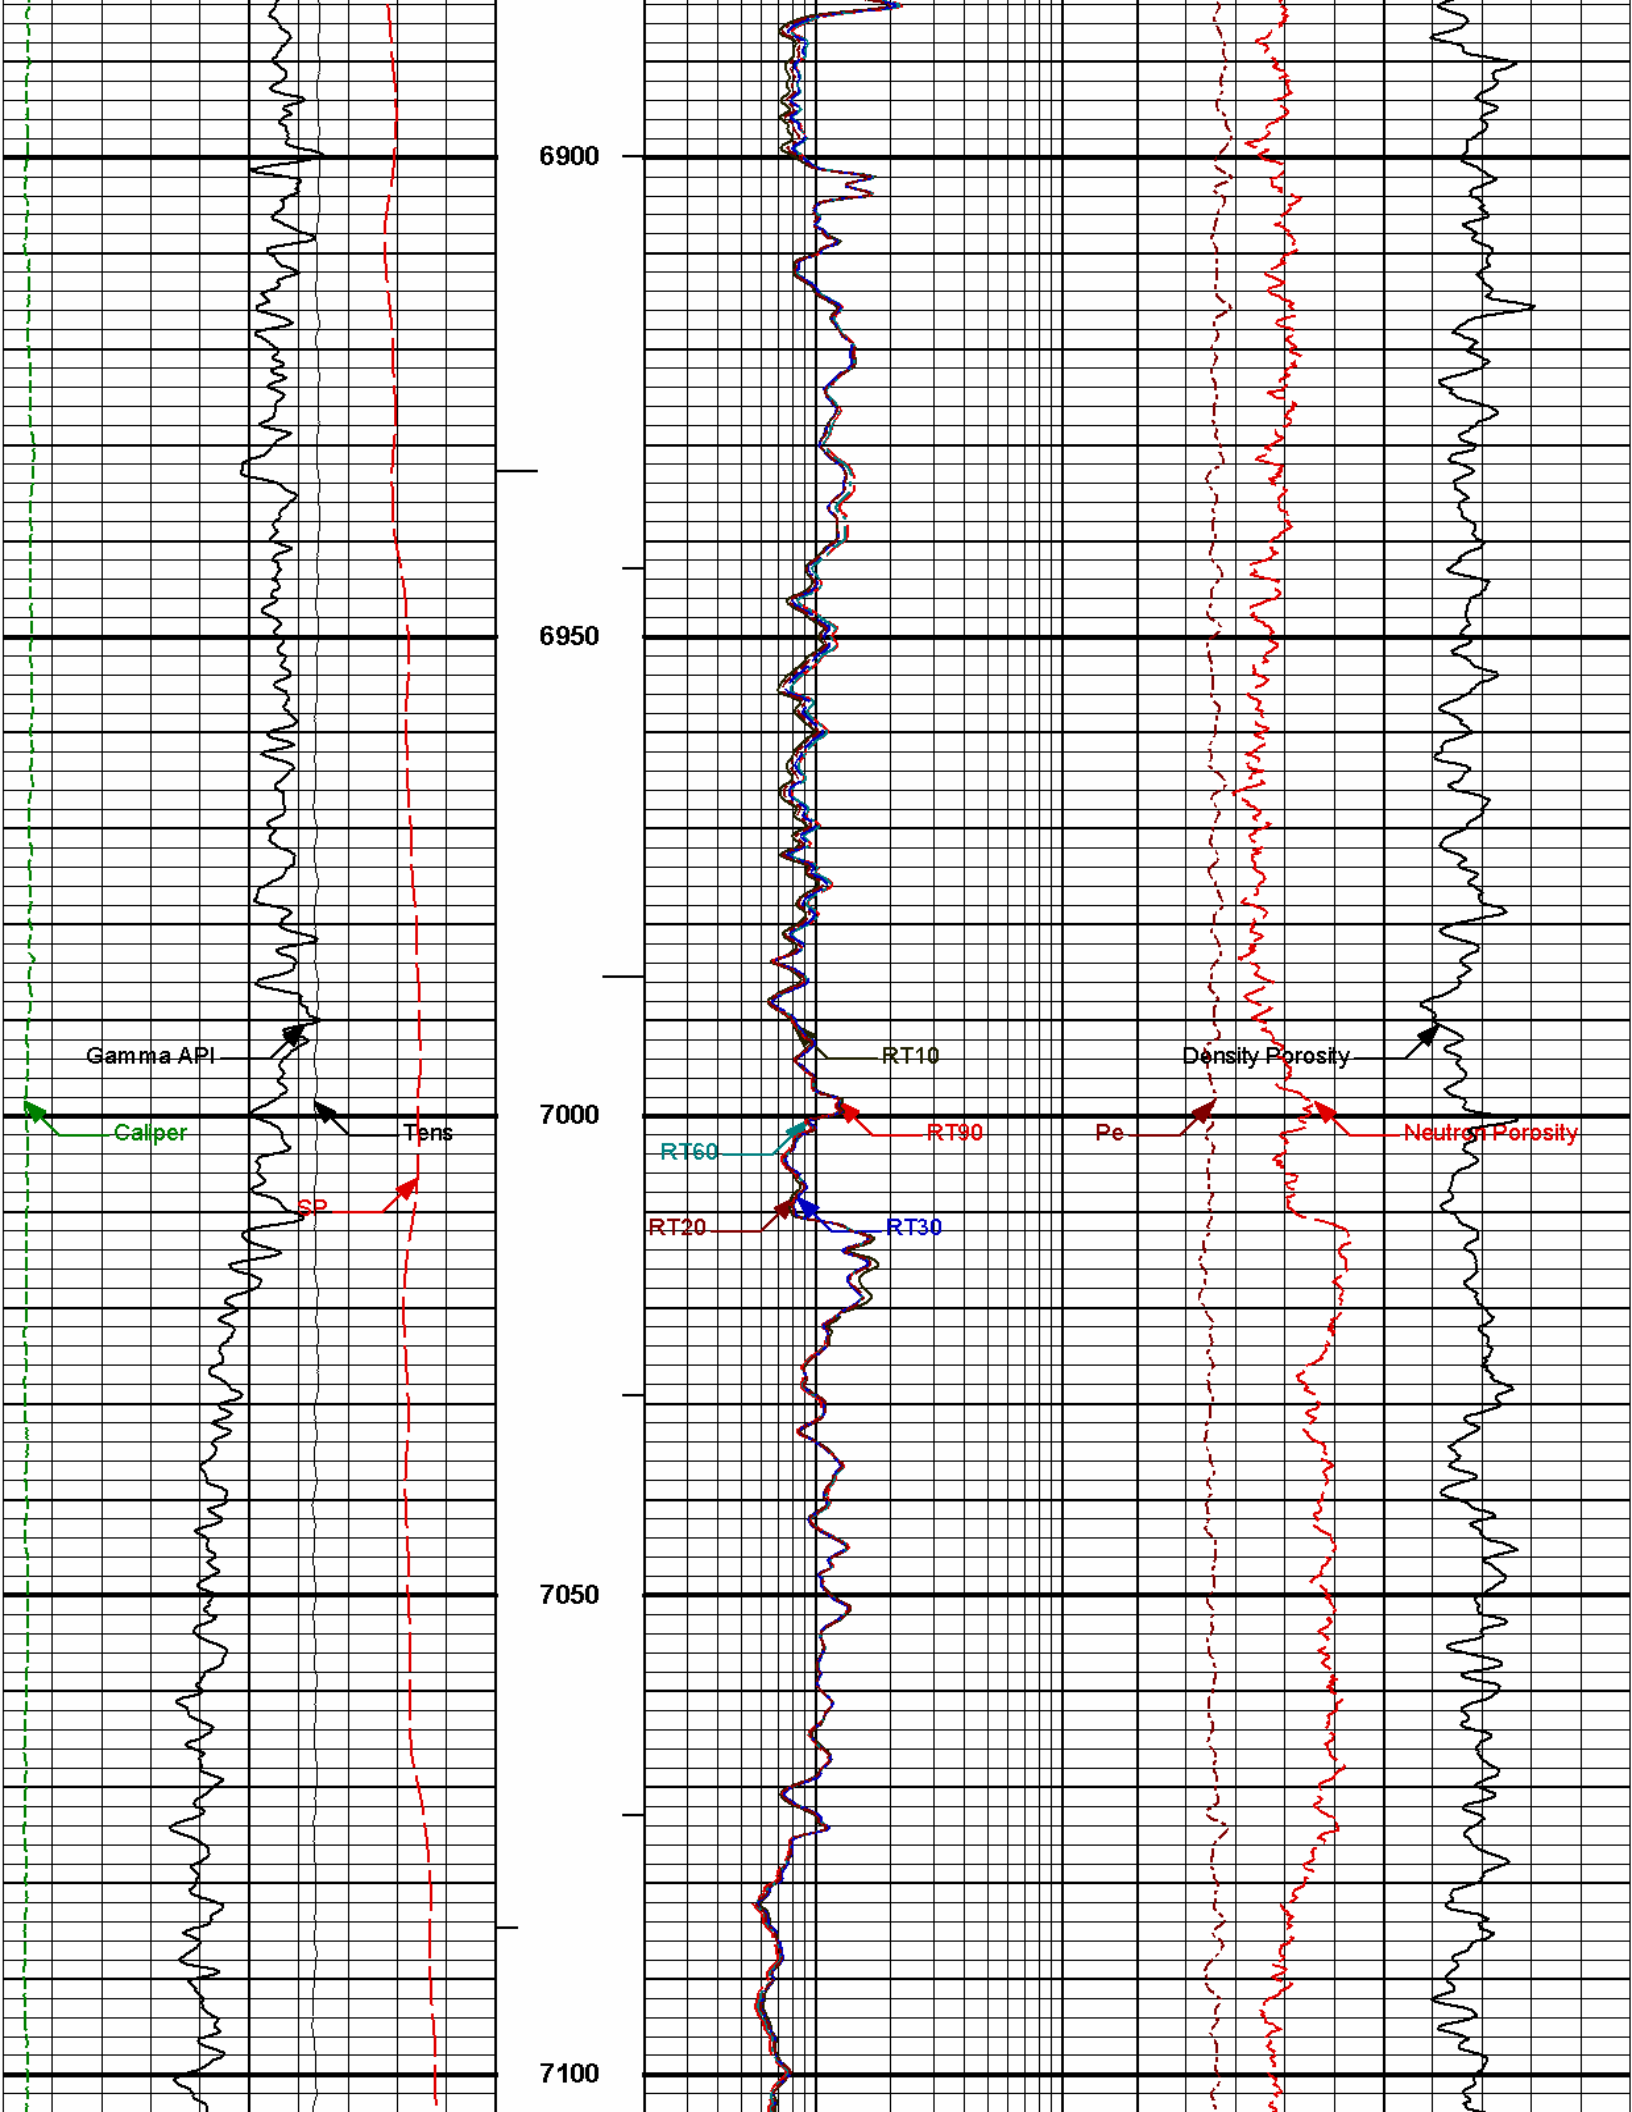


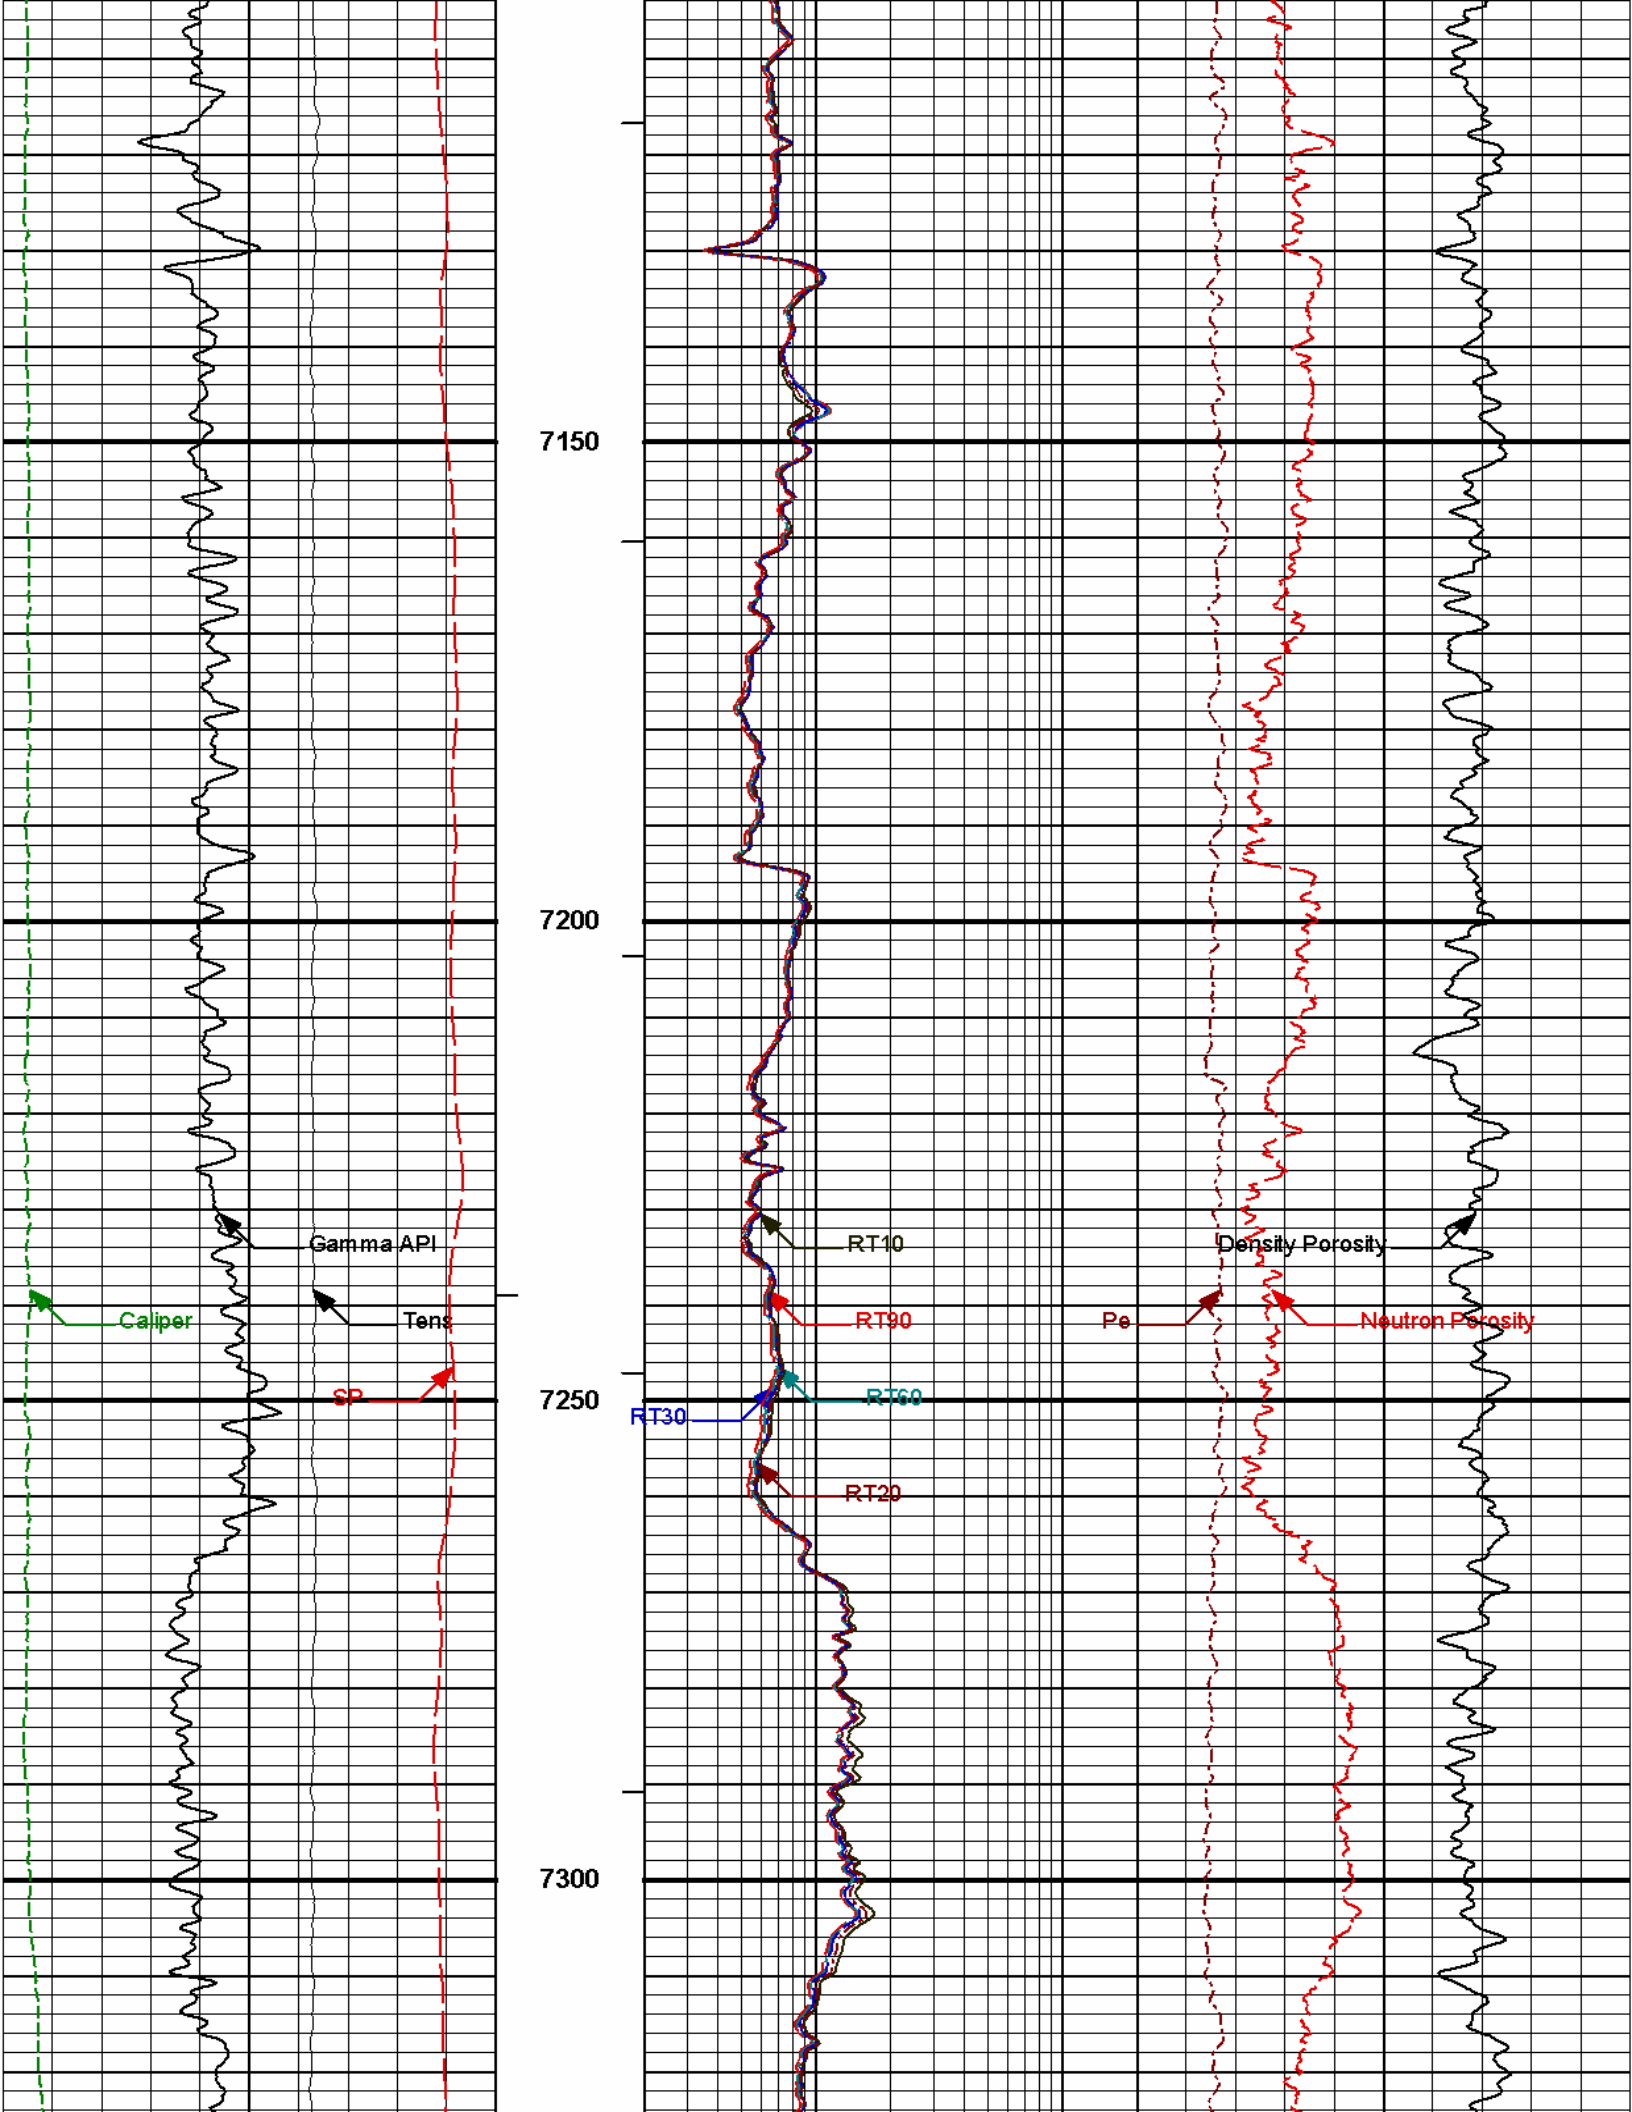


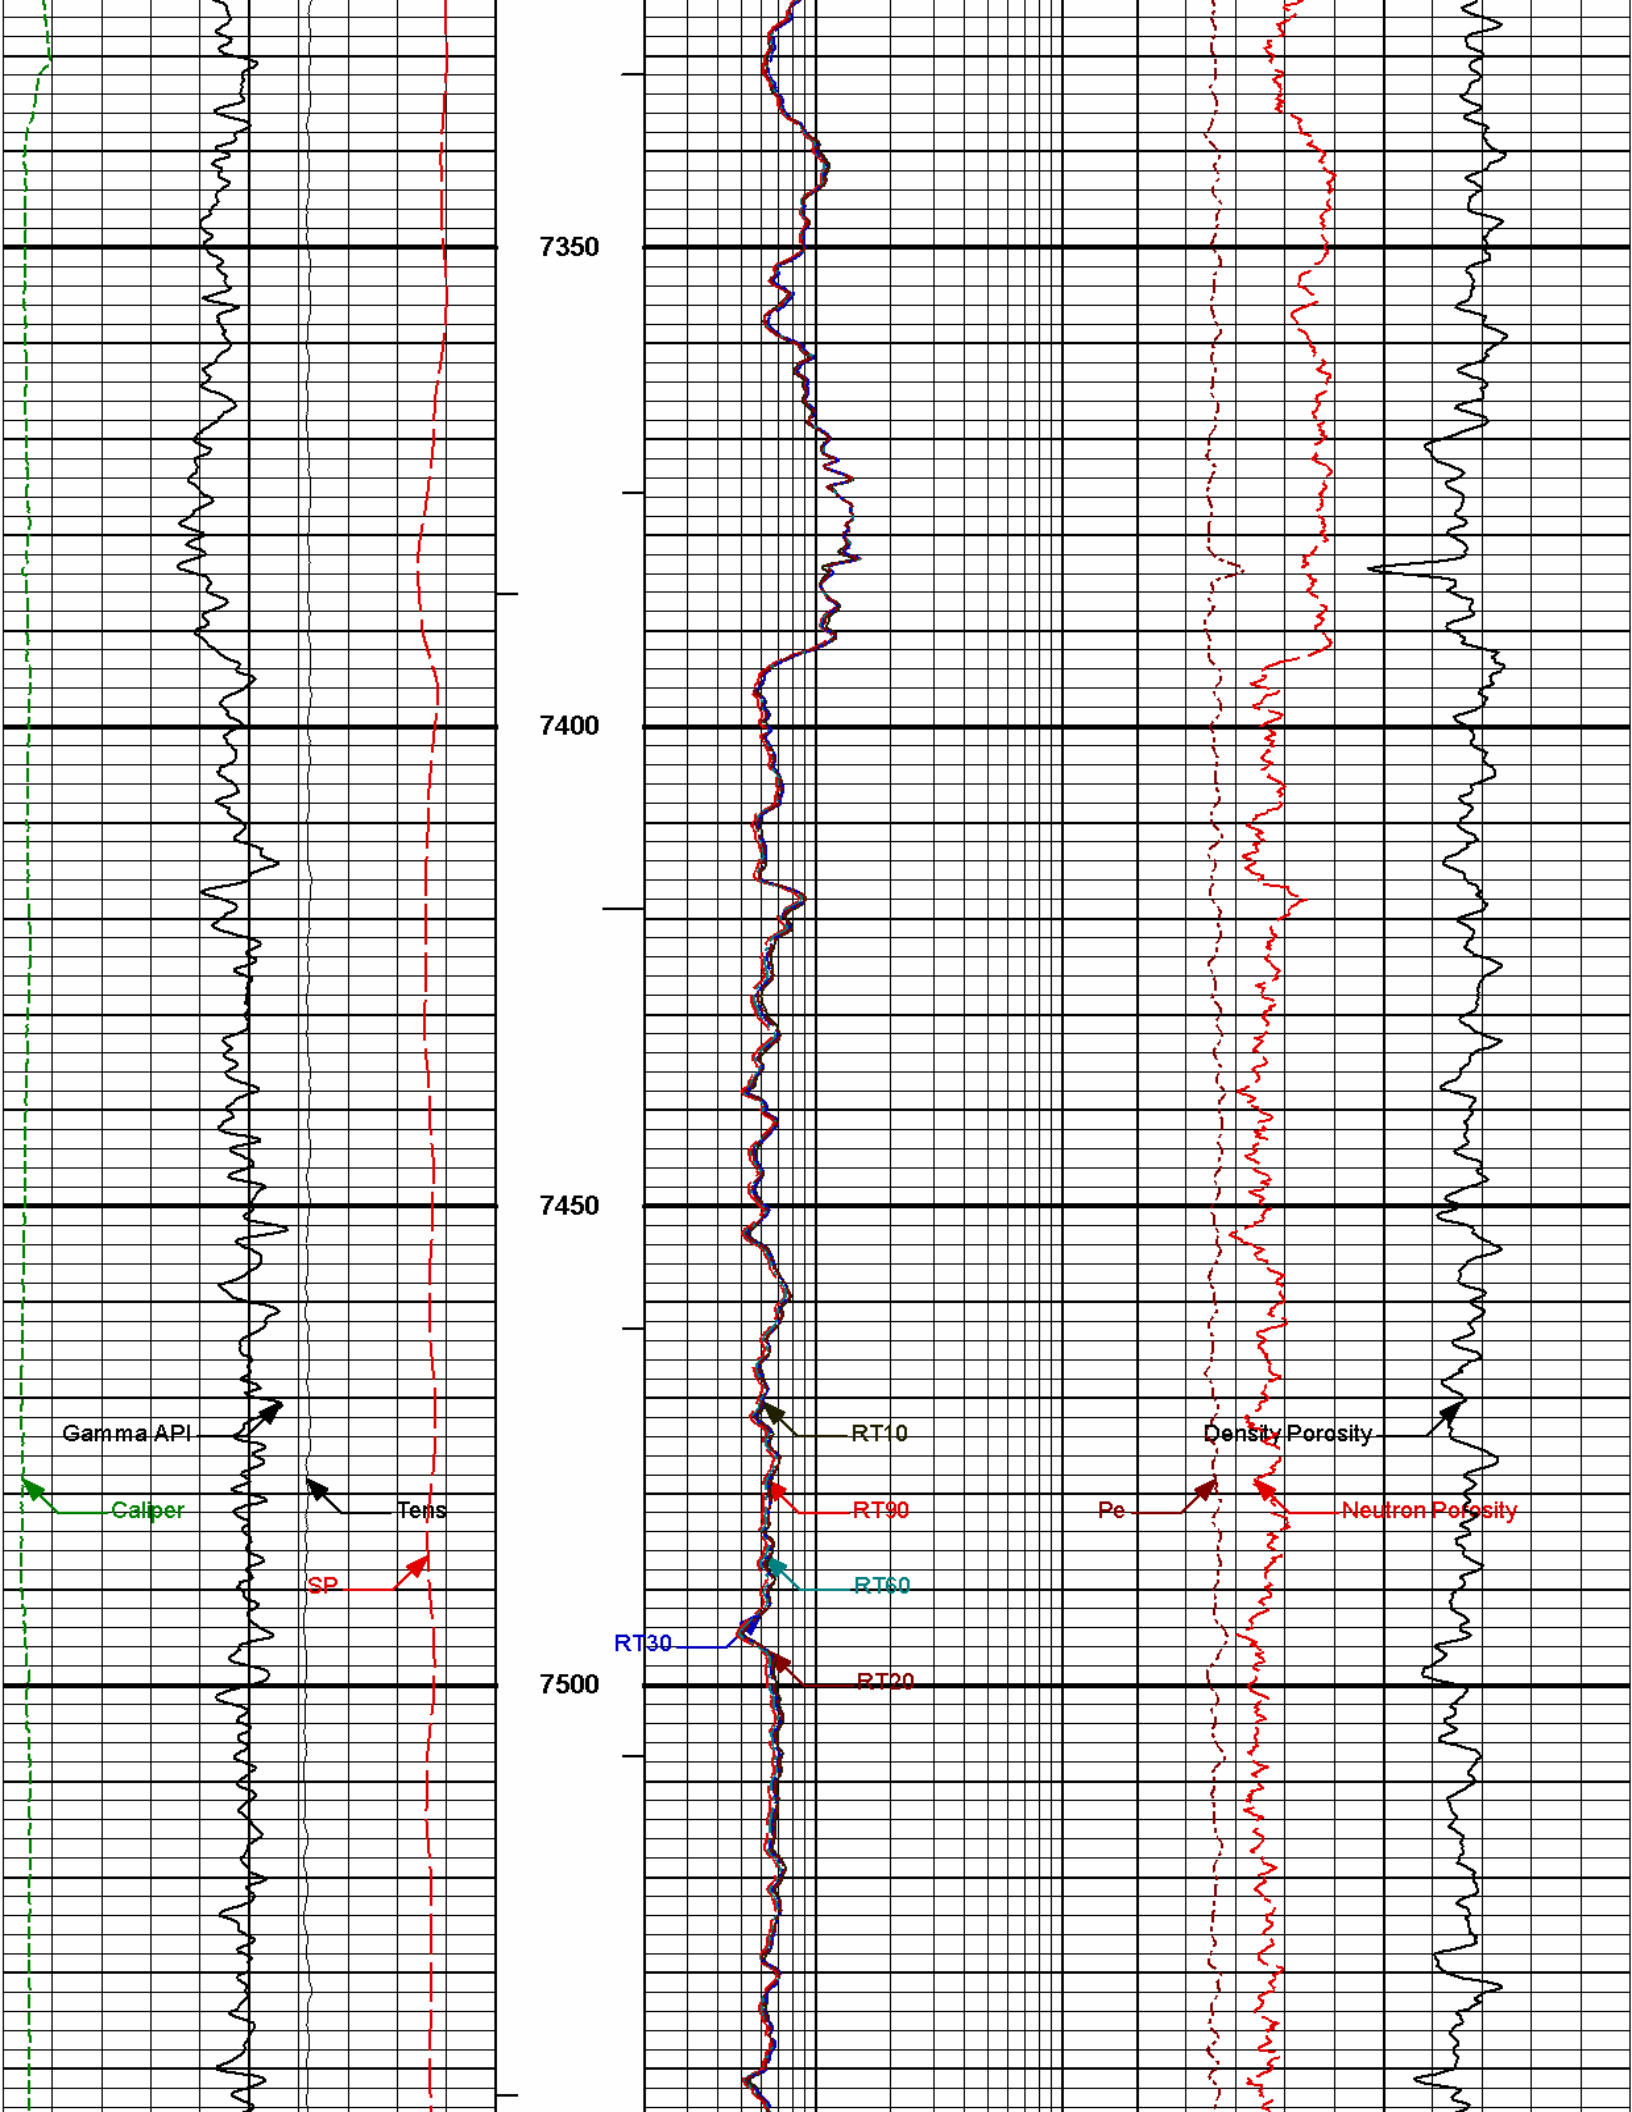


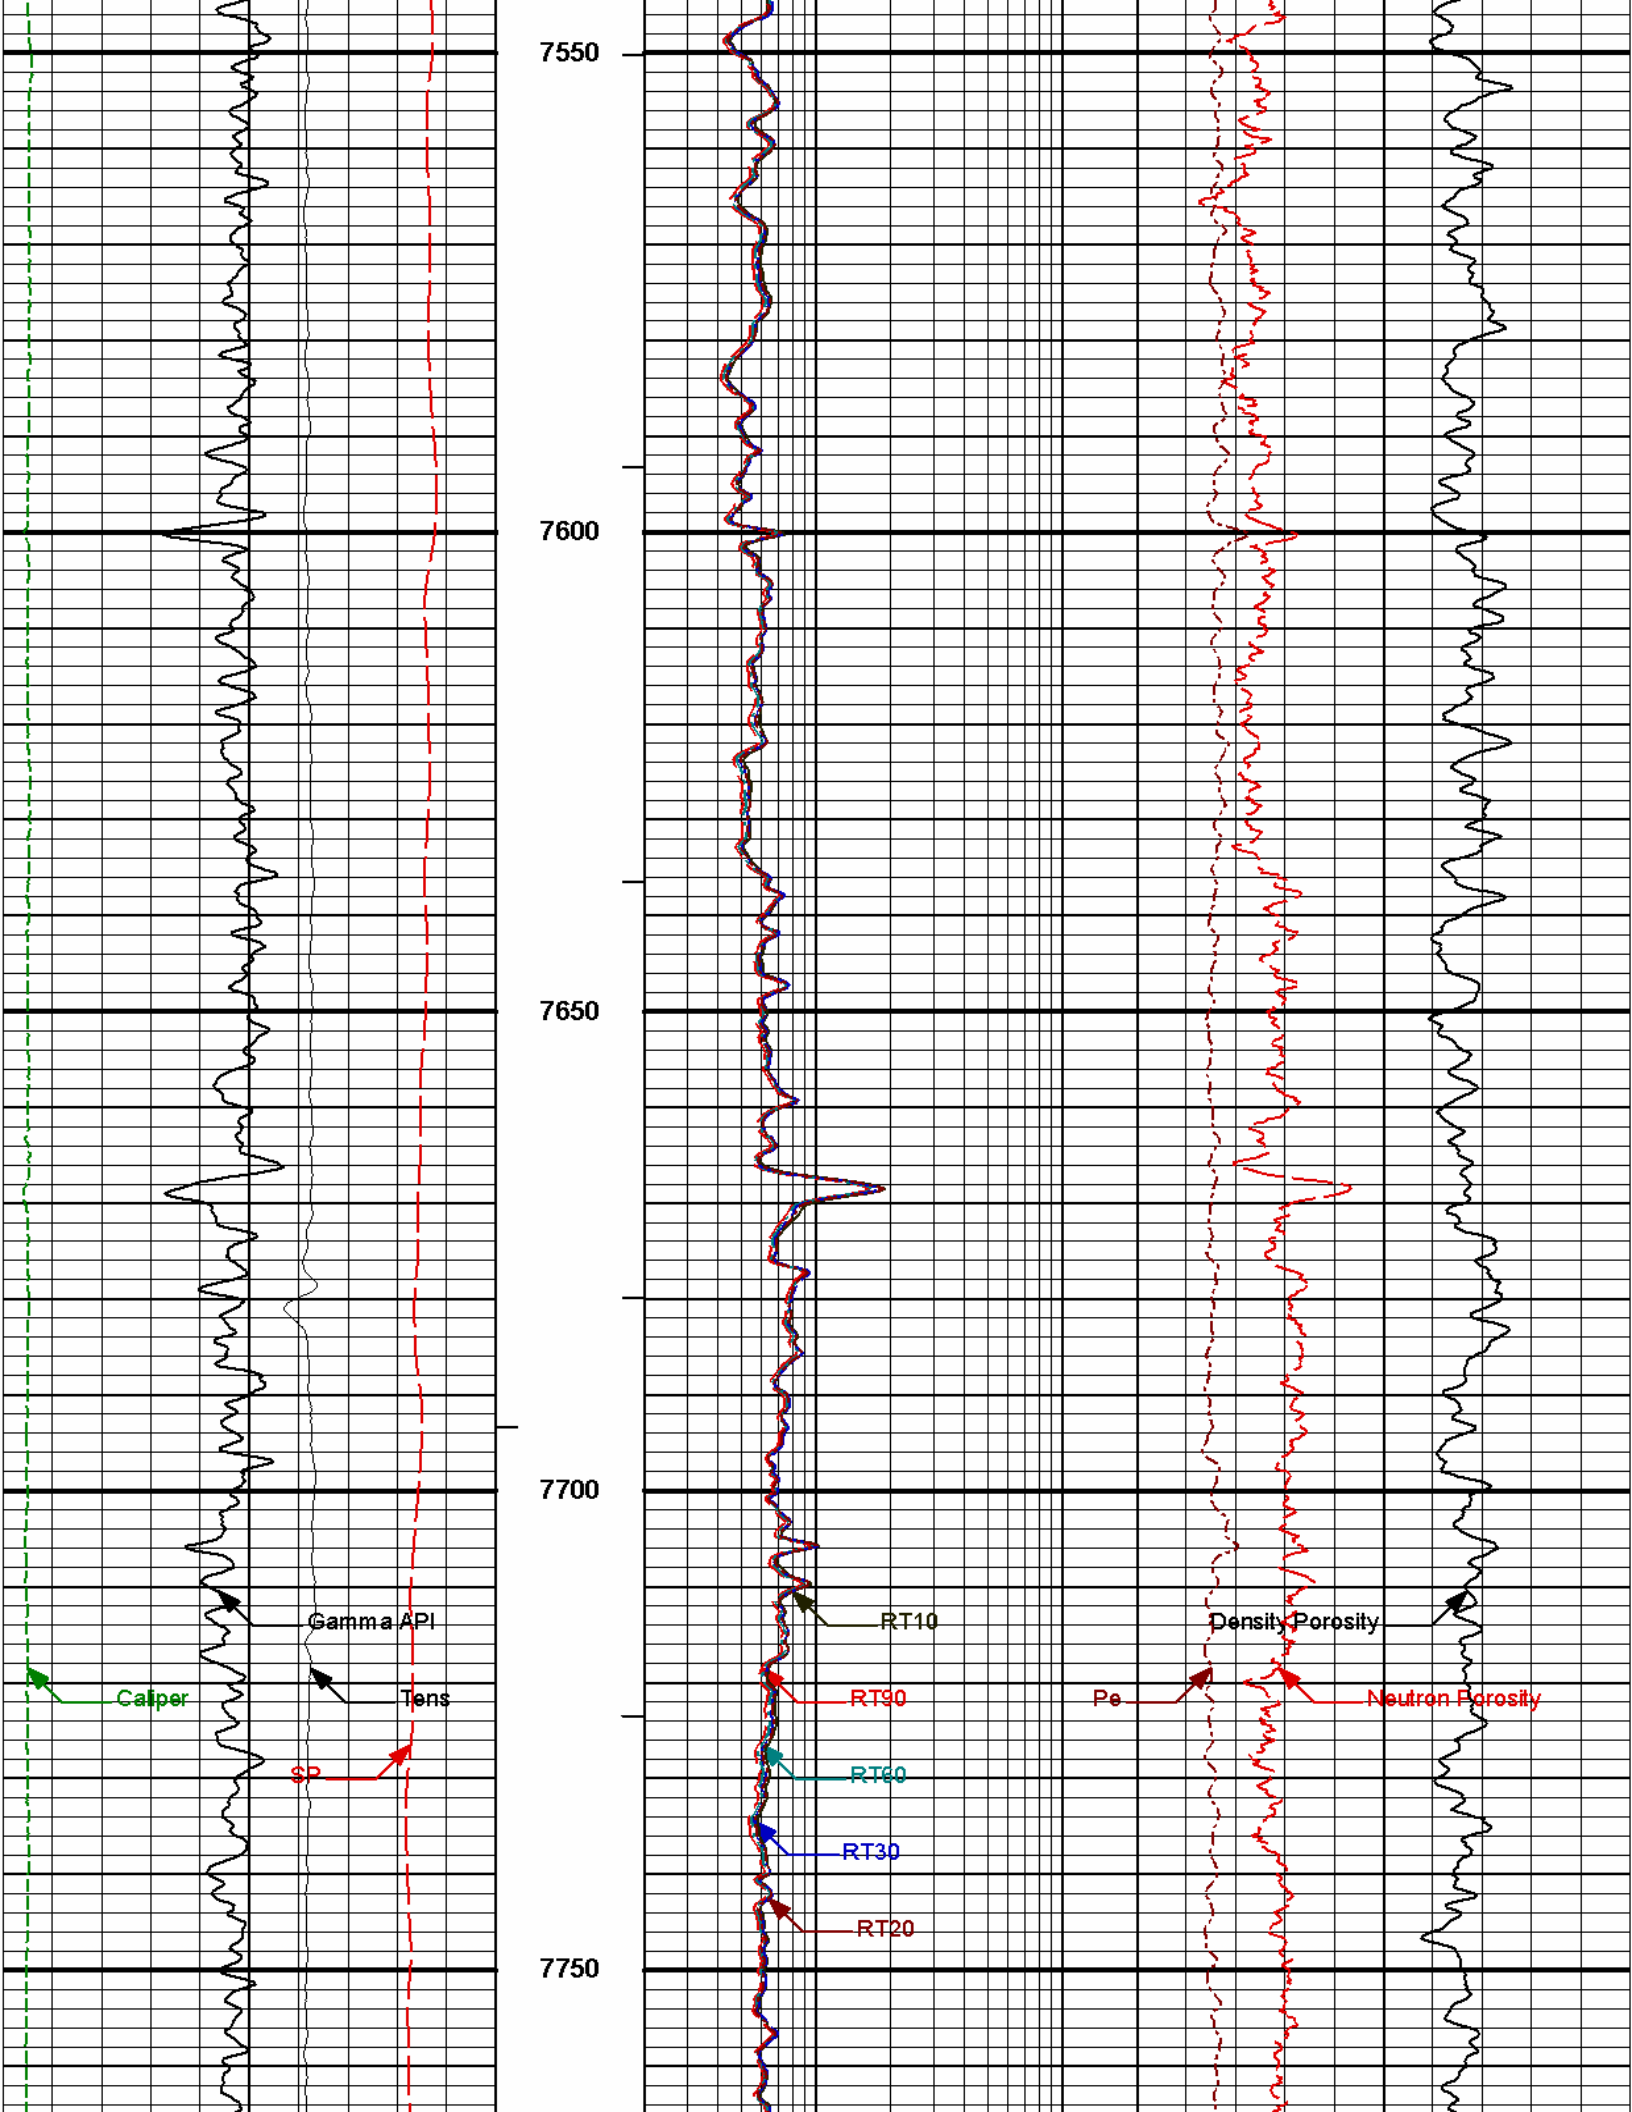


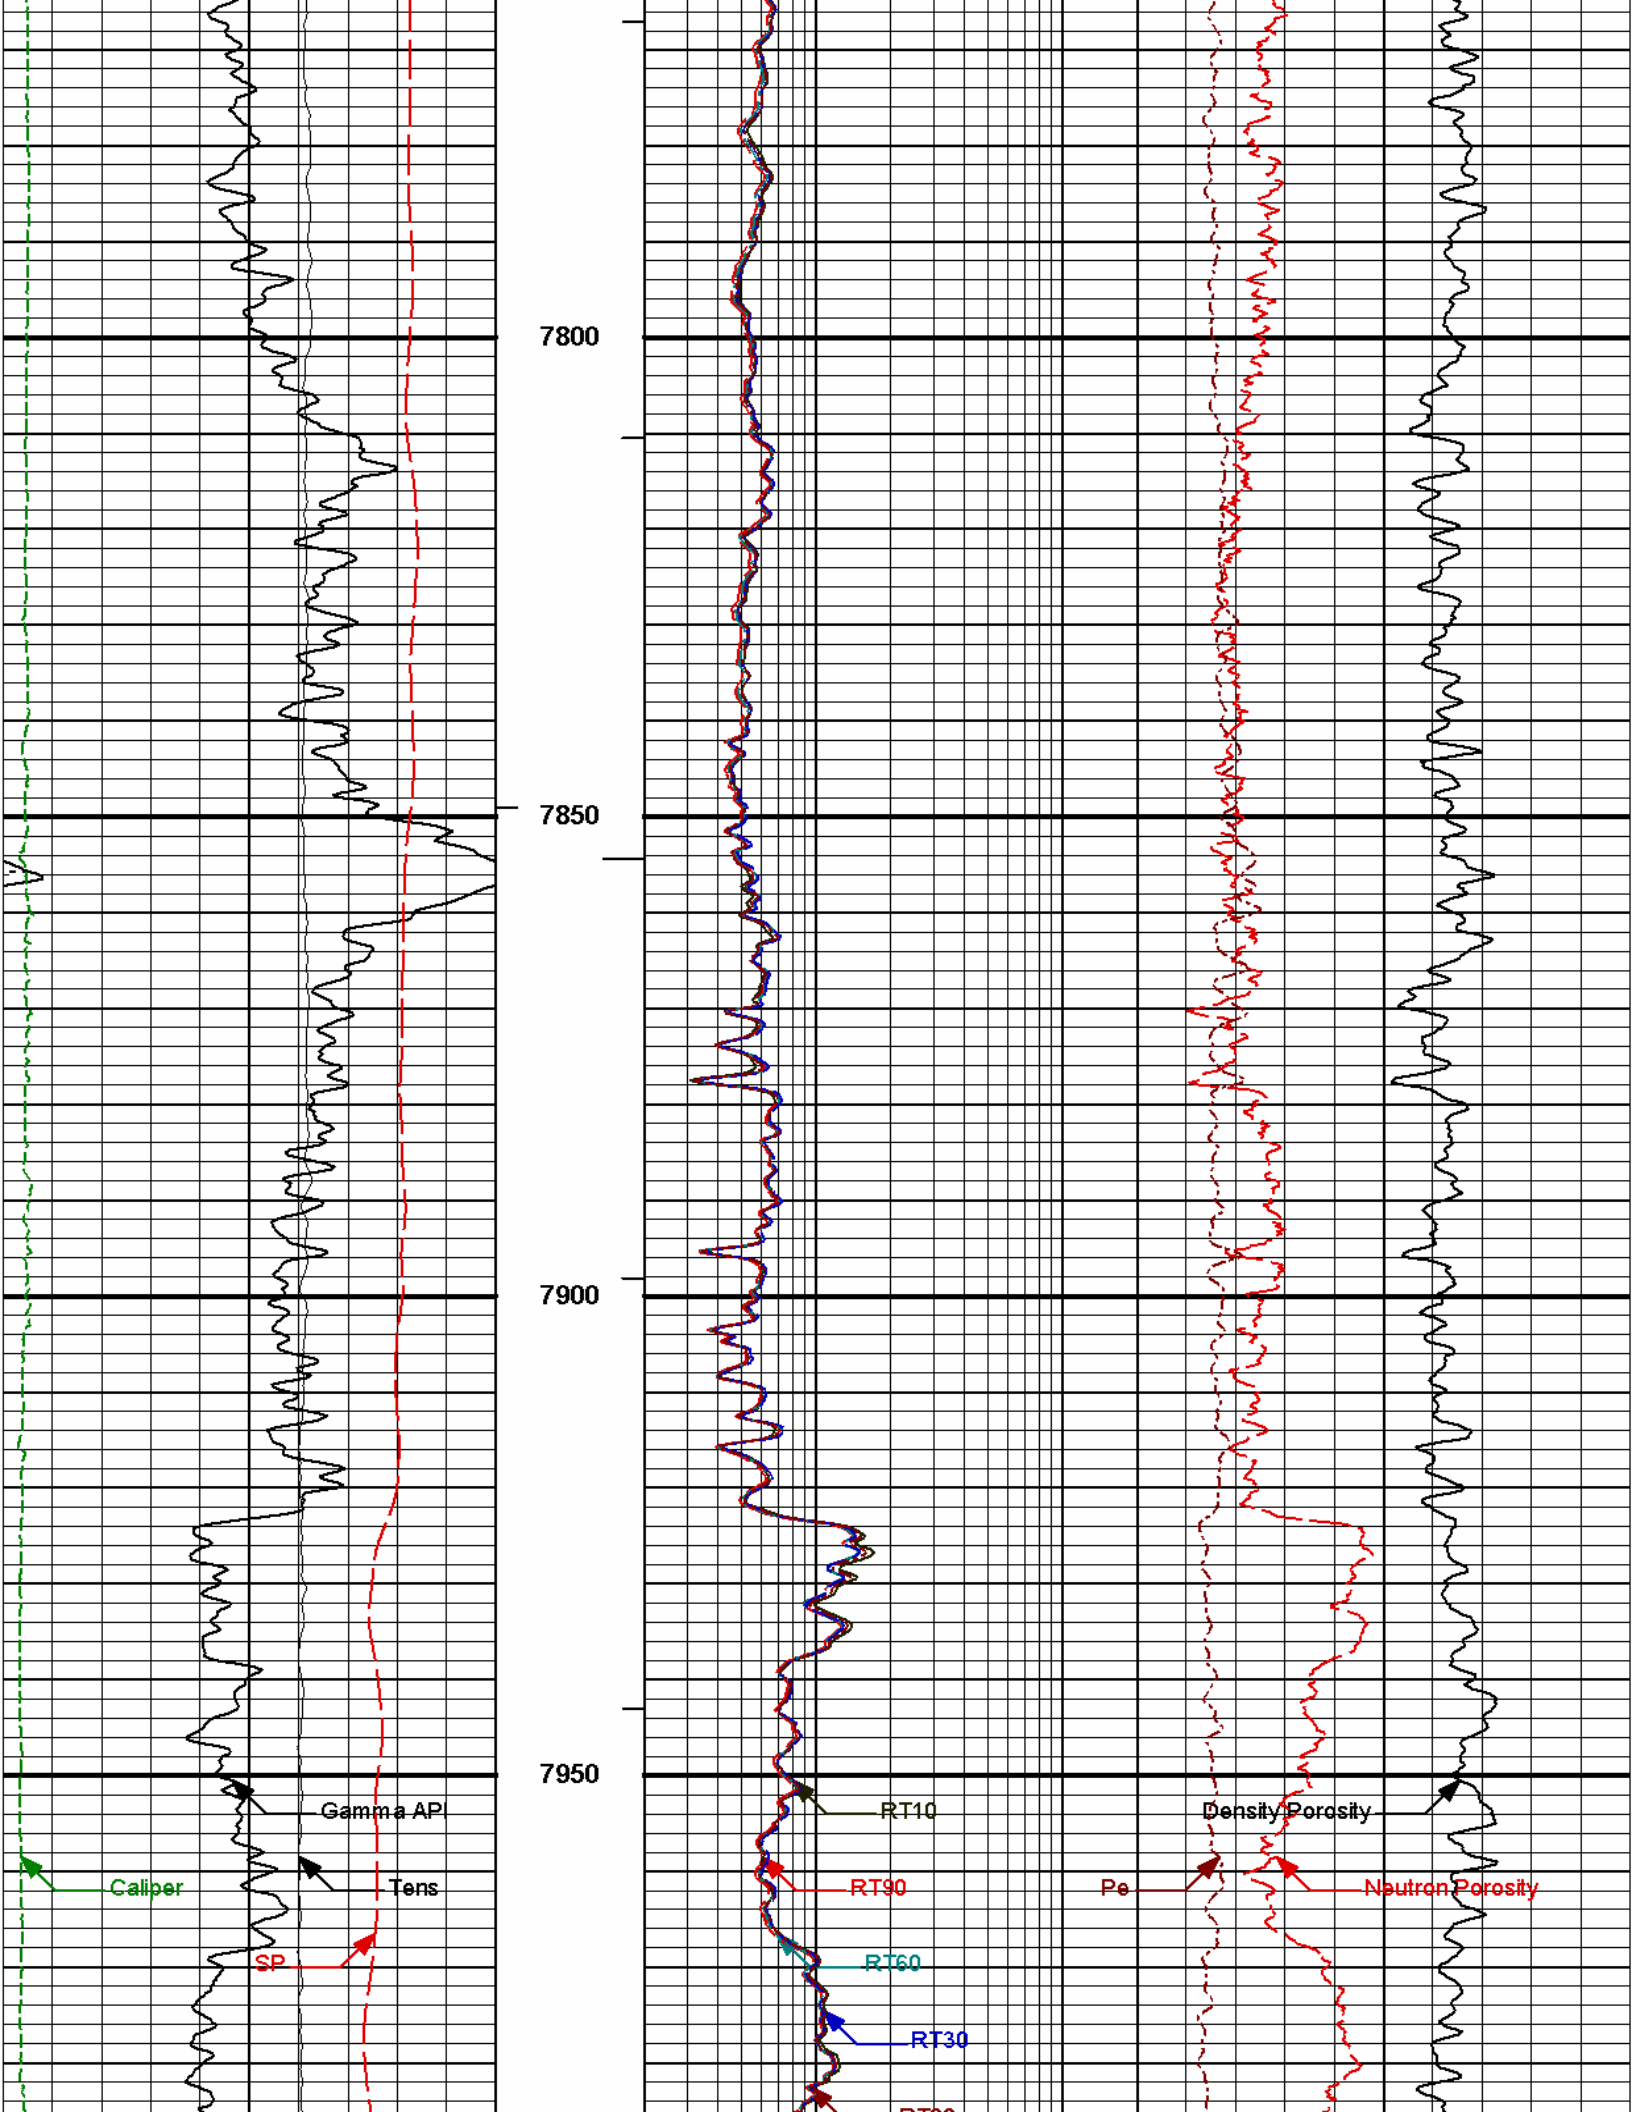


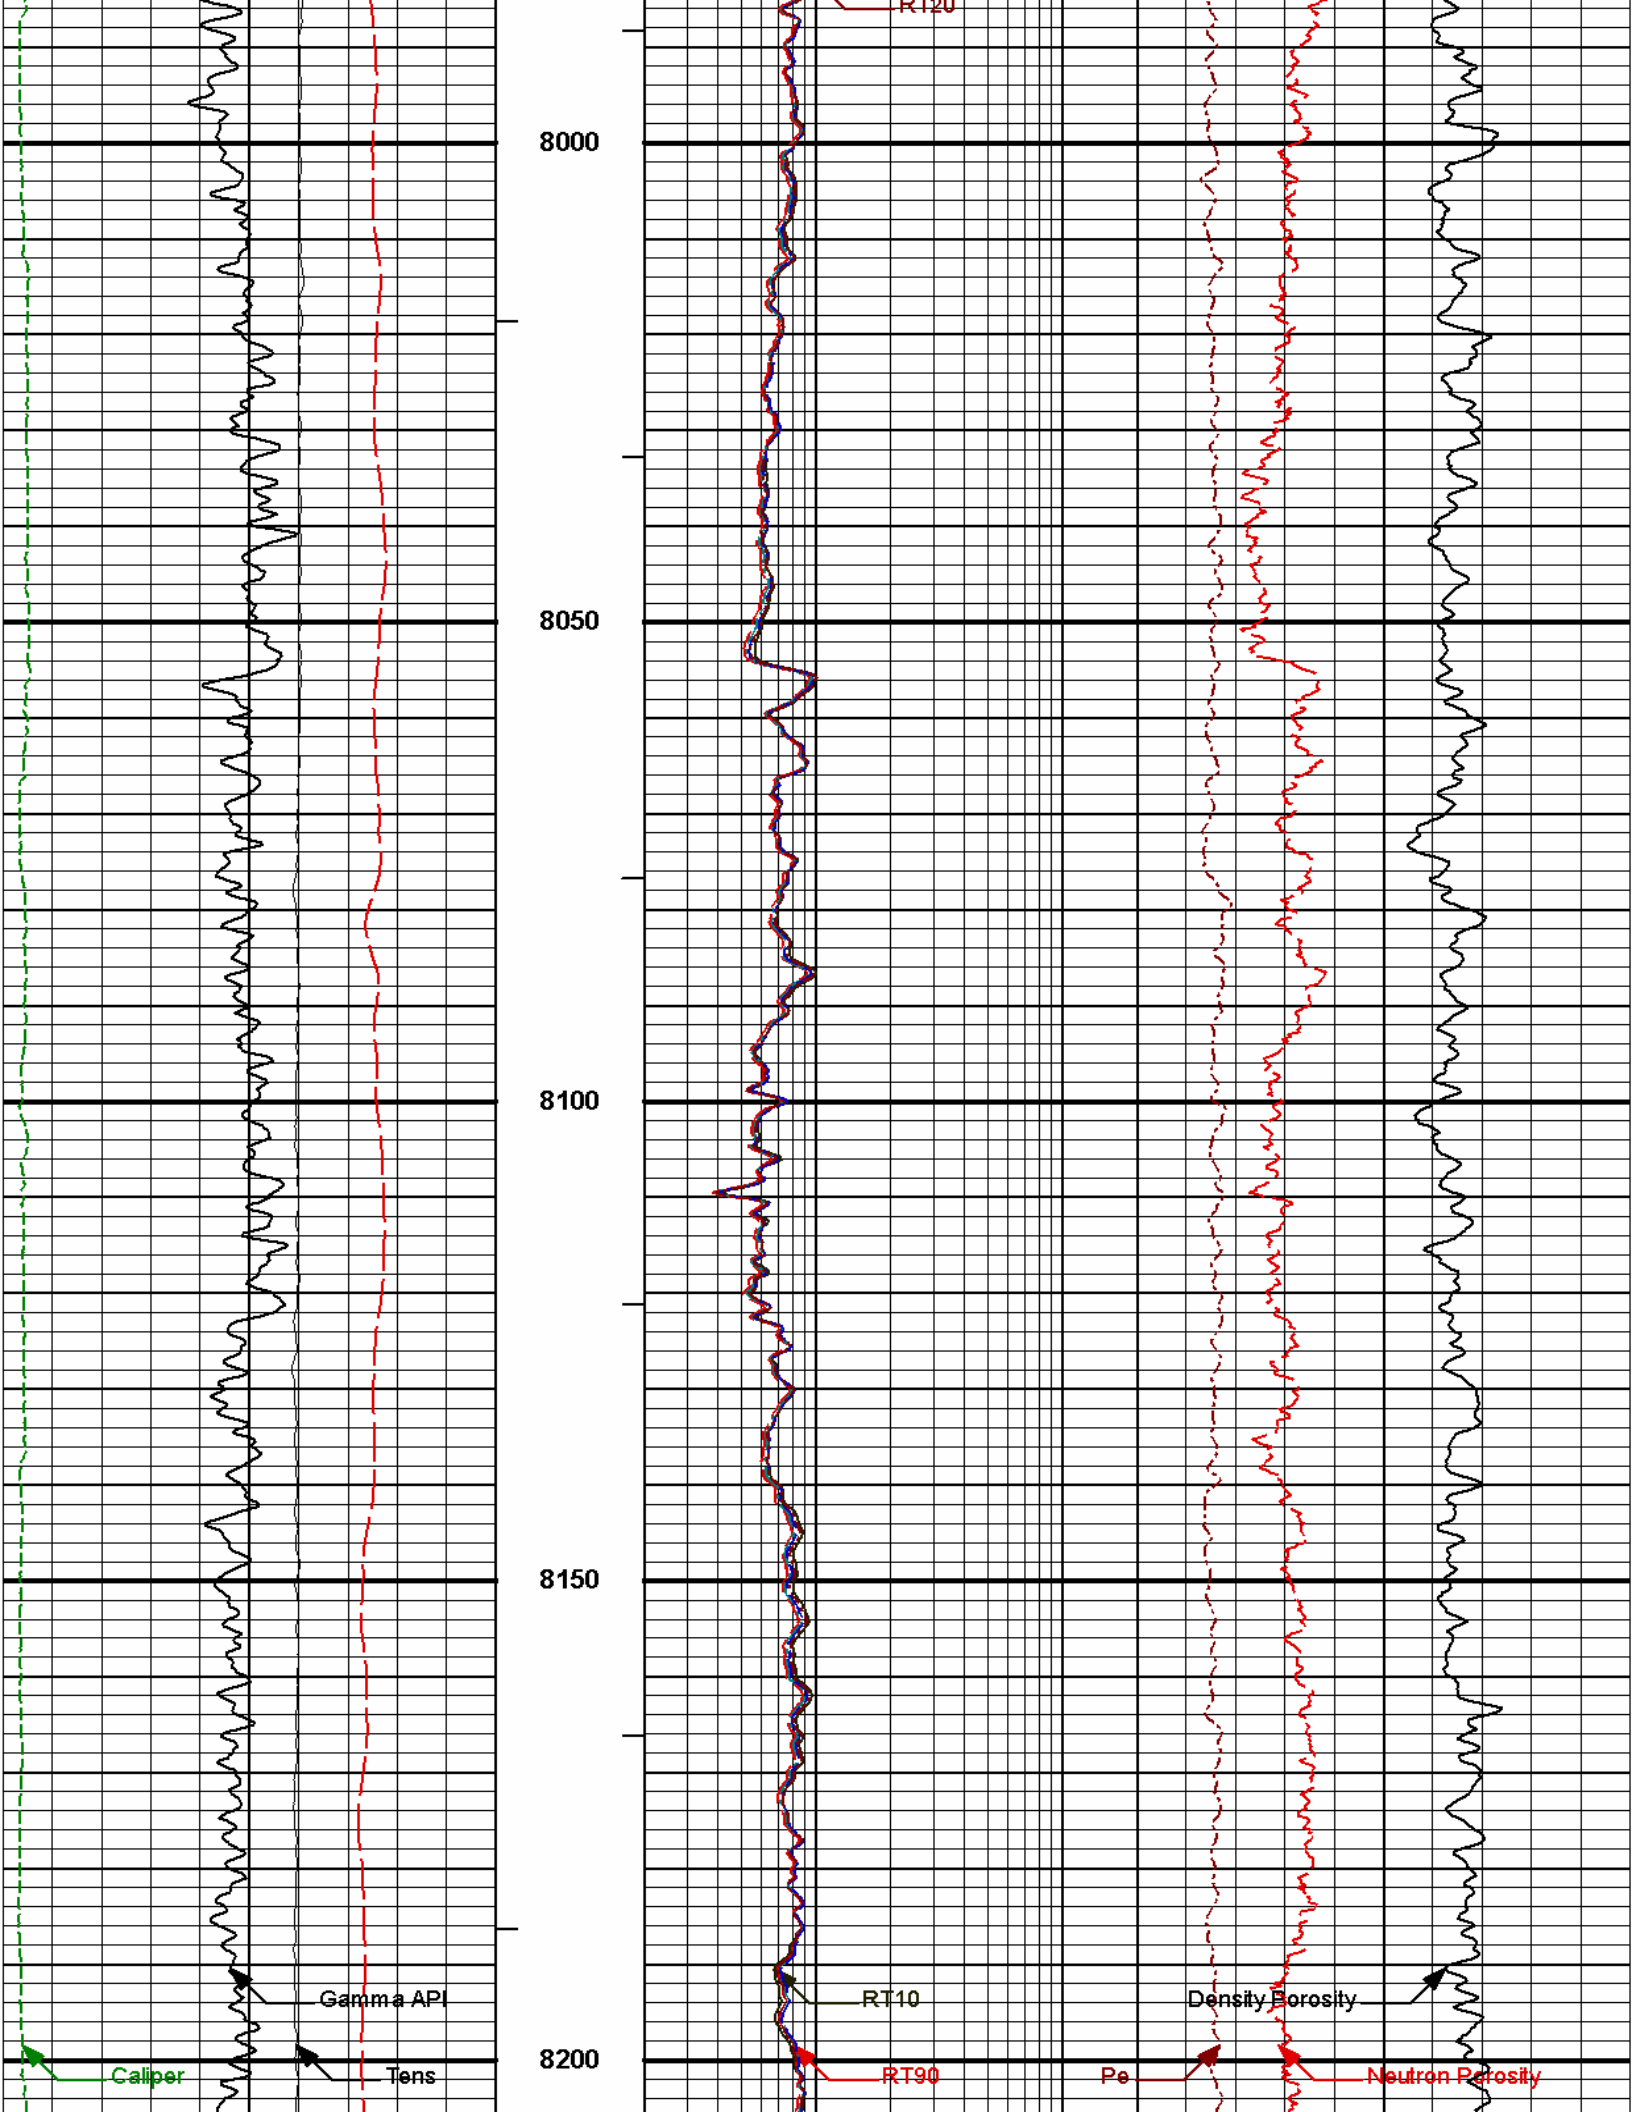


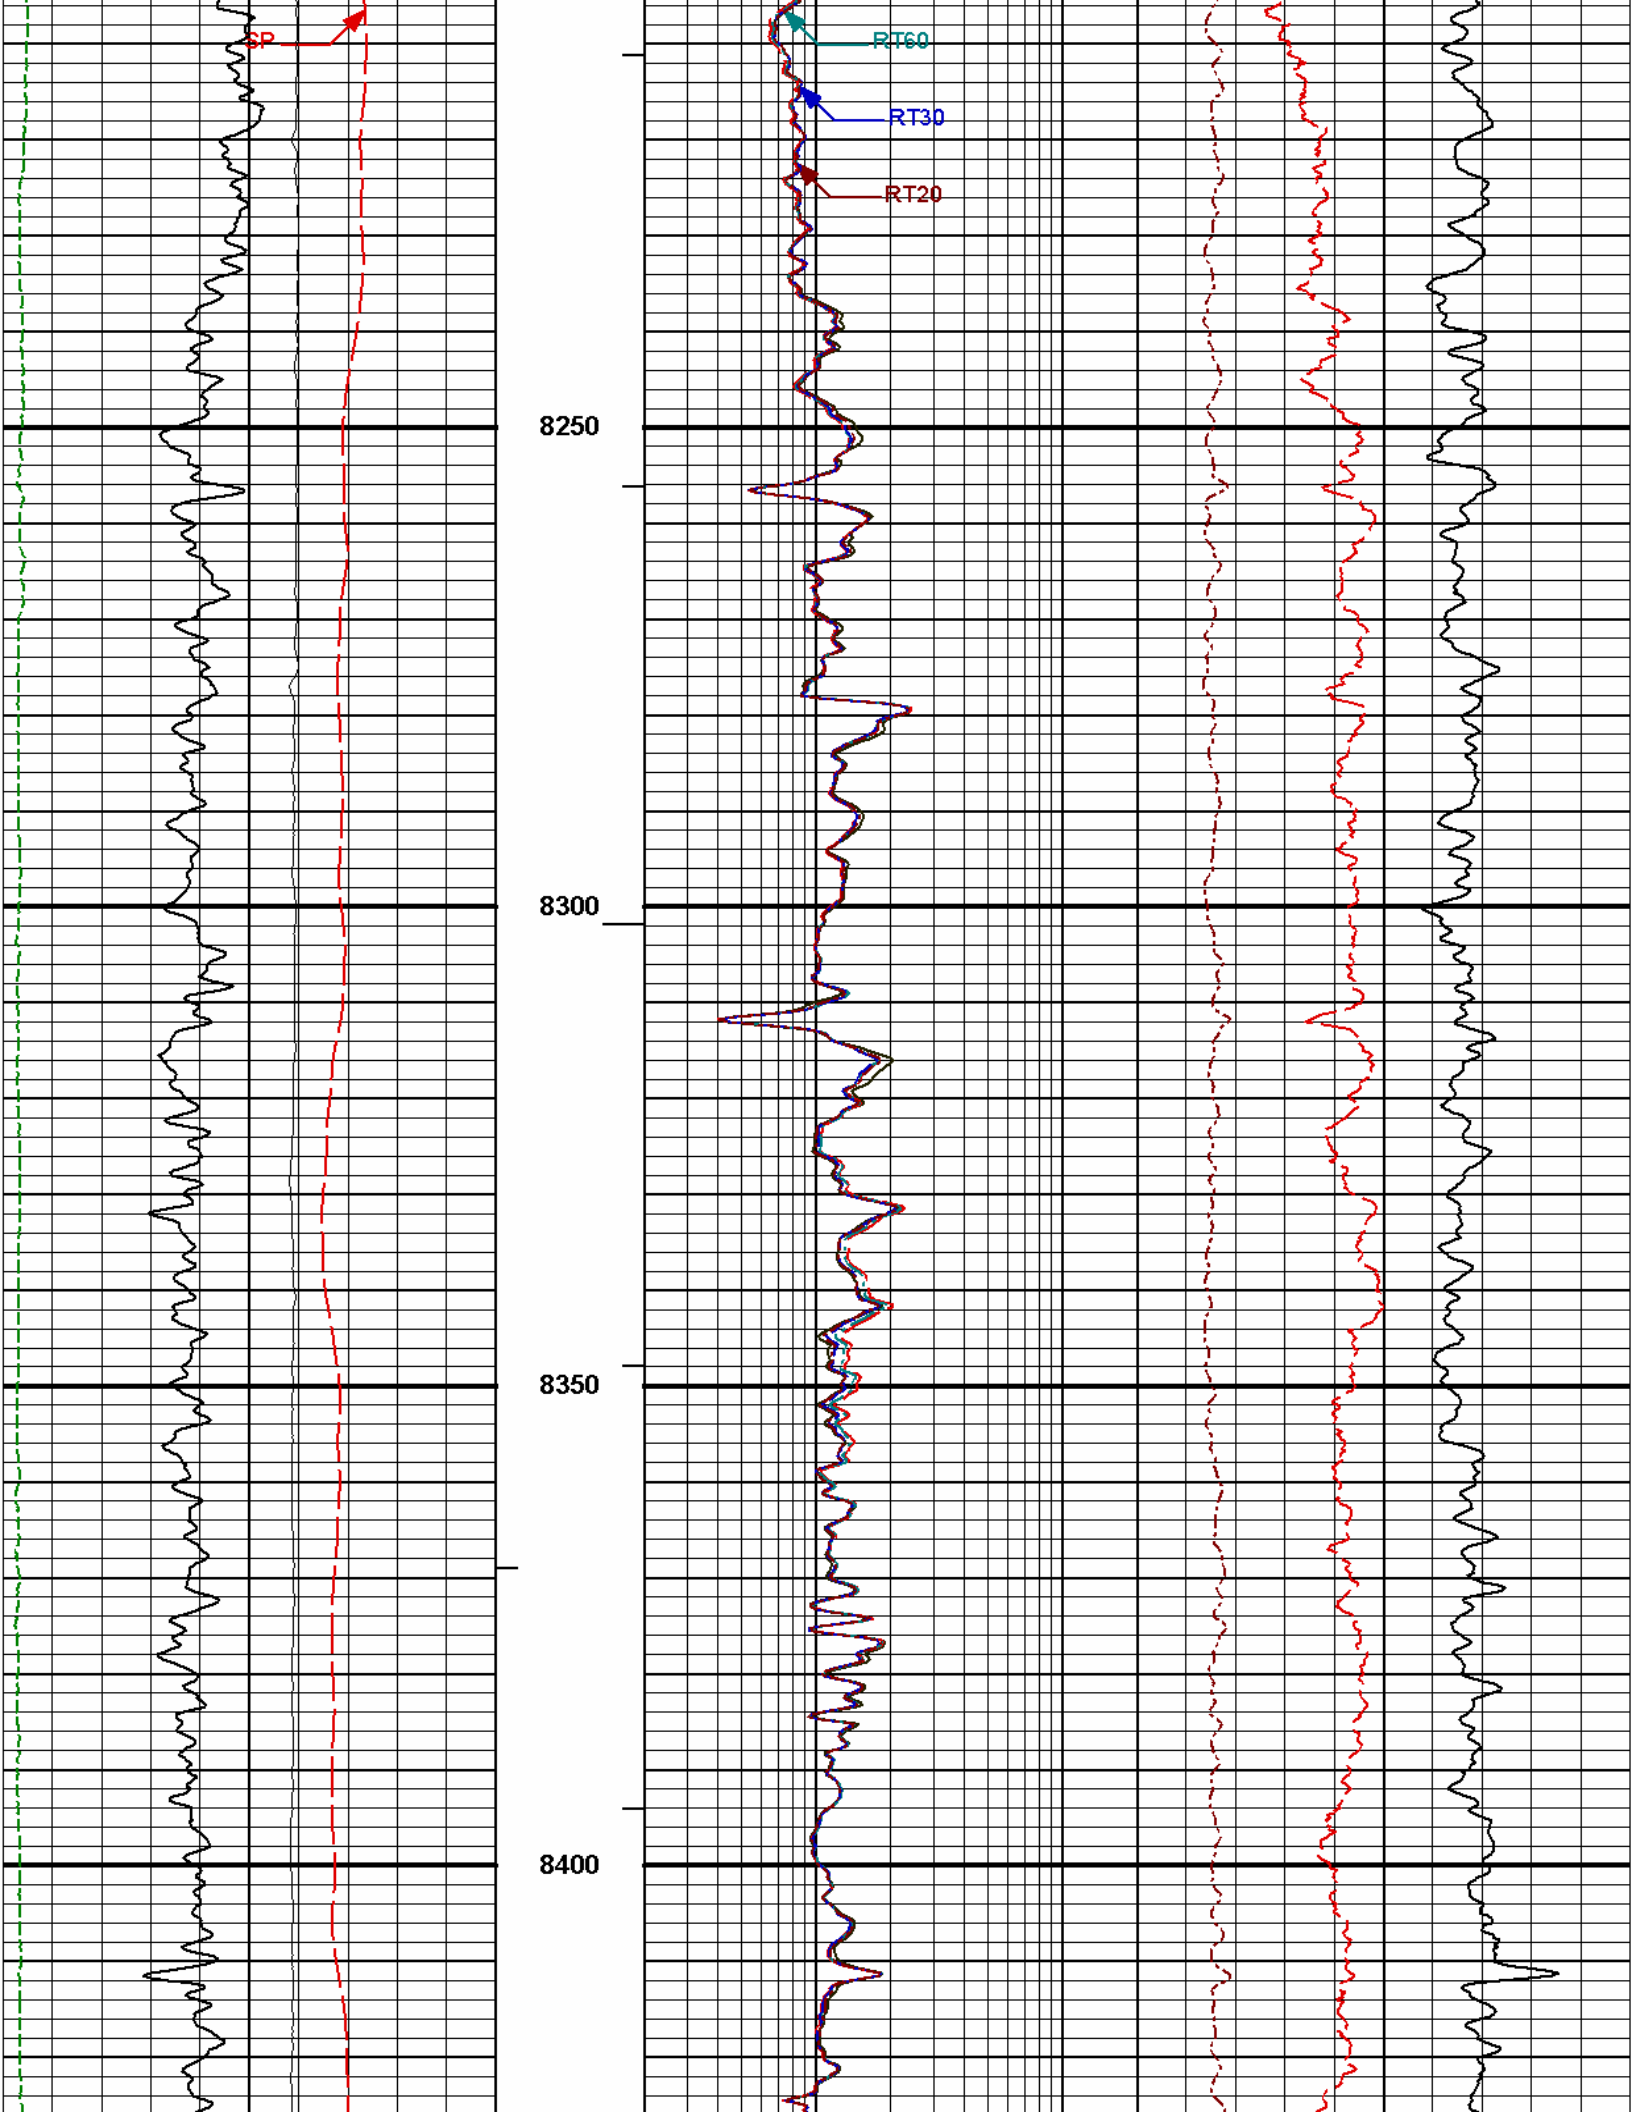


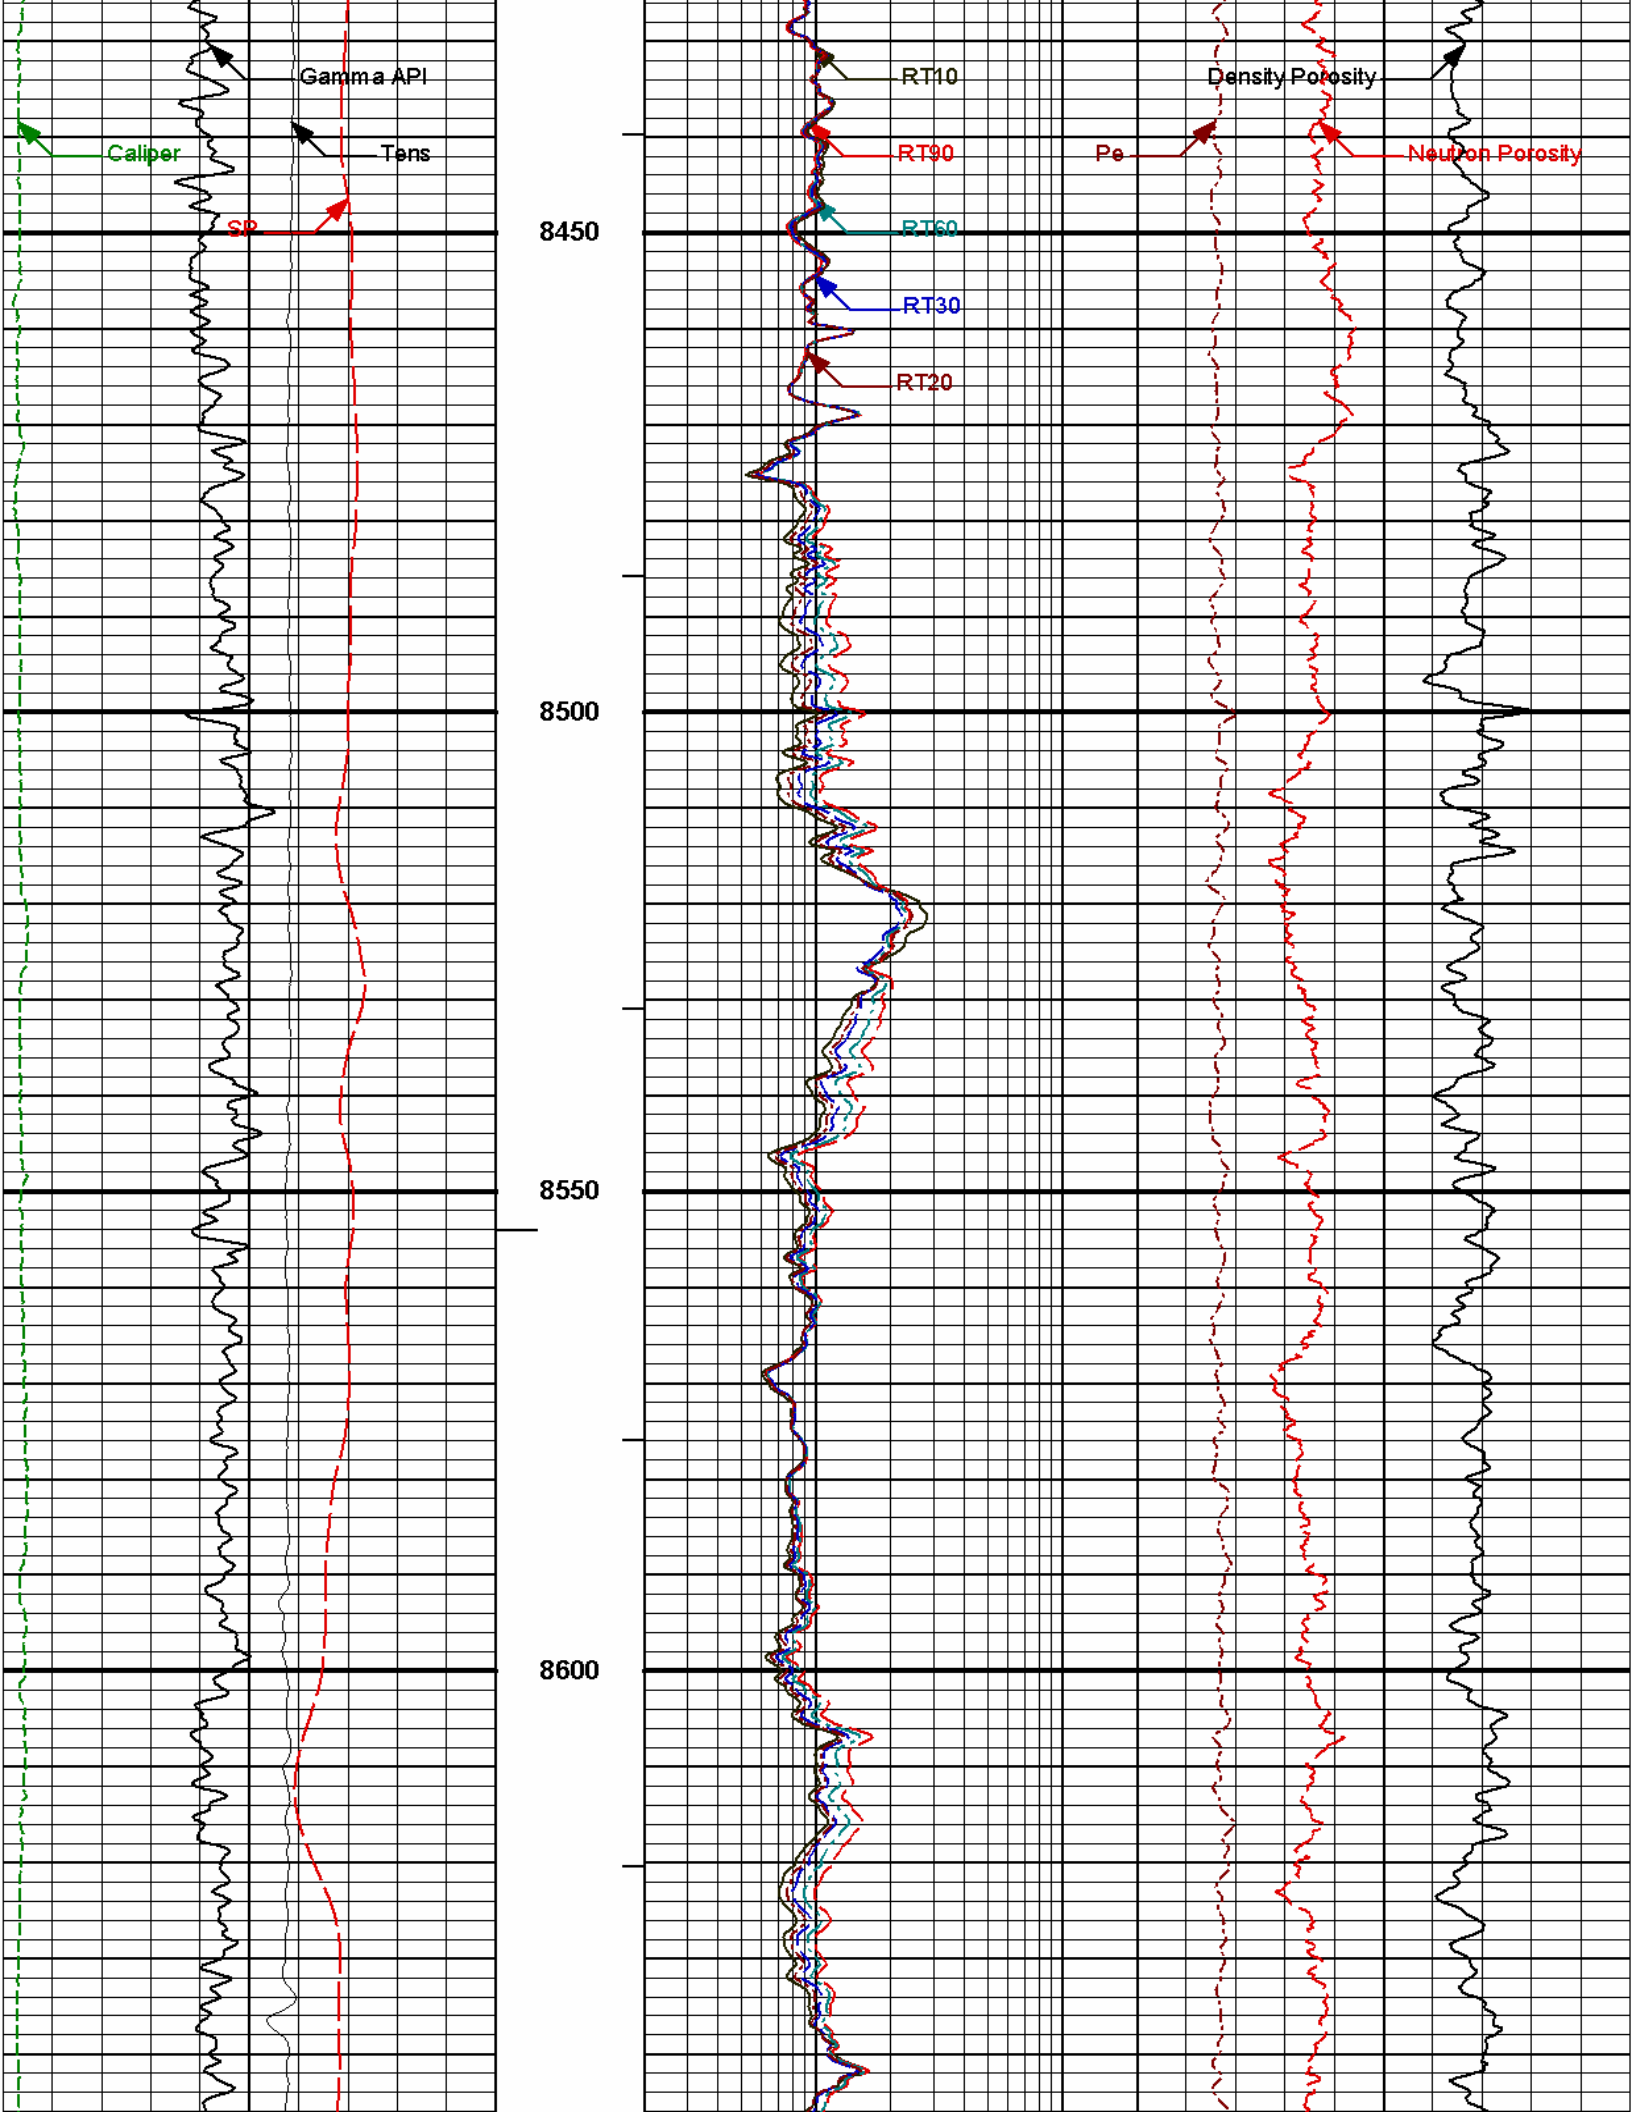


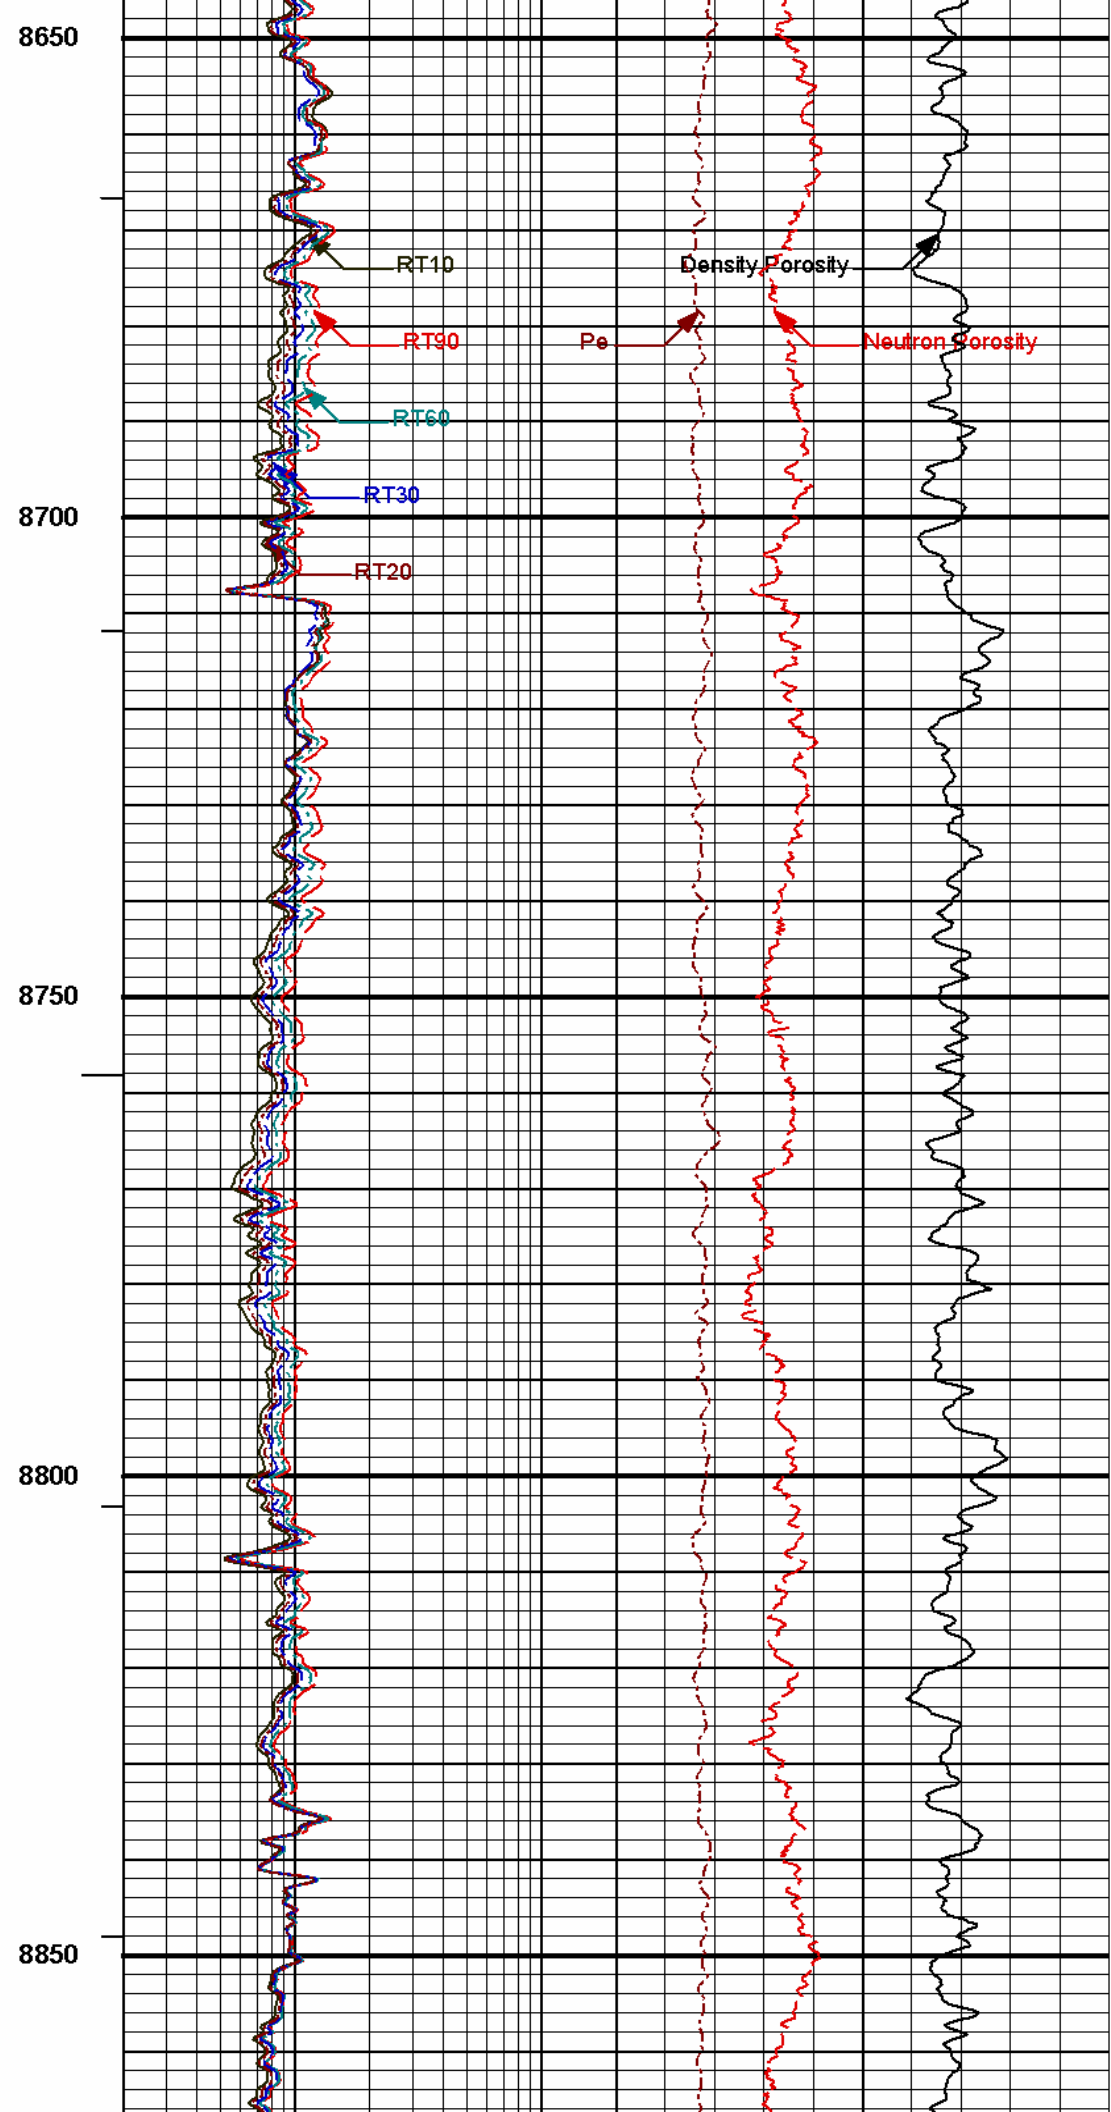


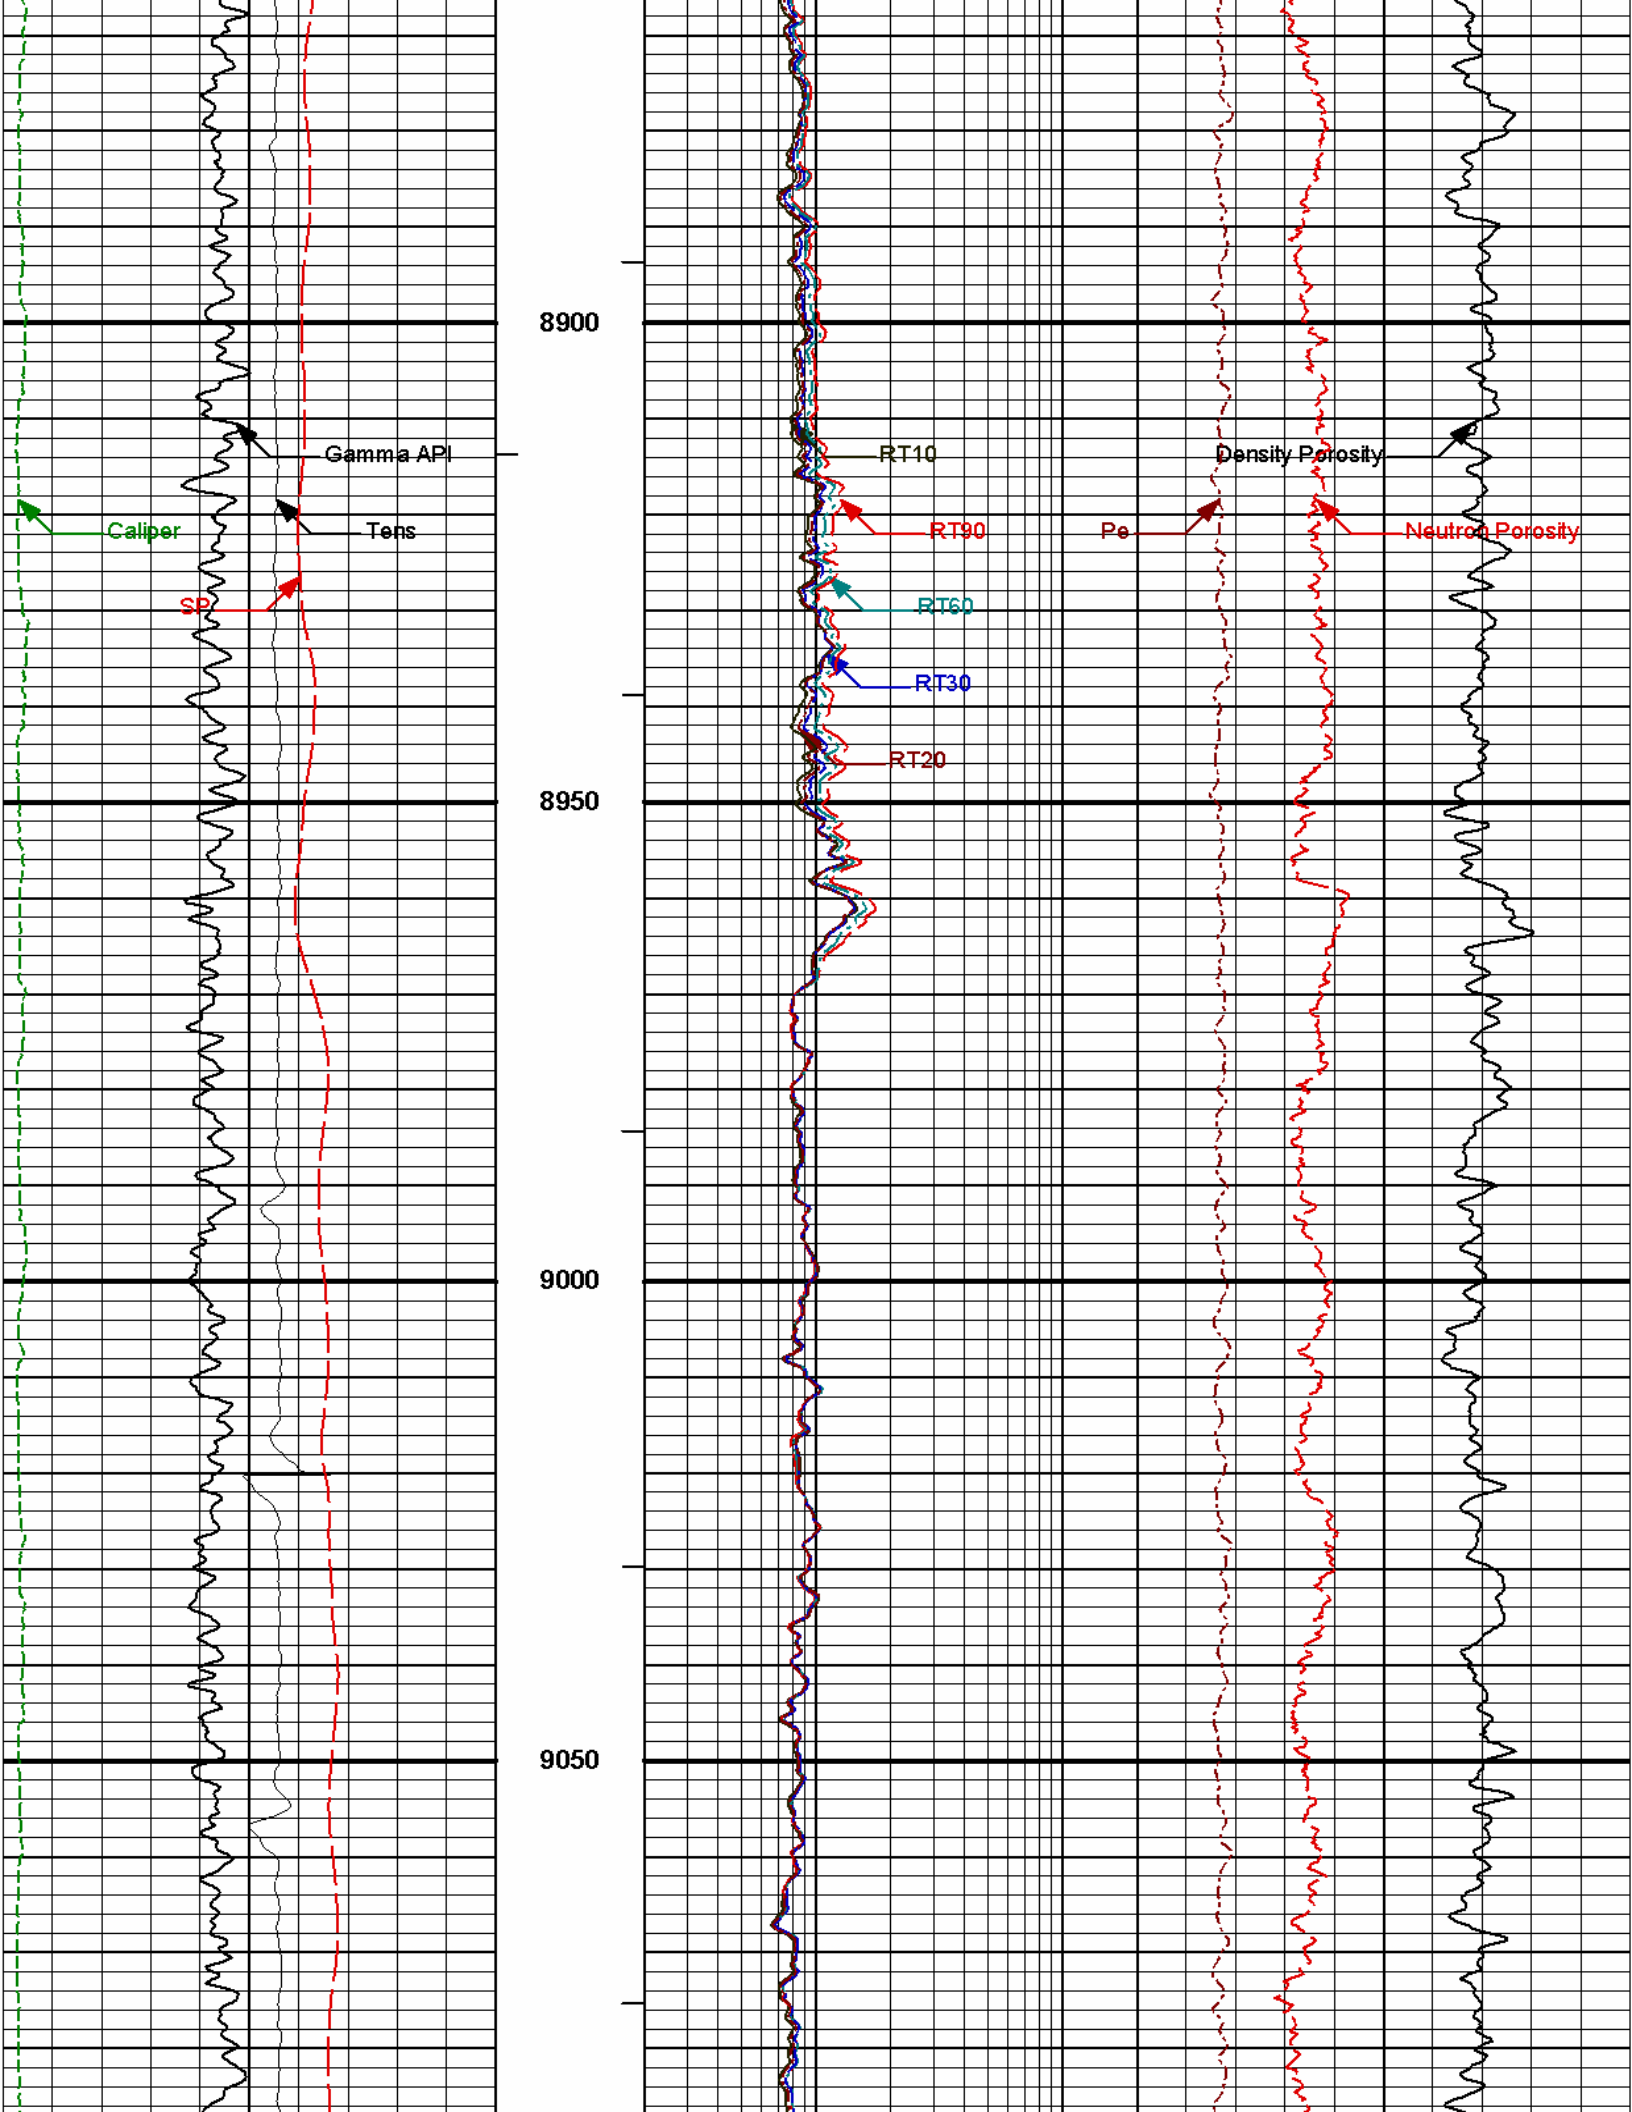


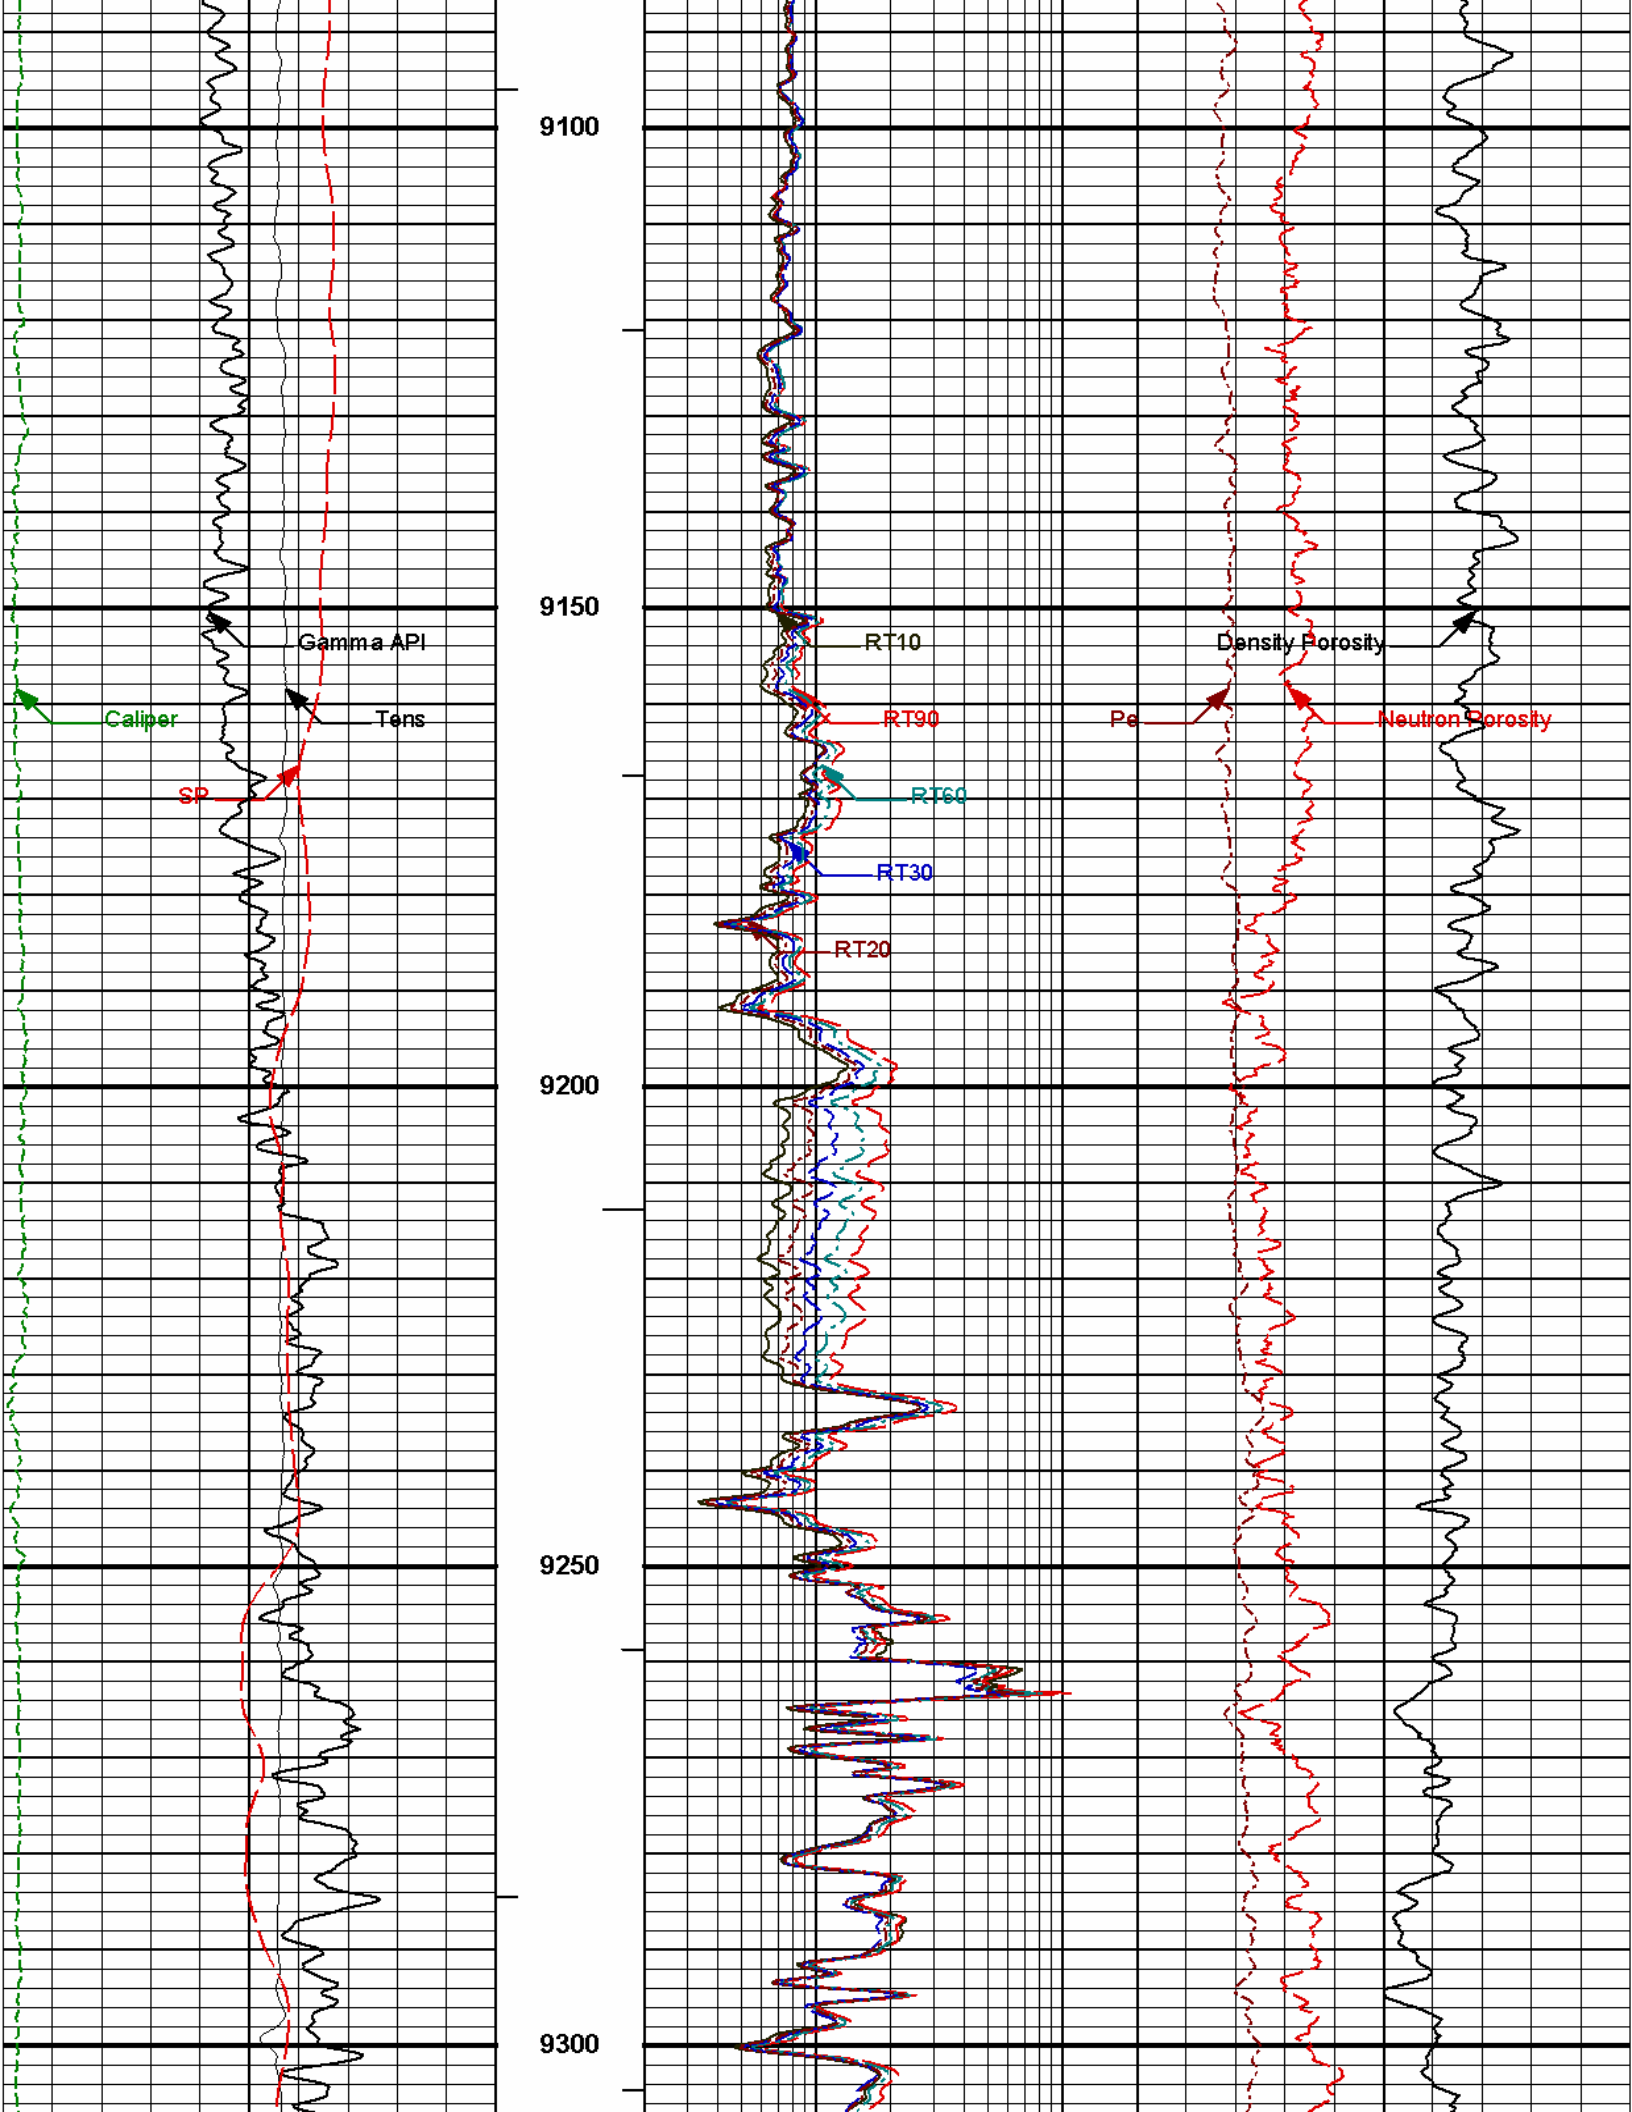


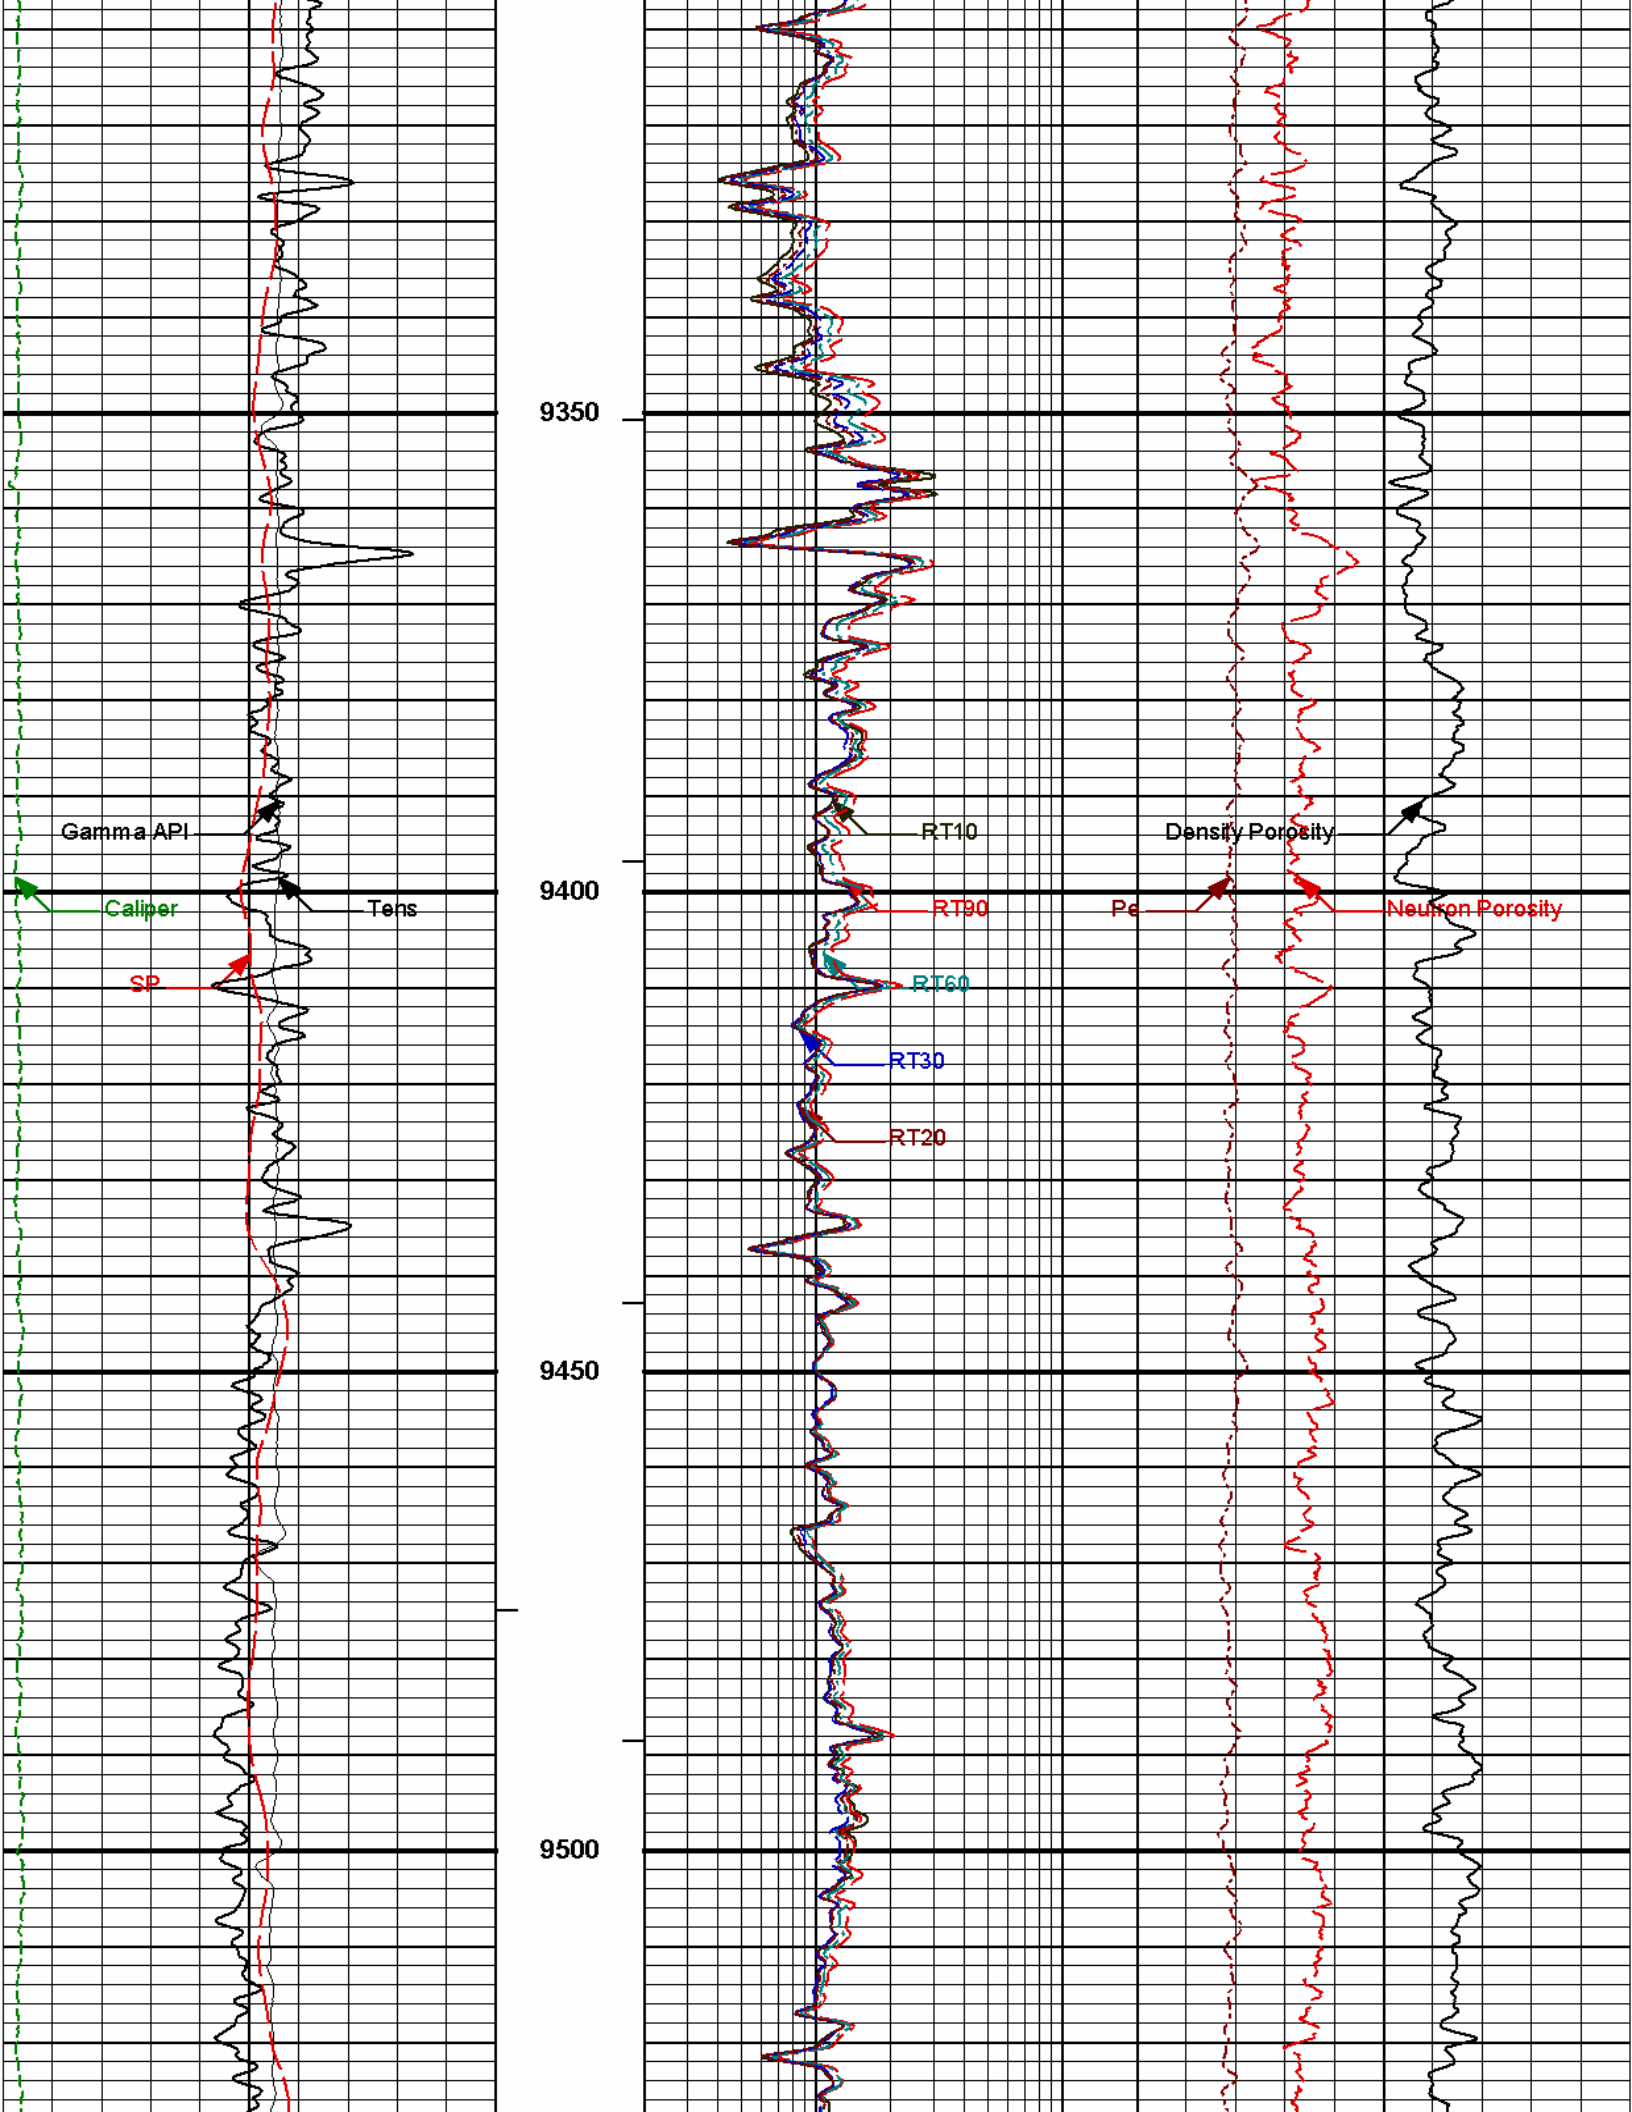


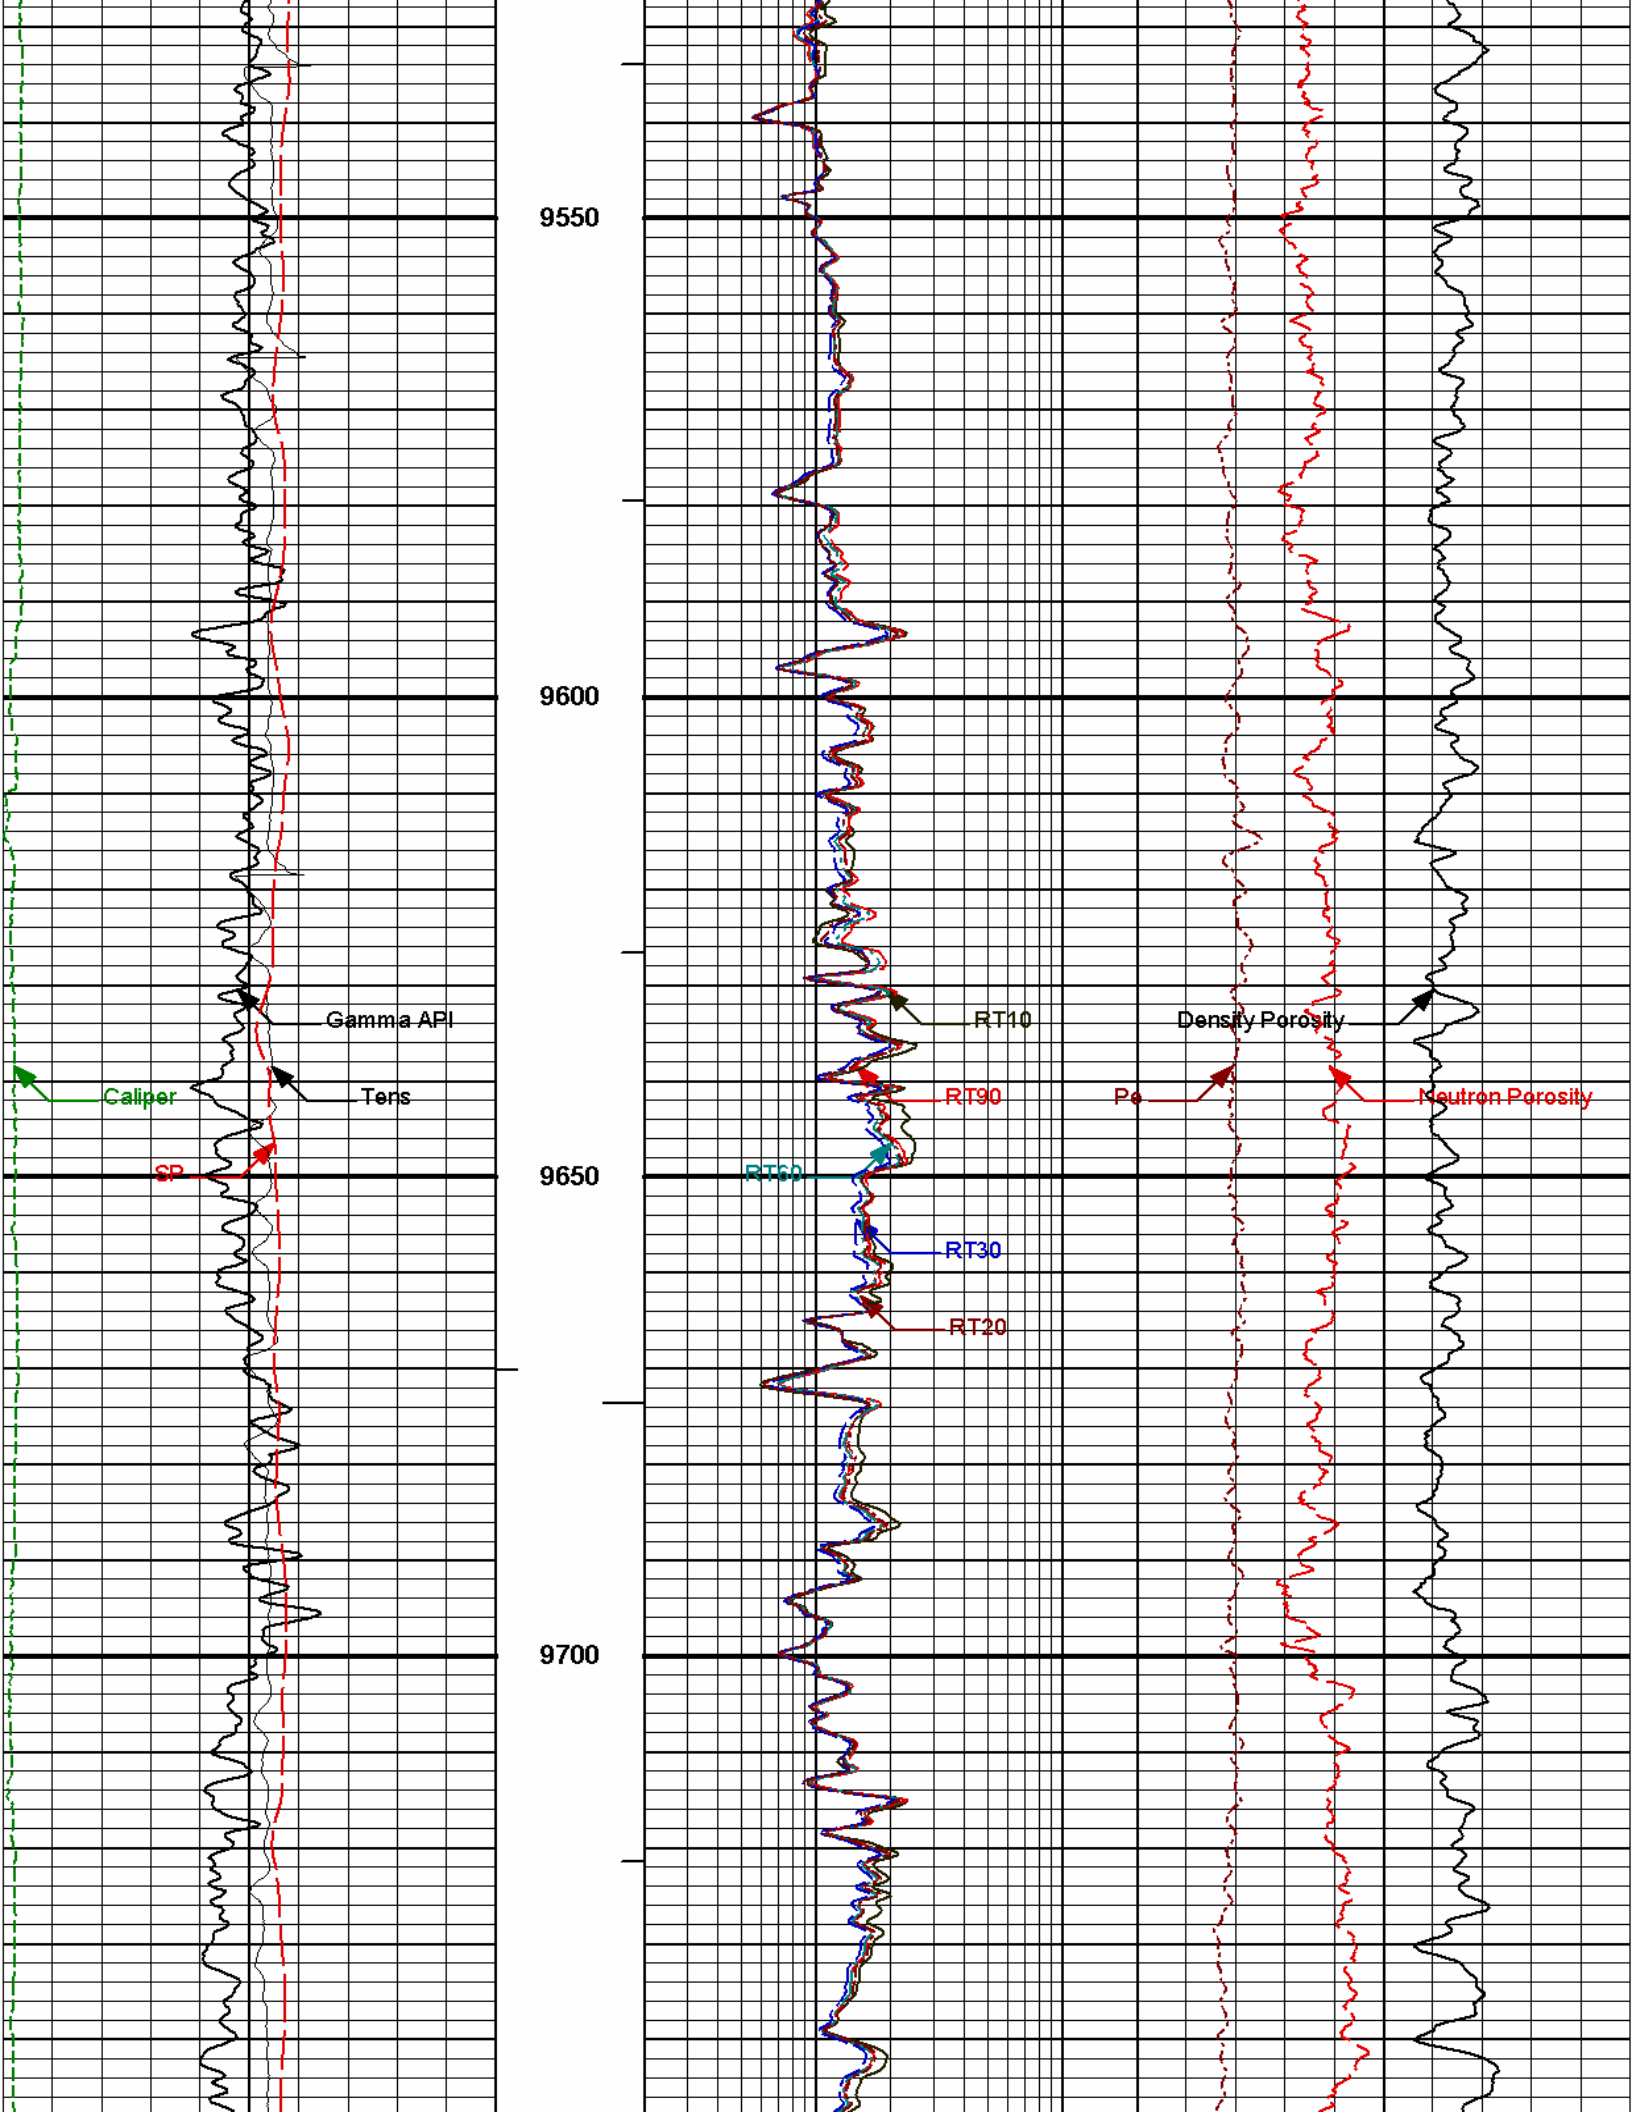


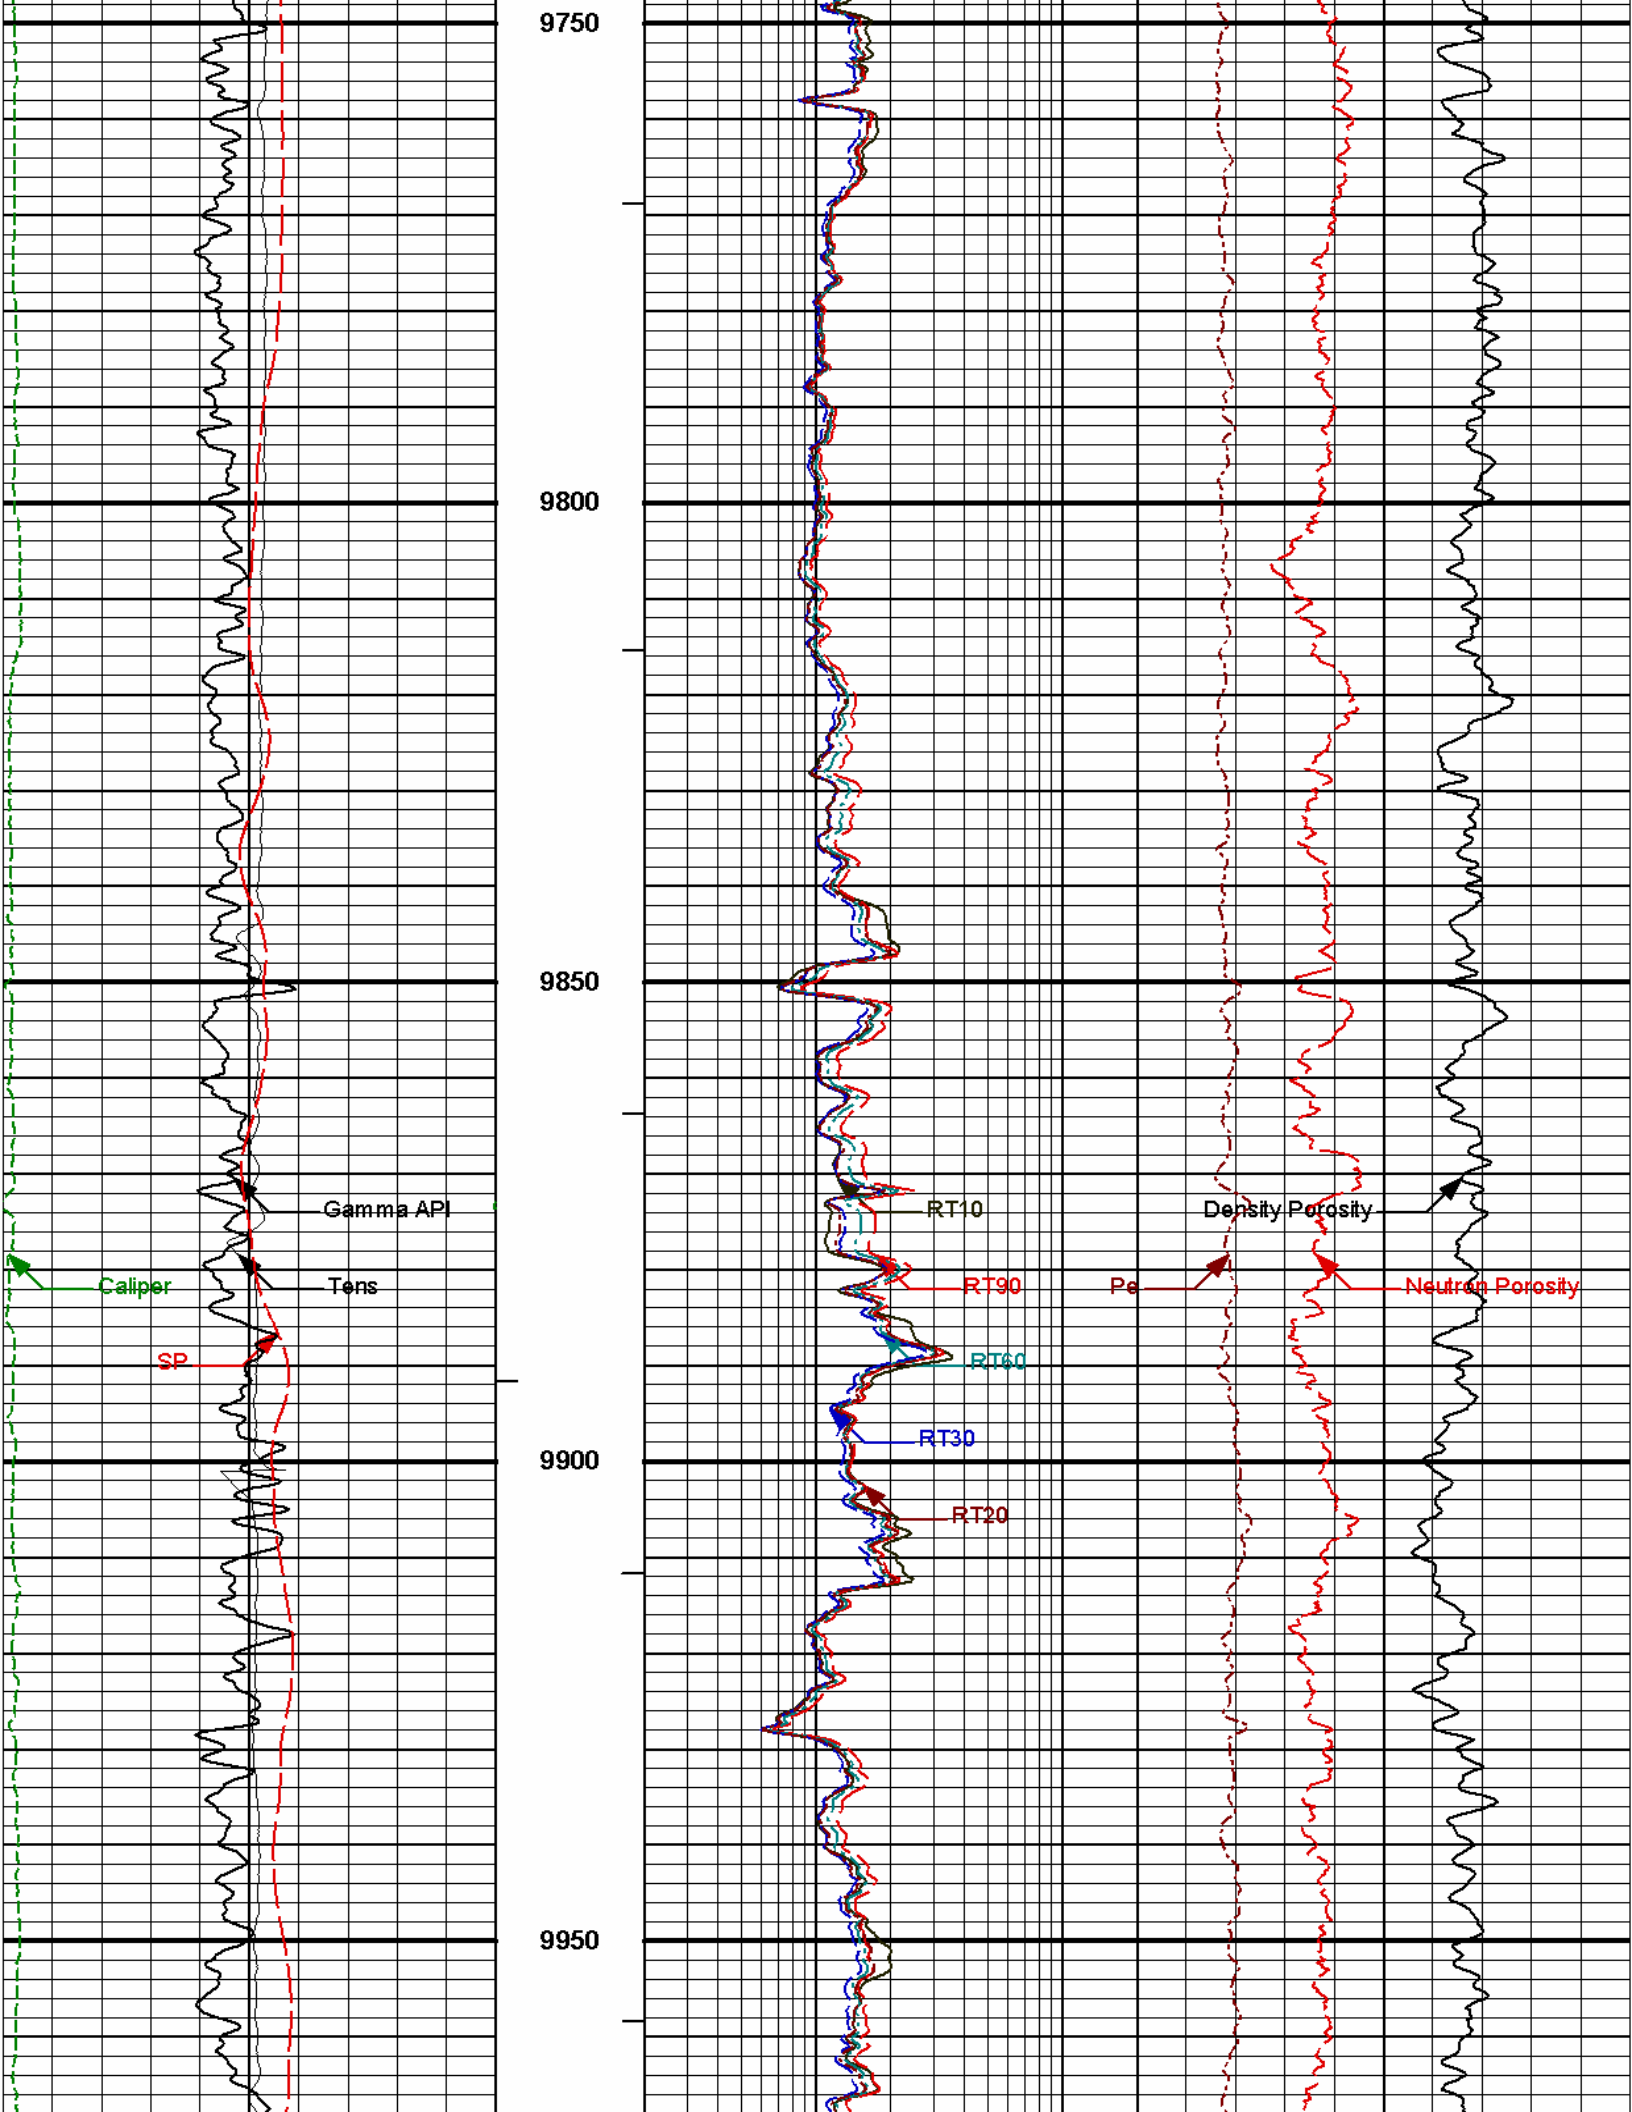

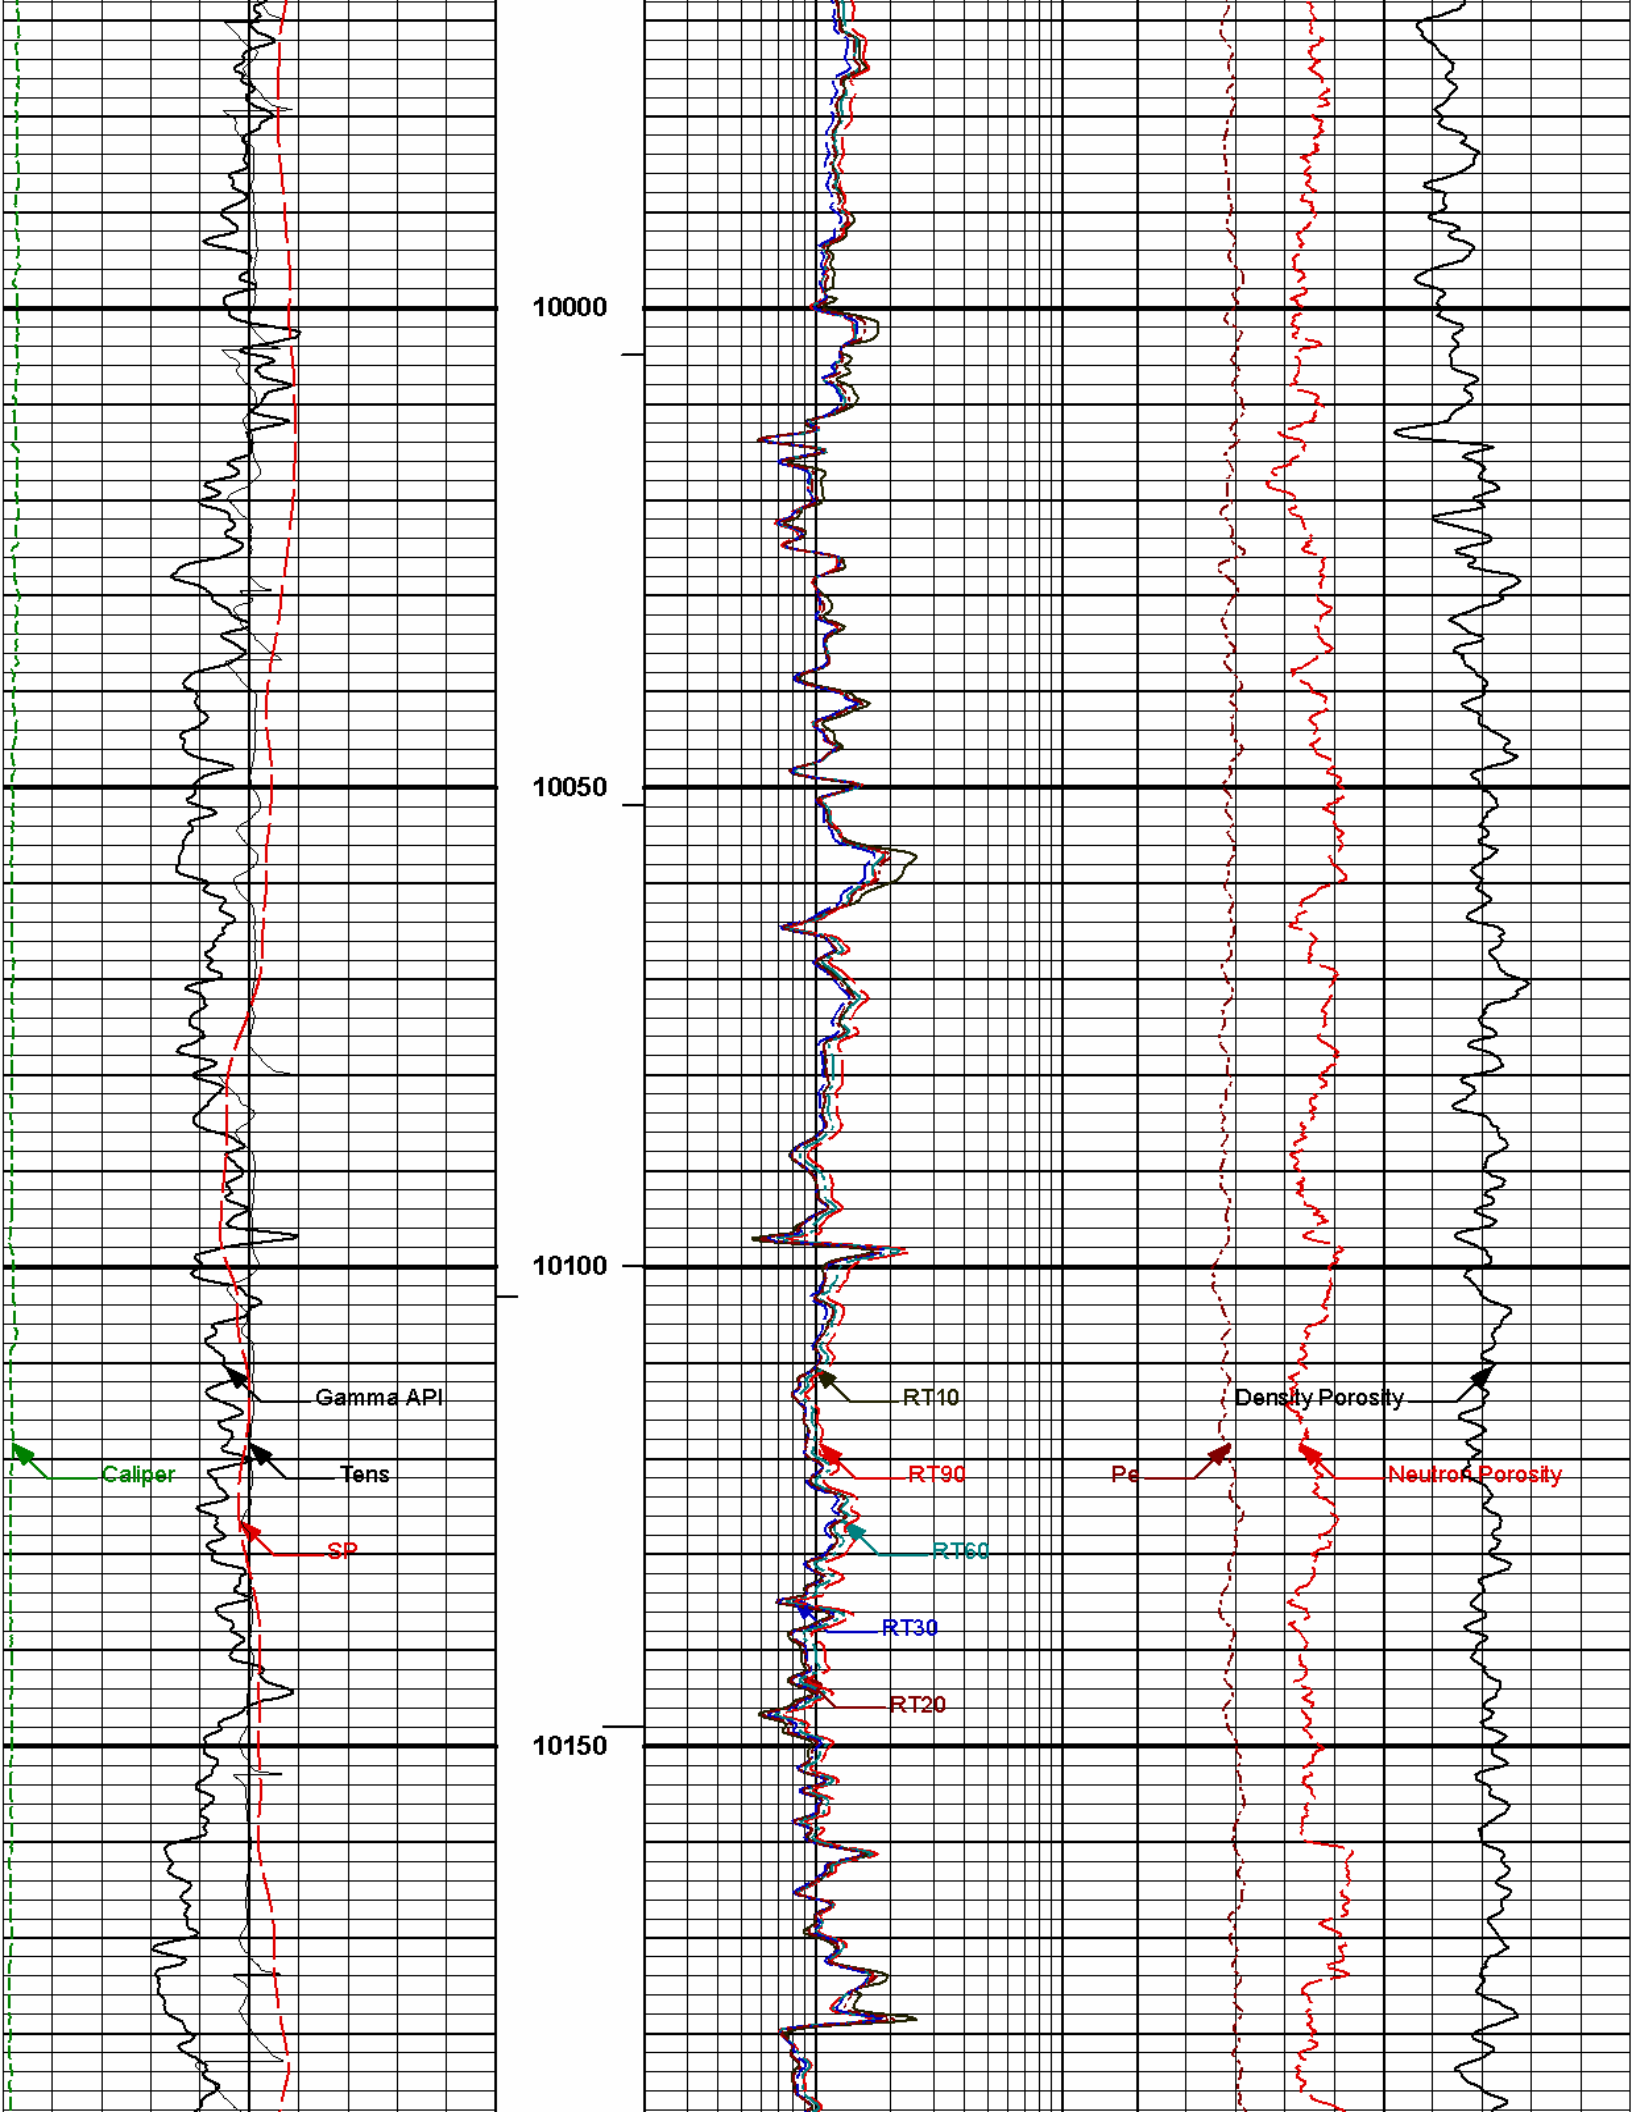

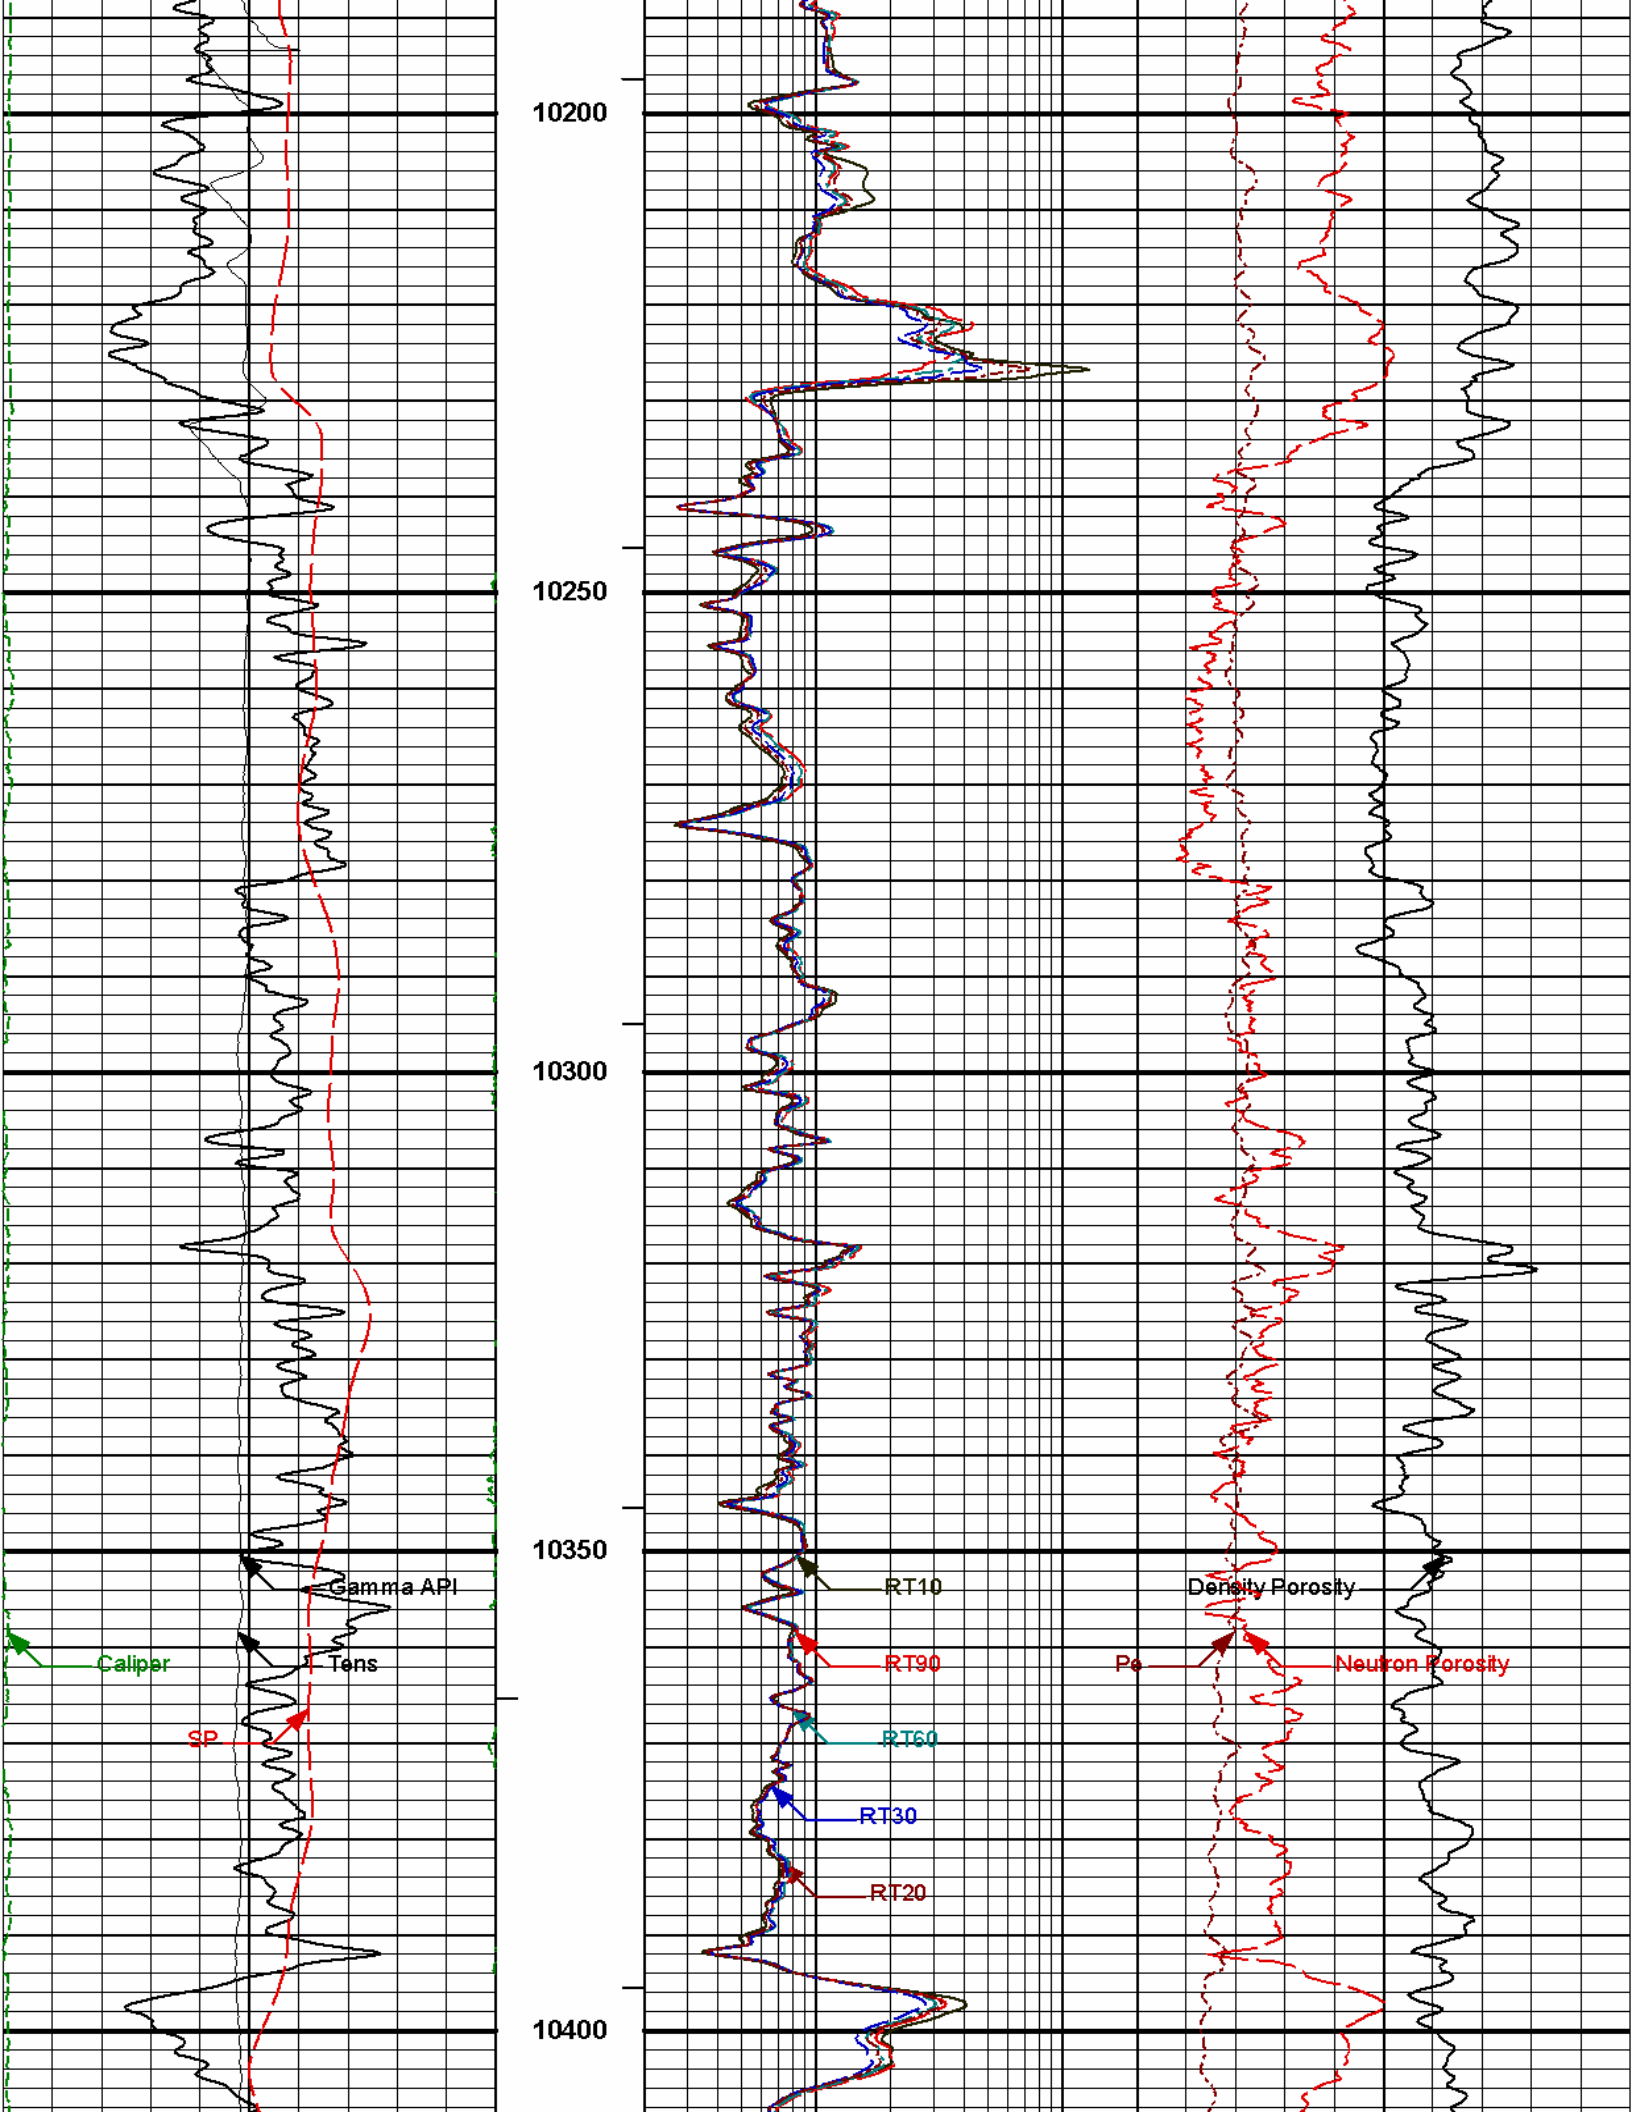

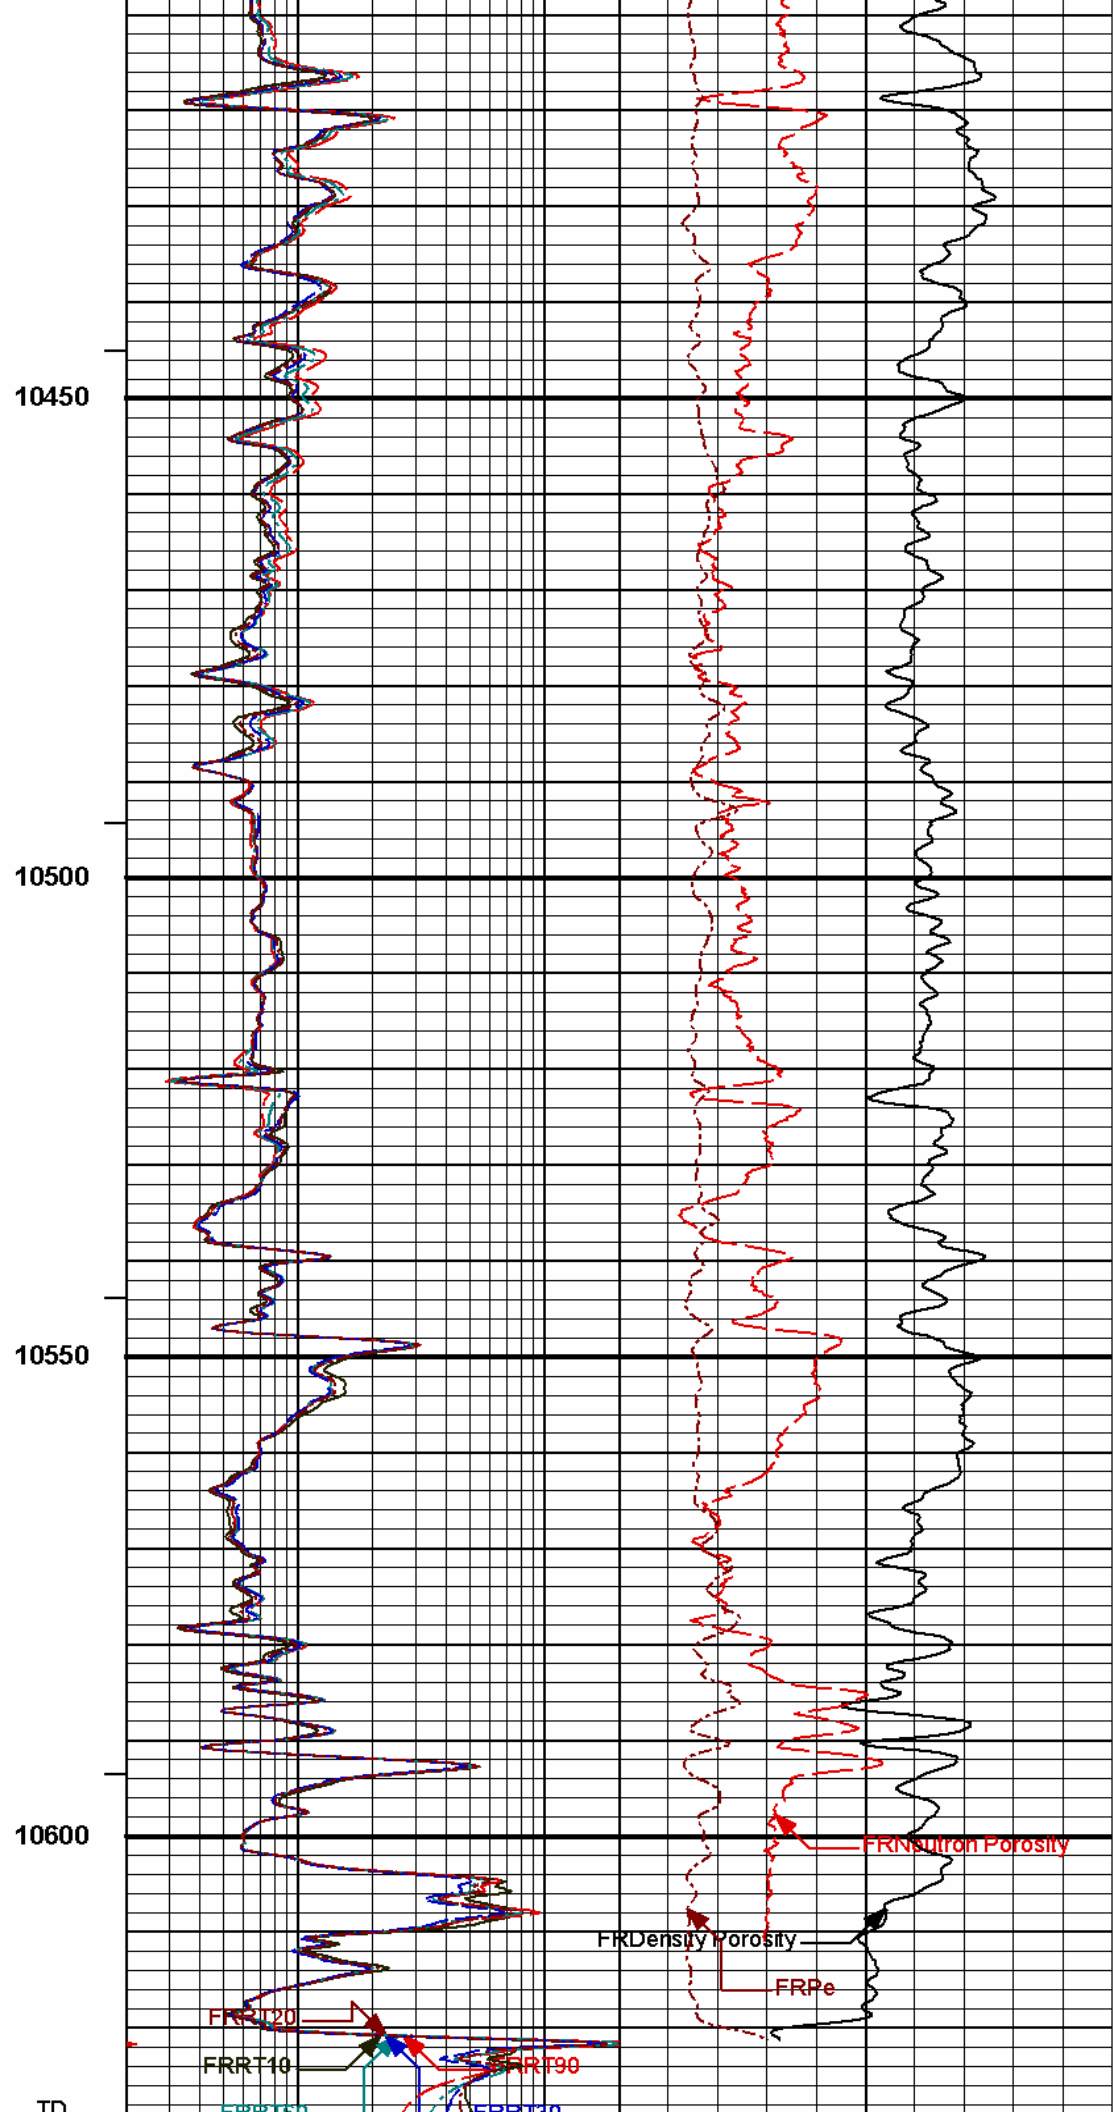

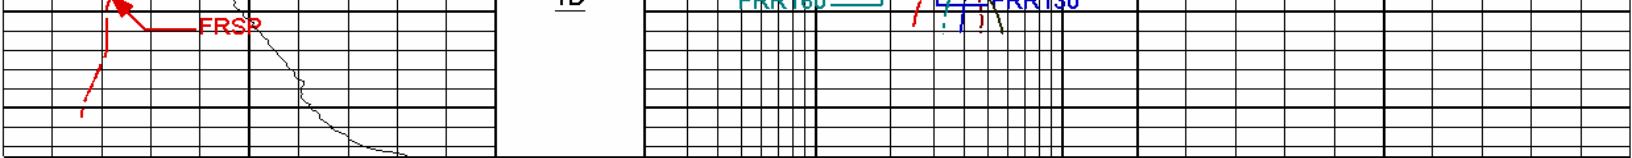

0	SP	100	1 : 240	2	RT90	200	0	Pe	10	
	millivolts				Ohm-m					
0	Gamma API	250	BHVT	2	RT60	200	30	Density Porosity		-10
	api				Ohm-m			percent		
6	Caliper	16	AHVT	2	RT30	200	30	Neutron Porosity		-10
	inches				Ohm-m			percent		
10 K	Tens	0		2	RT20	200				
	pounds				Ohm-m					
				2	RT10	200				
					Ohm-m					

HALLIBURTON

Plot Time: 16-Oct-11 22:42:25
Plot Range: 6494 ft to 10645.2 ft
Data: LARA_HAWX19_13A\Well Based\MAIN_TDI*
Plot File: \\COMP_TDI\Q_COMPOSITE_9N_RM_NOBLE


2150 TO 2500 5" = 100'

HALLIBURTON

Plot Time: 16-Oct-11 22:42:25
Plot Range: 10400 ft to 10650 ft
Data: LARA_HAWX19_13A\Well Based\RPT_TDI*
Plot File: \\COMP_TDI\Q_COMPOSITE_9N_RM_NOBLE

3500 TO 4480 5" = 100'

Track 1	Depth Track	Track 2	Track 5	Track 3
		2	RT10	200
			Ohm-m	
10K	Tens	2	RT20	200
	pounds		Ohm-m	
6	Caliper	2	RT30	200
	inches		Ohm-m	
0	Gamma API	2	RT60	200
	api		Ohm-m	
50	SP	2	RT90	200
	millivolts		Ohm-m	

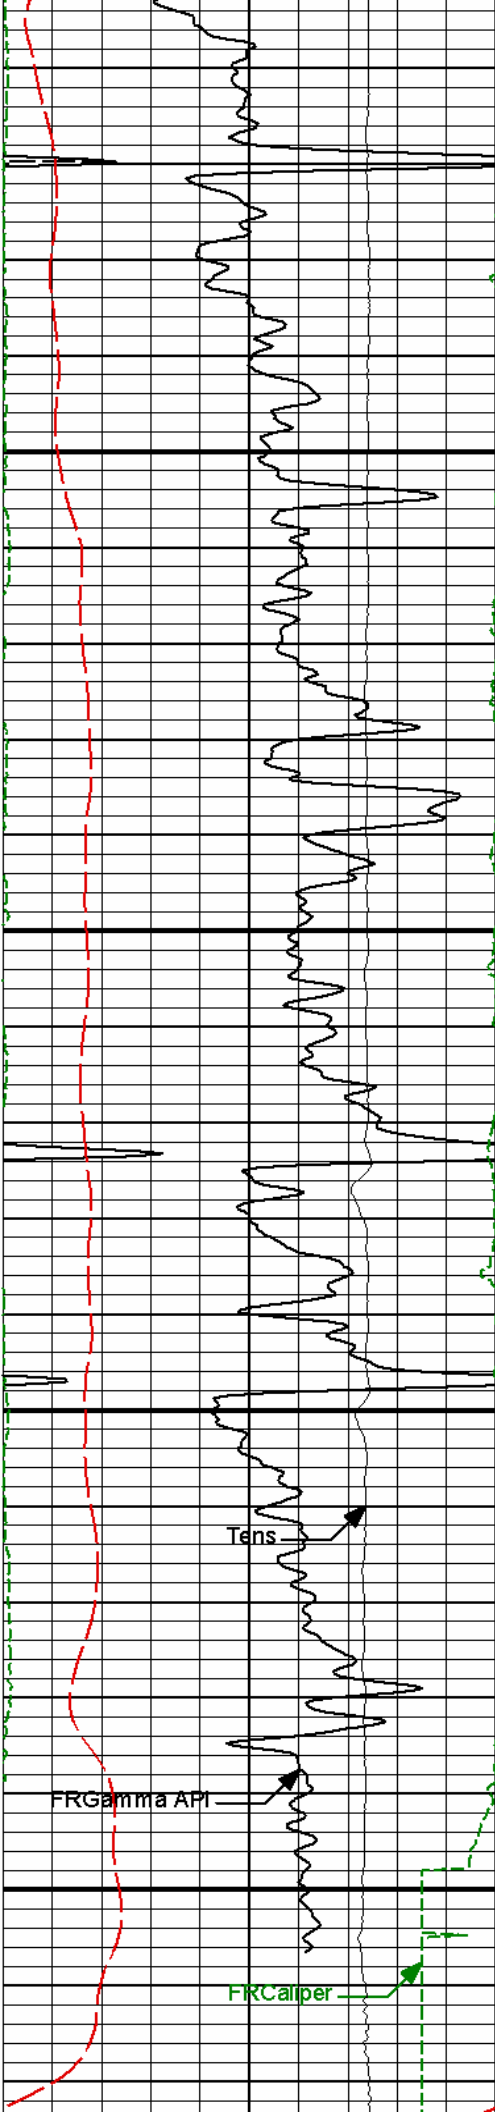


10450

10500

10550


10600

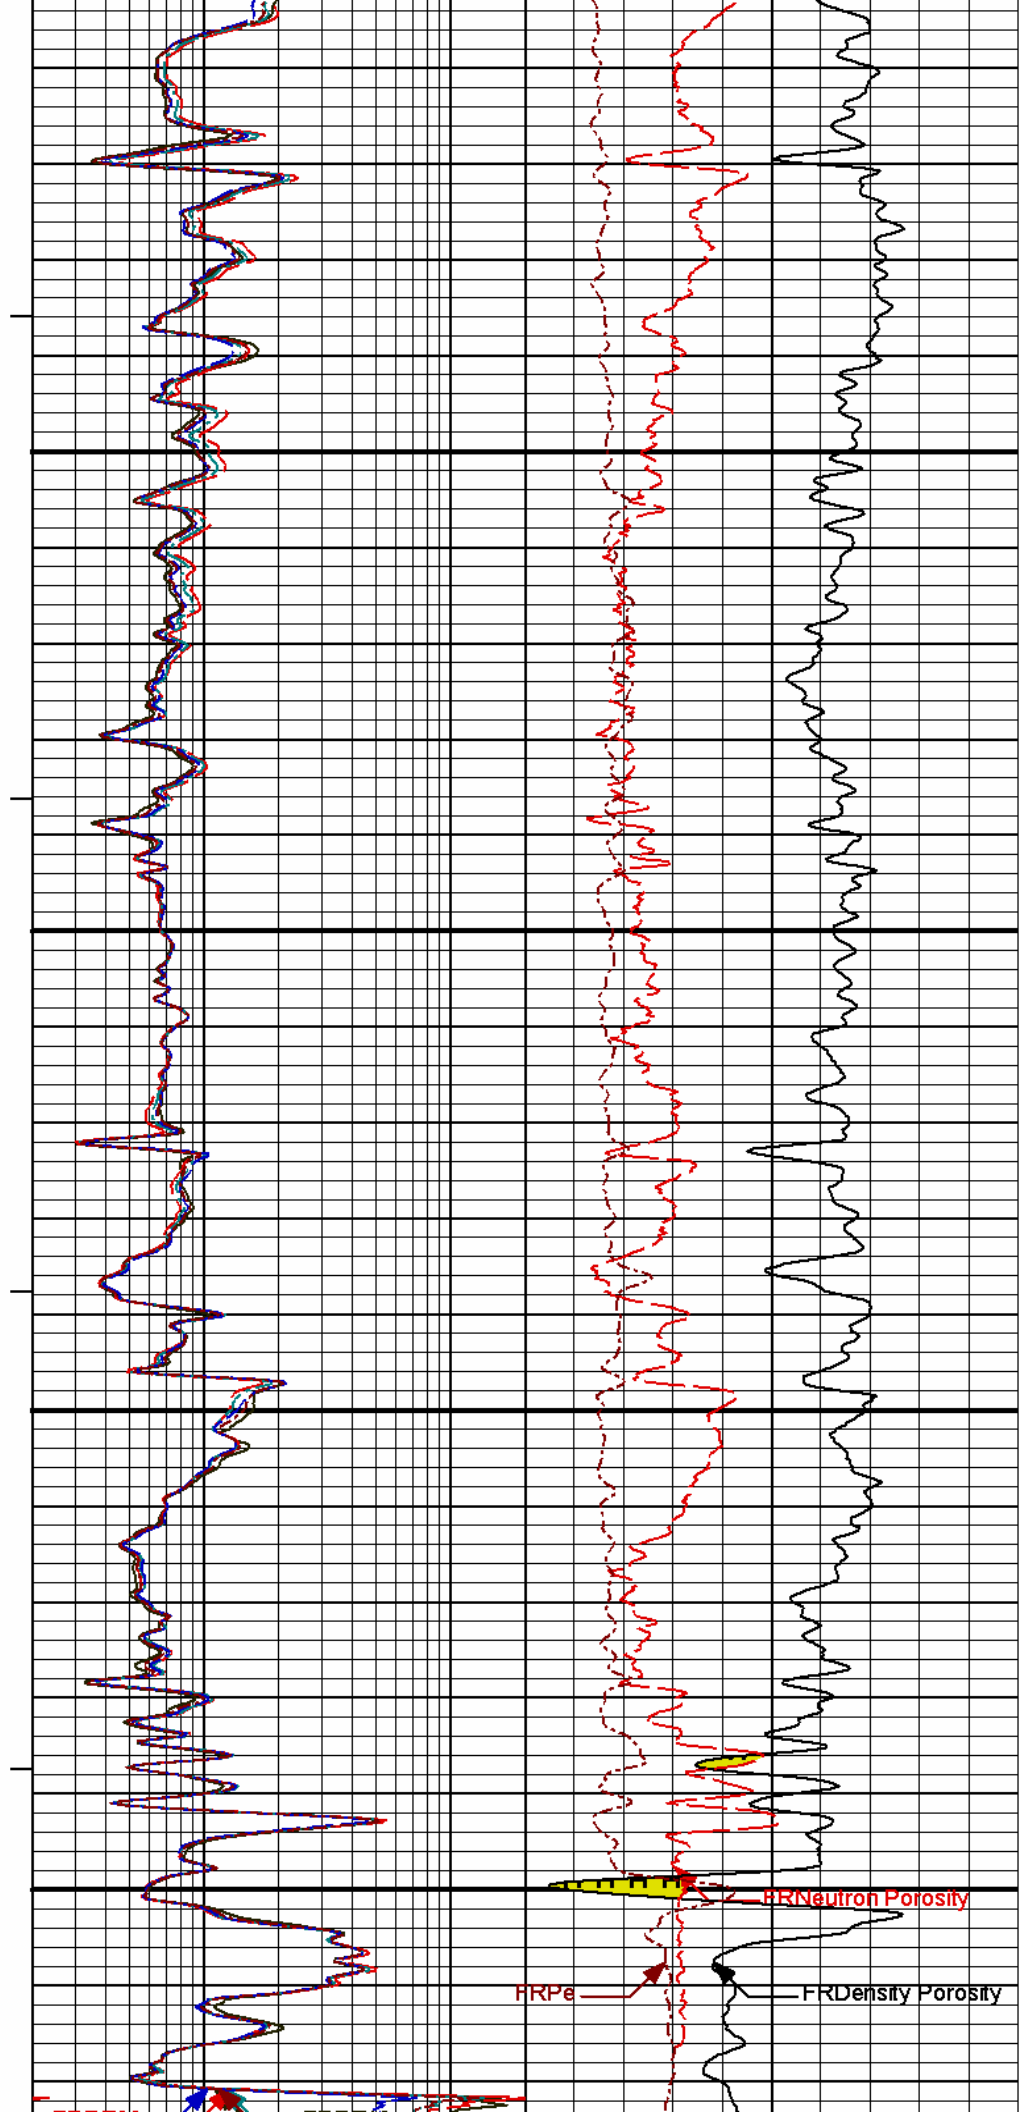

FRPe

FRNeutron Porosity

FRDensity Porosity

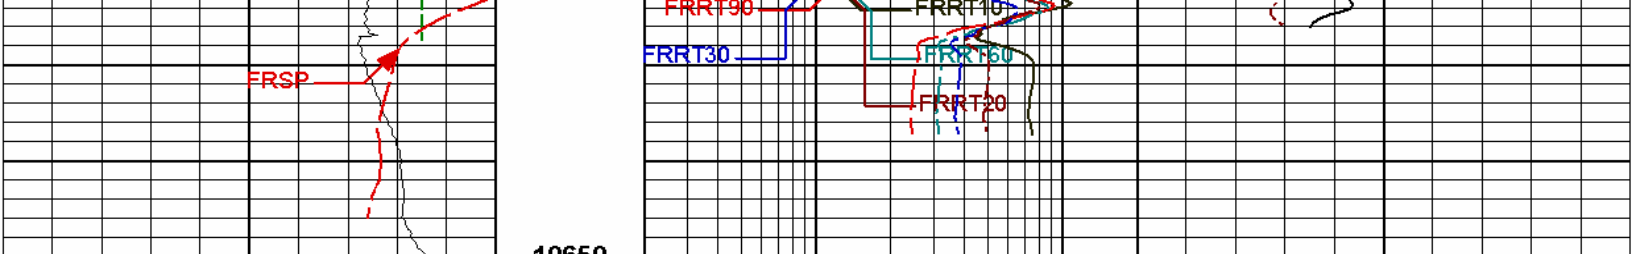

50	SP	150	1 : 240	2	RT90	200	0	Pe	10	
	millivolts				Ohm-m					
0	Gamma API	250	BHVT	2	RT60	200	30	Density Porosity		-10
	api				Ohm-m			percent		
6	Caliper	16	AHVT	2	RT30	200	30	Neutron Porosity		-10
	inches				Ohm-m			percent		
10K	Tens	0		2	RT20	200				
	pounds				Ohm-m					
				2	RT10	200				
					Ohm-m					

HALLIBURTON

Plot Time: 16-Oct-11 22:42:27
 Plot Range: 10400 ft to 10650 ft
 Data: LARA_HAWX19_13A\Well Based\RPT_TDI*
 Plot File: \COMP_TDI\Q_COMPOSITE_9N_RM_NOBLE

3500 TO 4480 5" = 100'

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name:	GTET - 11602915	Reference Calibration Date:	03-Aug-11 12:55:22
Engineer:	C. BRUNTZ	Calibration Date:	02-Sep-11 10:42:37
Software Version:	WL INSITE R3.2.1 (Build 7)	Calibration Version:	1

Calibrator Source S/N: TB-775
 Calibrator API Reference: 212.00 api
 Equivalent Calibrator API Reference: 215.7 api

Measurement	Measured	Calibrated	Units
Background	30.6	30.0	api
Background + Calibrator	250.5	245.8	api
Calibrator	215.1	215.7	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name:	GTET - 11602915	Reference Calibration Date:	02-Sep-11 10:42:37
Engineer:	B. DRAKE	Calibration Date:	16-Oct-11 03:15:06
Software Version:	WL INSITE R3.4.0 (Build 4)	Calibration Version:	1

Calibrator Source S/N: TB-775
 Calibrator API Reference: 212.00 api
 Equivalent Calibrator API Reference: 215.7 api

Field Verification	Shop	Field	Units
Background	30.0	30.0	api
Background + Calibrator	245.8	244.4	api
Calibrator	215.7	214.4	api
Shop	Field	Difference	Tolerance
215.7	214.4	1.3	+/- 9.00

ACCELEROMETER SHOP CALIBRATION

Tool Name:	GTET - 11602915	Reference Calibration Date:	11-May-11 13:49:10
Engineer:	C. BRUNTZ	Calibration Date:	11-May-11 13:51:36
Software Version:	WL INSITE R3.2.1 (Build 7)	Calibration Version:	1

Horizontal-1 Telemetry	Horizontal-2 Telemetry	Vertical Telemetry	Units	
-188.27	-140.73	-16381.18	cnts	
	Coefficient	Coefficient Value	Tolerance	
	Gain	-0.000062	----	
	Offset	-0.010	----	
	Noise	0.0010	0.0000 - 0.0030	
Orientation	Measured	Tolerance	Calibrated	Tolerance
Horizontal	0.00	-0.10 - 0.10	0.00	-0.10 - 0.10
Vertical	1.00	0.90 - 1.10	1.00	0.90 - 1.10

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name:	DSNT - 10981426	Reference Calibration Date:	11-May-11 13:15:06
Engineer:	M. LECUREUX	Calibration Date:	11-May-11 13:30:45
Software Version:	WL INSITE R3.2.1 (Build 7)	Calibration Version:	1

Logging Source S/N: 362
 Tank Serial Number: VERNAL
 Reference value assigned to Tank: 52.630
 Snow Block S/N: VERNAL
 Calibration Tank Water Temperature: 64 degF
 Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS			
Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	0.945	0.946	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)				
Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2158	0.2162	0.0004	+/- 0.0020
Calibrated Ratio:	9.89	9.91	0.015	+/- 0.050

VERIFIER		
Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0764	0.02000 - 0.09000

PASS/FAIL SUMMARY	
Tool Housing Outside Diameter:	Pass

Background Check:
Gain-Range Check:
Snow-Block Check:

Passed
Passed
Passed

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name: DSNT - 10981426

Reference Calibration Date: 11-May-11 13:30:45

Engineer: B. DRAKE

Calibration Date: 16-Oct-11 03:24:11

Software Version: WL INSITE R3.4.0 (Build 4)

Calibration Version: 1

Logging Source S/N: 362
Snow Block S/N: VERNAL

NEUTRON FIELD-CHECK SUMMARY

	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decip):	0.0764	0.0645	-0.0119	+/- 0.0150

PASS/FAIL SUMMARY

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION

Tool Name: SDLT - 11577181

Reference Calibration Date: 05-Jul-11 23:18:57

Engineer: C. BRUNTZ

Calibration Date: 02-Sep-11 12:04:09

Software Version: WL INSITE R3.2.1 (Build 7)

Calibration Version: 1

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-2275.94	-2523.85	-7000.00 - -1000.00
Pad Gain	0.0003859	0.0003892	0.000200 - 0.000600
Arm Offset	-3646.69	-3446.12	-5000.00 - 3000.00
Arm Gain	0.0005223	0.0005396	0.000300 - 0.000700
Arm Power	-0.000002418	-0.000003471	-0.000010 - 0.000010

The ring diameter is computed from: $\text{DIAMETER} = \text{PAD EXTENSION} + \text{ARM EXTENSION} + \text{TOOL DIAMETER}$

Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	2.08	2.00	-0.08	+/- 0.20
Medium Ring (in)	3.81	3.75	-0.06	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.44	6.50	0.06	+/- 0.20
Medium Ring (in)	8.15	8.25	0.10	+/- 0.20
Large Ring (in)	14.91	15.00	0.09	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - 11577181

Reference Calibration Date: 02-Sep-11 12:04:09

Engineer: B. DRAKE

Calibration Date: 16-Oct-11 03:15:03

Engineer: B. DRAKE		Calibration Date: 16-Oct-11 09:15:00							
Software Version: WL INSITE R3.4.0 (Build 4)		Calibration Version: 1							
MEASURED CALIPER VALUES									
Measurement	Shop	Field	Change	Control Limit On New Value					
Pad Extension	3.75	3.75	-0.00	+/- 0.10					
Ring Diameter	8.25	8.25	-0.00	+/- 0.15					
PASS/FAIL SUMMARY									
Pad Extension Check:			Passed						
Diameter Check:			Passed						
ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION									
Tool Name: ACRT Sonde - I777S201		Reference Calibration Date: 27-May-11 09:42:13							
Engineer: B. PEDERSEN		Calibration Date: 27-May-11 09:52:04							
Software Version: WL INSITE R3.2.1 (Build 7)		Calibration Version: 1							
TYPICAL GAIN RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0067	1.05	0.95	1.0119	1.05	0.95	1.0173	1.05
A2 (50")	0.95	1.0123	1.05	0.95	1.0187	1.05	0.95	1.0258	1.05
A3 (29")	0.95	1.0041	1.05	0.95	1.0087	1.05	0.95	1.0136	1.05
A4 (17")	0.95	1.0019	1.05	0.95	1.0053	1.05	0.95	1.0126	1.05
A5 (10")	N/A	N/A	N/A	0.95	0.9913	1.05	0.95	0.9971	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9817	1.05	0.95	0.9856	1.05
TYPICAL SONDE OFFSET RANGE									
Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	-5	-1.423	2	-6	-4.169	-2	-8	-4.609	-2
A2 (50")	-7	-3.152	-1	-6	-4.088	-2	-7	-4.081	-2
A3 (29")	-27	-13.620	-9	-9	-4.328	-3	-7	-2.971	-1
A4 (17")	-180	-94.403	-60	-45	-30.649	-15	-39	-25.615	-13
A5 (10")	N/A	N/A	N/A	-150	-86.594	-50	-80	-40.842	-10
A6 (6")	N/A	N/A	N/A	175	329.351	525	90	166.441	270
TRANSMITTER CURRENT GAIN					R-MUD VERIFICATION				
Signal	Lower	R	Upper	Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)		
12K	0.6	0.9423	1.3	Mud Cell	0.95	1.005	1.05		
36K	1.0	1.2880	2.0						
72K	1.0	1.4668	2.0						
SPECTRAL DENSITY SHOP CALIBRATION									
Tool Name: SDLT Pad - 10950493				Reference Calibration Date: 03-Aug-11 13:06:44					
Engineer: B. DRAKE				Calibration Date: 03-Aug-11 13:26:15					
Software Version: WL INSITE R3.2.1 (Build 7)				Calibration Version: 1					
Logging Source S/N: 18265B									
Aluminum Block S/N: 8261				Density: 2.602g/cc		Pe: 3.182			
Magnesium Block S/N: 8260				Density: 1.688g/cc		Pe: 2.594			
DENSITY CALIBRATION SUMMARY									

Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0383	1.0507	0.90 - 1.10
Near Dens Gain	1.0232	1.0218	0.90 - 1.10
Near Peak Gain	1.0280	1.0203	0.90 - 1.10
Near Lith Gain	1.0076	1.0027	0.90 - 1.10
Far Bar Gain	1.0175	1.0162	0.90 - 1.10
Far Dens Gain	1.0046	1.0035	0.90 - 1.10
Far Peak Gain	1.0010	1.0035	0.90 - 1.10
Far Lith Gain	0.9795	0.9794	0.90 - 1.10

Near Bar Offset	-0.1717	-0.2858	NONE
Near Dens Offset	-0.0598	-0.0455	NONE
Near Peak Offset	-0.1105	-0.0456	NONE
Near Lith Offset	0.0591	0.0997	NONE
Far Bar Offset	0.0124	0.0246	NONE
Far Dens Offset	0.1209	0.1326	NONE
Far Peak Offset	0.1445	0.1212	NONE
Far Lith Offset	0.2890	0.2910	NONE

Near Bar Background	1104.66	1107.60	700 - 1450
Near Dens Background	364.19	363.36	230 - 480
Near Peak Background	158.46	158.29	100 - 210
Near Lith Background	194.23	195.38	125 - 260
Far Bar Background	593.92	596.40	450 - 900
Far Dens Background	235.22	236.58	175 - 345
Far Peak Background	92.69	92.55	70 - 140
Far Lith Background	95.47	95.54	75 - 145

CALIBRATION BLOCK SUMMARY				
Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.687	1.688	0.001	+/- 0.015
Pe	2.545	2.554	0.009	+/- 0.150
ALUMINUM				
Density (g/cc)	2.601	2.602	0.002	+/- 0.01500
Pe	3.152	3.138	-0.014	+/- 0.150

TOOL SUMMARY				
Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	0.0013	+/- 0.0110	0.0007	+/- 0.0140
Magnesium Block	-0.0010	+/- 0.0110	-0.0016	+/- 0.0140
Aluminum Block	0.0002	+/- 0.0110	-0.0003	+/- 0.0140
Resolution	9.68	6.00 - 11.50	9.29	6.00 - 11.50
Internal Verifier(B+D+P+L)	1825	1200 - 2700	1021	800 - 1700

PASS/FAIL SUMMARY	
Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed

Magnesium Quality Check:

Passed

Aluminum Quality Check:

Passed

Gains Check:

Passed

Changes in Calibration Blocks:

Passed

CALIBRATION SUMMARY


Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11602915						
Gamma Ray Calibrator	215.7	214.4	-----	1.3	+/- 9.00	api
DSNT-10981426						
Snow-Block Porosity	0.0764	0.0645	-----	0.0119	+/- 0.0150	decp
SDLT-11577181						
Pad Extension	3.75	3.75	-----	0.00	+/-0.10	in
Ring Diameter	8.25	8.25	-----	0.000	+/-0.15	in
ACRt Sonde-I777S201						
Mud Cell	1.005	-----	-----	0.000	-----	ohm-m
SDLT Pad-10950493						
Near(B+D+P+L)	1824.629	-----	-----	0.000	+/-14.951	cps
Far(B+D+P+L)	1021.072	-----	-----	0.000	+/-15.436	cps


Data: LARA_HAWX19_13A\0003 TRIPLE_ACRT004 16-Oct-11 21:17 Up 10640.3f

Date: 16-Oct-11 22:36:11

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
RWCH-10895163 135.00 lbs		Ø 3.625 in →		Load Cell @ 51.17 ft BH Temperature @ 50.60 ft	6.25 ft	54.85 ft
GTET-11602915 165.00 lbs		Ø 3.625 in →		GammaRay @ 42.54 ft	8.52 ft	48.60 ft
DSNT-10981426 174.00 lbs		Ø 3.625 in →		DSN Far @ 33.15 ft DSN Near @ 32.40 ft	9.69 ft	40.08 ft
						30.40 ft

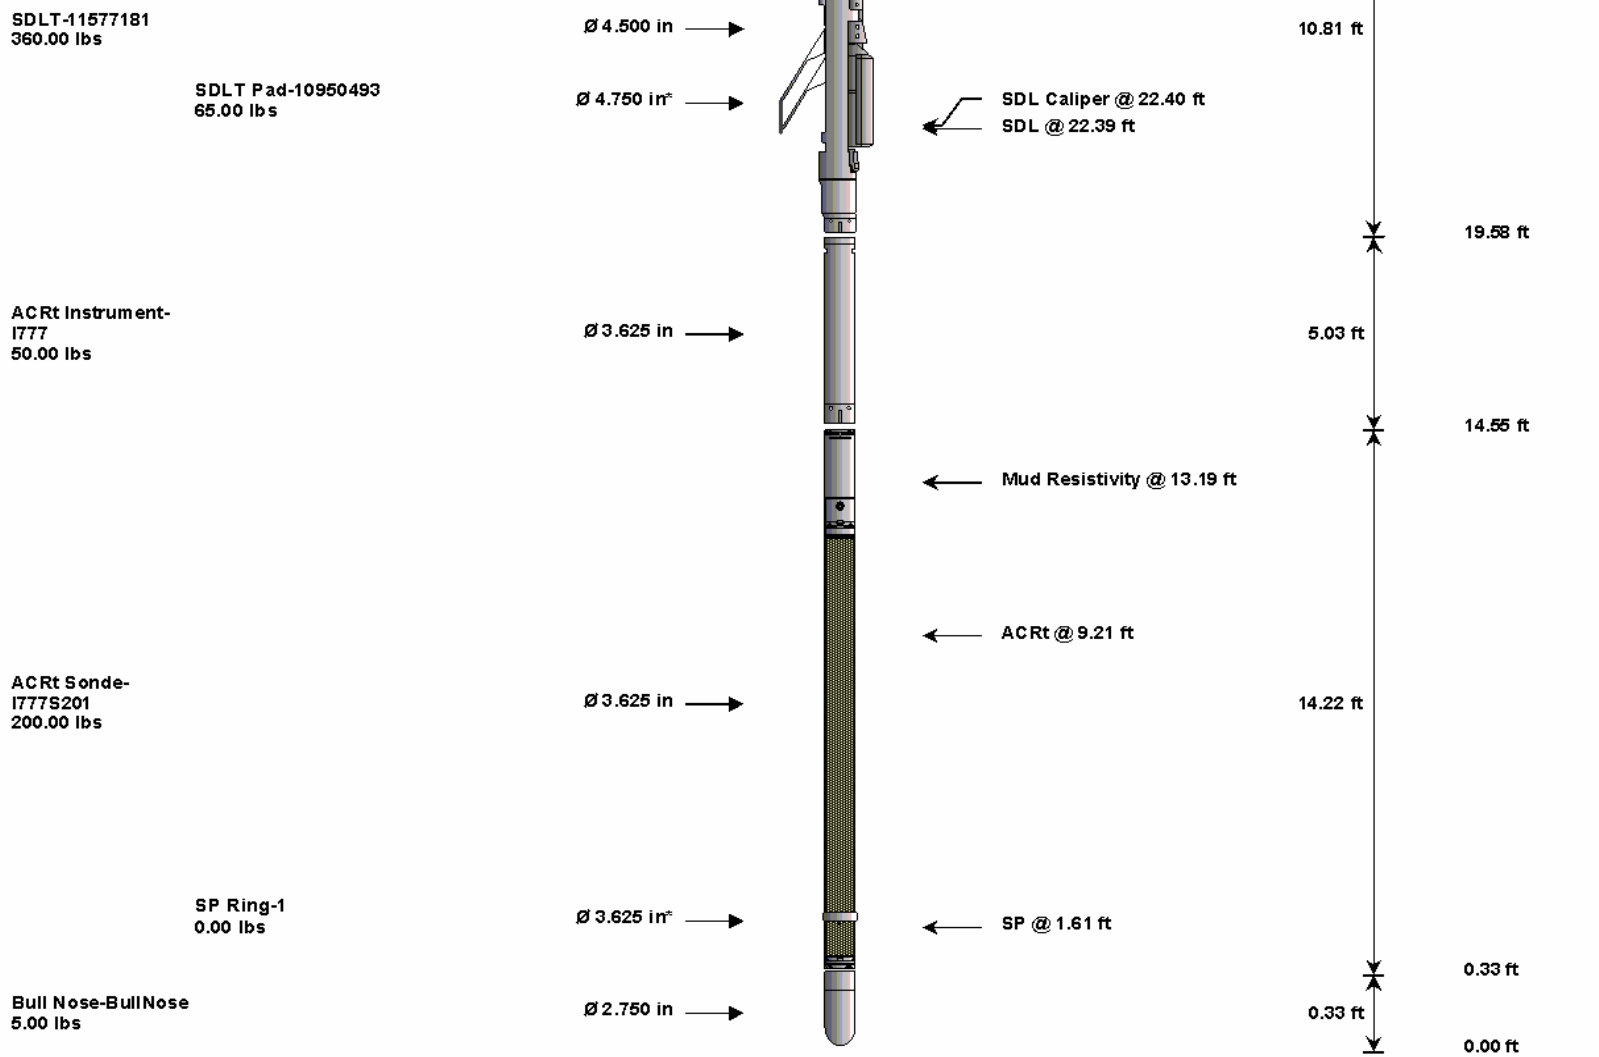

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	10895163	135.00	6.25	48.60	300.00
GTET	Gamma Telemetry Tool	11602915	165.00	8.52	40.08	60.00
DSNT	Dual Spaced Neutron	10981426	174.00	9.69	30.40	60.00
SDLT	Spectral Density Tool	11577181	360.00	10.81	19.58	60.00
SDLP	Density Insite Pad	10950493	65.00	2.55	21.79	60.00
ACRt	Array Compensated True Resistivity Instrument Section	1777	50.00	5.03	14.55	300.00
ACRt	Array Compensated True Resistivity	1777S201	200.00	14.22	0.33	300.00
SP	SP Ring	1	0.00	0.25	1.61	300.00
BLNS	Bull Nose	BullNose	5.00	0.33	0.00	300.00

Total			1,154.00	54.85		
* Not included in Total Length and Length Accumulation.						
Data: LARA_HAWX19_13A\0003 TRIPLE_ACRT\004 16-Oct-11 21:17 Up 10640.3f						Date: 16-Oct-11 22:08:31

COMPANY	LARAMIE ENERGY				
WELL	HAWXHURST 19-13A				
FIELD	BRUSH CREEK				
COUNTY	MESA	STATE	CO		

HALLIBURTON

DUAL SPACED NEUTRON
SPECTRAL DENSITY
ARRAY COMPENSATED
TRUE RESISTIVITY