

Downhole Schematic for COSSLETT 8-2-22



Project :DJ Basin

API # :05123327020000

Surface Location :SENE Sec 22 T1N - R68W 6th PI

Area :Wattenberg

County :


BHL :

As Of : 03/22/2012

GL : 5188.0 ft

KB to GL : 13.0 ft

KB : 5201.0 ft

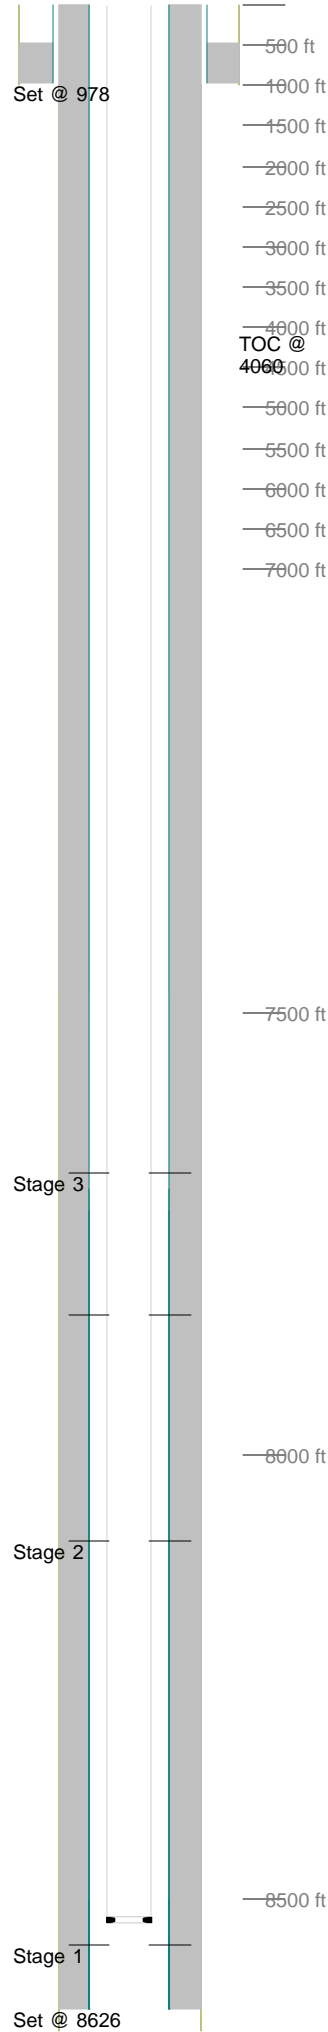

Casing Details								
Section	Hole	Casing	Mass	Set At	Length	Thread	Grade	Description
Surface	12.250	8.625	24	978	978	ST&C	N-80	Surface Csg.
Production	7.875	4.5	11.6	8,626	1	LT&C	SB80	Float Shoe
		4.5	11.6	8,626	82	LT&C	SB80	Shoe Track
		4.5	11.6	8,626	41	LT&C	SB80	Float Collar
		4.5	11.6	8,626	778	LT&C	SB80	Casing Joint
		4.5	11.6	8,626	23	LT&C	SB80	Marker Joint
		4.5	11.6	8,626	7,705	LT&C	SB80	Casing Joint
Cement Details								
Section	Sequence	Top	Density	Blend / Additives				
Surface	Fill	0	0.0	/				
Production	Lead	464	14.5	Type 111 / 1.5 % CaCl.				
	Lead	0	12.5	PLC / .2%CD32, .7%FL52, .2SA301, 6% Gel, 3 lb/sxCSE2				
	Tail	7,479	13.5	50:50 POZ / 6% FL52, 3%Gel.1%SMS, 20%FL				
Tubing and Downhole Equipment								
O.D.	Length	Depth	Description					
0.000	13.00	13.00	KB					
2.375	8,507.92	8,520.92	259 JTS 4.7# J55 EUE 8RD					
2.375	1.90	8,522.82	Sn w/ Partial Pump Out Sub					
Perforations								
Stage 1					12/27/2011	8,098	8,118	40
	Date	From	To	Shots	Stage 3			
	12/20/2011	8,552	8,572	40		Date	From	To
Stage 2					12/27/2011	7,842	7,862	80
	Date	From	To	Shots		7,682	7,691	36
Frac Summary								
Stage 1 : 8,552 - 8,572, 40 - 0.420" shots, 3830 bbls of Hybrid pHaserFrac, 250520 lbs of 20/40 Sand								
Report Date: 12/27/2011								
Stage 2 : 8,098 - 8,118, 40 - 0.420" shots, 2767 bbls of Hybrid pHaserFrac, 252270 lbs of 20/40 Sand								
Report Date: 12/27/2011								
Stage 3 : 7,682 - 7,862, 116 - 0.420" shots, 3278 bbls of Hybrid pHaserFrac, 252270 lbs of 20/40 Sand								
Report Date: 12/27/2011								