

US ROCKIES WATTENBERG PLANNING

**WELD-NAD83-UTMFT13N
1N-67W-10 JZM 16-10HZ Pad
JZM 26C-3HZ**

Plan A

Plan: Permit Rev-1

Standard Planning Report

20 August, 2015

Project: WELD-NAD83-UTMFT13N

Site: 1N-67W-10 JZM 16-10HZ Pad

Well: JZM 26C-3HZ

Wellbore: Plan A

Design: Permit Rev-1



US ROCKIES WATTENBERG PLANNING

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	
3	916.67	10.00	89.00	913.29	1.01	58.02	1.50	89.00	0.77	
4	2956.67	10.00	89.00	2922.29	7.20	412.21	0.00	0.00	5.47	
5	3456.67	0.00	0.00	3419.76	7.95	455.73	2.00	180.00	6.05	
6	7057.29	0.00	0.00	7020.38	7.95	455.73	0.00	0.00	6.05	
7	8055.37	89.83	359.76	7657.00	642.65	453.06	9.00	359.76	640.75	
8	17699.24	89.83	359.76	7686.00	10286.39	412.61	0.00	0.00	10284.57	JZM 26C-3HZ_TOE

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Latitude	Longitude	Shape
JZM 26C-3HZ_SHL	0.00	0.00	0.00	40.059120	-104.869447	Point
JZM 26C-3HZ_TOE	7686.00	10286.39	412.61	40.087368	-104.867972	Point

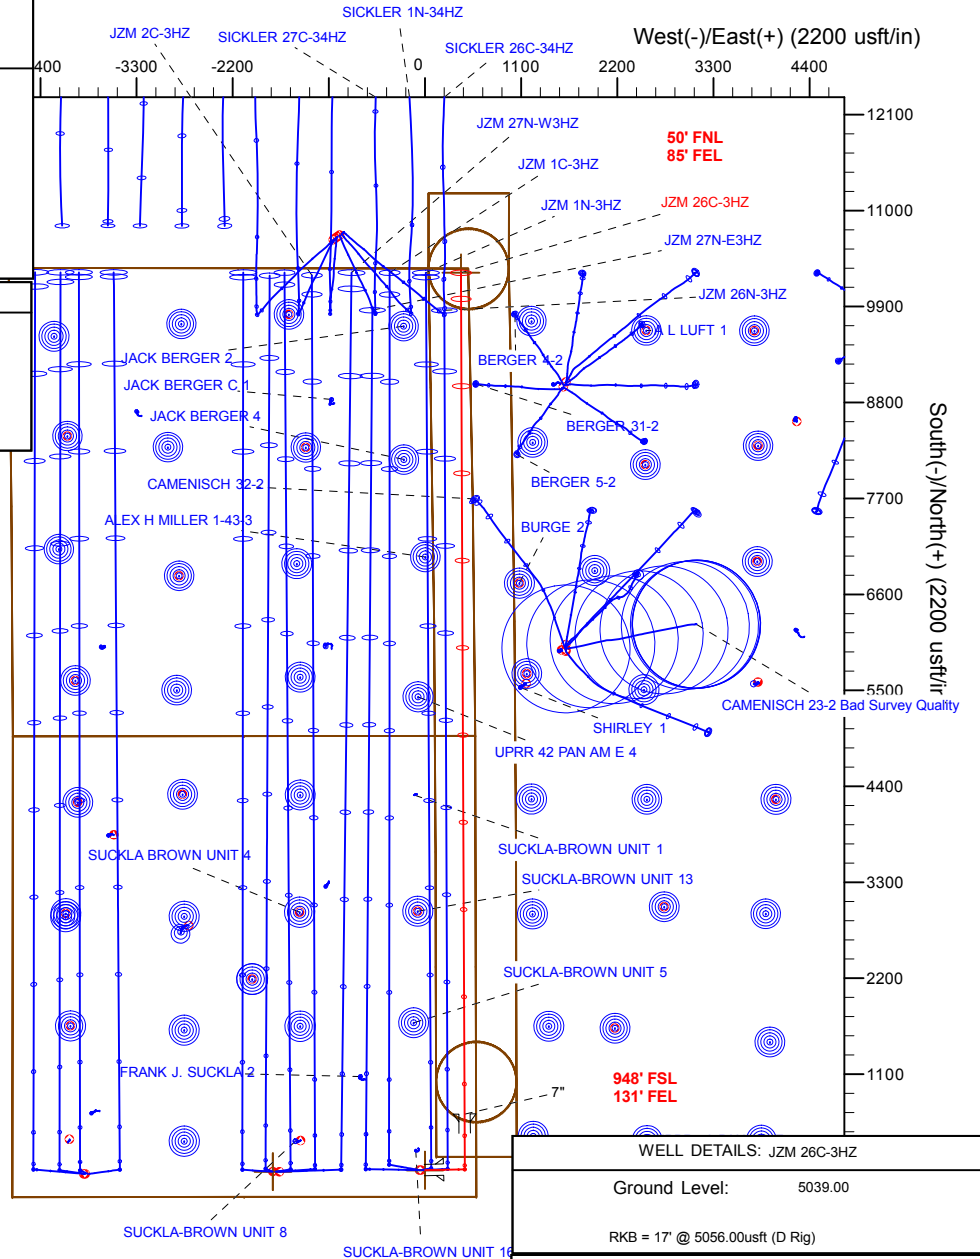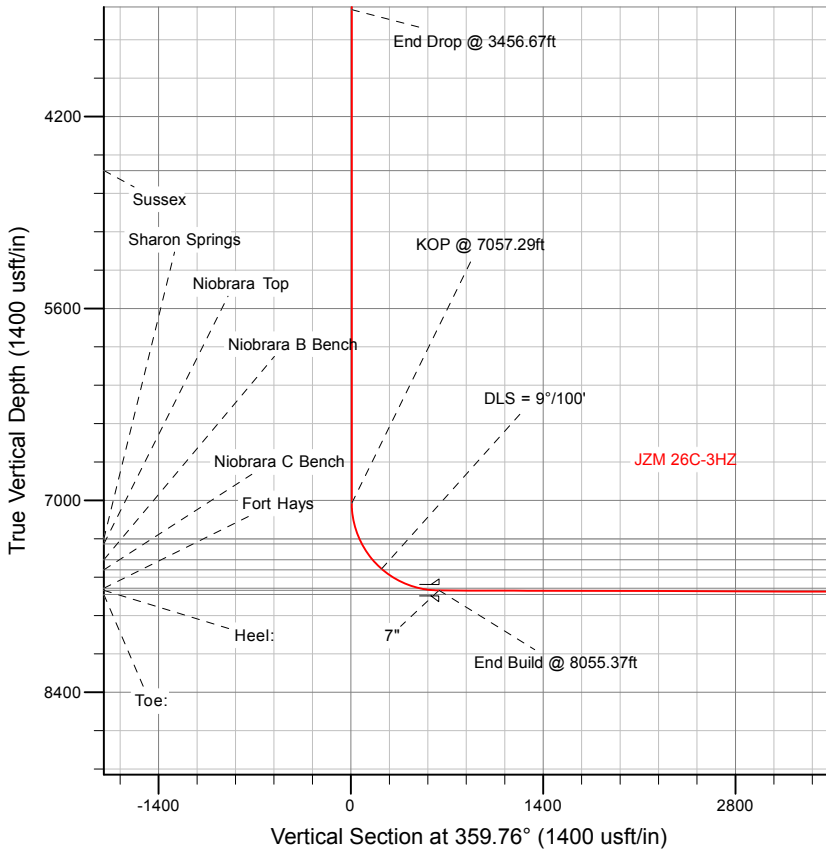

WELL DETAILS: JZM 26C-3HZ	
Ground Level:	5039.00
RKB = 17' @ 5056.00usft (D Rig)	
Plan:	Permit Rev-1 (JZM 26C-3HZ/Plan A)
Created By:	Clint Eshelman
Reviewed:	
Date:	8/20/2015
Date:	

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Project WELD-NAD83-UTMFT13N			
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Zone 13N (108 W to 102 W)		

Site 1N-67W-10 JZM 16-10HZ Pad			
Site Position:		Northing:	14,548,288.94 usft
From:	Lat/Long	Easting:	1,676,856.79 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	40.059122
		Longitude:	-104.869768
		Grid Convergence:	0.08 °

Well JZM 26C-3HZ			
Well Position	+N/-S	-0.73 usft	Northing: 14,548,288.35 usft
	+E/-W	89.82 usft	Easting: 1,676,946.61 usft
Position Uncertainty		3.28 usft	Wellhead Elevation: 0.00 usft
			Latitude: 40.059120
			Longitude: -104.869447
			Ground Level: 5,039.00 usft

Wellbore Plan A					
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	8/19/2015	8.33	66.61	52,500

Design Permit Rev-1			
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.00	0.00	0.00
			Direction (°) 359.76

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	
916.67	10.00	89.00	913.29	1.01	58.02	1.50	1.50	0.00	89.00	
2,956.67	10.00	89.00	2,922.30	7.20	412.21	0.00	0.00	0.00	0.00	
3,456.67	0.00	0.00	3,419.76	7.95	455.73	2.00	-2.00	0.00	180.00	
7,057.29	0.00	0.00	7,020.38	7.95	455.73	0.00	0.00	0.00	0.00	
8,055.37	89.83	359.76	7,657.00	642.65	453.06	9.00	9.00	-0.02	359.76	
17,699.24	89.83	359.76	7,686.00	10,286.39	412.61	0.00	0.00	0.00	0.00	JZM 26C-3HZ_TOE

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
250.00	0.00	0.00	250.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Begin Nudge @ 250.00ft										
300.00	0.75	89.00	300.00	0.01	0.33	0.00	1.50	1.50	0.00	0.00
400.00	2.25	89.00	399.96	0.05	2.94	0.04	1.50	1.50	0.00	0.00
500.00	3.75	89.00	499.82	0.14	8.18	0.11	1.50	1.50	0.00	0.00
600.00	5.25	89.00	599.51	0.28	16.02	0.21	1.50	1.50	0.00	0.00
700.00	6.75	89.00	698.96	0.46	26.47	0.35	1.50	1.50	0.00	0.00
800.00	8.25	89.00	798.10	0.69	39.52	0.52	1.50	1.50	0.00	0.00
900.00	9.75	89.00	896.87	0.96	55.16	0.73	1.50	1.50	0.00	0.00
916.67	10.00	89.00	913.29	1.01	58.02	0.77	1.50	1.50	0.00	0.00
End Nudge @ 916.67ft										
1,000.00	10.00	89.00	995.35	1.27	72.49	0.96	0.00	0.00	0.00	0.00
1,100.00	10.00	89.00	1,093.84	1.57	89.85	1.19	0.00	0.00	0.00	0.00
1,200.00	10.00	89.00	1,192.32	1.87	107.21	1.42	0.00	0.00	0.00	0.00
1,300.00	10.00	89.00	1,290.80	2.17	124.58	1.65	0.00	0.00	0.00	0.00
1,359.10	10.00	89.00	1,349.00	2.35	134.84	1.79	0.00	0.00	0.00	0.00
Fox Hills										
1,400.00	10.00	89.00	1,389.28	2.48	141.94	1.88	0.00	0.00	0.00	0.00
1,500.00	10.00	89.00	1,487.76	2.78	159.30	2.11	0.00	0.00	0.00	0.00
1,600.00	10.00	89.00	1,586.24	3.08	176.66	2.34	0.00	0.00	0.00	0.00
1,700.00	10.00	89.00	1,684.72	3.39	194.02	2.57	0.00	0.00	0.00	0.00
1,800.00	10.00	89.00	1,783.20	3.69	211.39	2.80	0.00	0.00	0.00	0.00
1,817.06	10.00	89.00	1,800.00	3.74	214.35	2.84	0.00	0.00	0.00	0.00
9 5/8"										
1,900.00	10.00	89.00	1,881.68	3.99	228.75	3.03	0.00	0.00	0.00	0.00
2,000.00	10.00	89.00	1,980.16	4.30	246.11	3.26	0.00	0.00	0.00	0.00
2,100.00	10.00	89.00	2,078.64	4.60	263.47	3.50	0.00	0.00	0.00	0.00
2,200.00	10.00	89.00	2,177.12	4.90	280.84	3.73	0.00	0.00	0.00	0.00
2,300.00	10.00	89.00	2,275.60	5.21	298.20	3.96	0.00	0.00	0.00	0.00
2,400.00	10.00	89.00	2,374.09	5.51	315.56	4.19	0.00	0.00	0.00	0.00
2,500.00	10.00	89.00	2,472.57	5.81	332.92	4.42	0.00	0.00	0.00	0.00
2,600.00	10.00	89.00	2,571.05	6.11	350.28	4.65	0.00	0.00	0.00	0.00
2,700.00	10.00	89.00	2,669.53	6.42	367.65	4.88	0.00	0.00	0.00	0.00
2,800.00	10.00	89.00	2,768.01	6.72	385.01	5.11	0.00	0.00	0.00	0.00
2,900.00	10.00	89.00	2,866.49	7.02	402.37	5.34	0.00	0.00	0.00	0.00
2,956.67	10.00	89.00	2,922.30	7.20	412.21	5.47	0.00	0.00	0.00	0.00
Begin Drop @ 2956.67ft										
3,000.00	9.13	89.00	2,965.03	7.32	419.41	5.56	2.00	-2.00	0.00	0.00
3,100.00	7.13	89.00	3,064.01	7.57	433.56	5.75	2.00	-2.00	0.00	0.00
3,200.00	5.13	89.00	3,163.44	7.75	444.24	5.89	2.00	-2.00	0.00	0.00
3,300.00	3.13	89.00	3,263.17	7.88	451.44	5.99	2.00	-2.00	0.00	0.00
3,400.00	1.13	89.00	3,363.10	7.94	455.17	6.04	2.00	-2.00	0.00	0.00
3,456.67	0.00	0.00	3,419.76	7.95	455.73	6.05	2.00	-2.00	0.00	0.00
End Drop @ 3456.67ft										
3,500.00	0.00	0.00	3,463.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,563.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,663.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,763.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,863.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	3,963.09	7.95	455.73	6.05	0.00	0.00	0.00	0.00

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
4,100.00	0.00	0.00	4,063.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,200.00	0.00	0.00	4,163.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,300.00	0.00	0.00	4,263.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,400.00	0.00	0.00	4,363.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,500.00	0.00	0.00	4,463.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,600.00	0.00	0.00	4,563.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,631.91	0.00	0.00	4,595.00	7.95	455.73	6.05	0.00	0.00	0.00	
Sussex										
4,700.00	0.00	0.00	4,663.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,800.00	0.00	0.00	4,763.09	7.95	455.73	6.05	0.00	0.00	0.00	
4,900.00	0.00	0.00	4,863.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,000.00	0.00	0.00	4,963.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,100.00	0.00	0.00	5,063.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,200.00	0.00	0.00	5,163.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,300.00	0.00	0.00	5,263.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,400.00	0.00	0.00	5,363.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,500.00	0.00	0.00	5,463.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,600.00	0.00	0.00	5,563.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,700.00	0.00	0.00	5,663.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,800.00	0.00	0.00	5,763.09	7.95	455.73	6.05	0.00	0.00	0.00	
5,900.00	0.00	0.00	5,863.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,000.00	0.00	0.00	5,963.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,100.00	0.00	0.00	6,063.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,200.00	0.00	0.00	6,163.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,300.00	0.00	0.00	6,263.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,400.00	0.00	0.00	6,363.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,500.00	0.00	0.00	6,463.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,600.00	0.00	0.00	6,563.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,700.00	0.00	0.00	6,663.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,800.00	0.00	0.00	6,763.09	7.95	455.73	6.05	0.00	0.00	0.00	
6,900.00	0.00	0.00	6,863.09	7.95	455.73	6.05	0.00	0.00	0.00	
7,000.00	0.00	0.00	6,963.09	7.95	455.73	6.05	0.00	0.00	0.00	
7,057.29	0.00	0.00	7,020.38	7.95	455.73	6.05	0.00	0.00	0.00	
KOP @ 7057.29ft										
7,100.00	3.84	359.76	7,063.06	9.39	455.72	7.48	9.00	9.00	0.00	
7,200.00	12.84	359.76	7,161.90	23.88	455.66	21.98	9.00	9.00	0.00	
7,300.00	21.84	359.76	7,257.26	53.66	455.53	51.76	9.00	9.00	0.00	
7,326.22	24.20	359.76	7,281.39	63.92	455.49	62.01	9.00	9.00	0.00	
Sharon Springs										
7,367.42	27.91	359.76	7,318.39	82.01	455.41	80.10	9.00	9.00	0.00	
Niobrara Top										
7,400.00	30.84	359.76	7,346.78	97.99	455.35	96.09	9.00	9.00	0.00	
7,500.00	39.84	359.76	7,428.26	155.78	455.11	153.88	9.00	9.00	0.00	
7,505.93	40.38	359.76	7,432.80	159.60	455.09	157.70	9.00	9.00	0.00	
Niobrara B Bench										
7,600.00	48.84	359.76	7,499.71	225.61	454.81	223.70	9.00	9.00	0.00	
DLS = 9°/100'										
7,610.13	49.76	359.76	7,506.31	233.29	454.78	231.38	9.00	9.00	0.00	
Niobrara C Bench										
7,700.00	57.84	359.76	7,559.35	305.75	454.48	303.84	9.00	9.00	0.00	
7,800.00	66.84	359.76	7,605.71	394.23	454.11	392.33	9.00	9.00	0.00	
7,900.00	75.84	359.76	7,637.67	488.88	453.71	486.97	9.00	9.00	0.00	
7,915.66	77.25	359.76	7,641.31	504.11	453.64	502.20	9.00	9.00	0.00	

Anadarko Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Fort Hays									
8,000.00	84.84	359.76	7,654.42	587.36	453.30	585.46	9.00	9.00	0.00
8,055.37	89.83	359.76	7,657.00	642.65	453.06	640.75	9.00	9.00	0.00
End Build @ 8055.37ft - Heel: - 7"									
8,100.00	89.83	359.76	7,657.13	687.28	452.88	685.38	0.00	0.00	0.00
8,200.00	89.83	359.76	7,657.43	787.28	452.46	785.38	0.00	0.00	0.00
8,300.00	89.83	359.76	7,657.73	887.28	452.04	885.38	0.00	0.00	0.00
8,400.00	89.83	359.76	7,658.03	987.28	451.62	985.38	0.00	0.00	0.00
8,500.00	89.83	359.76	7,658.33	1,087.28	451.20	1,085.38	0.00	0.00	0.00
8,600.00	89.83	359.76	7,658.64	1,187.28	450.78	1,185.38	0.00	0.00	0.00
8,700.00	89.83	359.76	7,658.94	1,287.27	450.36	1,285.38	0.00	0.00	0.00
8,800.00	89.83	359.76	7,659.24	1,387.27	449.94	1,385.38	0.00	0.00	0.00
8,900.00	89.83	359.76	7,659.54	1,487.27	449.52	1,485.38	0.00	0.00	0.00
9,000.00	89.83	359.76	7,659.84	1,587.27	449.10	1,585.37	0.00	0.00	0.00
9,100.00	89.83	359.76	7,660.14	1,687.27	448.68	1,685.37	0.00	0.00	0.00
9,200.00	89.83	359.76	7,660.44	1,787.27	448.26	1,785.37	0.00	0.00	0.00
9,300.00	89.83	359.76	7,660.74	1,887.27	447.84	1,885.37	0.00	0.00	0.00
9,400.00	89.83	359.76	7,661.04	1,987.26	447.42	1,985.37	0.00	0.00	0.00
9,500.00	89.83	359.76	7,661.34	2,087.26	447.00	2,085.37	0.00	0.00	0.00
9,600.00	89.83	359.76	7,661.64	2,187.26	446.58	2,185.37	0.00	0.00	0.00
9,700.00	89.83	359.76	7,661.94	2,287.26	446.16	2,285.37	0.00	0.00	0.00
9,800.00	89.83	359.76	7,662.24	2,387.26	445.74	2,385.37	0.00	0.00	0.00
9,900.00	89.83	359.76	7,662.54	2,487.26	445.33	2,485.37	0.00	0.00	0.00
10,000.00	89.83	359.76	7,662.85	2,587.26	444.91	2,585.37	0.00	0.00	0.00
10,100.00	89.83	359.76	7,663.15	2,687.26	444.49	2,685.37	0.00	0.00	0.00
10,200.00	89.83	359.76	7,663.45	2,787.25	444.07	2,785.37	0.00	0.00	0.00
10,300.00	89.83	359.76	7,663.75	2,887.25	443.65	2,885.37	0.00	0.00	0.00
10,400.00	89.83	359.76	7,664.05	2,987.25	443.23	2,985.37	0.00	0.00	0.00
10,500.00	89.83	359.76	7,664.35	3,087.25	442.81	3,085.37	0.00	0.00	0.00
10,600.00	89.83	359.76	7,664.65	3,187.25	442.39	3,185.37	0.00	0.00	0.00
10,700.00	89.83	359.76	7,664.95	3,287.25	441.97	3,285.37	0.00	0.00	0.00
10,800.00	89.83	359.76	7,665.25	3,387.25	441.55	3,385.37	0.00	0.00	0.00
10,900.00	89.83	359.76	7,665.55	3,487.24	441.13	3,485.37	0.00	0.00	0.00
11,000.00	89.83	359.76	7,665.85	3,587.24	440.71	3,585.37	0.00	0.00	0.00
11,100.00	89.83	359.76	7,666.15	3,687.24	440.29	3,685.37	0.00	0.00	0.00
11,200.00	89.83	359.76	7,666.45	3,787.24	439.87	3,785.36	0.00	0.00	0.00
11,300.00	89.83	359.76	7,666.76	3,887.24	439.45	3,885.36	0.00	0.00	0.00
11,400.00	89.83	359.76	7,667.06	3,987.24	439.03	3,985.36	0.00	0.00	0.00
11,500.00	89.83	359.76	7,667.36	4,087.24	438.61	4,085.36	0.00	0.00	0.00
11,600.00	89.83	359.76	7,667.66	4,187.24	438.19	4,185.36	0.00	0.00	0.00
11,700.00	89.83	359.76	7,667.96	4,287.23	437.78	4,285.36	0.00	0.00	0.00
11,800.00	89.83	359.76	7,668.26	4,387.23	437.36	4,385.36	0.00	0.00	0.00
11,900.00	89.83	359.76	7,668.56	4,487.23	436.94	4,485.36	0.00	0.00	0.00
12,000.00	89.83	359.76	7,668.86	4,587.23	436.52	4,585.36	0.00	0.00	0.00
12,100.00	89.83	359.76	7,669.16	4,687.23	436.10	4,685.36	0.00	0.00	0.00
12,200.00	89.83	359.76	7,669.46	4,787.23	435.68	4,785.36	0.00	0.00	0.00
12,300.00	89.83	359.76	7,669.76	4,887.23	435.26	4,885.36	0.00	0.00	0.00
12,400.00	89.83	359.76	7,670.06	4,987.22	434.84	4,985.36	0.00	0.00	0.00
12,500.00	89.83	359.76	7,670.36	5,087.22	434.42	5,085.36	0.00	0.00	0.00
12,600.00	89.83	359.76	7,670.66	5,187.22	434.00	5,185.36	0.00	0.00	0.00
12,700.00	89.83	359.76	7,670.97	5,287.22	433.58	5,285.36	0.00	0.00	0.00
12,800.00	89.83	359.76	7,671.27	5,387.22	433.16	5,385.36	0.00	0.00	0.00
12,900.00	89.83	359.76	7,671.57	5,487.22	432.74	5,485.36	0.00	0.00	0.00
13,000.00	89.83	359.76	7,671.87	5,587.22	432.32	5,585.36	0.00	0.00	0.00

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,100.00	89.83	359.76	7,672.17	5,687.22	431.90	5,685.36	0.00	0.00	0.00	
13,200.00	89.83	359.76	7,672.47	5,787.21	431.48	5,785.36	0.00	0.00	0.00	
13,300.00	89.83	359.76	7,672.77	5,887.21	431.06	5,885.36	0.00	0.00	0.00	
13,400.00	89.83	359.76	7,673.07	5,987.21	430.64	5,985.35	0.00	0.00	0.00	
13,500.00	89.83	359.76	7,673.37	6,087.21	430.22	6,085.35	0.00	0.00	0.00	
13,600.00	89.83	359.76	7,673.67	6,187.21	429.81	6,185.35	0.00	0.00	0.00	
13,700.00	89.83	359.76	7,673.97	6,287.21	429.39	6,285.35	0.00	0.00	0.00	
13,800.00	89.83	359.76	7,674.27	6,387.21	428.97	6,385.35	0.00	0.00	0.00	
13,900.00	89.83	359.76	7,674.57	6,487.20	428.55	6,485.35	0.00	0.00	0.00	
14,000.00	89.83	359.76	7,674.88	6,587.20	428.13	6,585.35	0.00	0.00	0.00	
14,100.00	89.83	359.76	7,675.18	6,687.20	427.71	6,685.35	0.00	0.00	0.00	
14,200.00	89.83	359.76	7,675.48	6,787.20	427.29	6,785.35	0.00	0.00	0.00	
14,300.00	89.83	359.76	7,675.78	6,887.20	426.87	6,885.35	0.00	0.00	0.00	
14,400.00	89.83	359.76	7,676.08	6,987.20	426.45	6,985.35	0.00	0.00	0.00	
14,500.00	89.83	359.76	7,676.38	7,087.20	426.03	7,085.35	0.00	0.00	0.00	
14,600.00	89.83	359.76	7,676.68	7,187.20	425.61	7,185.35	0.00	0.00	0.00	
14,700.00	89.83	359.76	7,676.98	7,287.19	425.19	7,285.35	0.00	0.00	0.00	
14,800.00	89.83	359.76	7,677.28	7,387.19	424.77	7,385.35	0.00	0.00	0.00	
14,900.00	89.83	359.76	7,677.58	7,487.19	424.35	7,485.35	0.00	0.00	0.00	
15,000.00	89.83	359.76	7,677.88	7,587.19	423.93	7,585.35	0.00	0.00	0.00	
15,100.00	89.83	359.76	7,678.18	7,687.19	423.51	7,685.35	0.00	0.00	0.00	
15,200.00	89.83	359.76	7,678.48	7,787.19	423.09	7,785.35	0.00	0.00	0.00	
15,300.00	89.83	359.76	7,678.78	7,887.19	422.67	7,885.35	0.00	0.00	0.00	
15,400.00	89.83	359.76	7,679.09	7,987.18	422.25	7,985.35	0.00	0.00	0.00	
15,500.00	89.83	359.76	7,679.39	8,087.18	421.84	8,085.35	0.00	0.00	0.00	
15,600.00	89.83	359.76	7,679.69	8,187.18	421.42	8,185.34	0.00	0.00	0.00	
15,700.00	89.83	359.76	7,679.99	8,287.18	421.00	8,285.34	0.00	0.00	0.00	
15,800.00	89.83	359.76	7,680.29	8,387.18	420.58	8,385.34	0.00	0.00	0.00	
15,900.00	89.83	359.76	7,680.59	8,487.18	420.16	8,485.34	0.00	0.00	0.00	
16,000.00	89.83	359.76	7,680.89	8,587.18	419.74	8,585.34	0.00	0.00	0.00	
16,100.00	89.83	359.76	7,681.19	8,687.18	419.32	8,685.34	0.00	0.00	0.00	
16,200.00	89.83	359.76	7,681.49	8,787.17	418.90	8,785.34	0.00	0.00	0.00	
16,300.00	89.83	359.76	7,681.79	8,887.17	418.48	8,885.34	0.00	0.00	0.00	
16,400.00	89.83	359.76	7,682.09	8,987.17	418.06	8,985.34	0.00	0.00	0.00	
16,500.00	89.83	359.76	7,682.39	9,087.17	417.64	9,085.34	0.00	0.00	0.00	
16,600.00	89.83	359.76	7,682.69	9,187.17	417.22	9,185.34	0.00	0.00	0.00	
16,700.00	89.83	359.76	7,683.00	9,287.17	416.80	9,285.34	0.00	0.00	0.00	
16,800.00	89.83	359.76	7,683.30	9,387.17	416.38	9,385.34	0.00	0.00	0.00	
16,900.00	89.83	359.76	7,683.60	9,487.16	415.96	9,485.34	0.00	0.00	0.00	
17,000.00	89.83	359.76	7,683.90	9,587.16	415.54	9,585.34	0.00	0.00	0.00	
17,100.00	89.83	359.76	7,684.20	9,687.16	415.12	9,685.34	0.00	0.00	0.00	
17,200.00	89.83	359.76	7,684.50	9,787.16	414.70	9,785.34	0.00	0.00	0.00	
17,300.00	89.83	359.76	7,684.80	9,887.16	414.28	9,885.34	0.00	0.00	0.00	
17,400.00	89.83	359.76	7,685.10	9,987.16	413.87	9,985.34	0.00	0.00	0.00	
17,500.00	89.83	359.76	7,685.40	10,087.16	413.45	10,085.34	0.00	0.00	0.00	
17,600.00	89.83	359.76	7,685.70	10,187.16	413.03	10,185.34	0.00	0.00	0.00	
17,699.23	89.83	359.76	7,686.00	10,286.38	412.61	10,284.57	0.00	0.00	0.00	
Toe:										
17,699.24	89.83	359.76	7,686.00	10,286.39	412.61	10,284.57	0.00	0.00	0.00	
TD Well @ 17699.24ft										

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Design Targets										
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)			
- Shape										
JZM 26C-3HZ_460' Poly	0.00	0.00	0.00	0.00	0.00	14,548,288.35	1,676,946.61	40.059120	-104.869447	
- plan hits target center										
- Polygon										
Point 1			0.00	1,472.78	588.39	14,549,761.99	1,677,532.84			
Point 2			0.00	1,472.35	607.53	14,549,761.59	1,677,551.98			
Point 3			0.00	1,471.13	626.63	14,549,760.39	1,677,571.08			
Point 4			0.00	1,469.11	645.66	14,549,758.40	1,677,590.12			
Point 5			0.00	1,466.31	664.59	14,549,755.63	1,677,609.05			
Point 6			0.00	1,462.72	683.39	14,549,752.07	1,677,627.85			
Point 7			0.00	1,458.35	702.03	14,549,747.72	1,677,646.50			
Point 8			0.00	1,453.20	720.46	14,549,742.60	1,677,664.94			
Point 9			0.00	1,447.31	738.67	14,549,736.74	1,677,683.16			
Point 10			0.00	1,440.65	756.61	14,549,730.10	1,677,701.11			
Point 11			0.00	1,433.26	774.27	14,549,722.74	1,677,718.78			
Point 12			0.00	1,425.13	791.60	14,549,714.64	1,677,736.12			
Point 13			0.00	1,416.29	808.57	14,549,705.82	1,677,753.10			
Point 14			0.00	1,406.75	825.17	14,549,696.30	1,677,769.72			
Point 15			0.00	1,396.54	841.35	14,549,686.12	1,677,785.91			
Point 16			0.00	1,385.65	857.09	14,549,675.25	1,677,801.67			
Point 17			0.00	1,374.12	872.37	14,549,663.74	1,677,816.96			
Point 18			0.00	1,361.97	887.16	14,549,651.62	1,677,831.77			
Point 19			0.00	1,349.21	901.43	14,549,638.88	1,677,846.06			
Point 20			0.00	1,335.87	915.15	14,549,625.56	1,677,859.80			
Point 21			0.00	1,321.97	928.31	14,549,611.68	1,677,872.98			
Point 22			0.00	1,307.53	940.88	14,549,597.25	1,677,885.57			
Point 23			0.00	1,292.58	952.82	14,549,582.32	1,677,897.53			
Point 24			0.00	1,277.16	964.15	14,549,566.92	1,677,908.89			
Point 25			0.00	1,261.27	974.83	14,549,551.04	1,677,919.59			
Point 26			0.00	1,244.96	984.82	14,549,534.75	1,677,929.60			
Point 27			0.00	1,228.23	994.14	14,549,518.03	1,677,938.95			
Point 28			0.00	1,211.14	1,002.75	14,549,500.95	1,677,947.58			
Point 29			0.00	1,193.70	1,010.64	14,549,483.53	1,677,955.50			
Point 30			0.00	1,175.95	1,017.80	14,549,465.79	1,677,962.68			
Point 31			0.00	1,157.92	1,024.22	14,549,447.77	1,677,969.13			
Point 32			0.00	1,139.64	1,029.88	14,549,429.49	1,677,974.82			
Point 33			0.00	1,121.13	1,034.77	14,549,410.99	1,677,979.74			
Point 34			0.00	1,102.45	1,038.89	14,549,392.32	1,677,983.88			
Point 35			0.00	1,083.60	1,042.24	14,549,373.47	1,677,987.26			
Point 36			0.00	1,064.63	1,044.79	14,549,354.51	1,677,989.84			
Point 37			0.00	1,045.57	1,046.54	14,549,335.45	1,677,991.62			
Point 38			0.00	1,026.45	1,047.51	14,549,316.33	1,677,992.61			
Point 39			0.00	1,007.31	1,047.69	14,549,297.19	1,677,992.82			
Point 40			0.00	988.19	1,047.06	14,549,278.07	1,677,992.22			
Point 41			0.00	969.10	1,045.64	14,549,258.98	1,677,990.83			
Point 42			0.00	950.09	1,043.42	14,549,239.96	1,677,988.64			
Point 43			0.00	931.18	1,040.42	14,549,221.05	1,677,985.66			
Point 44			0.00	912.43	1,036.64	14,549,202.29	1,677,981.91			
Point 45			0.00	893.84	1,032.08	14,549,183.70	1,677,977.38			
Point 46			0.00	875.45	1,026.74	14,549,165.30	1,677,972.07			
Point 47			0.00	857.31	1,020.65	14,549,147.15	1,677,966.00			
Point 48			0.00	839.43	1,013.81	14,549,129.26	1,677,959.19			
Point 49			0.00	821.86	1,006.23	14,549,111.68	1,677,951.63			
Point 50			0.00	804.62	997.93	14,549,094.43	1,677,943.36			
Point 51			0.00	787.74	988.91	14,549,077.54	1,677,934.36			
Point 52			0.00	771.24	979.20	14,549,061.02	1,677,924.68			
Point 53			0.00	755.17	968.82	14,549,044.94	1,677,914.32			
Point 54			0.00	739.54	957.77	14,549,029.29	1,677,903.29			
Point 55			0.00	724.37	946.08	14,549,014.10	1,677,891.63			

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Point 56	0.00	709.72	933.78	14,548,999.43	1,677,879.35
Point 57	0.00	695.59	920.87	14,548,985.29	1,677,866.46
Point 58	0.00	682.00	907.39	14,548,971.68	1,677,853.00
Point 59	0.00	668.99	893.35	14,548,958.65	1,677,838.98
Point 60	0.00	656.57	878.78	14,548,946.20	1,677,824.43
Point 61	0.00	644.77	863.71	14,548,934.38	1,677,809.37
Point 62	0.00	633.62	848.17	14,548,923.21	1,677,793.85
Point 63	0.00	623.11	832.17	14,548,912.68	1,677,777.87
Point 64	0.00	613.27	815.75	14,548,902.81	1,677,761.46
Point 65	0.00	604.14	798.93	14,548,893.66	1,677,744.65
Point 66	0.00	595.70	781.75	14,548,885.19	1,677,727.49
Point 67	0.00	587.99	764.23	14,548,877.46	1,677,709.98
Point 68	0.00	581.02	746.41	14,548,870.46	1,677,692.17
Point 69	0.00	574.79	728.31	14,548,864.20	1,677,674.08
Point 70	0.00	569.32	709.97	14,548,858.71	1,677,655.74
Point 71	0.00	564.62	691.42	14,548,853.98	1,677,637.20
Point 72	0.00	560.69	672.69	14,548,850.02	1,677,618.48
Point 73	0.00	557.55	653.81	14,548,846.85	1,677,599.60
Point 74	0.00	555.19	634.81	14,548,844.47	1,677,580.61
Point 75	0.00	553.63	615.74	14,548,842.88	1,677,561.54
Point 76	0.00	552.87	596.61	14,548,842.09	1,677,542.41
Point 77	0.00	552.89	577.47	14,548,842.08	1,677,523.27
Point 78	0.00	553.71	558.35	14,548,842.87	1,677,504.15
Point 79	0.00	555.33	539.28	14,548,844.47	1,677,485.08
Point 80	0.00	557.75	520.30	14,548,846.86	1,677,466.09
Point 81	0.00	560.94	501.42	14,548,850.02	1,677,447.21
Point 82	0.00	564.92	482.71	14,548,853.97	1,677,428.49
Point 83	0.00	569.68	464.16	14,548,858.71	1,677,409.93
Point 84	0.00	575.21	445.84	14,548,864.21	1,677,391.61
Point 85	0.00	581.48	427.76	14,548,870.45	1,677,373.52
Point 86	0.00	588.51	409.95	14,548,877.46	1,677,355.70
Point 87	0.00	596.27	392.46	14,548,885.19	1,677,338.20
Point 88	0.00	604.76	375.30	14,548,893.66	1,677,321.02
Point 89	0.00	613.94	358.52	14,548,902.81	1,677,304.23
Point 90	0.00	623.83	342.12	14,548,912.68	1,677,287.82
Point 91	0.00	634.38	326.16	14,548,923.20	1,677,271.84
Point 92	0.00	645.58	310.64	14,548,934.38	1,677,256.30
Point 93	0.00	657.43	295.60	14,548,946.21	1,677,241.25
Point 94	0.00	669.89	281.08	14,548,958.65	1,677,226.71
Point 95	0.00	682.94	267.08	14,548,971.68	1,677,212.69
Point 96	0.00	696.57	253.64	14,548,985.29	1,677,199.23
Point 97	0.00	710.74	240.77	14,548,999.44	1,677,186.34
Point 98	0.00	725.43	228.51	14,549,014.11	1,677,174.06
Point 99	0.00	740.62	216.86	14,549,029.28	1,677,162.38
Point 100	0.00	756.29	205.87	14,549,044.94	1,677,151.37
Point 101	0.00	772.39	195.52	14,549,061.02	1,677,141.00
Point 102	0.00	788.92	185.86	14,549,077.54	1,677,131.31
Point 103	0.00	805.82	176.90	14,549,094.42	1,677,122.33
Point 104	0.00	823.09	168.64	14,549,111.68	1,677,114.04
Point 105	0.00	840.68	161.12	14,549,129.26	1,677,106.50
Point 106	0.00	858.58	154.33	14,549,147.15	1,677,099.68
Point 107	0.00	876.74	148.29	14,549,165.30	1,677,093.61
Point 108	0.00	895.14	143.01	14,549,183.69	1,677,088.31
Point 109	0.00	913.75	138.51	14,549,202.30	1,677,083.78
Point 110	0.00	932.51	134.77	14,549,221.05	1,677,080.01
Point 111	0.00	951.43	131.82	14,549,239.97	1,677,077.04
Point 112	0.00	970.44	129.67	14,549,258.97	1,677,074.86
Point 113	0.00	989.53	128.31	14,549,278.06	1,677,073.47
Point 114	0.00	1,008.66	127.74	14,549,297.19	1,677,072.87
Point 115	0.00	1,027.80	127.96	14,549,316.33	1,677,073.06
Point 116	0.00	1,046.91	128.98	14,549,335.44	1,677,074.06
Point 117	0.00	1,065.97	130.80	14,549,354.51	1,677,075.85
Point 118	0.00	1,084.94	133.41	14,549,373.48	1,677,078.43
Point 119	0.00	1,103.77	136.81	14,549,392.32	1,677,081.80

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Point 120			0.00	1,122.44	140.98	14,549,410.99	1,677,085.94		
Point 121			0.00	1,140.94	145.93	14,549,429.50	1,677,090.87		
Point 122			0.00	1,159.20	151.65	14,549,447.77	1,677,096.56		
Point 123			0.00	1,177.21	158.11	14,549,465.79	1,677,102.99		
Point 124			0.00	1,194.94	165.32	14,549,483.53	1,677,110.18		
Point 125			0.00	1,212.36	173.27	14,549,500.96	1,677,118.10		
Point 126			0.00	1,229.42	181.93	14,549,518.03	1,677,126.74		
Point 127			0.00	1,246.12	191.29	14,549,534.74	1,677,136.07		
Point 128			0.00	1,262.41	201.34	14,549,551.05	1,677,146.10		
Point 129			0.00	1,278.26	212.06	14,549,566.92	1,677,156.80		
Point 130			0.00	1,293.65	223.42	14,549,582.32	1,677,168.13		
Point 131			0.00	1,308.57	235.43	14,549,597.26	1,677,180.12		
Point 132			0.00	1,322.97	248.04	14,549,611.68	1,677,192.71		
Point 133			0.00	1,336.83	261.24	14,549,625.56	1,677,205.89		
Point 134			0.00	1,350.13	275.00	14,549,638.88	1,677,219.63		
Point 135			0.00	1,362.85	289.31	14,549,651.62	1,677,233.92		
Point 136			0.00	1,374.95	304.12	14,549,663.74	1,677,248.71		
Point 137			0.00	1,386.44	319.43	14,549,675.25	1,677,264.01		
Point 138			0.00	1,397.28	335.21	14,549,686.12	1,677,279.77		
Point 139			0.00	1,407.45	351.42	14,549,696.31	1,677,295.97		
Point 140			0.00	1,416.93	368.05	14,549,705.81	1,677,312.58		
Point 141			0.00	1,425.73	385.05	14,549,714.64	1,677,329.57		
Point 142			0.00	1,433.80	402.40	14,549,722.73	1,677,346.91		
Point 143			0.00	1,441.15	420.07	14,549,730.11	1,677,364.57		
Point 144			0.00	1,447.75	438.04	14,549,736.74	1,677,382.53		
Point 145			0.00	1,453.59	456.26	14,549,742.60	1,677,400.74		
Point 146			0.00	1,458.68	474.72	14,549,747.72	1,677,419.19		
Point 147			0.00	1,463.00	493.36	14,549,752.07	1,677,437.82		
Point 148			0.00	1,466.53	512.17	14,549,755.63	1,677,456.63		
Point 149			0.00	1,469.28	531.11	14,549,758.40	1,677,475.57		
Point 150			0.00	1,471.24	550.16	14,549,760.39	1,677,494.61		
Point 151			0.00	1,472.41	569.26	14,549,761.59	1,677,513.71		
Point 152			0.00	1,472.78	588.39	14,549,761.99	1,677,532.84		
JZM 26C-3HZ_SHL	0.00	0.00	0.00	0.00	0.00	14,548,288.35	1,676,946.61	40.059120	-104.869447
- plan hits target center									
- Point									
JZM 26C-3HZ_Hardline	0.00	0.00	0.00	0.00	0.00	14,548,288.35	1,676,946.61	40.059120	-104.869447
- plan hits target center									
- Polygon									
Point 1			0.00	11,197.96	961.53	14,559,487.70	1,677,891.72		
Point 2			0.00	10,334.33	959.64	14,558,624.07	1,677,891.09		
Point 3			0.00	8,973.67	985.68	14,557,263.45	1,677,919.13		
Point 4			0.00	6,293.18	1,024.58	14,554,583.02	1,677,961.96		
Point 5			0.00	3,653.30	1,040.92	14,551,943.17	1,677,982.17		
Point 6			0.00	2,333.22	1,044.35	14,550,623.09	1,677,987.54		
Point 7			0.00	152.09	1,049.91	14,548,441.98	1,677,996.30		
Point 8			0.00	151.94	589.91	14,548,441.15	1,677,536.30		
Point 9			0.00	151.74	129.91	14,548,440.28	1,677,076.30		
Point 10			0.00	2,333.33	124.35	14,550,621.86	1,677,067.54		
Point 11			0.00	3,653.26	120.90	14,551,941.78	1,677,062.15		
Point 12			0.00	6,290.11	104.56	14,554,578.60	1,677,041.95		
Point 13			0.00	8,977.81	65.43	14,557,266.24	1,676,998.87		
Point 14			0.00	10,334.46	39.56	14,558,622.85	1,676,971.01		
Point 15			0.00	11,198.32	41.53	14,559,486.71	1,676,971.72		
JZM 26C-3HZ_460' Poly	0.00	0.00	0.00	0.00	0.00	14,548,288.35	1,676,946.61	40.059120	-104.869447
- plan hits target center									
- Polygon									
Point 1			0.00	10,793.85	500.24	14,559,082.92	1,677,431.02		
Point 2			0.00	10,793.42	519.38	14,559,082.52	1,677,450.16		
Point 3			0.00	10,792.20	538.47	14,559,081.32	1,677,469.25		
Point 4			0.00	10,790.18	557.51	14,559,079.33	1,677,488.30		
Point 5			0.00	10,787.39	576.44	14,559,076.57	1,677,507.23		
Point 6			0.00	10,783.79	595.24	14,559,073.00	1,677,526.04		

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Point 7	0.00	10,779.42	613.88	14,559,068.65	1,677,544.68
Point 8	0.00	10,774.28	632.31	14,559,063.54	1,677,563.12
Point 9	0.00	10,768.38	650.52	14,559,057.67	1,677,581.34
Point 10	0.00	10,761.72	668.46	14,559,051.03	1,677,599.29
Point 11	0.00	10,754.32	686.11	14,559,043.66	1,677,616.95
Point 12	0.00	10,746.20	703.45	14,559,035.57	1,677,634.30
Point 13	0.00	10,737.36	720.42	14,559,026.75	1,677,651.28
Point 14	0.00	10,727.83	737.01	14,559,017.25	1,677,667.89
Point 15	0.00	10,717.61	753.20	14,559,007.05	1,677,684.09
Point 16	0.00	10,706.72	768.94	14,558,996.18	1,677,699.85
Point 17	0.00	10,695.20	784.22	14,558,984.68	1,677,715.14
Point 18	0.00	10,683.04	799.00	14,558,972.55	1,677,729.94
Point 19	0.00	10,670.29	813.28	14,558,959.82	1,677,744.24
Point 20	0.00	10,656.95	827.00	14,558,946.50	1,677,757.98
Point 21	0.00	10,643.04	840.16	14,558,932.61	1,677,771.16
Point 22	0.00	10,628.61	852.72	14,558,918.20	1,677,783.74
Point 23	0.00	10,613.66	864.67	14,558,903.26	1,677,795.71
Point 24	0.00	10,598.24	876.00	14,558,887.86	1,677,807.07
Point 25	0.00	10,582.34	886.67	14,558,871.97	1,677,817.76
Point 26	0.00	10,566.03	896.67	14,558,855.68	1,677,827.78
Point 27	0.00	10,549.30	905.99	14,558,838.96	1,677,837.13
Point 28	0.00	10,532.21	914.59	14,558,821.89	1,677,845.75
Point 29	0.00	10,514.78	922.49	14,558,804.47	1,677,853.68
Point 30	0.00	10,497.03	929.65	14,558,786.73	1,677,860.87
Point 31	0.00	10,479.00	936.07	14,558,768.71	1,677,867.31
Point 32	0.00	10,460.71	941.73	14,558,750.43	1,677,873.00
Point 33	0.00	10,442.21	946.62	14,558,731.93	1,677,877.92
Point 34	0.00	10,423.52	950.74	14,558,713.25	1,677,882.06
Point 35	0.00	10,404.67	954.08	14,558,694.40	1,677,885.43
Point 36	0.00	10,385.71	956.63	14,558,675.45	1,677,888.01
Point 37	0.00	10,366.65	958.39	14,558,656.39	1,677,889.80
Point 38	0.00	10,347.53	959.36	14,558,637.27	1,677,890.79
Point 39	0.00	10,328.39	959.53	14,558,618.13	1,677,890.99
Point 40	0.00	10,309.26	958.91	14,558,599.00	1,677,890.40
Point 41	0.00	10,290.18	957.49	14,558,579.92	1,677,889.01
Point 42	0.00	10,271.16	955.27	14,558,560.90	1,677,886.82
Point 43	0.00	10,252.26	952.27	14,558,541.99	1,677,883.84
Point 44	0.00	10,233.50	948.49	14,558,523.23	1,677,880.09
Point 45	0.00	10,214.92	943.92	14,558,504.64	1,677,875.55
Point 46	0.00	10,196.53	938.59	14,558,486.24	1,677,870.25
Point 47	0.00	10,178.38	932.49	14,558,468.08	1,677,864.17
Point 48	0.00	10,160.51	925.66	14,558,450.20	1,677,857.37
Point 49	0.00	10,142.93	918.07	14,558,432.61	1,677,849.80
Point 50	0.00	10,125.70	909.77	14,558,415.37	1,677,841.53
Point 51	0.00	10,108.81	900.76	14,558,398.47	1,677,832.54
Point 52	0.00	10,092.31	891.05	14,558,381.95	1,677,822.86
Point 53	0.00	10,076.24	880.67	14,558,365.87	1,677,812.50
Point 54	0.00	10,060.61	869.61	14,558,350.22	1,677,801.47
Point 55	0.00	10,045.45	857.93	14,558,335.04	1,677,789.81
Point 56	0.00	10,030.79	845.62	14,558,320.37	1,677,777.52
Point 57	0.00	10,016.66	832.72	14,558,306.22	1,677,764.64
Point 58	0.00	10,003.08	819.24	14,558,292.62	1,677,751.18
Point 59	0.00	9,990.07	805.20	14,558,279.59	1,677,737.16
Point 60	0.00	9,977.65	790.63	14,558,267.14	1,677,722.61
Point 61	0.00	9,965.85	775.56	14,558,255.32	1,677,707.55
Point 62	0.00	9,954.69	760.02	14,558,244.14	1,677,692.03
Point 63	0.00	9,944.18	744.02	14,558,233.61	1,677,676.05
Point 64	0.00	9,934.35	727.60	14,558,223.75	1,677,659.64
Point 65	0.00	9,925.21	710.78	14,558,214.59	1,677,642.83
Point 66	0.00	9,916.77	693.60	14,558,206.12	1,677,625.67
Point 67	0.00	9,909.07	676.08	14,558,198.40	1,677,608.16
Point 68	0.00	9,902.09	658.26	14,558,191.39	1,677,590.35
Point 69	0.00	9,895.86	640.16	14,558,185.13	1,677,572.26
Point 70	0.00	9,890.40	621.82	14,558,179.65	1,677,553.93

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Point 71	0.00	9,885.70	603.27	14,558,174.92	1,677,535.38
Point 72	0.00	9,881.76	584.53	14,558,170.95	1,677,516.65
Point 73	0.00	9,878.62	565.65	14,558,167.78	1,677,497.77
Point 74	0.00	9,876.27	546.66	14,558,165.41	1,677,478.79
Point 75	0.00	9,874.71	527.58	14,558,163.82	1,677,459.71
Point 76	0.00	9,873.93	508.46	14,558,163.01	1,677,440.59
Point 77	0.00	9,873.96	489.32	14,558,163.01	1,677,421.45
Point 78	0.00	9,874.79	470.20	14,558,163.81	1,677,402.33
Point 79	0.00	9,876.41	451.13	14,558,165.41	1,677,383.26
Point 80	0.00	9,878.82	432.14	14,558,167.79	1,677,364.26
Point 81	0.00	9,882.01	413.27	14,558,170.95	1,677,345.39
Point 82	0.00	9,886.00	394.55	14,558,174.91	1,677,326.66
Point 83	0.00	9,890.76	376.01	14,558,179.65	1,677,308.12
Point 84	0.00	9,896.28	357.68	14,558,185.14	1,677,289.78
Point 85	0.00	9,902.56	339.61	14,558,191.39	1,677,271.70
Point 86	0.00	9,909.59	321.80	14,558,198.40	1,677,253.88
Point 87	0.00	9,917.34	304.31	14,558,206.12	1,677,236.38
Point 88	0.00	9,925.83	287.15	14,558,214.59	1,677,219.20
Point 89	0.00	9,935.02	270.36	14,558,223.75	1,677,202.40
Point 90	0.00	9,944.90	253.97	14,558,233.61	1,677,186.00
Point 91	0.00	9,955.45	238.00	14,558,244.13	1,677,170.01
Point 92	0.00	9,966.66	222.48	14,558,255.32	1,677,154.47
Point 93	0.00	9,978.51	207.45	14,558,267.15	1,677,139.43
Point 94	0.00	9,990.97	192.92	14,558,279.59	1,677,124.88
Point 95	0.00	10,004.02	178.93	14,558,292.62	1,677,110.87
Point 96	0.00	10,017.64	165.48	14,558,306.22	1,677,097.40
Point 97	0.00	10,031.81	152.62	14,558,320.37	1,677,084.52
Point 98	0.00	10,046.50	140.35	14,558,335.04	1,677,072.23
Point 99	0.00	10,061.69	128.71	14,558,350.21	1,677,060.56
Point 100	0.00	10,077.36	117.72	14,558,365.87	1,677,049.55
Point 101	0.00	10,093.46	107.37	14,558,381.95	1,677,039.18
Point 102	0.00	10,109.99	97.71	14,558,398.47	1,677,029.49
Point 103	0.00	10,126.90	88.75	14,558,415.37	1,677,020.51
Point 104	0.00	10,144.16	80.49	14,558,432.61	1,677,012.22
Point 105	0.00	10,161.76	72.97	14,558,450.20	1,677,004.68
Point 106	0.00	10,179.65	66.18	14,558,468.08	1,676,997.86
Point 107	0.00	10,197.82	60.14	14,558,486.24	1,676,991.80
Point 108	0.00	10,216.22	54.86	14,558,504.64	1,676,986.49
Point 109	0.00	10,234.82	50.35	14,558,523.23	1,676,981.95
Point 110	0.00	10,253.59	46.62	14,558,541.99	1,676,978.19
Point 111	0.00	10,272.50	43.67	14,558,560.90	1,676,975.22
Point 112	0.00	10,291.52	41.52	14,558,579.92	1,676,973.04
Point 113	0.00	10,310.61	40.15	14,558,599.00	1,676,971.64
Point 114	0.00	10,329.74	39.59	14,558,618.13	1,676,971.05
Point 115	0.00	10,348.88	39.81	14,558,637.27	1,676,971.24
Point 116	0.00	10,367.99	40.83	14,558,656.38	1,676,972.24
Point 117	0.00	10,387.05	42.65	14,558,675.45	1,676,974.03
Point 118	0.00	10,406.00	45.26	14,558,694.40	1,676,976.61
Point 119	0.00	10,424.84	48.66	14,558,713.25	1,676,979.98
Point 120	0.00	10,443.52	52.83	14,558,731.93	1,676,984.12
Point 121	0.00	10,462.01	57.78	14,558,750.43	1,676,989.05
Point 122	0.00	10,480.28	63.49	14,558,768.71	1,676,994.73
Point 123	0.00	10,498.29	69.96	14,558,786.73	1,677,001.17
Point 124	0.00	10,516.02	77.17	14,558,804.47	1,677,008.36
Point 125	0.00	10,533.43	85.11	14,558,821.89	1,677,016.27
Point 126	0.00	10,550.49	93.78	14,558,838.96	1,677,024.92
Point 127	0.00	10,567.19	103.13	14,558,855.68	1,677,034.24
Point 128	0.00	10,583.47	113.19	14,558,871.97	1,677,044.28
Point 129	0.00	10,599.34	123.91	14,558,887.86	1,677,054.98
Point 130	0.00	10,614.73	135.27	14,558,903.26	1,677,066.31
Point 131	0.00	10,629.64	147.28	14,558,918.19	1,677,078.30
Point 132	0.00	10,644.04	159.89	14,558,932.61	1,677,090.89
Point 133	0.00	10,657.91	173.09	14,558,946.50	1,677,104.07
Point 134	0.00	10,671.21	186.85	14,558,959.82	1,677,117.81

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Point 135	0.00	10,683.92	201.15	14,558,972.55	1,677,132.09				
Point 136	0.00	10,696.03	215.97	14,558,984.68	1,677,146.89				
Point 137	0.00	10,707.51	231.28	14,558,996.18	1,677,162.19				
Point 138	0.00	10,718.35	247.06	14,559,007.05	1,677,177.95				
Point 139	0.00	10,728.52	263.27	14,559,017.24	1,677,194.15				
Point 140	0.00	10,738.01	279.89	14,559,026.75	1,677,210.75				
Point 141	0.00	10,746.80	296.90	14,559,035.57	1,677,227.75				
Point 142	0.00	10,754.87	314.25	14,559,043.67	1,677,245.09				
Point 143	0.00	10,762.21	331.92	14,559,051.03	1,677,262.75				
Point 144	0.00	10,768.82	349.89	14,559,057.67	1,677,280.71				
Point 145	0.00	10,774.67	368.11	14,559,063.54	1,677,298.92				
Point 146	0.00	10,779.75	386.57	14,559,068.65	1,677,317.37				
Point 147	0.00	10,784.07	405.21	14,559,073.00	1,677,336.00				
Point 148	0.00	10,787.61	424.02	14,559,076.57	1,677,354.81				
Point 149	0.00	10,790.35	442.96	14,559,079.33	1,677,373.75				
Point 150	0.00	10,792.31	461.99	14,559,081.32	1,677,392.77				
Point 151	0.00	10,793.48	481.11	14,559,082.52	1,677,411.89				
Point 152	0.00	10,793.85	500.24	14,559,082.92	1,677,431.02				
1N-R67W-Sec. 10_Secti	0.00	0.00	-24.00	-18.51	-1,738.74	14,548,267.29	1,675,207.90	40.059069	-104.875661
- plan misses target center by 1739.00usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1		-24.00	4,992.86	-2,976.12	14,553,255.78	1,672,224.46			
Point 2		-24.00	4,994.59	-331.69	14,553,261.38	1,674,868.89			
Point 3		-24.00	4,996.25	2,313.07	14,553,266.92	1,677,513.64			
Point 4		-24.00	2,354.63	2,320.05	14,550,625.32	1,677,524.50			
Point 5		-24.00	-287.06	2,326.97	14,547,983.64	1,677,535.29			
Point 6		-24.00	-288.46	-327.65	14,547,978.35	1,674,880.67			
Point 7		-24.00	-290.97	-2,982.55	14,547,971.94	1,672,225.78			
1N-R67W-Sec. 3_Sectio	0.00	0.00	-24.00	-18.51	-1,738.74	14,548,267.29	1,675,207.90	40.059069	-104.875661
- plan misses target center by 1739.00usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1		-24.00	10,361.30	-3,022.88	14,558,624.14	1,672,169.83			
Point 2		-24.00	10,358.07	-398.53	14,558,624.76	1,674,794.18			
Point 3		-24.00	10,354.85	2,234.71	14,558,625.40	1,677,427.42			
Point 4		-24.00	7,634.95	2,286.94	14,555,905.58	1,677,483.64			
Point 5		-24.00	4,996.25	2,313.07	14,553,266.92	1,677,513.64			
Point 6		-24.00	4,994.59	-331.69	14,553,261.38	1,674,868.89			
Point 7		-24.00	4,992.86	-2,976.12	14,553,255.78	1,672,224.46			
Point 8		-24.00	7,632.17	-2,992.40	14,555,895.06	1,672,204.31			
JZM 26C-3HZ_TOE	0.00	0.00	7,686.00	10,286.39	412.61	14,558,575.33	1,677,344.13	40.087368	-104.867972
- plan hits target center									
- Point									

Casing Points					
	Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
	1,817.06	1,800.00	9 5/8"	9-5/8	13-1/2
	8,055.37	7,657.00	7"	7	8-3/4

Anadarko

Planning Report

Database:	PLANNING	Local Co-ordinate Reference:	Well JZM 26C-3HZ
Company:	US ROCKIES WATTENBERG PLANNING	TVD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Project:	WELD-NAD83-UTMFT13N	MD Reference:	RKB = 17' @ 5056.00usft (D Rig)
Site:	1N-67W-10 JZM 16-10HZ Pad	North Reference:	True
Well:	JZM 26C-3HZ	Survey Calculation Method:	Minimum Curvature
Wellbore:	Plan A		
Design:	Permit Rev-1		

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,359.10	1,349.00	Fox Hills		0.00	
	4,631.91	4,595.00	Sussex		0.00	
	7,326.22	7,281.39	Sharon Springs		0.00	
	7,367.42	7,318.39	Niobrara Top		0.00	
	7,505.93	7,432.80	Niobrara B Bench		0.00	
	7,610.13	7,506.31	Niobrara C Bench		0.00	
	7,915.66	7,641.31	Fort Hays		0.00	
	8,055.37	7,657.00	Heel:		0.00	
	17,699.23	7,686.00	Toe:		0.00	

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			Comment
		+N/-S (usft)	+E/-W (usft)		
250.00	250.00	0.00	0.00		Begin Nudge @ 250.00ft
916.67	913.29	1.01	58.02		End Nudge @ 916.67ft
2,956.67	2,922.30	7.20	412.21		Begin Drop @ 2956.67ft
3,456.67	3,419.76	7.95	455.73		End Drop @ 3456.67ft
7,057.29	7,020.38	7.95	455.73		KOP @ 7057.29ft
7,600.00	7,499.71	225.61	454.81		DLS = 9°/100'
8,055.37	7,657.00	642.65	453.06		End Build @ 8055.37ft
17,699.24	7,686.00	10,286.39	412.61		TD Well @ 17699.24ft