



WELL DETAILS: Horsetail #07F-1806




+N/-S	+E/-W	Northing	Easting	Ground Level:	4899.00	Latitude	Longitude	Slot
0.00	0.00	1558396.90	3471361.44			40° 51' 13.480 N	103° 47' 45.790 W	

## SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N-/S	+E-/W	Dleg	TFace	Vsect	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
3	614.87	6.30	308.86	614.24	10.85	-13.46	2.00	308.86	-10.30	
4	4818.76	6.30	308.86	4792.76	300.15	-372.54	0.00	0.00	-284.97	
5	5133.63	0.00	0.00	5107.00	311.00	-386.00	2.00	180.00	-295.27	
6	5932.68	0.00	0.00	5307.00	-386.00	0.00	2.00	180.00	-295.27	
7	6152.02	90.00	179.54	5828.00	-209.98	-381.83	11.00	179.54	225.13	
8	13908.21	90.00	179.54	5828.00	-7965.93	-319.78	0.00	0.00	7972.35	PBHL 1806B

## FORMATION TOP DETAILS

TVDPath	MOPath	Formation
1550.00	1556.31	Upper Pierre
3500.00	3518.15	Hygiene
3650.00	3669.06	Lower Pierre
5626.00	5676.95	P200 Marker
5653.00	5712.04	P300 Marker
5672.00	5738.04	P350 Marker
5681.00	5750.80	Sharon Springs
5690.00	5763.90	Niobrara
5713.00	5799.15	Top A Chalk
5752.00	5867.07	Top A Marl
5772.00	5908.24	A Marl
5783.00	5933.89	Top Upper B
5806.00	6000.07	Base Upper B
5828.00	6152.02	Top Lower B

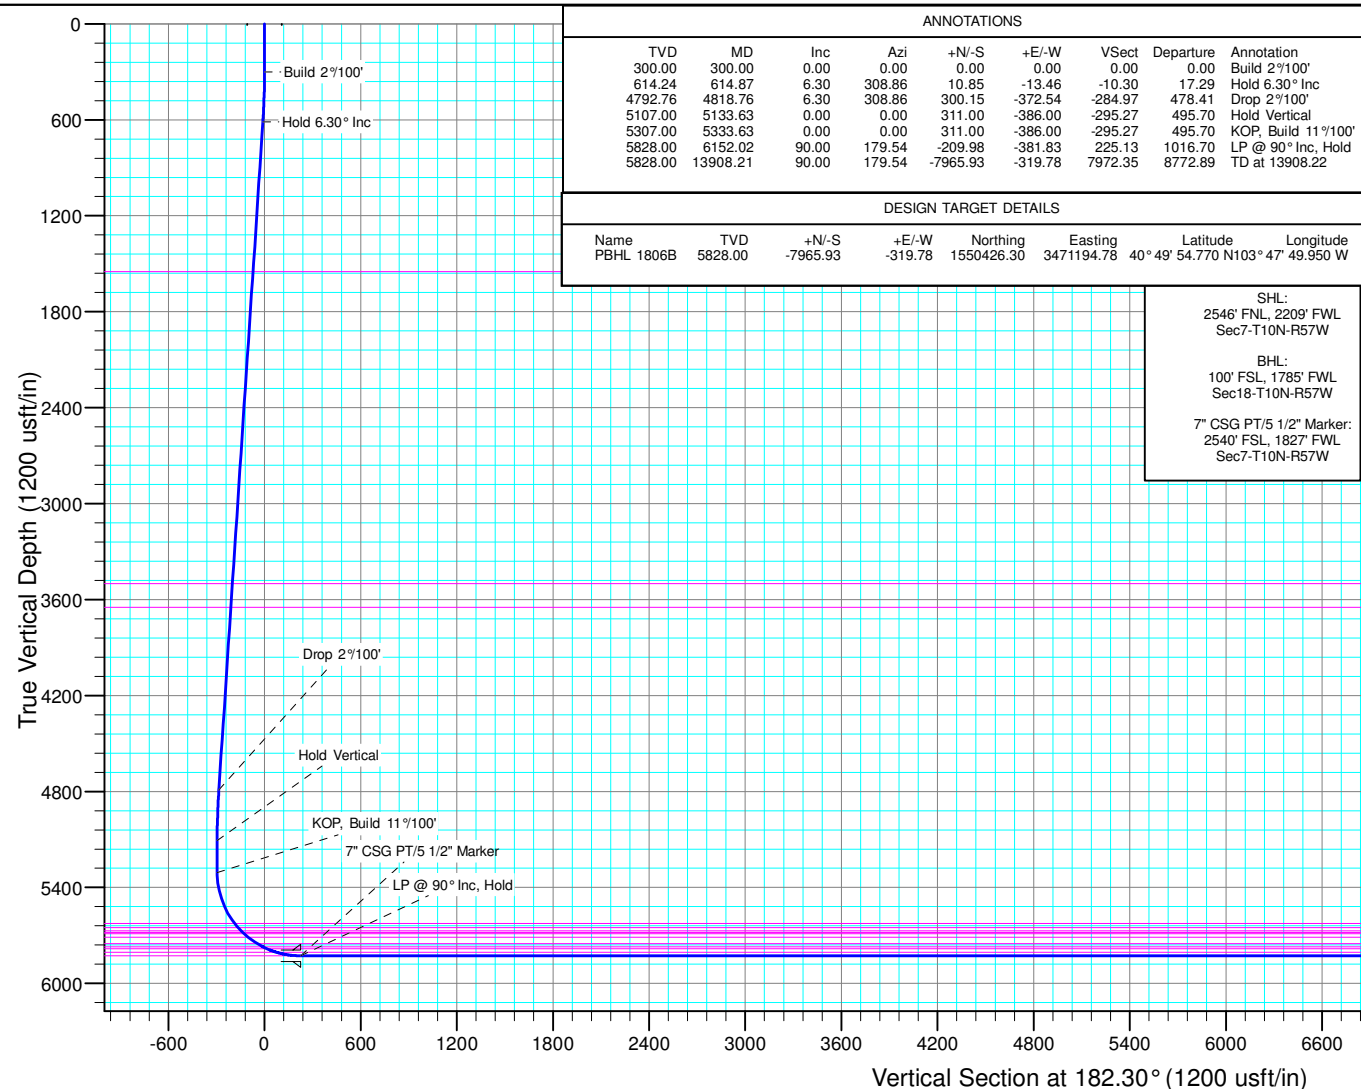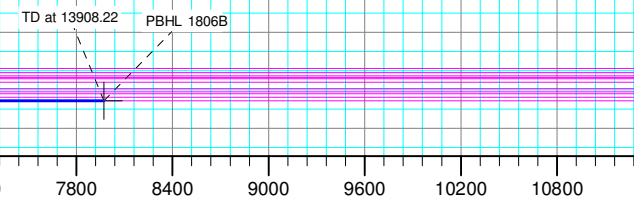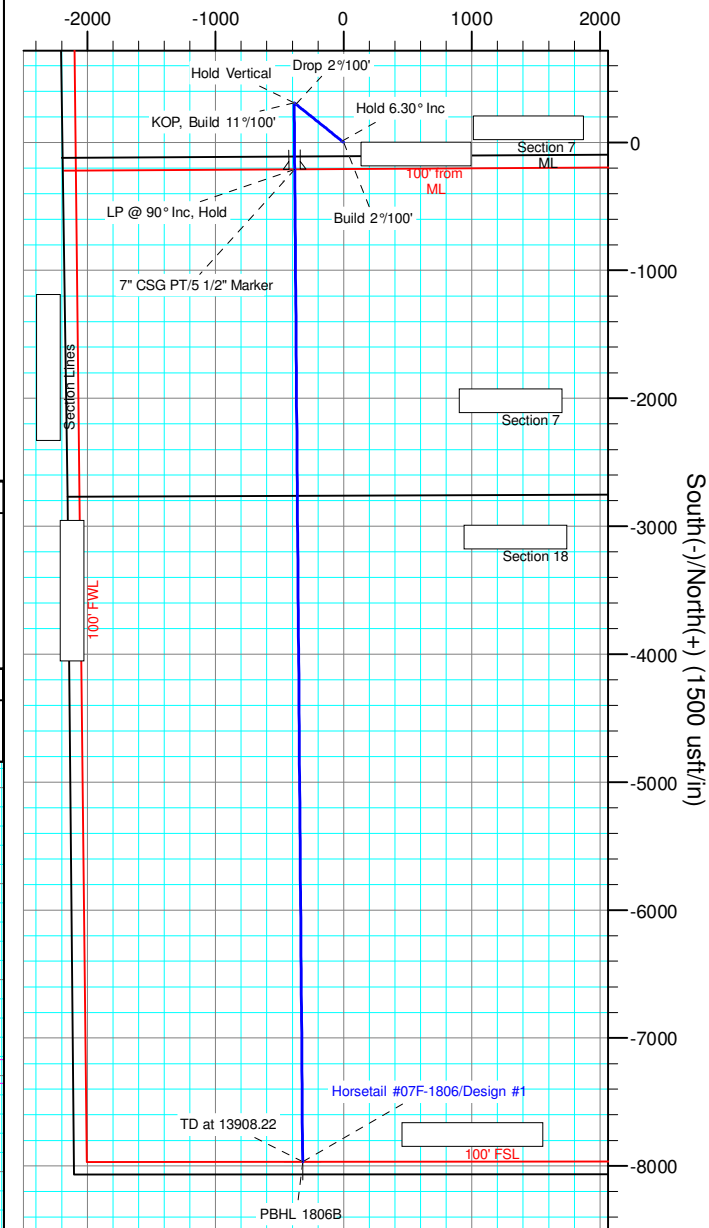



# **Whiting Petroleum Corp.**

**Weld County, CO  
Sec 7-T10N-R57W  
Horsetail #07F-1806**

**Hz**

**Plan: Design #1**

## **Standard Planning Report**

**12 November, 2015**



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	Design #1		

<b>Project</b>	Weld County, CO		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Colorado Northern Zone		

Site		Sec 7-T10N-R57W			
Site Position:		Northing:	1,558,450.14 usft	Latitude:	40° 51' 14.300 N
From:	Lat/Long	Easting:	3,469,810.15 usft	Longitude:	103° 48' 5.960 W
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	1.10 °

Well	Horsetail #07F-1806					
Well Position	+N/-S	-82.93 usft	Northing:	1,558,396.91 usft	Latitude:	40° 51' 13.480 N
	+E/-W	1,549.99 usft	Easting:	3,471,361.44 usft	Longitude:	103° 47' 45.790 W
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	4,899.00 usft

<b>Wellbore</b>	Hz				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	1/5/2015	7.88	67.44	53,087

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	182.30

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100ft)</b>	<b>Build Rate (°/100ft)</b>	<b>Turn Rate (°/100ft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
614.87	6.30	308.86	614.24	10.85	-13.46	2.00	2.00	0.00	308.86	
4,818.76	6.30	308.86	4,792.76	300.15	-372.54	0.00	0.00	0.00	0.00	
5,133.63	0.00	0.00	5,107.00	311.00	-386.00	2.00	-2.00	0.00	180.00	
5,333.63	0.00	0.00	5,307.00	311.00	-386.00	0.00	0.00	0.00	0.00	
6,152.02	90.00	179.54	5,828.00	-209.98	-381.83	11.00	11.00	0.00	179.54	
13,908.21	90.00	179.54	5,828.00	-7,965.93	-319.78	0.00	0.00	0.00	0.00	PBHL 1806B



# WOG Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Build 2°/100'</b>									
400.00	2.00	308.86	399.98	1.09	-1.36	-1.04	2.00	2.00	0.00
500.00	4.00	308.86	499.84	4.38	-5.43	-4.16	2.00	2.00	0.00
600.00	6.00	308.86	599.45	9.85	-12.22	-9.35	2.00	2.00	0.00
614.87	6.30	308.86	614.24	10.85	-13.46	-10.30	2.00	2.00	0.00
<b>Hold 6.30° Inc</b>									
700.00	6.30	308.86	698.85	16.70	-20.73	-15.86	0.00	0.00	0.00
800.00	6.30	308.86	798.25	23.59	-29.27	-22.39	0.00	0.00	0.00
900.00	6.30	308.86	897.65	30.47	-37.82	-28.93	0.00	0.00	0.00
1,000.00	6.30	308.86	997.04	37.35	-46.36	-35.46	0.00	0.00	0.00
1,100.00	6.30	308.86	1,096.44	44.23	-54.90	-41.99	0.00	0.00	0.00
1,200.00	6.30	308.86	1,195.84	51.11	-63.44	-48.53	0.00	0.00	0.00
1,300.00	6.30	308.86	1,295.23	58.00	-71.98	-55.06	0.00	0.00	0.00
1,400.00	6.30	308.86	1,394.63	64.88	-80.52	-61.60	0.00	0.00	0.00
1,500.00	6.30	308.86	1,494.03	71.76	-89.06	-68.13	0.00	0.00	0.00
1,556.31	6.30	308.86	1,550.00	75.63	-93.87	-71.81	0.00	0.00	0.00
<b>Upper Pierre</b>									
1,600.00	6.30	308.86	1,593.42	78.64	-97.61	-74.66	0.00	0.00	0.00
1,700.00	6.30	308.86	1,692.82	85.52	-106.15	-81.20	0.00	0.00	0.00
1,800.00	6.30	308.86	1,792.22	92.41	-114.69	-87.73	0.00	0.00	0.00
1,900.00	6.30	308.86	1,891.61	99.29	-123.23	-94.26	0.00	0.00	0.00
2,000.00	6.30	308.86	1,991.01	106.17	-131.77	-100.80	0.00	0.00	0.00
2,100.00	6.30	308.86	2,090.40	113.05	-140.31	-107.33	0.00	0.00	0.00
2,200.00	6.30	308.86	2,189.80	119.93	-148.86	-113.87	0.00	0.00	0.00
2,300.00	6.30	308.86	2,289.20	126.81	-157.40	-120.40	0.00	0.00	0.00
2,400.00	6.30	308.86	2,388.59	133.70	-165.94	-126.93	0.00	0.00	0.00
2,500.00	6.30	308.86	2,487.99	140.58	-174.48	-133.47	0.00	0.00	0.00
2,600.00	6.30	308.86	2,587.39	147.46	-183.02	-140.00	0.00	0.00	0.00
2,700.00	6.30	308.86	2,686.78	154.34	-191.56	-146.53	0.00	0.00	0.00
2,800.00	6.30	308.86	2,786.18	161.22	-200.11	-153.07	0.00	0.00	0.00
2,900.00	6.30	308.86	2,885.58	168.11	-208.65	-159.60	0.00	0.00	0.00
3,000.00	6.30	308.86	2,984.97	174.99	-217.19	-166.14	0.00	0.00	0.00
3,100.00	6.30	308.86	3,084.37	181.87	-225.73	-172.67	0.00	0.00	0.00
3,200.00	6.30	308.86	3,183.77	188.75	-234.27	-179.20	0.00	0.00	0.00
3,300.00	6.30	308.86	3,283.16	195.63	-242.81	-185.74	0.00	0.00	0.00
3,400.00	6.30	308.86	3,382.56	202.52	-251.35	-192.27	0.00	0.00	0.00
3,500.00	6.30	308.86	3,481.96	209.40	-259.90	-198.80	0.00	0.00	0.00
3,518.15	6.30	308.86	3,500.00	210.65	-261.45	-199.99	0.00	0.00	0.00
<b>Hygiene</b>									
3,600.00	6.30	308.86	3,581.35	216.28	-268.44	-205.34	0.00	0.00	0.00
3,669.06	6.30	308.86	3,650.00	221.03	-274.34	-209.85	0.00	0.00	0.00
<b>Lower Pierre</b>									
3,700.00	6.30	308.86	3,680.75	223.16	-276.98	-211.87	0.00	0.00	0.00
3,800.00	6.30	308.86	3,780.15	230.04	-285.52	-218.41	0.00	0.00	0.00
3,900.00	6.30	308.86	3,879.54	236.93	-294.06	-224.94	0.00	0.00	0.00
4,000.00	6.30	308.86	3,978.94	243.81	-302.60	-231.47	0.00	0.00	0.00
4,100.00	6.30	308.86	4,078.34	250.69	-311.15	-238.01	0.00	0.00	0.00
4,200.00	6.30	308.86	4,177.73	257.57	-319.69	-244.54	0.00	0.00	0.00
4,300.00	6.30	308.86	4,277.13	264.45	-328.23	-251.07	0.00	0.00	0.00
4,400.00	6.30	308.86	4,376.53	271.34	-336.77	-257.61	0.00	0.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,500.00	6.30	308.86	4,475.92	278.22	-345.31	-264.14	0.00	0.00	0.00
4,600.00	6.30	308.86	4,575.32	285.10	-353.85	-270.68	0.00	0.00	0.00
4,700.00	6.30	308.86	4,674.72	291.98	-362.39	-277.21	0.00	0.00	0.00
4,800.00	6.30	308.86	4,774.11	298.86	-370.94	-283.74	0.00	0.00	0.00
4,818.76	6.30	308.86	4,792.76	300.15	-372.54	-284.97	0.00	0.00	0.00
<b>Drop 2°/100'</b>									
4,900.00	4.67	308.86	4,873.62	305.03	-378.59	-289.60	2.00	-2.00	0.00
5,000.00	2.67	308.86	4,973.41	309.04	-383.57	-293.41	2.00	-2.00	0.00
5,100.00	0.67	308.86	5,073.37	310.88	-385.85	-295.15	2.00	-2.00	0.00
5,133.63	0.00	0.00	5,107.00	311.00	-386.00	-295.27	2.00	-2.00	0.00
<b>Hold Vertical</b>									
5,200.00	0.00	0.00	5,173.37	311.00	-386.00	-295.27	0.00	0.00	0.00
5,300.00	0.00	0.00	5,273.37	311.00	-386.00	-295.27	0.00	0.00	0.00
5,333.63	0.00	0.00	5,307.00	311.00	-386.00	-295.27	0.00	0.00	0.00
<b>KOP, Build 11°/100'</b>									
5,350.00	1.80	179.54	5,323.36	310.74	-386.00	-295.01	11.00	11.00	0.00
5,400.00	7.30	179.54	5,373.19	306.78	-385.97	-291.05	11.00	11.00	0.00
5,450.00	12.80	179.54	5,422.40	298.06	-385.90	-282.34	11.00	11.00	0.00
5,500.00	18.30	179.54	5,470.55	284.66	-385.79	-268.96	11.00	11.00	0.00
5,550.00	23.79	179.54	5,517.20	266.72	-385.65	-251.03	11.00	11.00	0.00
5,600.00	29.29	179.54	5,561.91	244.38	-385.47	-228.72	11.00	11.00	0.00
5,650.00	34.79	179.54	5,604.28	217.87	-385.25	-202.24	11.00	11.00	0.00
5,676.95	37.75	179.54	5,626.00	201.93	-385.13	-186.32	11.00	11.00	0.00
<b>P200 Marker</b>									
5,700.00	40.29	179.54	5,643.91	187.41	-385.01	-171.82	11.00	11.00	0.00
5,712.04	41.61	179.54	5,653.00	179.52	-384.95	-163.94	11.00	11.00	0.00
<b>P300 Marker</b>									
5,738.04	44.47	179.54	5,672.00	161.78	-384.81	-146.21	11.00	11.00	0.00
<b>P350 Marker</b>									
5,750.00	45.79	179.54	5,680.44	153.30	-384.74	-137.74	11.00	11.00	0.00
5,750.80	45.88	179.54	5,681.00	152.72	-384.73	-137.17	11.00	11.00	0.00
<b>Sharon Springs</b>									
5,763.90	47.32	179.54	5,690.00	143.21	-384.66	-127.66	11.00	11.00	0.00
<b>Niobrara</b>									
5,799.15	51.19	179.54	5,713.00	116.51	-384.44	-101.00	11.00	11.00	0.00
<b>Top A Chalk</b>									
5,800.00	51.29	179.54	5,713.53	115.85	-384.44	-100.33	11.00	11.00	0.00
5,850.00	56.79	179.54	5,742.89	75.39	-384.12	-59.93	11.00	11.00	0.00
5,867.07	58.66	179.54	5,752.00	60.96	-384.00	-45.51	11.00	11.00	0.00
<b>Top A Marl</b>									
5,900.00	62.28	179.54	5,768.23	32.31	-383.77	-16.89	11.00	11.00	0.00
5,908.24	63.19	179.54	5,772.00	24.99	-383.71	-9.58	11.00	11.00	0.00
<b>A Marl</b>									
5,933.89	66.01	179.54	5,783.00	1.82	-383.53	13.56	11.00	11.00	0.00
<b>Top Upper B</b>									
5,950.00	67.78	179.54	5,789.32	-12.99	-383.41	28.36	11.00	11.00	0.00
6,000.00	73.28	179.54	5,805.98	-60.12	-383.03	75.43	11.00	11.00	0.00
6,000.07	73.28	179.54	5,806.00	-60.19	-383.03	75.50	0.00	0.00	0.00
<b>Base Upper B</b>									
6,050.00	78.78	179.54	5,818.04	-108.62	-382.64	123.88	11.01	11.01	0.00
6,100.00	84.28	179.54	5,825.41	-158.05	-382.25	173.26	11.00	11.00	0.00
6,152.02	90.00	179.54	5,828.00	-209.98	-381.83	225.13	11.00	11.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	H2		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
LP @ 90° Inc, Hold - Top Lower B - 7" CSG PT/5 1/2" Marker									
6,200.00	90.00	179.54	5,828.00	-257.96	-381.45	273.06	0.00	0.00	0.00
6,300.00	90.00	179.54	5,828.00	-357.96	-380.65	372.94	0.00	0.00	0.00
6,400.00	90.00	179.54	5,828.00	-457.96	-379.85	472.82	0.00	0.00	0.00
6,500.00	90.00	179.54	5,828.00	-557.95	-379.05	572.71	0.00	0.00	0.00
6,600.00	90.00	179.54	5,828.00	-657.95	-378.25	672.59	0.00	0.00	0.00
6,700.00	90.00	179.54	5,828.00	-757.95	-377.45	772.48	0.00	0.00	0.00
6,800.00	90.00	179.54	5,828.00	-857.94	-376.65	872.36	0.00	0.00	0.00
6,900.00	90.00	179.54	5,828.00	-957.94	-375.85	972.25	0.00	0.00	0.00
7,000.00	90.00	179.54	5,828.00	-1,057.94	-375.05	1,072.13	0.00	0.00	0.00
7,100.00	90.00	179.54	5,828.00	-1,157.93	-374.25	1,172.01	0.00	0.00	0.00
7,200.00	90.00	179.54	5,828.00	-1,257.93	-373.45	1,271.90	0.00	0.00	0.00
7,300.00	90.00	179.54	5,828.00	-1,357.93	-372.65	1,371.78	0.00	0.00	0.00
7,400.00	90.00	179.54	5,828.00	-1,457.92	-371.85	1,471.67	0.00	0.00	0.00
7,500.00	90.00	179.54	5,828.00	-1,557.92	-371.05	1,571.55	0.00	0.00	0.00
7,600.00	90.00	179.54	5,828.00	-1,657.92	-370.25	1,671.43	0.00	0.00	0.00
7,700.00	90.00	179.54	5,828.00	-1,757.91	-369.45	1,771.32	0.00	0.00	0.00
7,800.00	90.00	179.54	5,828.00	-1,857.91	-368.65	1,871.20	0.00	0.00	0.00
7,900.00	90.00	179.54	5,828.00	-1,957.91	-367.85	1,971.09	0.00	0.00	0.00
8,000.00	90.00	179.54	5,828.00	-2,057.91	-367.05	2,070.97	0.00	0.00	0.00
8,100.00	90.00	179.54	5,828.00	-2,157.90	-366.25	2,170.86	0.00	0.00	0.00
8,200.00	90.00	179.54	5,828.00	-2,257.90	-365.45	2,270.74	0.00	0.00	0.00
8,300.00	90.00	179.54	5,828.00	-2,357.90	-364.65	2,370.62	0.00	0.00	0.00
8,400.00	90.00	179.54	5,828.00	-2,457.89	-363.85	2,470.51	0.00	0.00	0.00
8,500.00	90.00	179.54	5,828.00	-2,557.89	-363.05	2,570.39	0.00	0.00	0.00
8,600.00	90.00	179.54	5,828.00	-2,657.89	-362.25	2,670.28	0.00	0.00	0.00
8,700.00	90.00	179.54	5,828.00	-2,757.88	-361.45	2,770.16	0.00	0.00	0.00
8,800.00	90.00	179.54	5,828.00	-2,857.88	-360.65	2,870.05	0.00	0.00	0.00
8,900.00	90.00	179.54	5,828.00	-2,957.88	-359.85	2,969.93	0.00	0.00	0.00
9,000.00	90.00	179.54	5,828.00	-3,057.87	-359.05	3,069.81	0.00	0.00	0.00
9,100.00	90.00	179.54	5,828.00	-3,157.87	-358.25	3,169.70	0.00	0.00	0.00
9,200.00	90.00	179.54	5,828.00	-3,257.87	-357.45	3,269.58	0.00	0.00	0.00
9,300.00	90.00	179.54	5,828.00	-3,357.86	-356.65	3,369.47	0.00	0.00	0.00
9,400.00	90.00	179.54	5,828.00	-3,457.86	-355.85	3,469.35	0.00	0.00	0.00
9,500.00	90.00	179.54	5,828.00	-3,557.86	-355.05	3,569.24	0.00	0.00	0.00
9,600.00	90.00	179.54	5,828.00	-3,657.85	-354.25	3,669.12	0.00	0.00	0.00
9,700.00	90.00	179.54	5,828.00	-3,757.85	-353.45	3,769.00	0.00	0.00	0.00
9,800.00	90.00	179.54	5,828.00	-3,857.85	-352.65	3,868.89	0.00	0.00	0.00
9,900.00	90.00	179.54	5,828.00	-3,957.84	-351.85	3,968.77	0.00	0.00	0.00
10,000.00	90.00	179.54	5,828.00	-4,057.84	-351.05	4,068.66	0.00	0.00	0.00
10,100.00	90.00	179.54	5,828.00	-4,157.84	-350.25	4,168.54	0.00	0.00	0.00
10,200.00	90.00	179.54	5,828.00	-4,257.83	-349.45	4,268.43	0.00	0.00	0.00
10,300.00	90.00	179.54	5,828.00	-4,357.83	-348.65	4,368.31	0.00	0.00	0.00
10,400.00	90.00	179.54	5,828.00	-4,457.83	-347.85	4,468.19	0.00	0.00	0.00
10,500.00	90.00	179.54	5,828.00	-4,557.83	-347.05	4,568.08	0.00	0.00	0.00
10,600.00	90.00	179.54	5,828.00	-4,657.82	-346.25	4,667.96	0.00	0.00	0.00
10,700.00	90.00	179.54	5,828.00	-4,757.82	-345.45	4,767.85	0.00	0.00	0.00
10,800.00	90.00	179.54	5,828.00	-4,857.82	-344.65	4,867.73	0.00	0.00	0.00
10,900.00	90.00	179.54	5,828.00	-4,957.81	-343.85	4,967.61	0.00	0.00	0.00
11,000.00	90.00	179.54	5,828.00	-5,057.81	-343.05	5,067.50	0.00	0.00	0.00
11,100.00	90.00	179.54	5,828.00	-5,157.81	-342.25	5,167.38	0.00	0.00	0.00
11,200.00	90.00	179.54	5,828.00	-5,257.80	-341.45	5,267.27	0.00	0.00	0.00
11,300.00	90.00	179.54	5,828.00	-5,357.80	-340.65	5,367.15	0.00	0.00	0.00



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
11,400.00	90.00	179.54	5,828.00	-5,457.80	-339.85	5,467.04	0.00	0.00	0.00	
11,500.00	90.00	179.54	5,828.00	-5,557.79	-339.05	5,566.92	0.00	0.00	0.00	
11,600.00	90.00	179.54	5,828.00	-5,657.79	-338.25	5,666.80	0.00	0.00	0.00	
11,700.00	90.00	179.54	5,828.00	-5,757.79	-337.45	5,766.69	0.00	0.00	0.00	
11,800.00	90.00	179.54	5,828.00	-5,857.78	-336.65	5,866.57	0.00	0.00	0.00	
11,900.00	90.00	179.54	5,828.00	-5,957.78	-335.85	5,966.46	0.00	0.00	0.00	
12,000.00	90.00	179.54	5,828.00	-6,057.78	-335.05	6,066.34	0.00	0.00	0.00	
12,100.00	90.00	179.54	5,828.00	-6,157.77	-334.25	6,166.23	0.00	0.00	0.00	
12,200.00	90.00	179.54	5,828.00	-6,257.77	-333.45	6,266.11	0.00	0.00	0.00	
12,300.00	90.00	179.54	5,828.00	-6,357.77	-332.65	6,365.99	0.00	0.00	0.00	
12,400.00	90.00	179.54	5,828.00	-6,457.76	-331.85	6,465.88	0.00	0.00	0.00	
12,500.00	90.00	179.54	5,828.00	-6,557.76	-331.05	6,565.76	0.00	0.00	0.00	
12,600.00	90.00	179.54	5,828.00	-6,657.76	-330.25	6,665.65	0.00	0.00	0.00	
12,700.00	90.00	179.54	5,828.00	-6,757.75	-329.45	6,765.53	0.00	0.00	0.00	
12,800.00	90.00	179.54	5,828.00	-6,857.75	-328.65	6,865.42	0.00	0.00	0.00	
12,900.00	90.00	179.54	5,828.00	-6,957.75	-327.85	6,965.30	0.00	0.00	0.00	
13,000.00	90.00	179.54	5,828.00	-7,057.75	-327.05	7,065.18	0.00	0.00	0.00	
13,100.00	90.00	179.54	5,828.00	-7,157.74	-326.25	7,165.07	0.00	0.00	0.00	
13,200.00	90.00	179.54	5,828.00	-7,257.74	-325.45	7,264.95	0.00	0.00	0.00	
13,300.00	90.00	179.54	5,828.00	-7,357.74	-324.65	7,364.84	0.00	0.00	0.00	
13,400.00	90.00	179.54	5,828.00	-7,457.73	-323.85	7,464.72	0.00	0.00	0.00	
13,500.00	90.00	179.54	5,828.00	-7,557.73	-323.05	7,564.60	0.00	0.00	0.00	
13,600.00	90.00	179.54	5,828.00	-7,657.73	-322.25	7,664.49	0.00	0.00	0.00	
13,700.00	90.00	179.54	5,828.00	-7,757.72	-321.45	7,764.37	0.00	0.00	0.00	
13,800.00	90.00	179.54	5,828.00	-7,857.72	-320.65	7,864.26	0.00	0.00	0.00	
13,908.21	90.00	179.54	5,828.00	-7,965.93	-319.78	7,972.35	0.00	0.00	0.00	
TD at 13908.22										

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL 1806B	0.00	0.00	5,828.00	-7,965.93	-319.78	1,550,426.30	3,471,194.78	40° 49' 54.770 N	103° 47' 49.950 W
- hit/miss target									
- Shape									
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (in)	Hole Diameter (in)	
6,152.02	5,828.00	7" CSG PT/5 1/2" Marker	7.000	8.750	



# WOG

## Planning Report

<b>Database:</b>	LandmarkEDM	<b>Local Co-ordinate Reference:</b>	Well Horsetail #07F-1806
<b>Company:</b>	Whiting Petroleum Corp.	<b>TVD Reference:</b>	KBE @ 4920.00usft
<b>Project:</b>	Weld County, CO	<b>MD Reference:</b>	KBE @ 4920.00usft
<b>Site:</b>	Sec 7-T10N-R57W	<b>North Reference:</b>	True
<b>Well:</b>	Horsetail #07F-1806	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Hz		
<b>Design:</b>	Design #1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,556.31	1,550.00	Upper Pierre				
3,518.15	3,500.00	Hygiene				
3,669.06	3,650.00	Lower Pierre				
5,676.95	5,626.00	P200 Marker				
5,712.04	5,653.00	P300 Marker				
5,738.04	5,672.00	P350 Marker				
5,750.80	5,681.00	Sharon Springs				
5,763.90	5,690.00	Niobrara				
5,799.15	5,713.00	Top A Chalk				
5,867.07	5,752.00	Top A Marl				
5,908.24	5,772.00	A Marl				
5,933.89	5,783.00	Top Upper B				
6,000.07	5,806.00	Base Upper B				
6,152.02	5,828.00	Top Lower B				

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
300.00	300.00	0.00	0.00	Build 2°/100'	
614.87	614.24	10.85	-13.46	Hold 6.30° Inc	
4,818.76	4,792.76	300.15	-372.54	Drop 2°/100'	
5,133.63	5,107.00	311.00	-386.00	Hold Vertical	
5,333.63	5,307.00	311.00	-386.00	KOP, Build 11°/100'	
6,152.02	5,828.00	-209.98	-381.83	LP @ 90° Inc, Hold	
13,908.21	5,828.00	-7,965.93	-319.78	TD at 13908.22	