

P&A Procedure for Evacuation Creek 7619

31-4S-102W Rio Blanco County, Colo.

8 5/8" 24# @ 219' TOC at Surface

2 7/8" 6.5# @ 5,085' TOC 2,040' CBL

Tubing: None

Perfs: 4,660'-4,940'

Prior to MIRU arrange for a 1.9" work string

MIRU

NDWH, NUBOP

RIH open ended to 4,960'

Roll hole with produced water

Spot a 15 sx plug across the perfs (530' in 2 7/8")

POH and WOC

Tag cement, it should be 100' above the perfs

Add cement if necessary

Pressure test casing, if it fails call for orders

POH

Perforate 50' below base of surface at 269'

NDBOP

Circulate cement to surface (90 sxs – 289' in 8 5/8")

Cut off the wellhead

Weld a plate with well information, RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

Well Name: Evacuation Creek 7619

API #: 05103100740000

Location: Sec. 31-4S-102W

KB: 8,391' (7' AGL)


GL: 8,384'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/5/2012

Current Wellbore

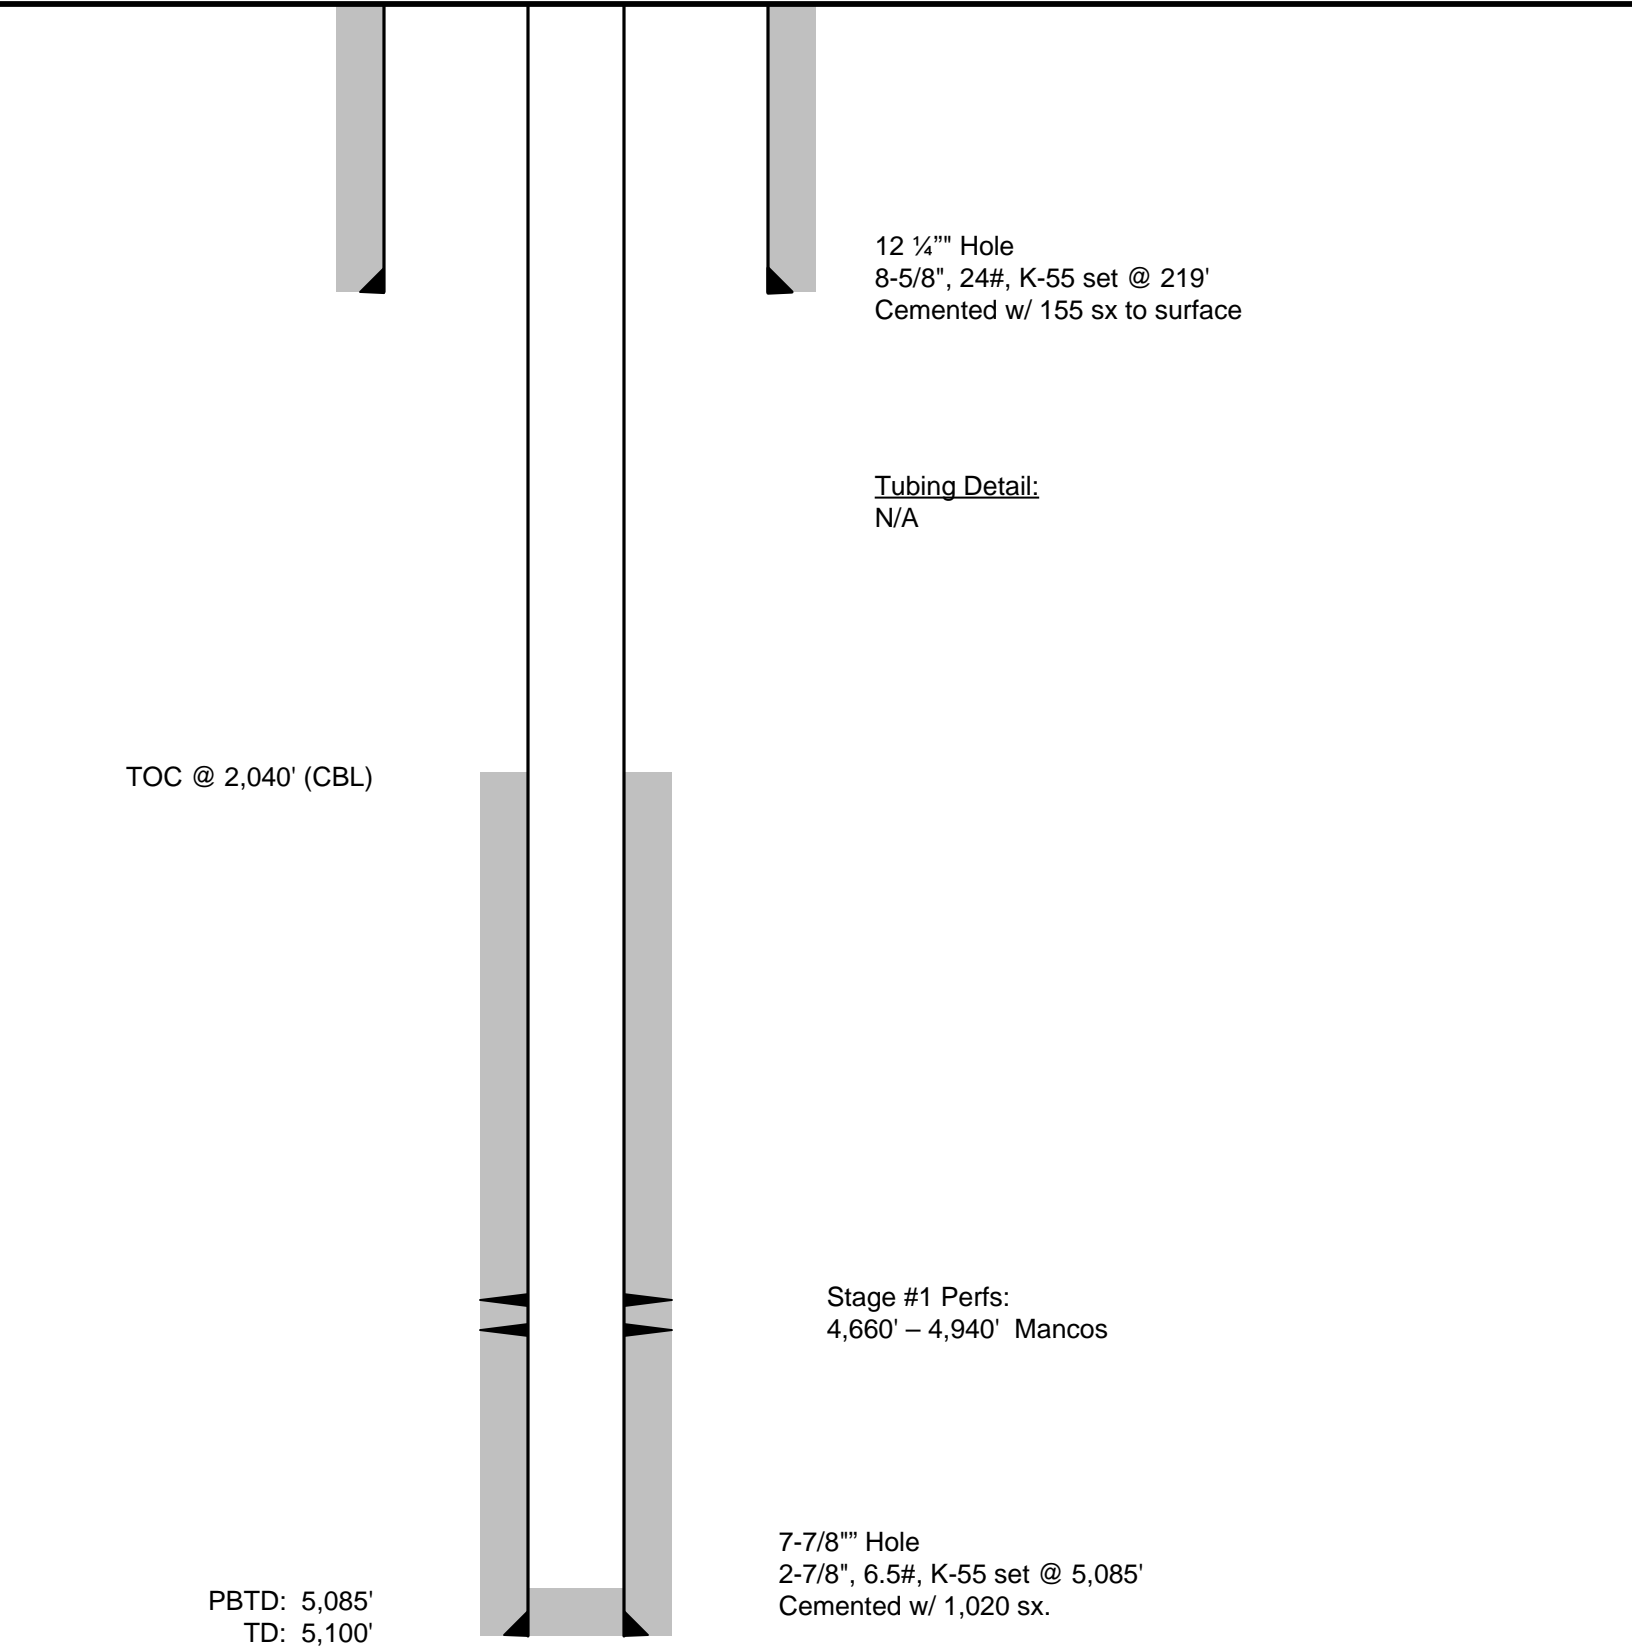

12 1/4" Hole
8-5/8", 24#, K-55 set @ 219'
Cemented w/ 155 sx to surface

Tubing Detail:
N/A

TOC @ 2,040' (CBL)

Stage #1 Perfs:
4,660' – 4,940' Mancos

7-7/8" Hole
2-7/8", 6.5#, K-55 set @ 5,085'
Cemented w/ 1,020 sx.

PBTD: 5,085'
TD: 5,100'

Well Name: Evacuation Creek 7619

API #: 05103100740000

Location: Sec. 31-4S-102W

KB: 8,391' (7' AGL)

GL: 8,384'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/5/2012

Proposed Wellbore

