

Well

Operator
Location
County
State
Field

IONE 6-8-8

EnCana Oil & Gas (USA) Inc.
SWSE Section 8-T2N-R66W
WELD
Colorado
SPINDLE

Footages: 874' FSL & 1761' FEL
Spud Date: 06-05-2009
TD Date 06-09-2009

Log Tops

Sussex	4427'
Shannon	5064'
Niobrara	7177'
Codell	7442'
J Sand	7862'

CIBP

Set @ 7510' on 1/9/12

CFP

Set @ 7320' on 1/9/12
Drilled out 3/5/12

CFP

Set @ 7330' on 06-23-09
Drilled out on 08-03-09

CFP

Set @ 7550' on 06-23-09
Drilled out on 08-03-09

Production Tubing

2-3/8", Set @ 7411'
03-06-12

Surface Casing and Cement

8 5/8" ,24#, landed @783',cemented with 365 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2", 11.6#, landed @ 8049', cemented with 350 sxs

DV Tool

Set @ 5022', cemented above DV tool with 135 sxs

Niobrara Refrac

Frac'd the Niobrara from 7230'- 7250' with 136,714 gal frac fluid and 250,800 # sand. 01-09-12

Codell Refrac

Frac'd the Codell 7442' – 7460' with 147,869 gal frac fluid and 360,700 # sand. 01-09-12

Perf'd the Niobrara from 7230'- 7250' @ 4 spf


Frac'd the Niobrara with 141,120 gal 18# to 16# Vistar cross linked gel containing 250,460# 20/40 sand. 06-23-09

Perf'd the Codell 7442' – 7460' @ 2 spf

Frac'd the Codell with 109,032 gal 24# Vistar Hybrid cross linked gel containing 250,540# 20/40 sand. 06-23-09

Perf'd the J Sand from 7896'- 7916' @ 2 spf

Frac'd the J Sand with 151,200 gals 20# Vistar Hybrid cross linked gel containing 251,400# 20/40 sand. 06-23-09

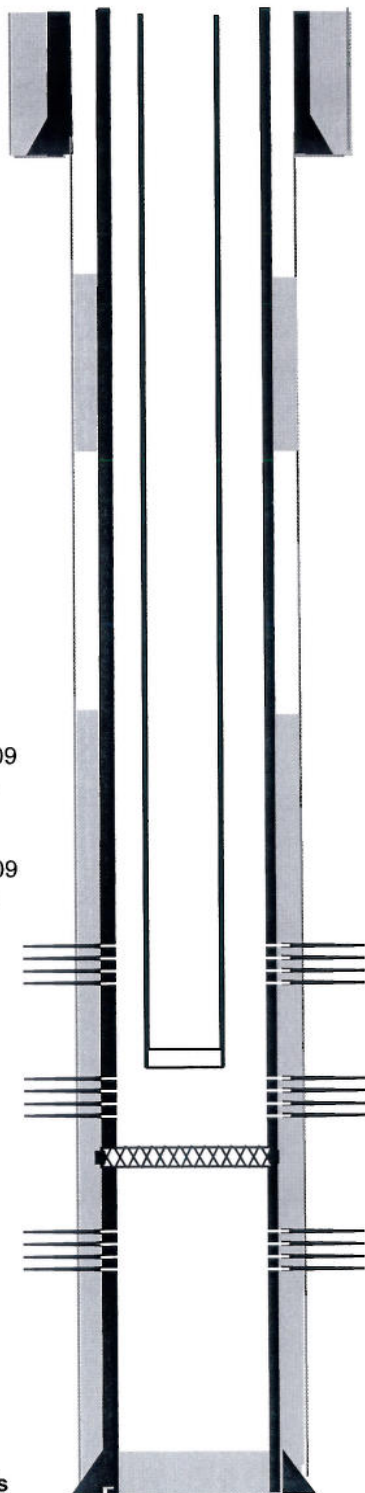

8065'

— Driller's
TD

Rev 5/1/12 jw