


Well

KIYOTA 4-6-35

Operator EnCana Oil & Gas (USA) Inc.
 Location NW SE Section 35-T2N-R68W
 County Weld
 State Colorado
 Field Wattenberg
 API 05-123-29141-0000
 Footages: 2228' FSL & 1836' FEL
 Spud Date: 03-04-2009
 TD Date: 03-08-2009

Log Tops

Niobrara 7206'
 Codell 7456'
 J Sand 7900'

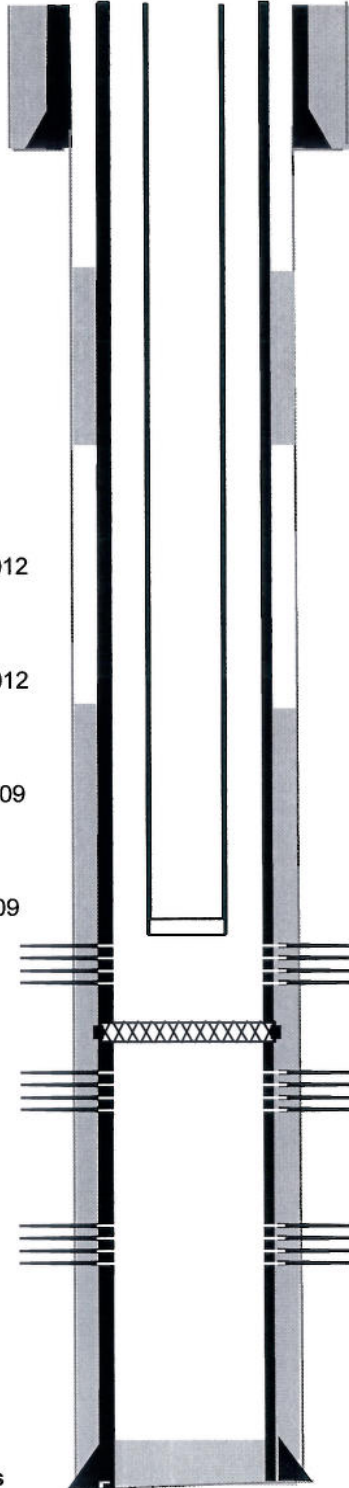

Surface Casing and Cement

8 5/8" , 24#, landed @ 789', cemented with 385 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , 11.6#, landed @ 8049', cemented with 250 sxs

Niobrara Refrac

Frac'd 7240' - 7260' with 131,595 gal frac fluid and 250,440# sand. 01-11-12

Codell Refrac

Frac'd 7456' - 7476' with 149,576 gal frac fluid and 250,440# sand. 01-11-12

CFP

Set @ 7320' on 1/11/2012
 Drilled out on 1/30/12

CIBP

Set @ 7520' on 1/11/2012

CFP

Set @ 7370' on 03-17-09
 Drilled out on 04-07-09

CFP

Set @ 7550' on 03-17-09
 Drilled out on 04-07-09

Perf'd the Niobrara from 7240' - 7260' @ 4 spf
 Frac'd the Niobrara with 144,522 gal 18# Vistar Hybrid cross linked gel with 250,320# 20/40 sand. 03-17-09

Perf'd the Codell 7456' - 7476' @ 2 spf
 Frac'd the Codell with 106,218 gal 25# Vistar Hybrid cross linked gel containing 250,320# 20/40 sand. 03-17-09

Production Tubing

2-3/8", Set @ 7441'
 1/31/12

Perf'd the J Sand from 7900' - 7916', 7924' - 7944' @ 2 spf
 Frac'd the J Sand with 154,224 gal 20# Vistar Hybrid cross linked gel containing 250,580# sand. 03-17-09

8060' — Driller's TD