





Project: Mamm Creek
Site: K31E Pad
Well: Shideler Fee 31-11A
Wellbore: OH
Plan: Plan #1



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	450.0	0.00	0.00	450.0	0.0	0.0	0.00	0.00	0.0	
3	658.8	6.26	77.79	658.4	2.4	11.1	3.00	77.79	11.4	
4	5860.9	6.26	77.79	5829.4	122.4	566.0	0.00	0.00	579.0	
5	6174.1	0.00	0.00	6142.0	126.0	582.7	2.00	180.00	596.2	Shideler Fee 31-11A TGT
6	8225.1	0.00	0.00	8193.0	126.0	582.7	0.00	0.00	596.2	Shideler Fee 31-11A PBHL
7	8375.1	0.00	0.00	8343.0	126.0	582.7	0.00	0.00	596.2	

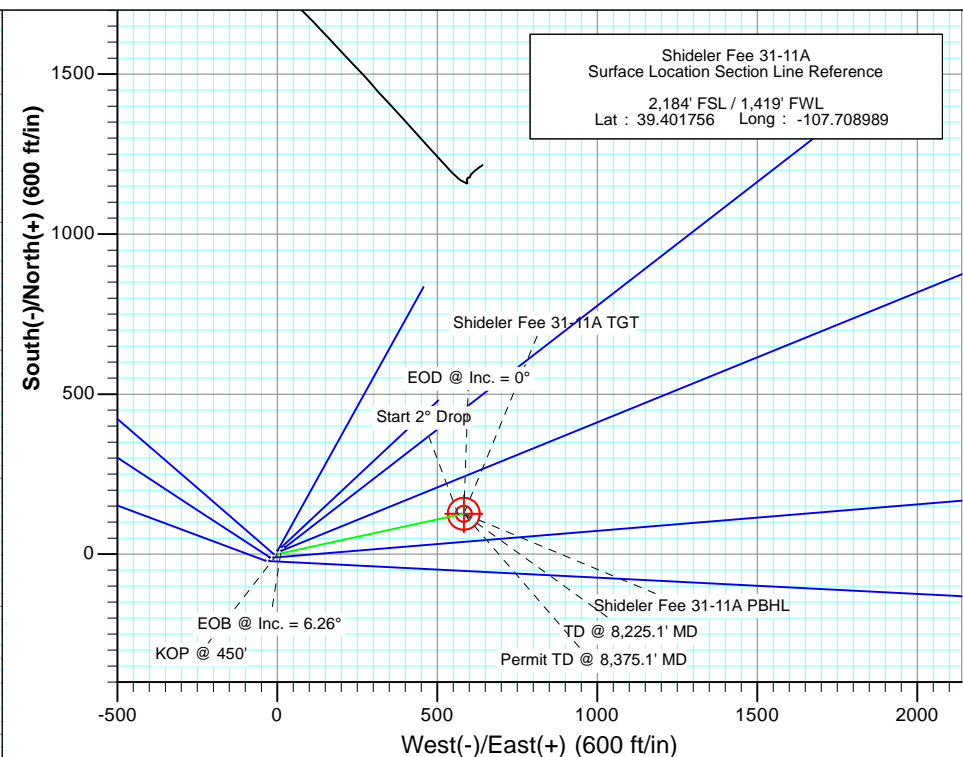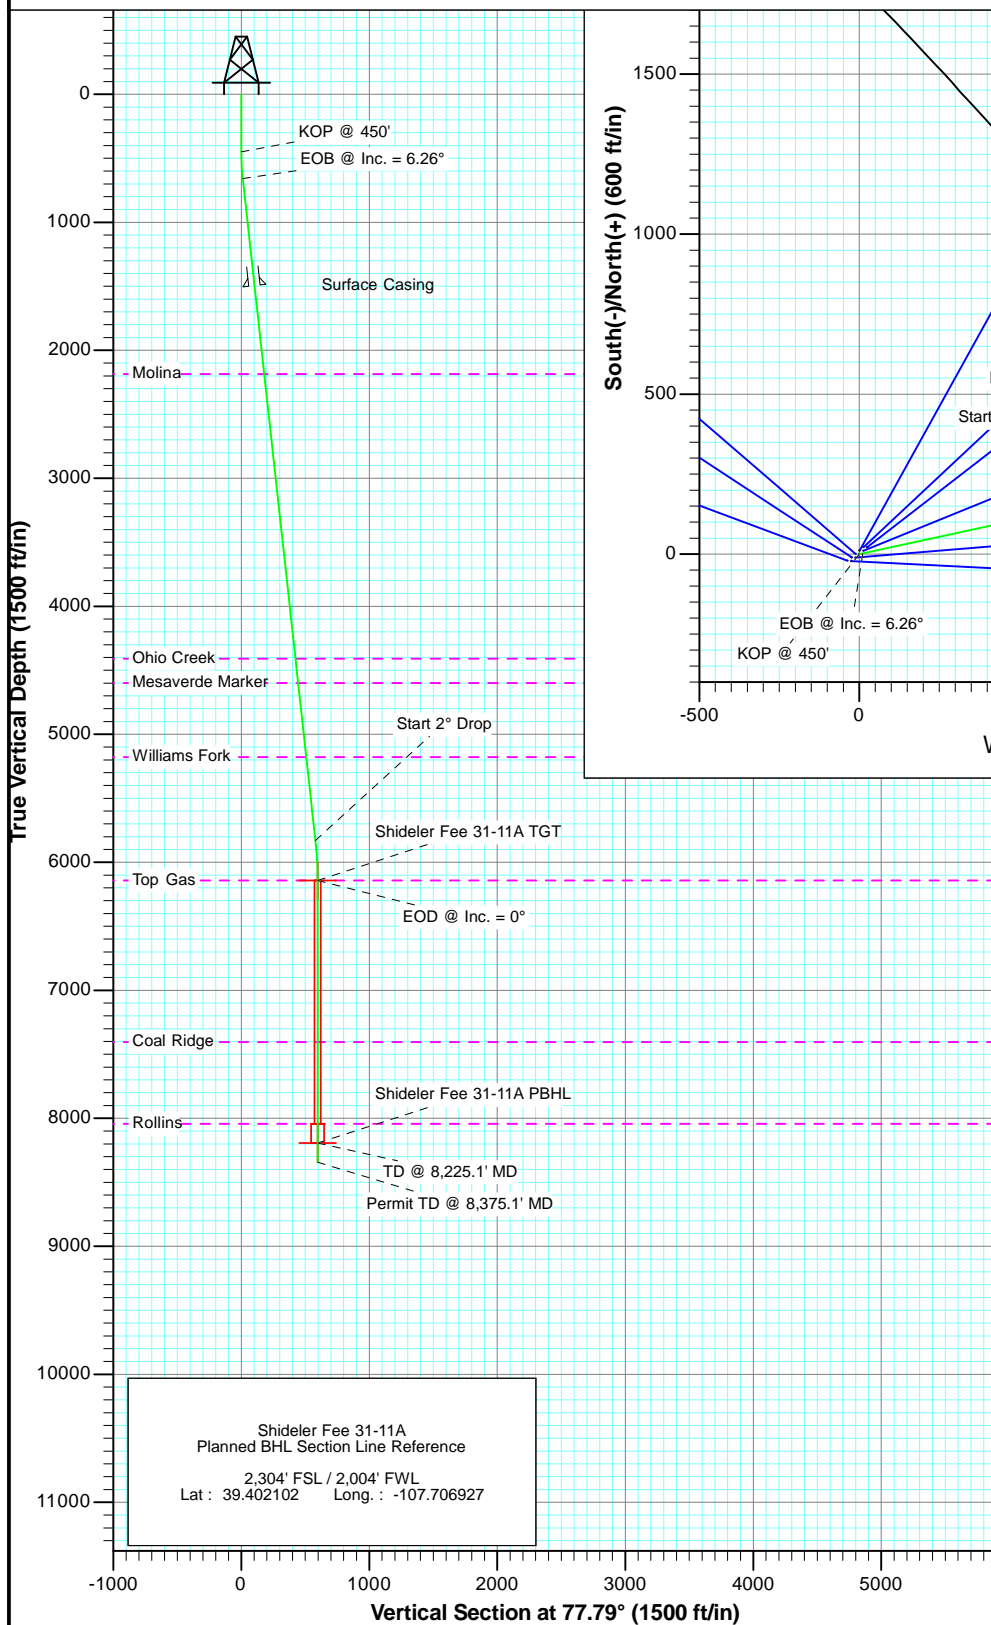

FORMATION TOP DETAILS

TVDPPath	MDPath	Formation
2185.0	2194.6	Molina
4409.0	4431.9	Ohio Creek
4598.0	4622.1	Mesaverde Marker
5178.0	5205.6	Williams Fork
6142.0	6174.1	Top Gas
7404.0	7436.1	Coal Ridge
8043.0	8075.1	Rollins



Azimuths to True North
Magnetic North: 10.10°

Magnetic Field
Strength: 52197.7snT
Dip Angle: 65.71°
Date: 2/8/2012
Model: IGRF200510


DESIGN DETAILS: Plan #1

125XXX; SC
KBE @ 6921.0ft (Original Well Elev)

No Target (Freehand)	Azimuth	Origin Type	N/S	E/W
	77.79	Slot	0.0	0.0




Project: Mamm Creek
Site: K31E Pad
Well: Shideler Fee 31-11A
Wellbore: OH
Design: Plan #1

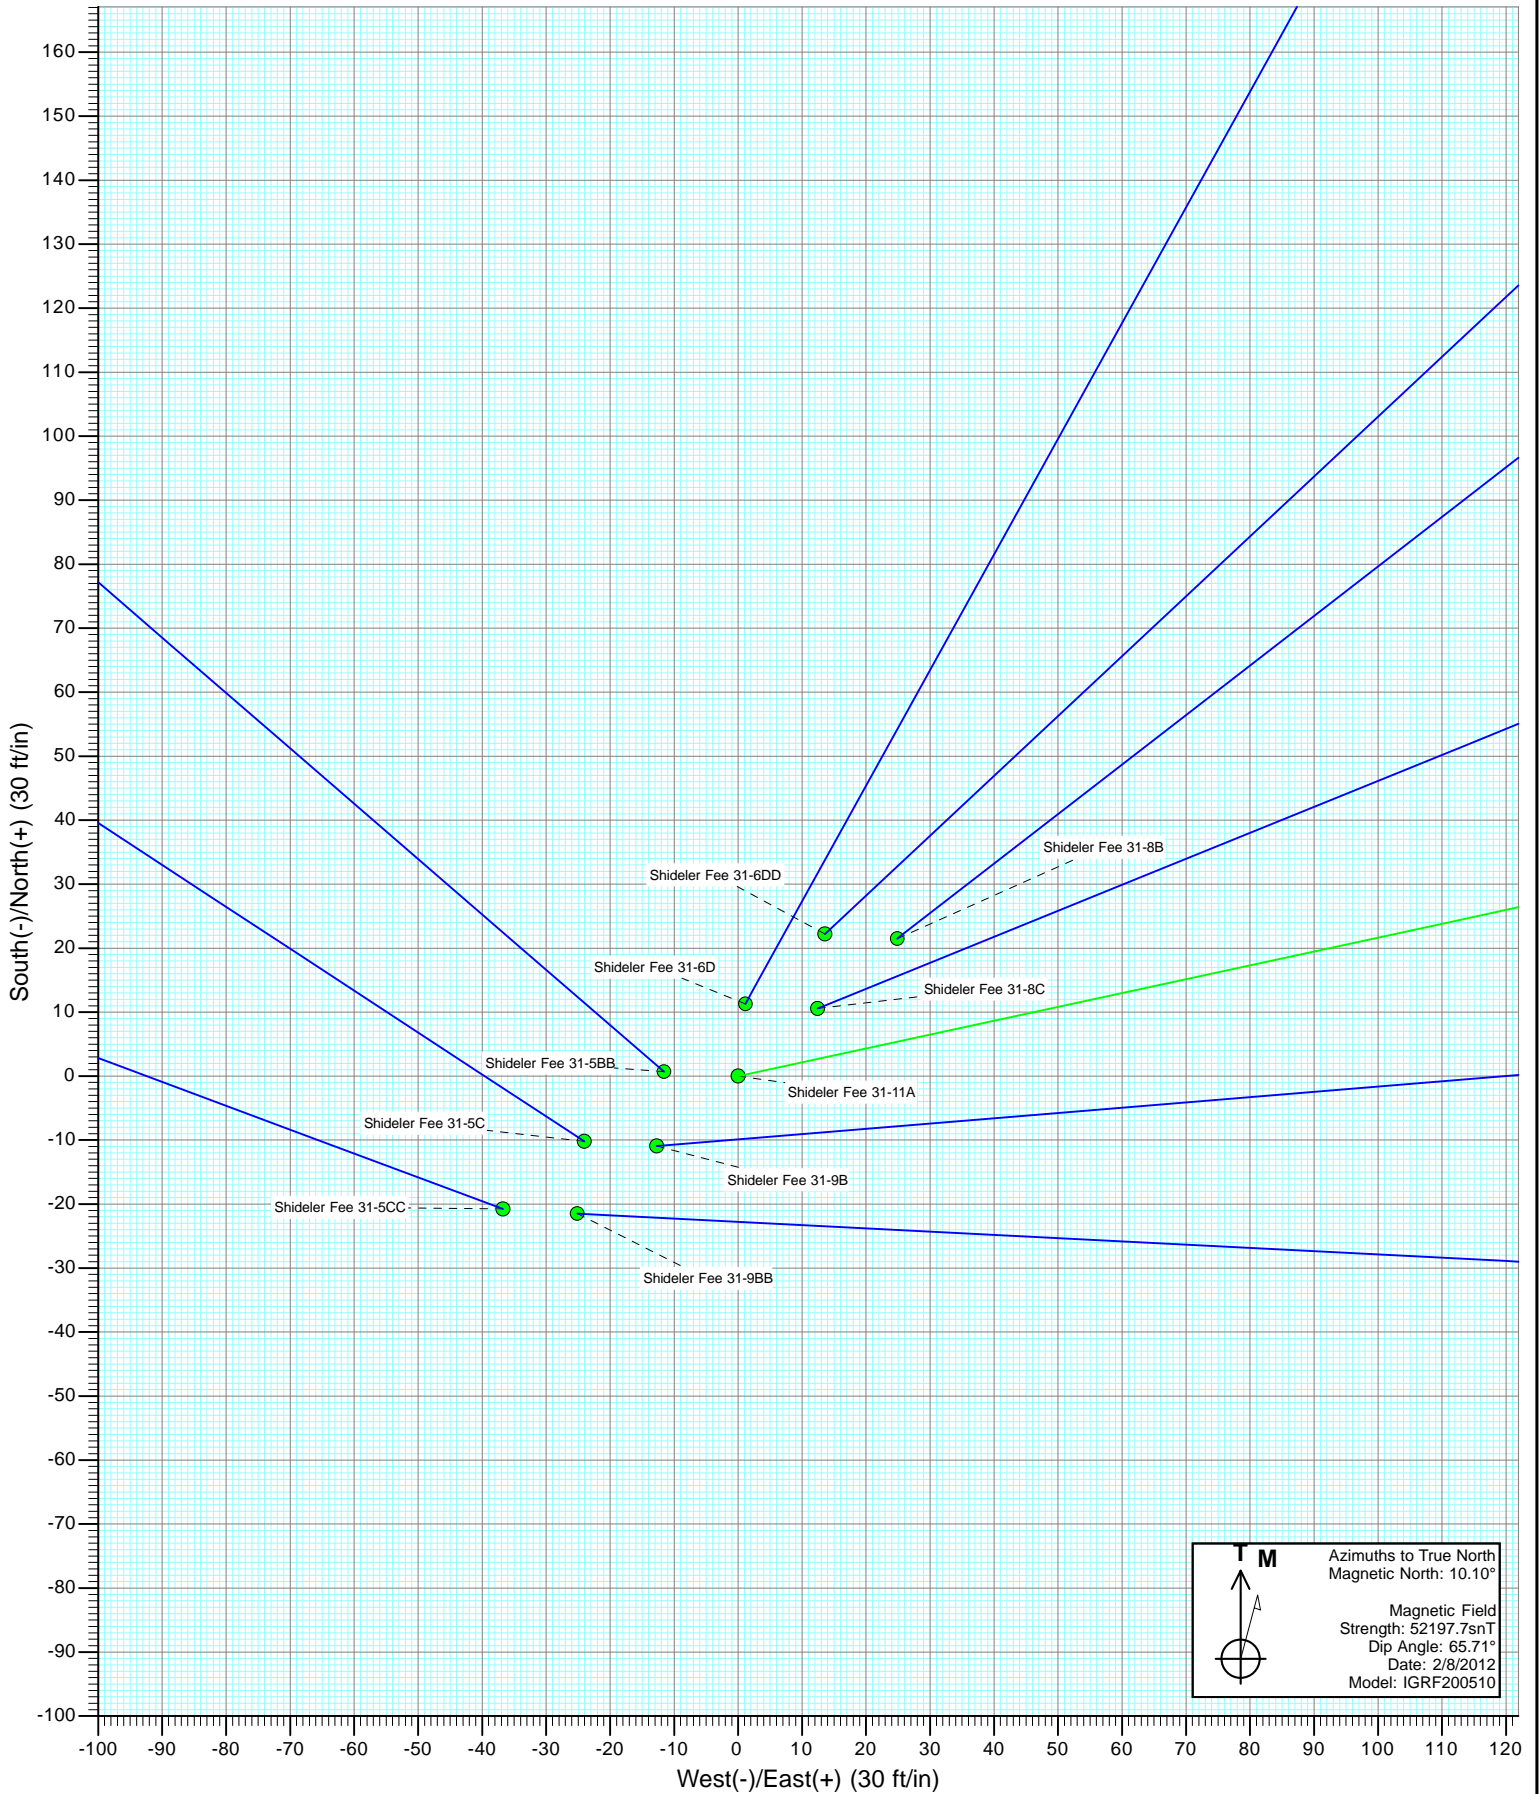




Project: Mamm Creek
Site: K31E Pad
Well: Shideler Fee 31-11A
Wellbore: OH
Design: Plan #1

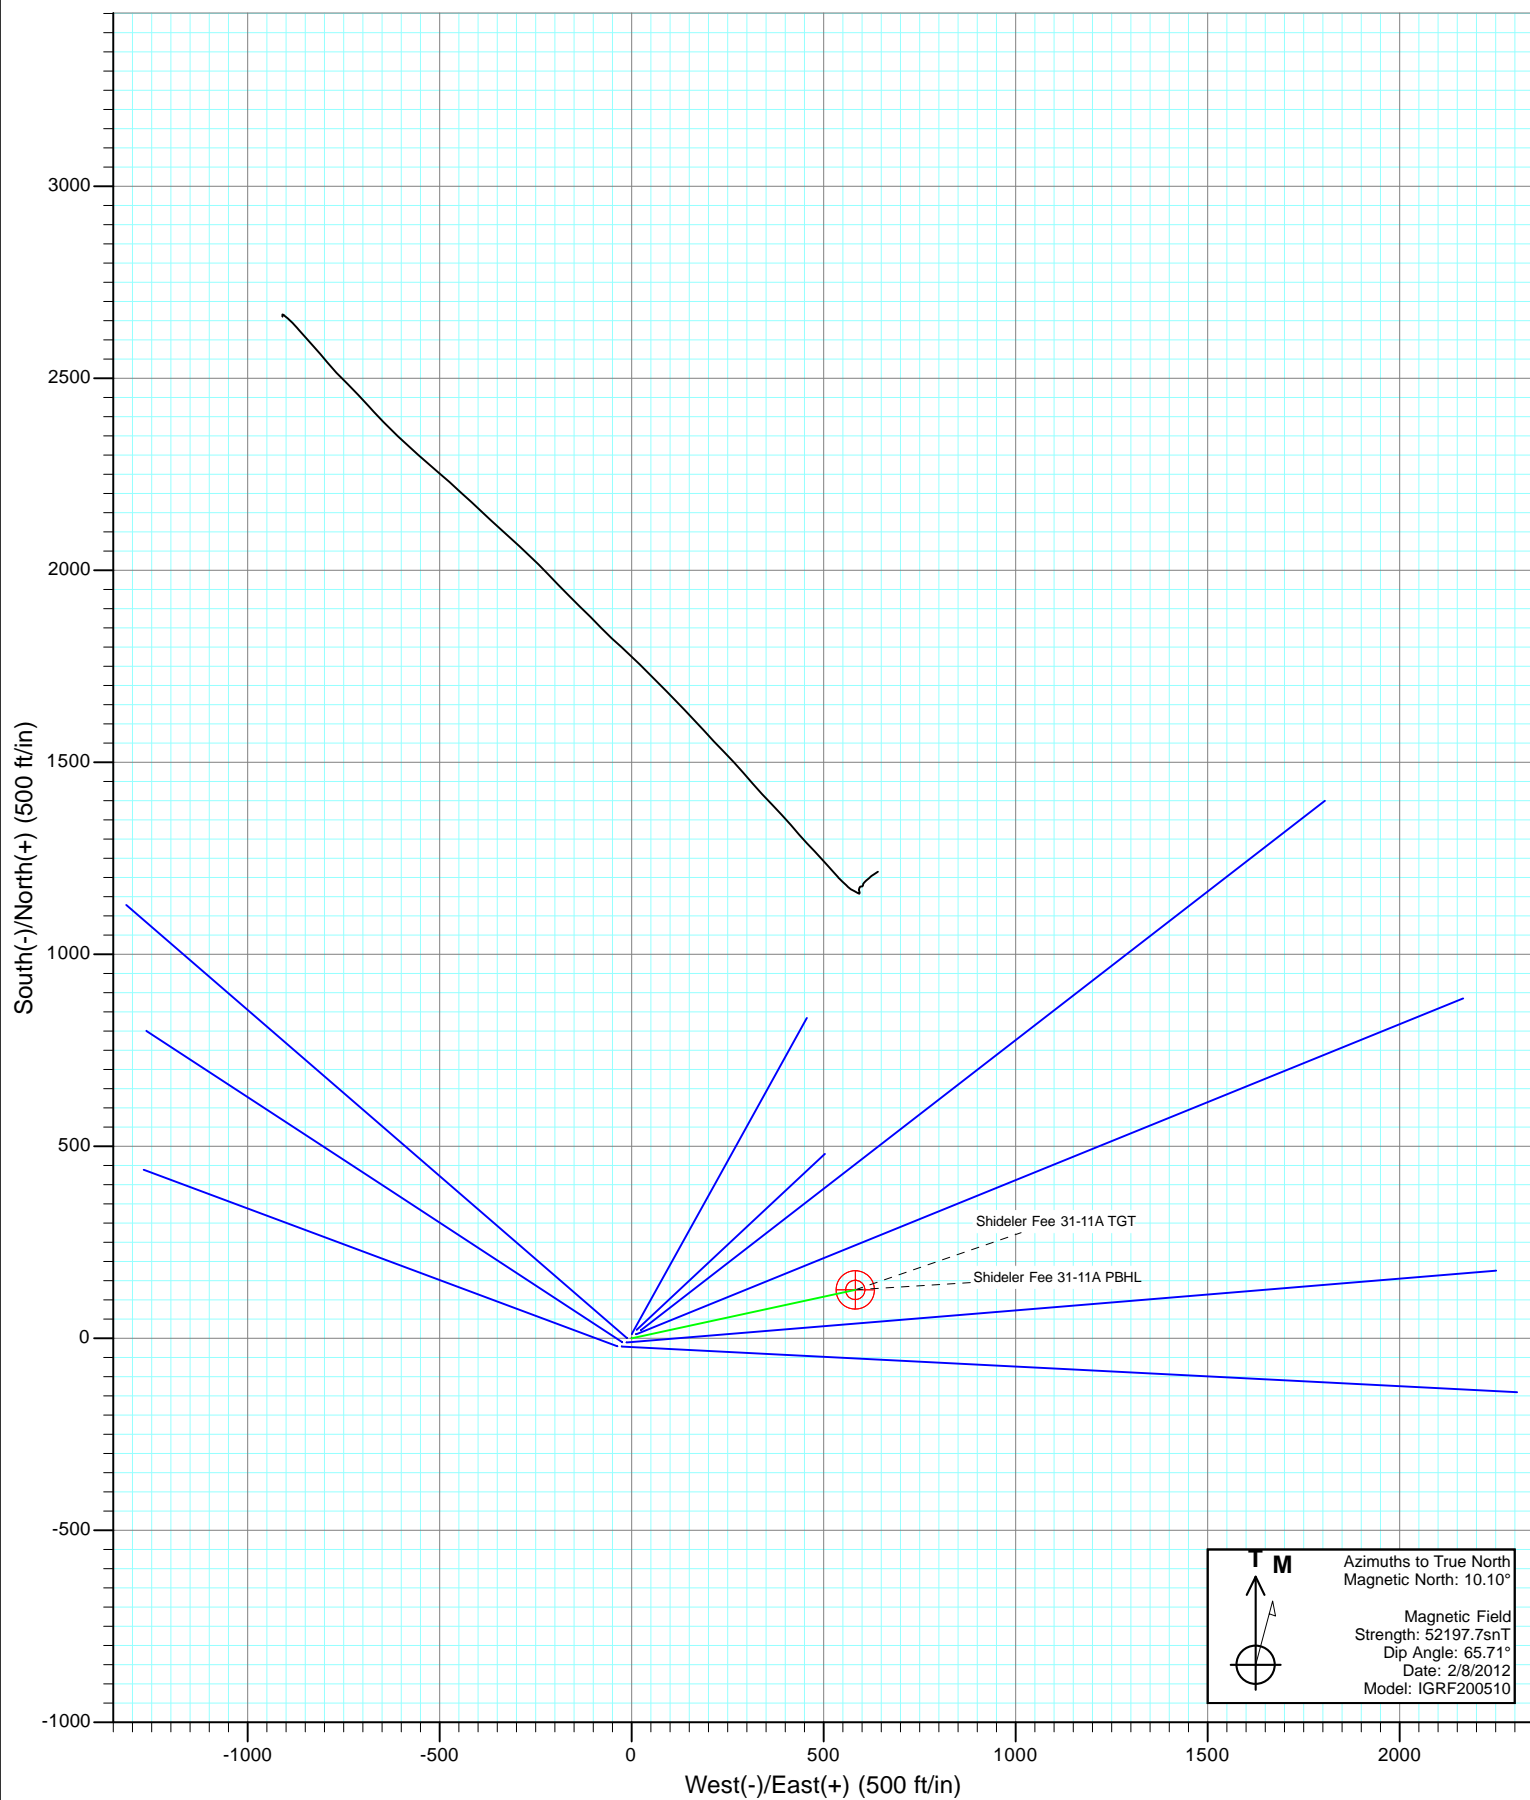



Project: Mamm Creek
Site: K31E Pad
Well: Shideler Fee 31-11A
Wellbore: OH
Plan: Plan #1

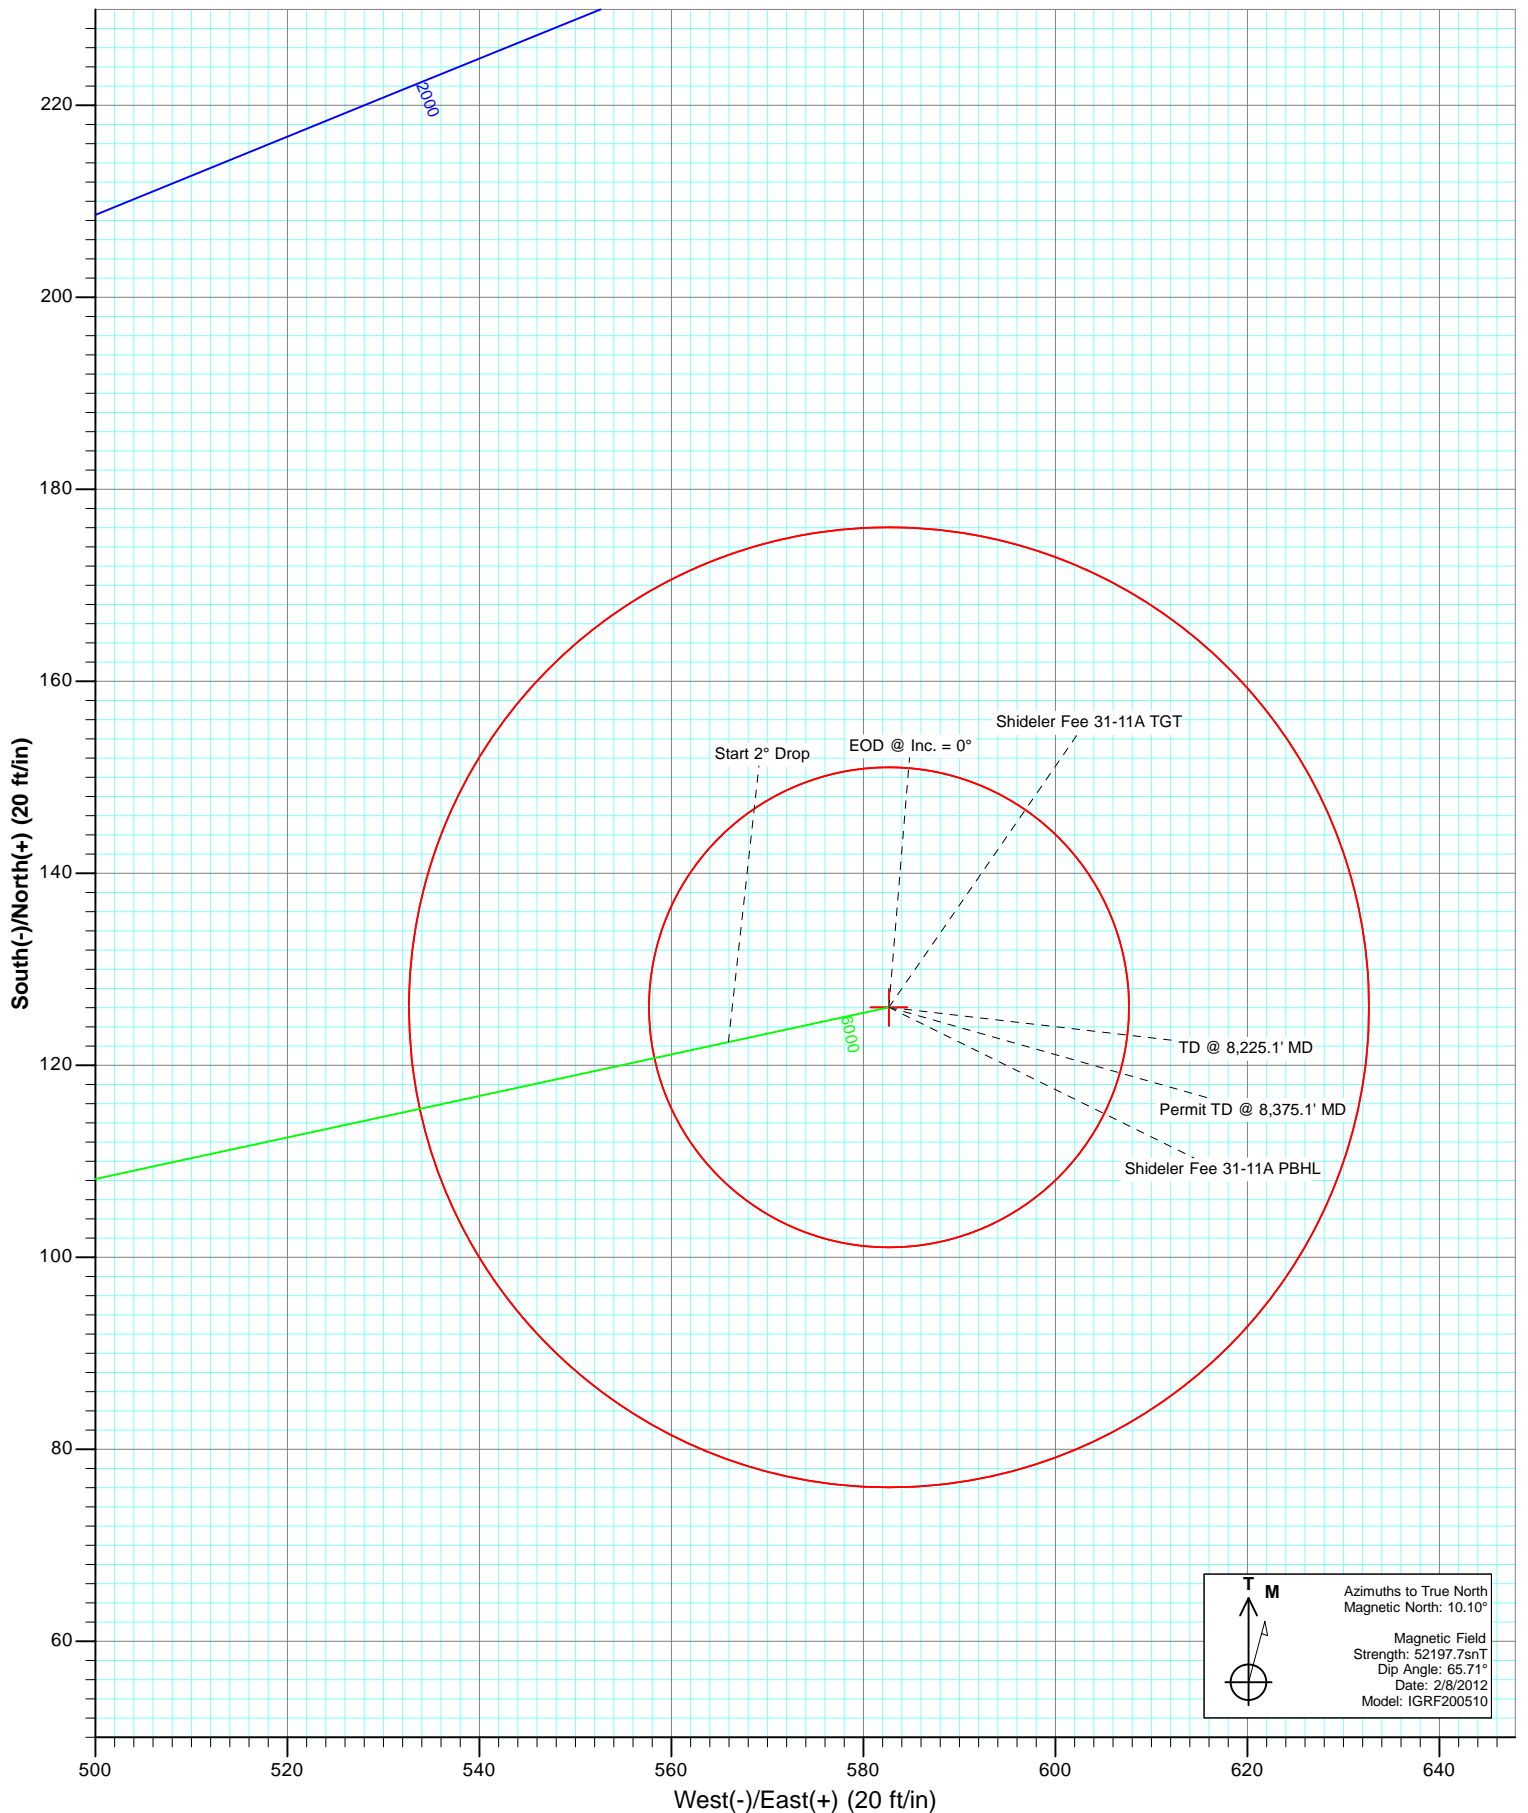

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well Shideler Fee 31-11A
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 6921.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 6921.0ft (Original Well Elev)
Site:	K31E Pad	North Reference:	True
Well:	Shideler Fee 31-11A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Mamm Creek		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site		K31E Pad			
Site Position:		Northing:	1,578,791.89 ft	Latitude:	39.401699
From:	Lat/Long	Easting:	2,375,816.61 ft	Longitude:	-107.709119
Position Uncertainty:	0.0 ft	Slot Radius:	13.200 in	Grid Convergence:	-1.39 °

Well	Shideler Fee 31-11A					
Well Position	+N/-S	0.0 ft	Northing:	1,578,811.74 ft	Latitude:	39.401756
	+E/-W	0.0 ft	Easting:	2,375,853.84 ft	Longitude:	-107.708989
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	6,899.0 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2/8/2012	10.10	65.71	52,198

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(ft)	(ft)	(ft)	(°)
	0.0	0.0	0.0	77.79

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
450.0	0.00	0.00	450.0	0.0	0.0	0.00	0.00	0.00	0.00	
658.8	6.26	77.79	658.4	2.4	11.1	3.00	3.00	0.00	77.79	
5,860.9	6.26	77.79	5,829.4	122.4	566.0	0.00	0.00	0.00	0.00	
6,174.1	0.00	0.00	6,142.0	126.0	582.7	2.00	-2.00	0.00	180.00	Shideler Fee 31-11A 1
8,225.1	0.00	0.00	8,193.0	126.0	582.7	0.00	0.00	0.00	0.00	Shideler Fee 31-11A f
8,375.1	0.00	0.00	8,343.0	126.0	582.7	0.00	0.00	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well Shideler Fee 31-11A
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 6921.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 6921.0ft (Original Well Elev)
Site:	K31E Pad	North Reference:	True
Well:	Shideler Fee 31-11A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	
450.0	0.00	0.00	450.0	0.0	0.0	0.0	0.00	0.00	KOP @ 450'
500.0	1.50	77.79	500.0	0.1	0.6	0.7	3.00	3.00	
600.0	4.50	77.79	599.8	1.2	5.8	5.9	3.00	3.00	
658.8	6.26	77.79	658.4	2.4	11.1	11.4	3.00	3.00	EOB @ Inc. = 6.26°
700.0	6.26	77.79	699.3	3.4	15.5	15.9	0.00	0.00	
800.0	6.26	77.79	798.7	5.7	26.2	26.8	0.00	0.00	
900.0	6.26	77.79	898.1	8.0	36.9	37.7	0.00	0.00	
1,000.0	6.26	77.79	997.5	10.3	47.5	48.6	0.00	0.00	
1,100.0	6.26	77.79	1,096.9	12.6	58.2	59.5	0.00	0.00	
1,200.0	6.26	77.79	1,196.4	14.9	68.9	70.5	0.00	0.00	
1,300.0	6.26	77.79	1,295.8	17.2	79.5	81.4	0.00	0.00	
1,400.0	6.26	77.79	1,395.2	19.5	90.2	92.3	0.00	0.00	
1,500.0	6.26	77.79	1,494.6	21.8	100.9	103.2	0.00	0.00	Surface Casing
1,600.0	6.26	77.79	1,594.0	24.1	111.5	114.1	0.00	0.00	
1,700.0	6.26	77.79	1,693.4	26.4	122.2	125.0	0.00	0.00	
1,800.0	6.26	77.79	1,792.8	28.7	132.9	135.9	0.00	0.00	
1,900.0	6.26	77.79	1,892.2	31.0	143.5	146.8	0.00	0.00	
2,000.0	6.26	77.79	1,991.6	33.4	154.2	157.8	0.00	0.00	
2,100.0	6.26	77.79	2,091.0	35.7	164.9	168.7	0.00	0.00	
2,194.6	6.26	77.79	2,185.0	37.8	174.9	179.0	0.00	0.00	Molina
2,200.0	6.26	77.79	2,190.4	38.0	175.5	179.6	0.00	0.00	
2,300.0	6.26	77.79	2,289.8	40.3	186.2	190.5	0.00	0.00	
2,400.0	6.26	77.79	2,389.2	42.6	196.8	201.4	0.00	0.00	
2,500.0	6.26	77.79	2,488.6	44.9	207.5	212.3	0.00	0.00	
2,600.0	6.26	77.79	2,588.0	47.2	218.2	223.2	0.00	0.00	
2,700.0	6.26	77.79	2,687.4	49.5	228.8	234.1	0.00	0.00	
2,800.0	6.26	77.79	2,786.8	51.8	239.5	245.0	0.00	0.00	
2,900.0	6.26	77.79	2,886.2	54.1	250.2	256.0	0.00	0.00	
3,000.0	6.26	77.79	2,985.6	56.4	260.8	266.9	0.00	0.00	
3,100.0	6.26	77.79	3,085.0	58.7	271.5	277.8	0.00	0.00	
3,200.0	6.26	77.79	3,184.4	61.0	282.2	288.7	0.00	0.00	
3,300.0	6.26	77.79	3,283.8	63.3	292.8	299.6	0.00	0.00	
3,400.0	6.26	77.79	3,383.2	65.7	303.5	310.5	0.00	0.00	
3,500.0	6.26	77.79	3,482.6	68.0	314.2	321.4	0.00	0.00	
3,600.0	6.26	77.79	3,582.0	70.3	324.8	332.3	0.00	0.00	
3,700.0	6.26	77.79	3,681.4	72.6	335.5	343.3	0.00	0.00	
3,800.0	6.26	77.79	3,780.8	74.9	346.2	354.2	0.00	0.00	
3,900.0	6.26	77.79	3,880.2	77.2	356.8	365.1	0.00	0.00	
4,000.0	6.26	77.79	3,979.6	79.5	367.5	376.0	0.00	0.00	
4,100.0	6.26	77.79	4,079.0	81.8	378.2	386.9	0.00	0.00	
4,200.0	6.26	77.79	4,178.4	84.1	388.8	397.8	0.00	0.00	
4,300.0	6.26	77.79	4,277.8	86.4	399.5	408.7	0.00	0.00	
4,400.0	6.26	77.79	4,377.2	88.7	410.2	419.6	0.00	0.00	
4,431.9	6.26	77.79	4,409.0	89.5	413.6	423.1	0.00	0.00	Ohio Creek
4,500.0	6.26	77.79	4,476.6	91.0	420.8	430.5	0.00	0.00	
4,600.0	6.26	77.79	4,576.1	93.3	431.5	441.5	0.00	0.00	
4,622.1	6.26	77.79	4,598.0	93.8	433.8	443.9	0.00	0.00	Mesaverde Marker

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well Shideler Fee 31-11A
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 6921.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 6921.0ft (Original Well Elev)
Site:	K31E Pad	North Reference:	True
Well:	Shideler Fee 31-11A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
4,700.0	6.26	77.79	4,675.5	95.6	442.1	452.4	0.00	0.00	
4,800.0	6.26	77.79	4,774.9	97.9	452.8	463.3	0.00	0.00	
4,900.0	6.26	77.79	4,874.3	100.3	463.5	474.2	0.00	0.00	
5,000.0	6.26	77.79	4,973.7	102.6	474.1	485.1	0.00	0.00	
5,100.0	6.26	77.79	5,073.1	104.9	484.8	496.0	0.00	0.00	
5,200.0	6.26	77.79	5,172.5	107.2	495.5	506.9	0.00	0.00	
5,205.6	6.26	77.79	5,178.0	107.3	496.1	507.5	0.00	0.00	Williams Fork
5,300.0	6.26	77.79	5,271.9	109.5	506.1	517.8	0.00	0.00	
5,400.0	6.26	77.79	5,371.3	111.8	516.8	528.8	0.00	0.00	
5,500.0	6.26	77.79	5,470.7	114.1	527.5	539.7	0.00	0.00	
5,600.0	6.26	77.79	5,570.1	116.4	538.1	550.6	0.00	0.00	
5,700.0	6.26	77.79	5,669.5	118.7	548.8	561.5	0.00	0.00	
5,800.0	6.26	77.79	5,768.9	121.0	559.5	572.4	0.00	0.00	
5,860.9	6.26	77.79	5,829.4	122.4	566.0	579.0	0.00	0.00	Start 2° Drop
5,900.0	5.48	77.79	5,868.3	123.3	569.9	583.0	2.00	-2.00	
6,000.0	3.48	77.79	5,968.0	124.9	577.5	590.9	2.00	-2.00	
6,100.0	1.48	77.79	6,067.9	125.8	581.7	595.2	2.00	-2.00	
6,174.1	0.00	0.00	6,142.0	126.0	582.7	596.2	2.00	-2.00	EOD @ Inc. = 0° - Top Gas
6,200.0	0.00	0.00	6,167.9	126.0	582.7	596.2	0.00	0.00	
6,300.0	0.00	0.00	6,267.9	126.0	582.7	596.2	0.00	0.00	
6,400.0	0.00	0.00	6,367.9	126.0	582.7	596.2	0.00	0.00	
6,500.0	0.00	0.00	6,467.9	126.0	582.7	596.2	0.00	0.00	
6,600.0	0.00	0.00	6,567.9	126.0	582.7	596.2	0.00	0.00	
6,700.0	0.00	0.00	6,667.9	126.0	582.7	596.2	0.00	0.00	
6,800.0	0.00	0.00	6,767.9	126.0	582.7	596.2	0.00	0.00	
6,900.0	0.00	0.00	6,867.9	126.0	582.7	596.2	0.00	0.00	
7,000.0	0.00	0.00	6,967.9	126.0	582.7	596.2	0.00	0.00	
7,100.0	0.00	0.00	7,067.9	126.0	582.7	596.2	0.00	0.00	
7,200.0	0.00	0.00	7,167.9	126.0	582.7	596.2	0.00	0.00	
7,300.0	0.00	0.00	7,267.9	126.0	582.7	596.2	0.00	0.00	
7,400.0	0.00	0.00	7,367.9	126.0	582.7	596.2	0.00	0.00	
7,436.1	0.00	0.00	7,404.0	126.0	582.7	596.2	0.00	0.00	Coal Ridge
7,500.0	0.00	0.00	7,467.9	126.0	582.7	596.2	0.00	0.00	
7,600.0	0.00	0.00	7,567.9	126.0	582.7	596.2	0.00	0.00	
7,700.0	0.00	0.00	7,667.9	126.0	582.7	596.2	0.00	0.00	
7,800.0	0.00	0.00	7,767.9	126.0	582.7	596.2	0.00	0.00	
7,900.0	0.00	0.00	7,867.9	126.0	582.7	596.2	0.00	0.00	
8,000.0	0.00	0.00	7,967.9	126.0	582.7	596.2	0.00	0.00	
8,075.1	0.00	0.00	8,043.0	126.0	582.7	596.2	0.00	0.00	Rollins
8,100.0	0.00	0.00	8,067.9	126.0	582.7	596.2	0.00	0.00	
8,200.0	0.00	0.00	8,167.9	126.0	582.7	596.2	0.00	0.00	
8,225.1	0.00	0.00	8,193.0	126.0	582.7	596.2	0.00	0.00	TD @ 8,225.1' MD
8,300.0	0.00	0.00	8,267.9	126.0	582.7	596.2	0.00	0.00	
8,375.1	0.00	0.00	8,343.0	126.0	582.7	596.2	0.00	0.00	Permit TD @ 8,375.1' MD

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well Shideler Fee 31-11A
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KBE @ 6921.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KBE @ 6921.0ft (Original Well Elev)
Site:	K31E Pad	North Reference:	True
Well:	Shideler Fee 31-11A	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(ft)		
Shideler Fee 31-11A PBI	0.00	0.00	8,193.0	126.0	582.7	1,578,923.58	2,376,439.41	39.402102	-107.706927
- plan hits target center									
- Circle (radius 50.0)									
Shideler Fee 31-11A TG	0.00	0.00	6,142.0	126.0	582.7	1,578,923.58	2,376,439.41	39.402102	-107.706927
- plan hits target center									
- Circle (radius 25.0)									

Casing Points					
Measured Depth	Vertical Depth			Casing Diameter	Hole Diameter
(ft)	(ft)	Name		(in)	(in)
1,500.0	1,494.6	Surface Casing		0.000	0.000

Formations						
Measured Depth	Vertical Depth				Dip	Dip Direction
(ft)	(ft)	Name	Lithology		(°)	(°)
2,194.6	2,185.0	Molina				
4,431.9	4,409.0	Ohio Creek				
4,622.1	4,598.0	Mesaverde Marker				
5,205.6	5,178.0	Williams Fork				
6,174.1	6,142.0	Top Gas				
7,436.1	7,404.0	Coal Ridge				
8,075.1	8,043.0	Rollins				

Plan Annotations				
Measured Depth	Vertical Depth	Local Coordinates		Comment
(ft)	(ft)	+N/-S (ft)	+E/-W (ft)	
450.0	450.0	0.0	0.0	KOP @ 450'
658.8	658.4	2.4	11.1	EOB @ Inc. = 6.26°
5,860.9	5,829.4	122.4	566.0	Start 2° Drop
6,174.1	6,142.0	126.0	582.7	EOD @ Inc. = 0°
8,225.1	8,193.0	126.0	582.7	TD @ 8,225.1' MD
8,375.1	8,343.0	126.0	582.7	Permit TD @ 8,375.1' MD