

P&A Procedure for Hells Hole 9123

13-2S-104W Rio Blanco County, Colo.

9 5/8" @ 299' TOC at Surface

7" 17# @ 2,844' TOC 2,170' (CBL)

Tubing: 2 3/8" 4.7# 2,843'

Perfs: Open Hole TD 2,881'

MIRU

NDWH, NUBOP

POH with tubing to check

RIH with a bit to 50' above the shoe at 2,790'

POH, and RIH with CIBP to 2,790' and set

Pressure test tubing

Spot 30 sxs on CIBP (156' in 7" casing)

Roll hole with produced water

Pressure test casing, if it fails call for orders

POH

Perforate 50' below the base of surface at 279'

NDBOP

Circulate cement to surface (110 sxs is 291' in 9 5/8")

Cut off wellhead

Add cement if necessary

Weld a plate with well information, RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

Well Name: Hells Hole 9123

API #: 0510310002

Location: Sec. 13-2S-104W

KB: 7,188' (9' AGL)


GL: 7,181'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 5/9/2012

Current Wellbore

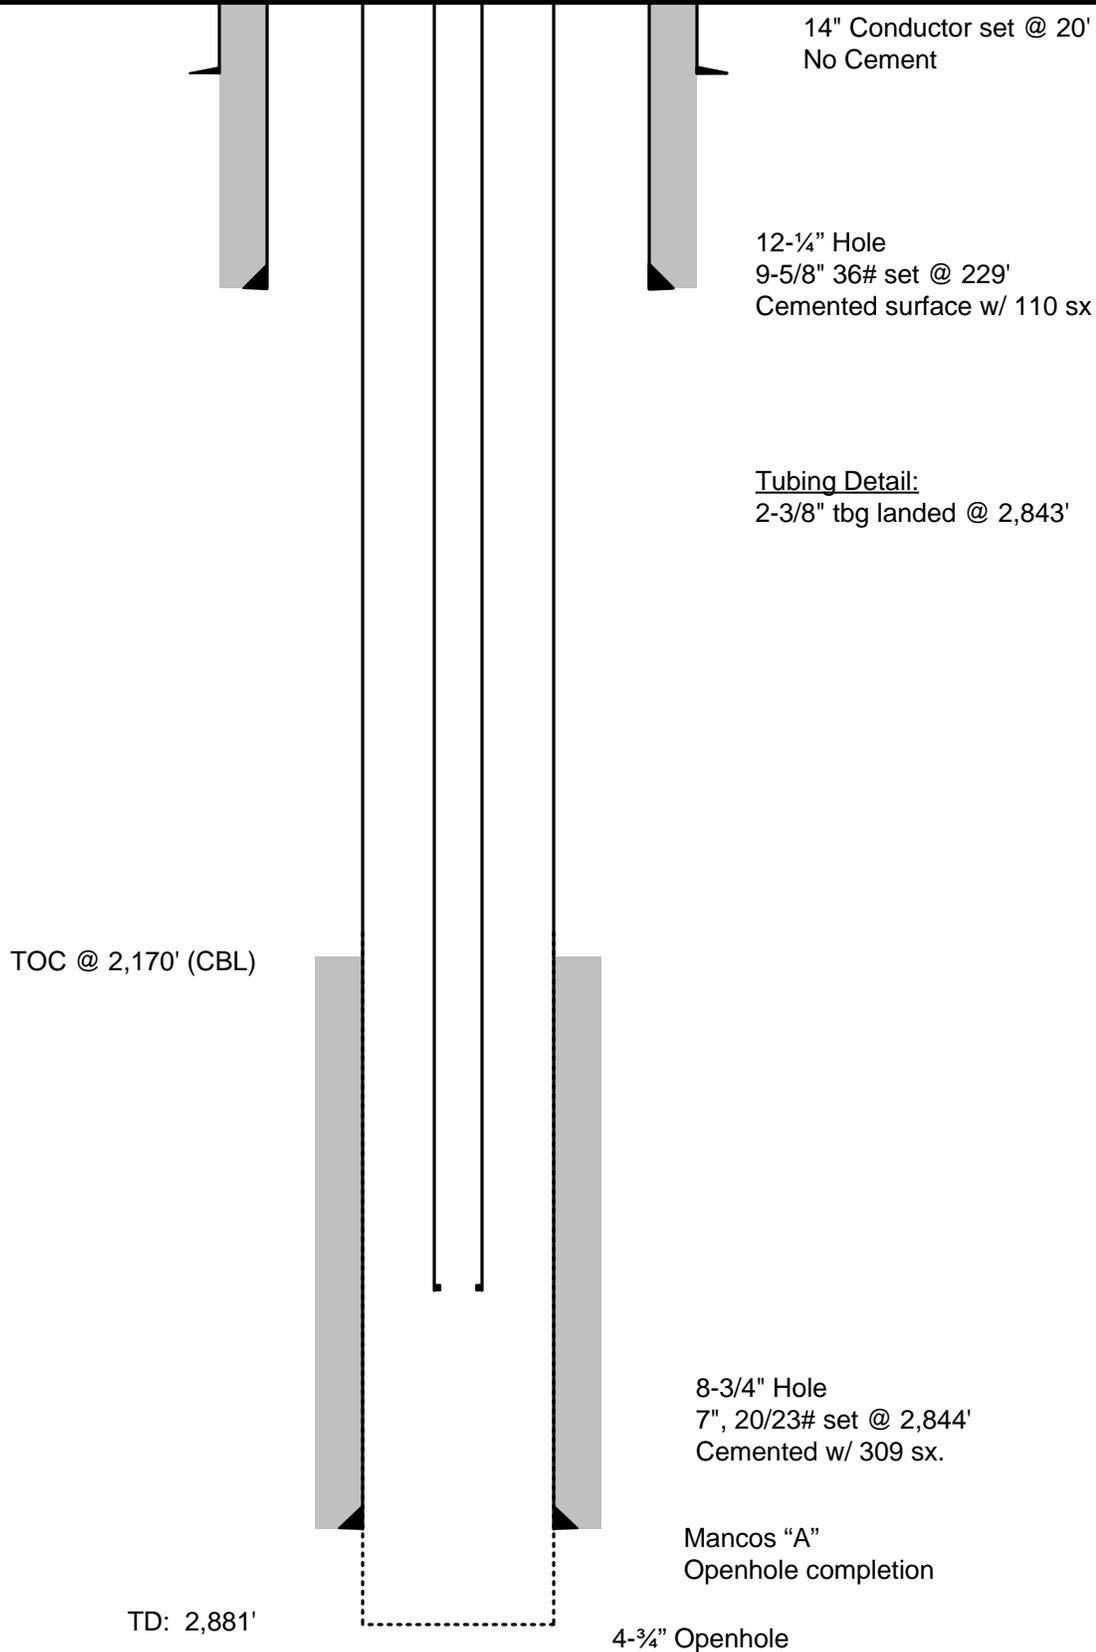

Well Name: Hells Hole 9123

API #: 0510310002

Location: Sec. 13-2S-104W

KB: 7,188' (9' AGL)

GL: 7,181'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 5/9/2012

Proposed Wellbore

