


# Well

# IONE 14-4

Operator EnCana Oil & Gas (USA) Inc.  
 Location SWSW Section 4-T2N-R66W  
 County Weld  
 State Colorado  
 Field Wattenberg  
 API 05-123-20050  
 Footages: 662' FSL & 660' FWL  
 Spud Date: 09-22-2000  
 TD Date: 09-27-2000

## Log Tops

Sussex 4380'  
 Shannon 5008'  
 Niobrara 7111'  
 Codell 7393'  
 J 3 Sand 7863'

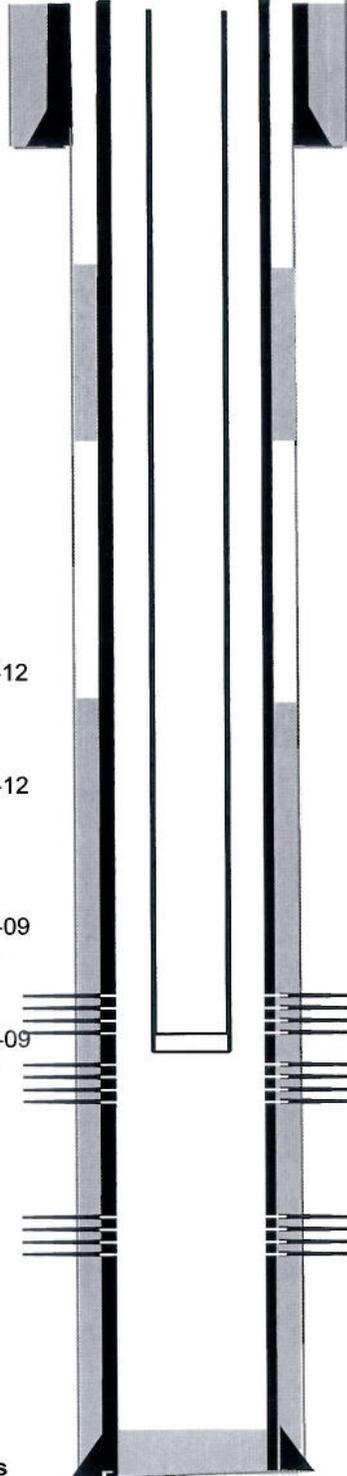

### Surface Casing and Cement

8 5/8" , 24#, landed @ 695', cemented with 490 sxs

### Main Hole

7-7/8" to TD

### Production Casing and Cement

4-1/2" , 11.6#, landed @ 7977', cemented with 230 sxs

### DV Tool

Set @ 4894', cemented above DV tool with 220 sxs

### RFP

Set @ 7240' on 02-09-12  
 Released on 3/8/12

### RBP

Set @ 7470' on 02-06-12  
 Released on 3/20/12

### RFP

Set @ 7290' on 03-11-09  
 Released on 03-19-09

### RBP

Set @ 7480' on 03-03-09  
 Released on 03-19-09

### Production Tubing

2-3/8", Set @ 7801'  
 3/21/12

### Niobrara

Perf'd the Niobrara from 7162' - 7182' @ 2 spf, 40 holes  
 Frac'd the Niobrara with 138,894 gal 20# to 18# Vistar cross  
 linked gel Hybrid containing 250,840# 20/40 sand. 03-11-09

Refrac 7162-7182 w/137,159 gal frac fluid and 251,120 # sand  
 (2/9/12)

### Codell

Re-Perf'd the Codell 7394' - 7412' @ 4 spf, 72 holes  
 Re-Frac'd the Codell with 112,896 gal 26# Vistar Hybrid cross  
 linked gel containing 251,060# 20/40 sand. 03-11-09

Refrac 7394' - 7412 w/ 120,445 gal frac fluid and 250,220 # sand.  
 (2/9/12)

Perf'd the J Sand from 7834' - 7900' @ 2 spf, 132 holes  
 Frac'd the J Sand with 219,472 gal frac gel and 549,440# 20/40  
 sand

7985' — Driller's TD