

P&A Procedure for the Cath Fed 30-1

30-3S-101W Rio Blanco County, Colo

8 5/8" 32# @ 148' TOC at Surface

4 1/2" 10.5# @ 3,047' TOC 2,110' CBL

Tubing: 2 1/16" at 2,475' on a packer

Perfs: 2,512'-2,875'

MIRU

NDWH, NUBOP

Release packer, POH and lay down 2 1/6" tubing

Run gauge ring to 2,450' on wireline

Set CIBP on wireline at 2,450' and dump 35' of cement

(Adjust CIBP depth to avoid a collar if necessary)

Load hole and pressure test casing, if it fails call for orders

Perforate 50' below base of surface @ 198'

Establish circulation

NDBOP

Circulate cement to surface (62' sxs is 198')

Cut off the wellhead

Add cement if necessary

Weld a plate with well information, RDMO

All cement is 15.8# class G neat with a 1.15 cuft/sack yield

Well Name: Cath Fed 30-1

API #: 0510307745

Location: Sec. 30-3S-101W

KB: 6,535' (9' AGL)


GL: 6,526'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/2/2012

Current Wellbore

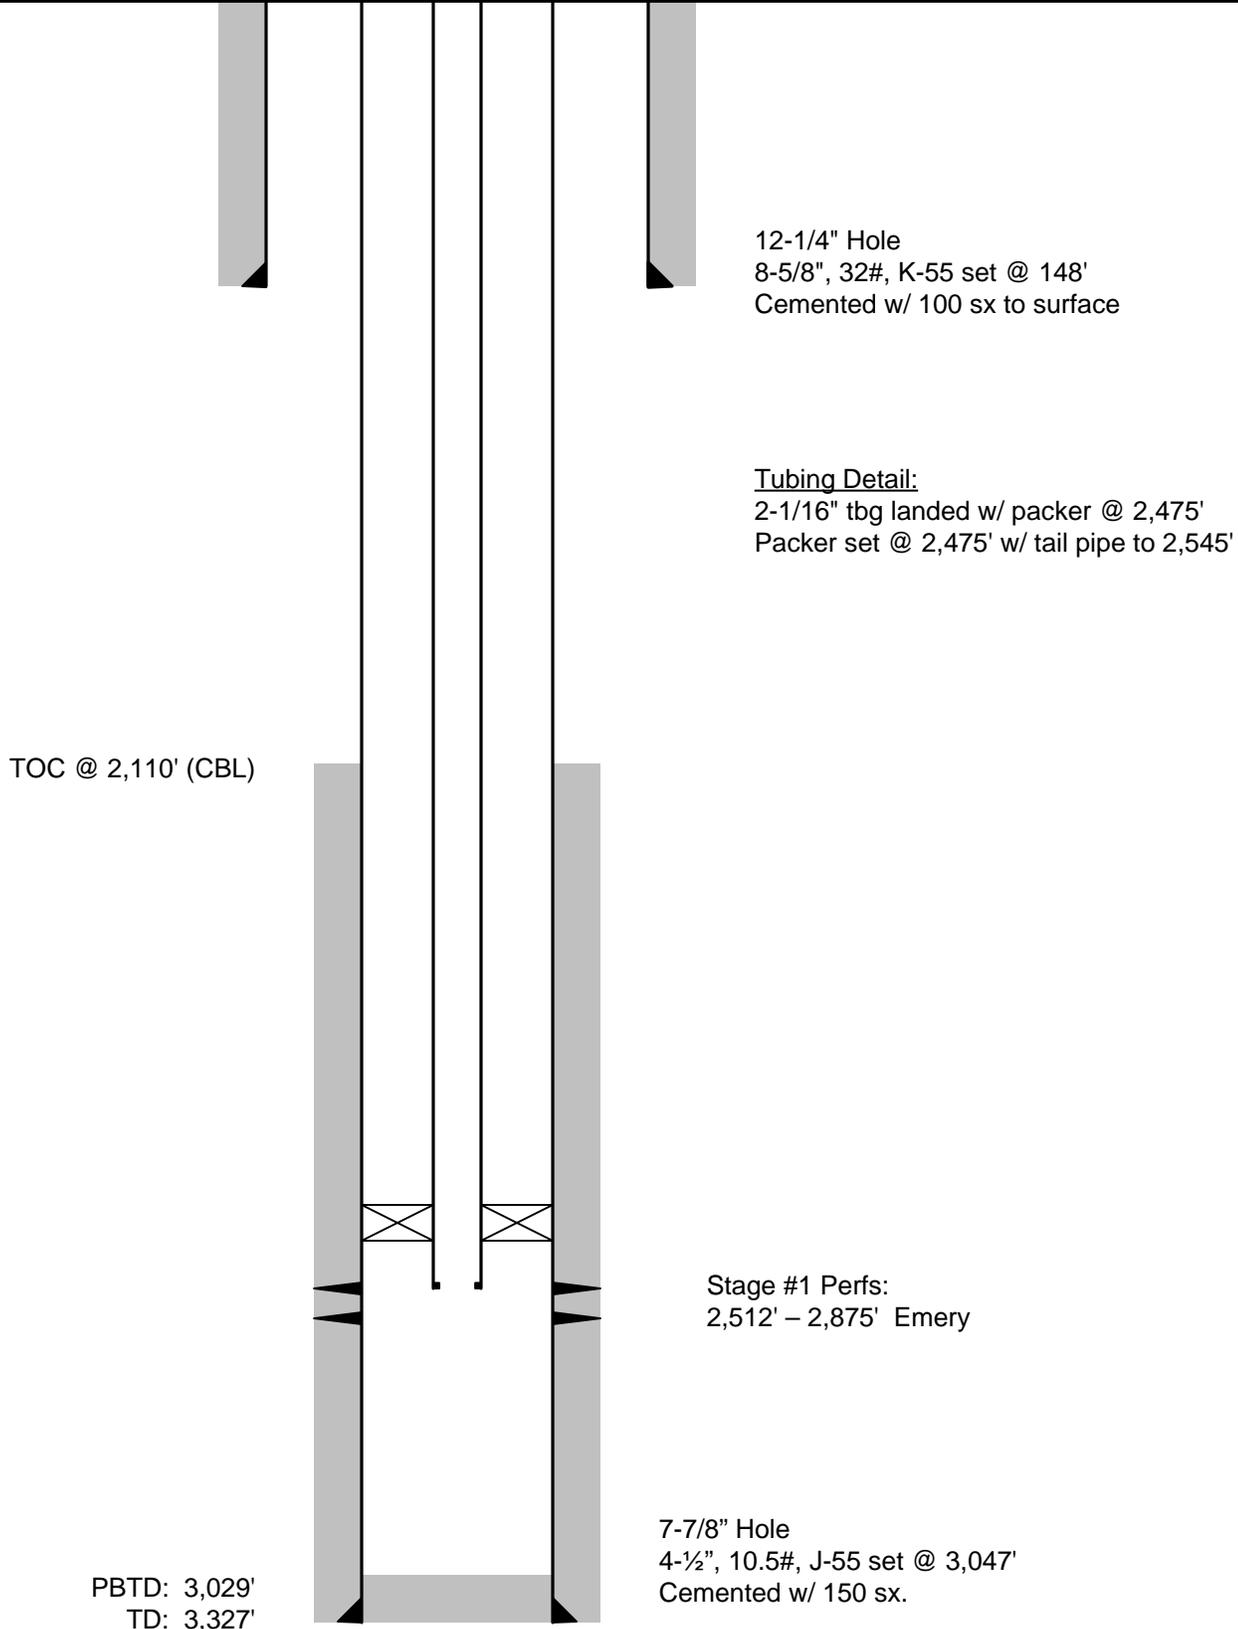

Well Name: Cath Fed 30-1

API #: 0510307745

Location: Sec. 30-3S-101W

KB: 6,535' (9' AGL)

GL: 6,526'

County/St: Rio Blanco, CO

Created By: M. Bale

Date: 4/2/2012

Proposed Wellbore

