

# ESTIMATED EARTHWORK QUANTITIES (cy)

ITEM	CUT	FILL	TOPSOIL	EXCESS
PAD	53000	41600	7200	4200
TRENCH	13110			13110
TOTALS	66110	41600	7200	17310

## \*NOTE:

- 1.) 10% Swell Factor Applied to Earthwork Cut Volume.
- 2.) Topsoil Volume Based on 12" Soil Depth.
- 3.) Total Disturbed Area is ±8.75 ac

REVISED: 8/16/17

136 East Third Street  
Rifle, Colorado 81650  
Ph. (970) 625-2720  
Fax (970) 625-2773



SCALE: 1" = 80'  
DATE: 6/21/16  
PLAT: 2 of 7  
PROJECT: Valley  
DFT: cs


## Construction Plan Prepared for:



TEP Rocky Mountain LLC

RU 23-17 Drill Pad - Plat 2  
CONSTRUCTION LAYOUT


WELLS

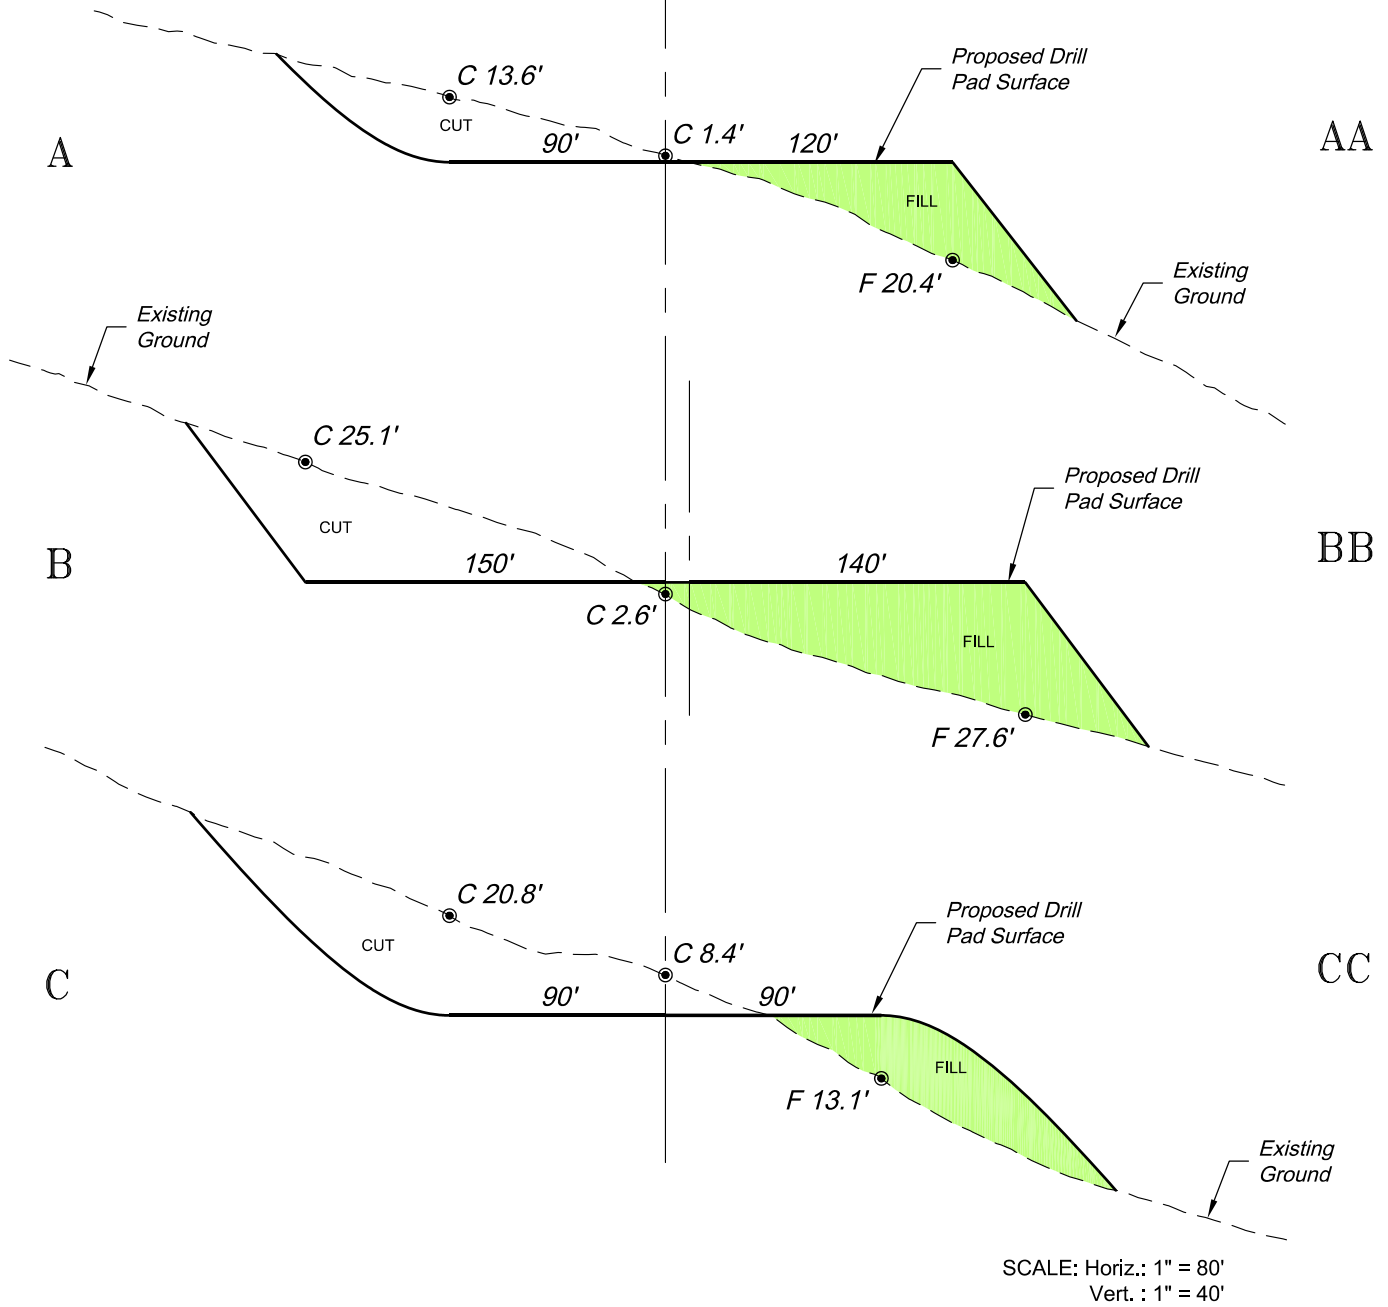

**\*NOTE:**  
CUT SLOPES: 1.5:1  
FILL SLOPES: 1.5:1,  
UNLESS OTHERWISE NOTED.

REVISED: 8/03/17

136 East Third Street  
Rifle, Colorado 81650  
Ph. (970) 625-2720  
Fax (970) 625-2773



**BOOKCLIFF**  
Survey Services, Inc.

SCALE: As Noted  
DATE: 6/21/16  
PLAT: 3 of 7  
PROJECT: Valley  
DFT: cs

Construction Plan Prepared for:



TEP Rocky Mountain LLC

RU 23-17 Drill Pad - Plat 3  
CONSTRUCTION LAYOUT  
CROSS SECTIONS