

Well

WOOLLEY 23-8

Operator
Location
County
State
Field
Footages

EnCana Oil & Gas (USA) Inc.
NESW Section 8-T1N-R68W
Weld
Colorado
Wattenberg
2030' FSL & 2067' FWL

Spud Date: 05-17-2006
TD Date: 05-25-2006

Log Tops

Sussex 4529'
Niobrara 7475'
Codell 7829'
J Sand 8263'
Log TD 8404'

CIBP

Set @ 6019 on 4/29/12
Drilled out 5/1/12

CFP

Set @ 7660' on 4/27/12
Drilled out 5/2/12

CIBP

Set @ 7890' on 4/27/12
Drilled out 5/2/12

CBP

Set @ 7340' on 06-19-06
Drilled out on 06-20-06

CFP

Set @ 7720' on 06-02-06
Drilled out on 06-20-06


CFP

Set @ 7950' on 06-02-06
Drilled out on 06-20-06

Production Tubing (5/3/12)

2-3/8" tubing, set @ 8227'

8429' — Driller's TD

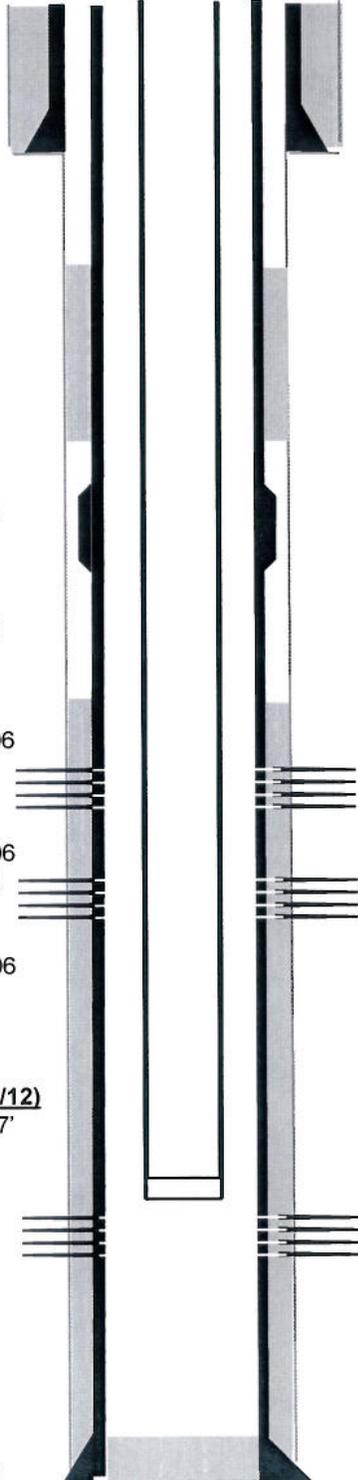

Surface Casing and Cement

8 5/8" , 24#, landed @ 885', cemented with 735 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , 11.6#, landed @ 8398', cemented with 350 sxs

DV Tool

Set @ 5450', cemented above DV tool with 315 sxs

Niobrara

Perf'd Niobrara from 7593' – 7613' @ 6 spf, 120 holes
Frac'd Niobrara with 177,576 gal frac fluid and 250,020# sand. (06-02-06)

Refrac'd 7593-7613 w/5312 bbls frac fluid and 150,100 # sand (4/27/12)

Codell

Perf'd Codell from 7830' – 7850' @ 4 spf, 80 holes
Frac'd Codell with 114,226 gal frac fluid and 251,100# sand. (06-02-06)

Refrac'd 7830-7850 w/ 5438 bbls frac fluid and 126,500 # sand. (4/27/12)

Perf'd J Sand from 8264' – 8281' @ 2 spf, 34 holes
Frac'd J Sand with 170,562 gal frac fluid and 250,000# sand. 06-02-06