

NOBLE ENERGY INC.

UPV 31-02G3

NWNE 31-6N-63W

691' FNL & 1934' FEL

Weld County, Colorado

Wattenberg

CURRENT WELLBORE SCHEMATIC

with PROPOSED P&A

8/3/2012

API: 05-123-18977

COGCC #

GL Elev: 4628'

KB Elev: 4642'

Spud Date: 8/14/1995

Surface Casing :

7" 20# @ 453'

Cement: 200 sx cement to surface


TOC @ 5552'

Production Casing :

3 1/2" 7.7# @ 6953'

Cement: 100 sx TOC @ 5552'

TD: 8/21/1995

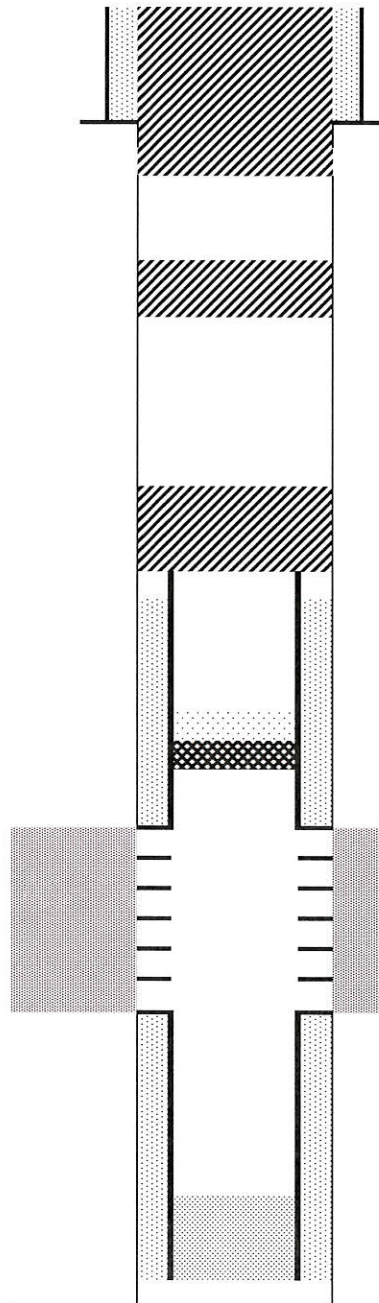

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 550'
Will bring cement to surface.

Courtesy Plug 40 sx @ 2500'

Stub Plug 50 sx @ 5350'

CIBP @ 6650' w/ 2 sx cement on top

Fort Hays Perfs: 6749' - 6765'

Codell Perfs: 6765' - 6776'

PBTD: 6869'

TD: 6971'