




Lat40°, Inc. 6250 W. 10th Street, Unit 2, Greeley, CO 970-515-5294

# WELL LOCATION CERTIFICATE

PC 1S-66-2928-9NH

SECTION: 29  
TOWNSHIP: 1S  
RANGE: 66W  
6TH. P.M.  
ADAMS COUNTY, CO

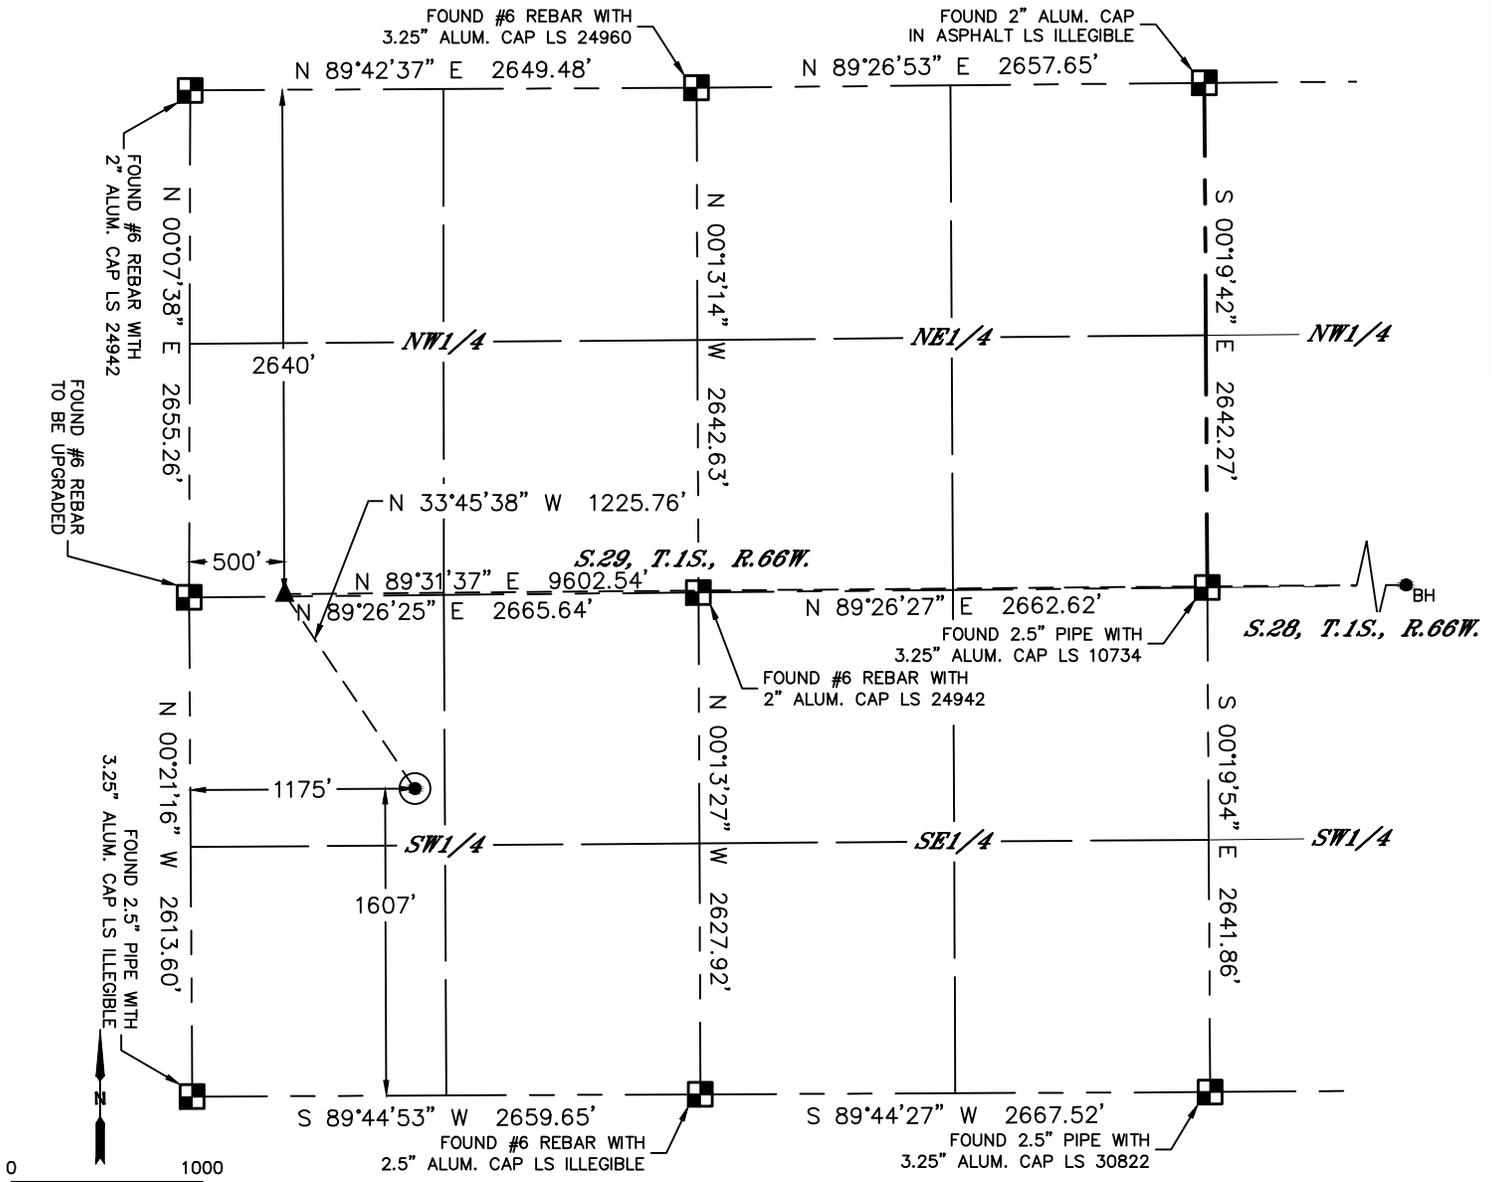

**LEGEND**

- = ALIQUOT MONUMENT AS DESCRIBED
- = CALCULATED POSITION
- = SURFACE HOLE LOCATION (SHL)
- ▲ = ENTRY POINT LOCATION (EP)
- BH = BOTTOM HOLE LOCATION (BHL)
- ⊕ = EXISTING WELL
- ⊙ = ABANDONED WELL


| CLIENT: EXTRACTION OIL & GAS      |          |           |          | LANDMAN: ALYSSA ANDREWS |             |                        |  |
|-----------------------------------|----------|-----------|----------|-------------------------|-------------|------------------------|--|
| INSTRUMENT OPERATOR: JAKE STILLIE |          |           |          | SURVEY DATE: 8/3/2017   |             | SURFACE USE: CROP LAND |  |
| SHL FOOTAGE                       | SHL LAT° | SHL LONG° | SHL PDOP | SHL ELEV                | SHL 1/4/1/4 | SHL S-T-R              |  |
| 1607                              | FSL      | 1175      | FWL      | 39.93328                | -104.80473  | 1.5 5064 NWSW 29-1S-66 |  |

| BHL FOOTAGE | BHL LAT° | BHL LONG° | BHL S-T-R | EP LAT°  | EP LONG°   | EP S-T-R                              |
|-------------|----------|-----------|-----------|----------|------------|---------------------------------------|
| 2640        | FNL      | 500       | FEL       | 39.93610 | -104.77290 | 28-1S-66 39.93609 -104.80713 29-1S-66 |

**NOTE:**

- Bearings shown are Grid Bearings of the Colorado State Plane Coordinate System, North Zone, North American Datum 1983. The lineal dimensions as contained herein are based upon the "U.S. Survey Foot."
- Distances to section lines measured at 90 degrees from said section lines.
- Ground elevations are based on an observed GPS elevation (NAVD 1988 DATUM).
- Latitude and Longitude shown are (NAD 83 DATUM).
- IMPROVEMENTS: See LOCATION DRAWING for all visible improvements within 500' of oil and gas location.
- This map does not represent a boundary survey.

| NEAREST CULTURAL ITEMS           |           |
|----------------------------------|-----------|
| BUILDING                         | ±1424' NW |
| BUILDING UNIT                    | ±1484' NW |
| HIGH OCCUPANCY BUILDING UNIT     | 5280'+    |
| DESIGNATED OUTSIDE ACTIVITY AREA | 5280'+    |
| PUBLIC ROAD (EAST 132ND AVENUE)  | ±1000' N  |
| ABOVE GROUND UTILITY             | ±1039' N  |
| RAILROAD                         | ±2531' SE |
| PROPERTY LINE                    | ±982' N   |



**SHEET 1 OF 2**

Jason S. Allee—On behalf of Lat40°, Inc.  
Colorado Licensed Professional Land Surveyor No. 38479  
DATE: 8/25/2017  
PROJECT#: 2017085

