NOBLE ENERGY INC.

LOUSTALET B 15-14
SESW 15-5N-64W
660' FSL & 2170' FWL
Weld County, Colorado
Wattenberg
CURRENT WELLBORE SCHEMATIC
with PROPOSED P&A
8/9/2012

API: 05-123-15013
COGCC #

GL Elev: 4574'
KB Elev: 4584'

Spud Date: 7/6/1991

Surface Casing :
8 5/8" 24# @ 341'
Cement: 300 sx
TOC: Surface

Csg Repair, patch @ 5194'

TOC @ 5930'

Production Casing :
2 7/8" 6.5# @ 6874'
Cement: 325 sx TOC @ 5930'
TD: 7/11/1991

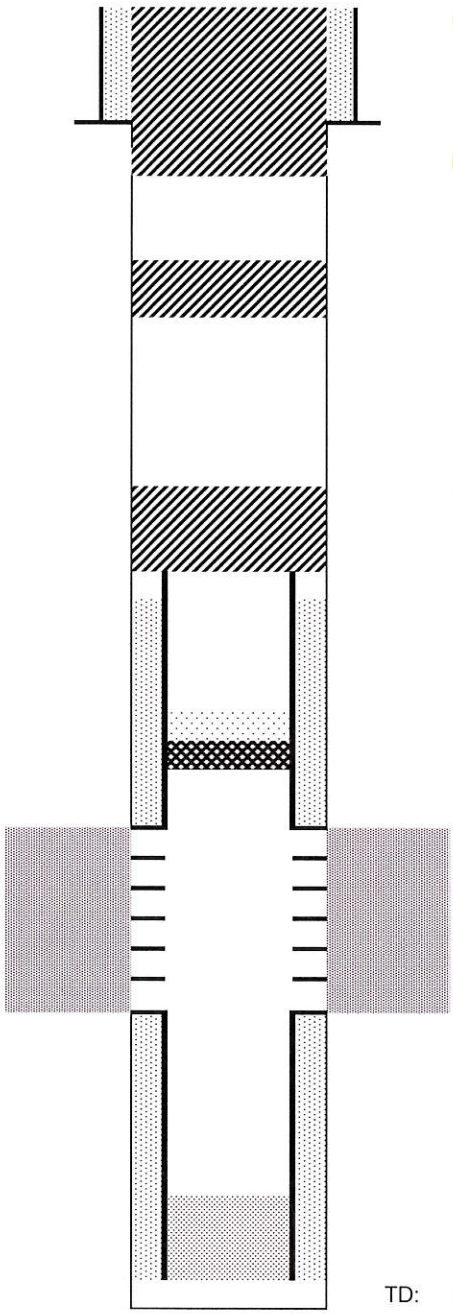

Cut surface casing off 6'-8' below surface.

Pump approx 265 sx shoe plug @ 441'
Will bring cement to surface.

Courtesy Plug 40 sx @ 2500'

Stub Plug 50 sx @ 5800'
Cut and pull csg @ 5800'

CIBP @ 6700' w/ 2 sx cement on top

Codell Perfs: 6804' - 6816'

TD: 6895'