


R. 94 W.

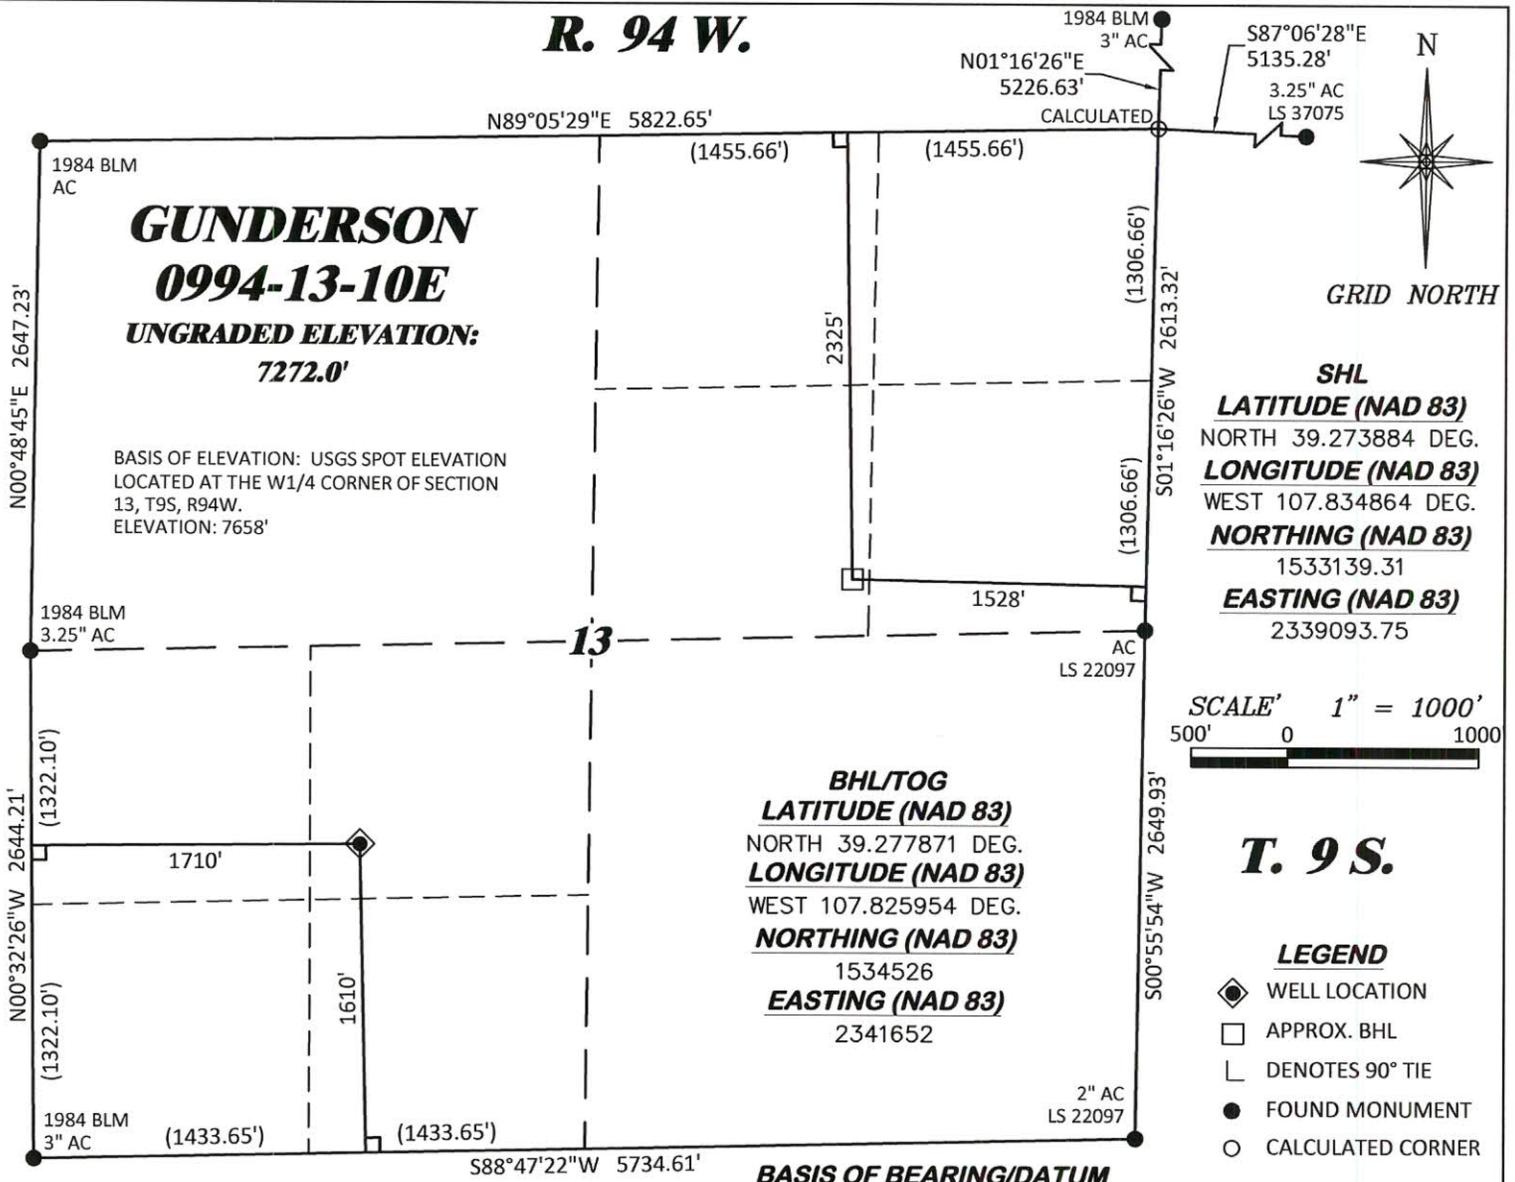

GUNDERSON
0994-13-10E
UNGRADED ELEVATION:
7272.0'

BASIS OF ELEVATION: USGS SPOT ELEVATION
 LOCATED AT THE W1/4 CORNER OF SECTION
 13, T9S, R94W.
 ELEVATION: 7658'

SHL
LATITUDE (NAD 83)
 NORTH 39.273884 DEG.
LONGITUDE (NAD 83)
 WEST 107.834864 DEG.
NORTHING (NAD 83)
 1533139.31
EASTING (NAD 83)
 2339093.75

SCALE' 1" = 1000'
 500' 0 1000'

T. 9 S.

- LEGEND**
- ◆ WELL LOCATION
 - APPROX. BHL
 - └ DENOTES 90° TIE
 - FOUND MONUMENT
 - CALCULATED CORNER

BHL/TOG
LATITUDE (NAD 83)
 NORTH 39.277871 DEG.
LONGITUDE (NAD 83)
 WEST 107.825954 DEG.
NORTHING (NAD 83)
 1534526
EASTING (NAD 83)
 2341652

BASIS OF BEARING/DATUM

SPCS COLORADO CENTRAL ZONE NAD 27 BASED ON GPS OBSERVATIONS
 AND OPUS SOLUTION ON DRG CONTROL POINT "23-9-94" HAVING A
 POSITION OF:
 NAD83(2011)
 LAT 39° 15' 45.58" NORTH
 LONG 107° 51' 00.68" WEST
 NAVD88 ELEVATION: 7182.10

THE WEST LINE OF THE SW¼ OF SECTION 13, MONUMENTED BY BLM
 AC'S AND BEARING N 00°32'26" W.


NOTES

1. GPS OPERATOR T. SHERRILL OBSERVED A PDOP OF 1.2.
2. ALL GPS OBSERVATIONS ARE IN COMPLIANCE WITH COGCC RULE No.215.
3. EXISTING IMPROVEMENTS WITHIN 500' OF LOCATION. SEE LOC. DRAWING.
4. SURROUNDING SURFACE USE IS NATIVE BRUSH, NON CROP RANGELAND.

SURVEYOR'S STATEMENT

I, DAVID E. HENDERHAN, AN EMPLOYEE AND AGENT ON BEHALF OF D.R. GRIFFIN & ASSOCIATES, INC. STATE THE PLAT HEREON IS A CORRECT REPRESENTATION OF A SURVEY MADE UNDER MY SUPERVISION ON THE 29th DAY OF SEPTEMBER, 2017 OF THE SHOWN GUNDERSON 0994-13-10E AND THAT THE LOCATION HAS BEEN STAKED ON THE GROUND AS SHOWN ON THIS PLAT.

Notice: In accordance with Colorado State Law, any legal action based upon any defect in this survey plat must commence within three (3) years after first discovery of such defect. In no event, may any action based upon any defect in this survey plat be commenced more than ten (10) years from the date of certification shown hereon.



GUNDERSON 13-11 PAD

DRG RIFFIN & ASSOCIATES, INC.
 (307) 362-5028 1414 ELK ST., ROCK SPRINGS, WY 82901

**PLAT OF DRILLING LOCATION IN
 NESW, SECTION 13, FOR
 LARAMIE ENERGY, LLC.**
**1610' F/SL, & 1710' F/WL, SECTION 13,
 T. 9 S., R. 94 W., 6TH P.M.,
 MESA COUNTY, COLORADO**

DRAWN: 10/11/2017 - TCM	SCALE: 1" = 1000'
REVISED: N/A - .	DRG JOB No. 21443
	B8-13-10E