



ConocoPhillips

Adams County, Colorado

Florida 3-65 27-26 3DH

Design C

Ground Level: 5564.00
Surface Location Latitude: 39° 45' 31.380 N
Surface Location Longitude: 104° 39' 26.580 W
North Reference: True
25' RKB @ 5589.00ft (25' RKB)


North American Datum 1983
GRS 1980
US State Plane 1983
Colorado Northern Zone

Well Profile Data

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	VSect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5186.00	0.00	0.00	5186.00	0.00	0.00	0.00	0.00
7059.00	28.10	269.63	6984.84	-2.88	-450.08	1.50	-450.04
7115.04	28.10	269.63	7034.27	-3.05	-476.46	0.00	-476.43
8299.82	90.39	90.37	7877.00	-12.13	32.80	10.00	32.89
17957.67	90.39	90.37	7812.00	-73.99	9690.23	0.00	9690.52

Casing Depths

TVD	MD	Name	Size
2128.00	2128.00	9-5/8" Casing	9-5/8
7812.00	17957.67	5-1/2" Casing	5-1/2

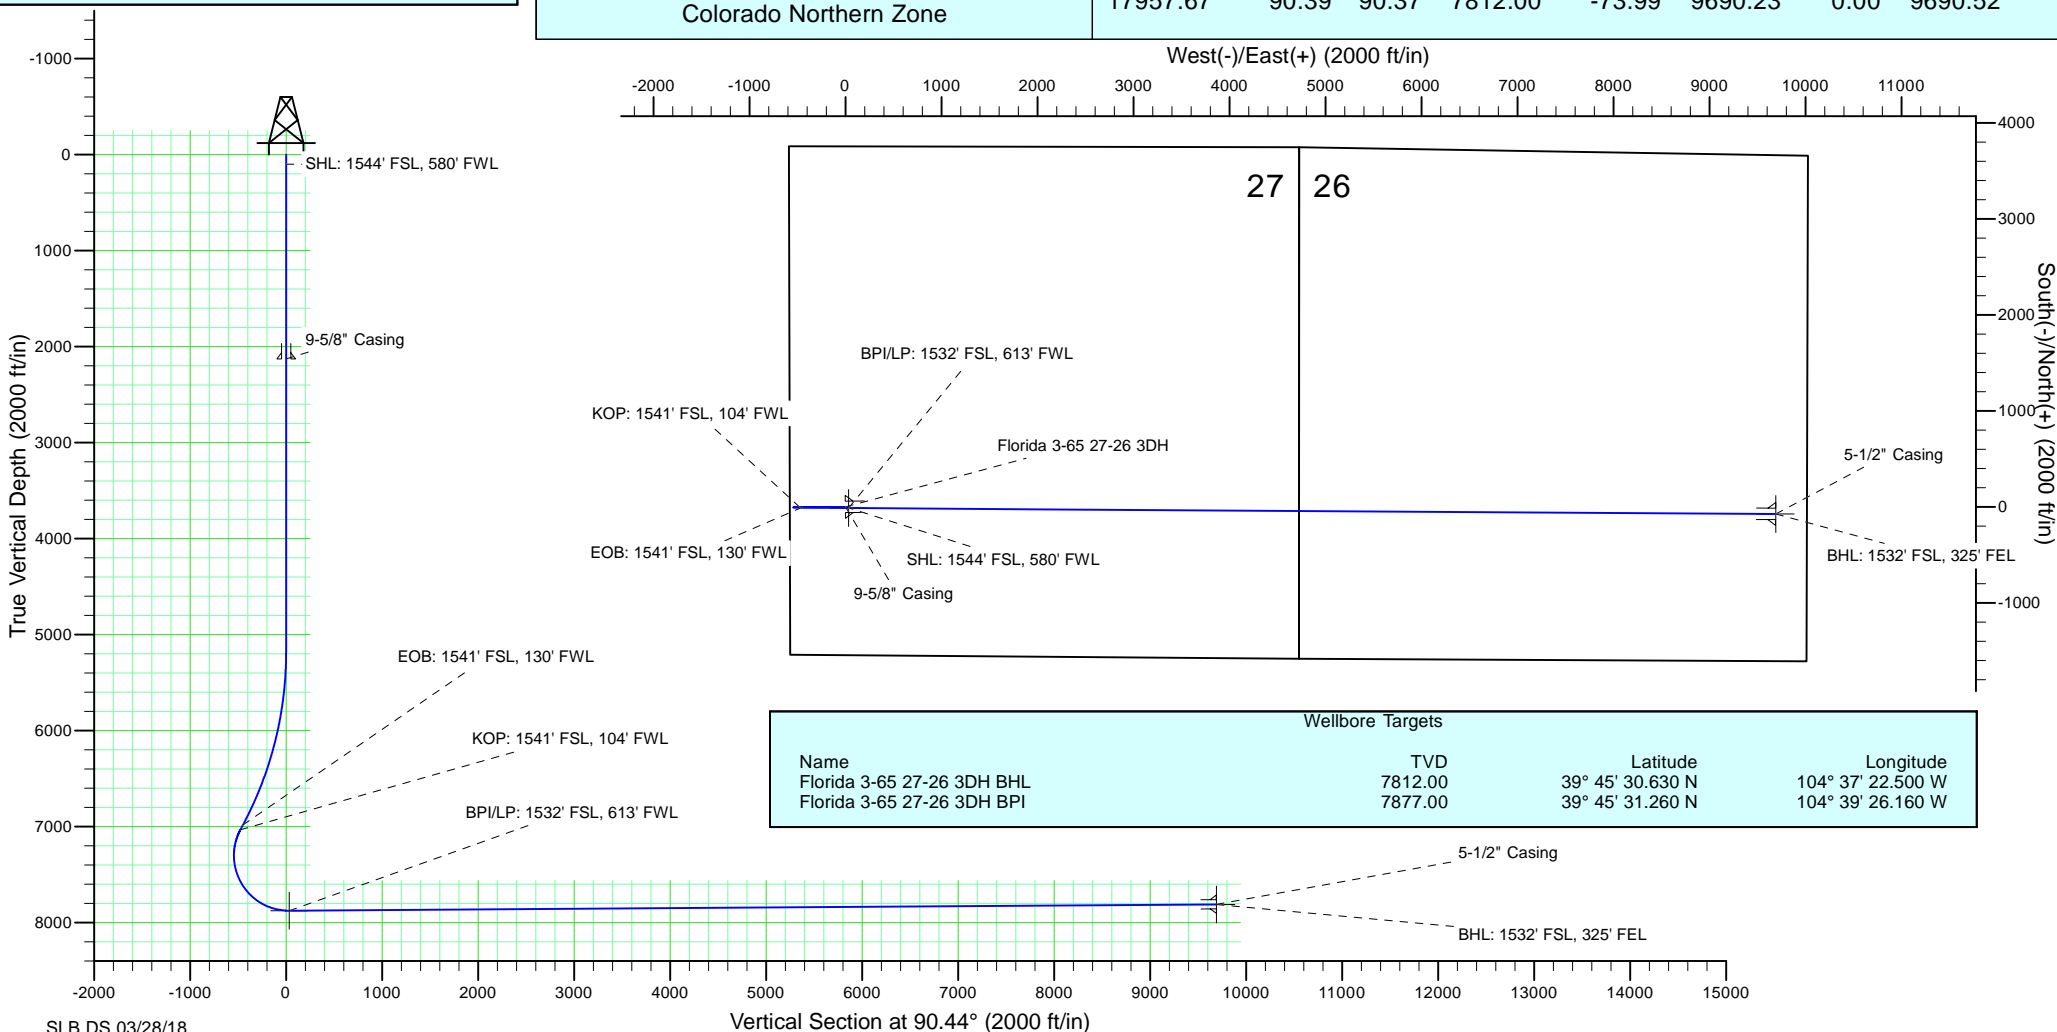

ConocoPhillips RBU Gold Data

Niobrara North Zone

Florida

Florida 3-65 27-26 3DH

Florida 3-65 27-26 3DH

Plan: Design C

Standard Planning Report

28 March, 2018

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Project	Niobrara North Zone, Colorado North Zone, FIPS Zone: 0501		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Northern Zone		Using geodetic scale factor

Site	Florida				
Site Position:		Northing:	1,159,831.332 usft	Latitude:	39° 46' 8.512 N
From:	Lat/Long	Easting:	3,236,267.808 usft	Longitude:	104° 39' 34.139 W
Position Uncertainty:	0.00 ft	Slot Radius:	26 "	Grid Convergence:	0.54 °

Well	Florida 3-65 27-26 3DH					
Well Position	+N-S	-3,757.24 ft	Northing:	1,156,079.899 usft	Latitude:	39° 45' 31.380 N
	+E-W	590.32 ft	Easting:	3,236,893.704 usft	Longitude:	104° 39' 26.580 W
Position Uncertainty		2.00 ft	Wellhead Elevation:	5,564.00 ft	Ground Level:	5,564.00 ft

Wellbore	Florida 3-65 27-26 3DH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2017	12/1/2018	8.16	66.34	51,879.77888355

Design	Design C				
Audit Notes:					
Version:	0	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	90.44	

Plan Survey Tool Program	Date	3/28/2018			
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.00	2,128.00	Design C (Florida 3-65 27-26 3D)	Gyro-BM-MS	
				Gyro - bat/mem drop m/s	
2	2,128.00	5,186.00	Design C (Florida 3-65 27-26 3D)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
3	5,186.00	7,059.00	Design C (Florida 3-65 27-26 3D)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
4	7,059.00	7,115.04	Design C (Florida 3-65 27-26 3D)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
5	7,115.04	8,299.82	Design C (Florida 3-65 27-26 3D)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	
6	8,299.82	17,957.67	Design C (Florida 3-65 27-26 3D)	MWD+IFR_No SAG	
				MWD + IFR (No SAG) corre	

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,186.00	0.00	0.00	5,186.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,059.00	28.10	269.63	6,984.84	-2.88	-450.08	1.50	1.50	0.00	269.63	
7,115.04	28.10	269.63	7,034.27	-3.05	-476.46	0.00	0.00	0.00	0.00	
8,299.82	90.39	90.37	7,877.00	-12.13	32.80	10.00	5.26	-15.13	-179.16	Florida 3-65 27-26 ;
17,957.67	90.39	90.37	7,812.00	-73.99	9,690.24	0.00	0.00	0.00	0.00	Florida 3-65 27-26 ;

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL: 1544' FSL, 580' FWL									
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,687.00	0.00	0.00	1,687.00	0.00	0.00	0.00	0.00	0.00	0.00
Fox Hills Top									
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,928.00	0.00	0.00	1,928.00	0.00	0.00	0.00	0.00	0.00	0.00
Pierre Top - Fox Hills Base									
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,128.00	0.00	0.00	2,128.00	0.00	0.00	0.00	0.00	0.00	0.00
Surface Casing - 9-5/8" Casing									
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,186.00	0.00	0.00	5,186.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.21	269.63	5,200.00	0.00	-0.03	-0.03	1.50	1.50	0.00
5,300.00	1.71	269.63	5,299.98	-0.01	-1.70	-1.70	1.50	1.50	0.00
5,400.00	3.21	269.63	5,399.89	-0.04	-5.99	-5.99	1.50	1.50	0.00
5,500.00	4.71	269.63	5,499.65	-0.08	-12.90	-12.90	1.50	1.50	0.00
5,600.00	6.21	269.63	5,599.19	-0.14	-22.41	-22.41	1.50	1.50	0.00
5,700.00	7.71	269.63	5,698.45	-0.22	-34.53	-34.53	1.50	1.50	0.00
5,800.00	9.21	269.63	5,797.36	-0.32	-49.24	-49.24	1.50	1.50	0.00
5,900.00	10.71	269.63	5,895.85	-0.43	-66.54	-66.53	1.50	1.50	0.00
6,000.00	12.21	269.63	5,993.85	-0.55	-86.40	-86.40	1.50	1.50	0.00
6,100.00	13.71	269.63	6,091.30	-0.70	-108.83	-108.82	1.50	1.50	0.00
6,200.00	15.21	269.63	6,188.13	-0.86	-133.80	-133.79	1.50	1.50	0.00
6,300.00	16.71	269.63	6,284.28	-1.03	-161.29	-161.28	1.50	1.50	0.00
6,400.00	18.21	269.63	6,379.66	-1.23	-191.30	-191.28	1.50	1.50	0.00
6,500.00	19.71	269.63	6,474.24	-1.43	-223.79	-223.77	1.50	1.50	0.00
6,600.00	21.21	269.63	6,567.93	-1.66	-258.74	-258.72	1.50	1.50	0.00
6,700.00	22.71	269.63	6,660.67	-1.90	-296.13	-296.11	1.50	1.50	0.00
6,800.00	24.21	269.63	6,752.40	-2.15	-335.94	-335.92	1.50	1.50	0.00
6,900.00	25.71	269.63	6,843.06	-2.42	-378.14	-378.11	1.50	1.50	0.00
7,000.00	27.21	269.63	6,932.58	-2.71	-422.69	-422.66	1.50	1.50	0.00
7,059.00	28.10	269.63	6,984.84	-2.88	-450.08	-450.04	1.50	1.50	0.00
EOB: 1541' FSL, 130' FWL									
7,100.00	28.10	269.63	7,021.01	-3.01	-469.38	-469.35	0.00	0.00	0.00
7,115.04	28.10	269.63	7,034.28	-3.05	-476.47	-476.43	0.00	0.00	0.00
KOP: 1541' FSL, 104' FWL									
7,150.00	24.60	269.51	7,065.60	-3.17	-491.98	-491.94	10.00	-10.00	-0.35
7,200.00	19.60	269.26	7,111.91	-3.37	-510.78	-510.74	10.00	-10.00	-0.49
7,250.00	14.60	268.86	7,159.69	-3.60	-525.48	-525.44	10.00	-10.00	-0.81
7,300.00	9.60	268.04	7,208.56	-3.87	-535.95	-535.91	10.00	-9.99	-1.63
7,350.00	4.61	265.49	7,258.16	-4.17	-542.13	-542.08	10.00	-9.98	-5.11
7,400.00	0.56	134.61	7,308.11	-4.50	-543.96	-543.91	10.00	-8.10	-261.76
7,450.00	5.42	94.52	7,358.03	-4.86	-541.43	-541.38	10.00	9.71	-80.17
7,500.00	10.41	92.51	7,407.54	-5.24	-534.56	-534.51	10.00	9.99	-4.02
7,550.00	15.41	91.80	7,456.26	-5.65	-523.40	-523.34	10.00	10.00	-1.43
7,600.00	20.41	91.43	7,503.82	-6.07	-508.04	-507.98	10.00	10.00	-0.74
7,650.00	25.41	91.20	7,549.86	-6.52	-488.59	-488.52	10.00	10.00	-0.46
7,700.00	30.41	91.04	7,594.03	-6.97	-465.20	-465.13	10.00	10.00	-0.32
7,750.00	35.41	90.92	7,636.00	-7.43	-438.05	-437.98	10.00	10.00	-0.23
7,800.00	40.41	90.83	7,675.44	-7.90	-407.34	-407.27	10.00	10.00	-0.18
7,840.05	44.41	90.77	7,705.00	-8.28	-380.34	-380.27	10.00	10.00	-0.15
Niobrara Top									
7,850.00	45.41	90.76	7,712.05	-8.37	-373.32	-373.24	10.00	10.00	-0.14
7,900.00	50.41	90.70	7,745.56	-8.84	-336.23	-336.15	10.00	10.00	-0.12
7,950.00	55.40	90.64	7,775.70	-9.31	-296.36	-296.28	10.00	10.00	-0.11
8,000.00	60.40	90.59	7,802.26	-9.76	-254.02	-253.94	10.00	10.00	-0.10
8,050.00	65.40	90.55	7,825.03	-10.20	-209.52	-209.44	10.00	10.00	-0.09
8,100.00	70.40	90.51	7,843.83	-10.63	-163.21	-163.13	10.00	10.00	-0.08
8,150.00	75.40	90.47	7,858.52	-11.04	-115.44	-115.35	10.00	10.00	-0.08

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,188.69	79.27	90.44	7,867.00	-11.34	-77.70	-77.61	10.00	10.00	-0.07
D Chalk Top									
8,200.00	80.40	90.44	7,869.00	-11.43	-66.57	-66.48	10.00	10.00	-0.07
8,250.00	85.40	90.40	7,875.17	-11.79	-16.97	-16.88	10.00	10.00	-0.07
8,299.82	90.39	90.37	7,877.00	-12.13	32.80	32.90	10.00	10.00	-0.07
BPI/LP: 1532' FSL, 613' FWL									
8,400.00	90.39	90.37	7,876.33	-12.77	132.98	133.07	0.00	0.00	0.00
8,500.00	90.39	90.37	7,875.65	-13.41	232.98	233.07	0.00	0.00	0.00
8,600.00	90.39	90.37	7,874.98	-14.05	332.97	333.07	0.00	0.00	0.00
8,700.00	90.39	90.37	7,874.31	-14.69	432.97	433.07	0.00	0.00	0.00
8,800.00	90.39	90.37	7,873.63	-15.33	532.96	533.06	0.00	0.00	0.00
8,900.00	90.39	90.37	7,872.96	-15.97	632.96	633.06	0.00	0.00	0.00
9,000.00	90.39	90.37	7,872.29	-16.61	732.95	733.06	0.00	0.00	0.00
9,100.00	90.39	90.37	7,871.61	-17.25	832.95	833.06	0.00	0.00	0.00
9,200.00	90.39	90.37	7,870.94	-17.89	932.94	933.05	0.00	0.00	0.00
9,300.00	90.39	90.37	7,870.27	-18.53	1,032.94	1,033.05	0.00	0.00	0.00
9,400.00	90.39	90.37	7,869.60	-19.17	1,132.94	1,133.05	0.00	0.00	0.00
9,500.00	90.39	90.37	7,868.92	-19.81	1,232.93	1,233.05	0.00	0.00	0.00
9,600.00	90.39	90.37	7,868.25	-20.45	1,332.93	1,333.05	0.00	0.00	0.00
9,700.00	90.39	90.37	7,867.58	-21.09	1,432.92	1,433.04	0.00	0.00	0.00
9,800.00	90.39	90.37	7,866.90	-21.73	1,532.92	1,533.04	0.00	0.00	0.00
9,900.00	90.39	90.37	7,866.23	-22.38	1,632.91	1,633.04	0.00	0.00	0.00
10,000.00	90.39	90.37	7,865.56	-23.02	1,732.91	1,733.04	0.00	0.00	0.00
10,100.00	90.39	90.37	7,864.88	-23.66	1,832.91	1,833.03	0.00	0.00	0.00
10,200.00	90.39	90.37	7,864.21	-24.30	1,932.90	1,933.03	0.00	0.00	0.00
10,300.00	90.39	90.37	7,863.54	-24.94	2,032.90	2,033.03	0.00	0.00	0.00
10,400.00	90.39	90.37	7,862.87	-25.58	2,132.89	2,133.03	0.00	0.00	0.00
10,500.00	90.39	90.37	7,862.19	-26.22	2,232.89	2,233.02	0.00	0.00	0.00
10,600.00	90.39	90.37	7,861.52	-26.86	2,332.88	2,333.02	0.00	0.00	0.00
10,700.00	90.39	90.37	7,860.85	-27.50	2,432.88	2,433.02	0.00	0.00	0.00
10,800.00	90.39	90.37	7,860.17	-28.14	2,532.88	2,533.02	0.00	0.00	0.00
10,900.00	90.39	90.37	7,859.50	-28.78	2,632.87	2,633.01	0.00	0.00	0.00
11,000.00	90.39	90.37	7,858.83	-29.42	2,732.87	2,733.01	0.00	0.00	0.00
11,100.00	90.39	90.37	7,858.15	-30.06	2,832.86	2,833.01	0.00	0.00	0.00
11,200.00	90.39	90.37	7,857.48	-30.70	2,932.86	2,933.01	0.00	0.00	0.00
11,300.00	90.39	90.37	7,856.81	-31.34	3,032.85	3,033.01	0.00	0.00	0.00
11,400.00	90.39	90.37	7,856.14	-31.98	3,132.85	3,133.00	0.00	0.00	0.00
11,500.00	90.39	90.37	7,855.46	-32.62	3,232.85	3,233.00	0.00	0.00	0.00
11,600.00	90.39	90.37	7,854.79	-33.26	3,332.84	3,333.00	0.00	0.00	0.00
11,700.00	90.39	90.37	7,854.12	-33.91	3,432.84	3,433.00	0.00	0.00	0.00
11,800.00	90.39	90.37	7,853.44	-34.55	3,532.83	3,532.99	0.00	0.00	0.00
11,900.00	90.39	90.37	7,852.77	-35.19	3,632.83	3,632.99	0.00	0.00	0.00
12,000.00	90.39	90.37	7,852.10	-35.83	3,732.82	3,732.99	0.00	0.00	0.00
12,100.00	90.39	90.37	7,851.42	-36.47	3,832.82	3,832.99	0.00	0.00	0.00
12,200.00	90.39	90.37	7,850.75	-37.11	3,932.82	3,932.98	0.00	0.00	0.00
12,300.00	90.39	90.37	7,850.08	-37.75	4,032.81	4,032.98	0.00	0.00	0.00
12,400.00	90.39	90.37	7,849.40	-38.39	4,132.81	4,132.98	0.00	0.00	0.00
12,500.00	90.39	90.37	7,848.73	-39.03	4,232.80	4,232.98	0.00	0.00	0.00
12,600.00	90.39	90.37	7,848.06	-39.67	4,332.80	4,332.97	0.00	0.00	0.00
12,700.00	90.39	90.37	7,847.39	-40.31	4,432.79	4,432.97	0.00	0.00	0.00
12,800.00	90.39	90.37	7,846.71	-40.95	4,532.79	4,532.97	0.00	0.00	0.00
12,900.00	90.39	90.37	7,846.04	-41.59	4,632.79	4,632.97	0.00	0.00	0.00
13,000.00	90.39	90.37	7,845.37	-42.23	4,732.78	4,732.97	0.00	0.00	0.00
13,100.00	90.39	90.37	7,844.69	-42.87	4,832.78	4,832.96	0.00	0.00	0.00

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
13,200.00	90.39	90.37	7,844.02	-43.51	4,932.77	4,932.96	0.00	0.00	0.00
13,300.00	90.39	90.37	7,843.35	-44.15	5,032.77	5,032.96	0.00	0.00	0.00
13,400.00	90.39	90.37	7,842.67	-44.79	5,132.76	5,132.96	0.00	0.00	0.00
13,500.00	90.39	90.37	7,842.00	-45.44	5,232.76	5,232.95	0.00	0.00	0.00
13,600.00	90.39	90.37	7,841.33	-46.08	5,332.76	5,332.95	0.00	0.00	0.00
13,700.00	90.39	90.37	7,840.66	-46.72	5,432.75	5,432.95	0.00	0.00	0.00
13,800.00	90.39	90.37	7,839.98	-47.36	5,532.75	5,532.95	0.00	0.00	0.00
13,900.00	90.39	90.37	7,839.31	-48.00	5,632.74	5,632.94	0.00	0.00	0.00
14,000.00	90.39	90.37	7,838.64	-48.64	5,732.74	5,732.94	0.00	0.00	0.00
14,100.00	90.39	90.37	7,837.96	-49.28	5,832.73	5,832.94	0.00	0.00	0.00
14,200.00	90.39	90.37	7,837.29	-49.92	5,932.73	5,932.94	0.00	0.00	0.00
14,300.00	90.39	90.37	7,836.62	-50.56	6,032.72	6,032.94	0.00	0.00	0.00
14,400.00	90.39	90.37	7,835.94	-51.20	6,132.72	6,132.93	0.00	0.00	0.00
14,500.00	90.39	90.37	7,835.27	-51.84	6,232.72	6,232.93	0.00	0.00	0.00
14,600.00	90.39	90.37	7,834.60	-52.48	6,332.71	6,332.93	0.00	0.00	0.00
14,700.00	90.39	90.37	7,833.93	-53.12	6,432.71	6,432.93	0.00	0.00	0.00
14,800.00	90.39	90.37	7,833.25	-53.76	6,532.70	6,532.92	0.00	0.00	0.00
14,900.00	90.39	90.37	7,832.58	-54.40	6,632.70	6,632.92	0.00	0.00	0.00
15,000.00	90.39	90.37	7,831.91	-55.04	6,732.69	6,732.92	0.00	0.00	0.00
15,100.00	90.39	90.37	7,831.23	-55.68	6,832.69	6,832.92	0.00	0.00	0.00
15,200.00	90.39	90.37	7,830.56	-56.32	6,932.69	6,932.91	0.00	0.00	0.00
15,300.00	90.39	90.37	7,829.89	-56.97	7,032.68	7,032.91	0.00	0.00	0.00
15,400.00	90.39	90.37	7,829.21	-57.61	7,132.68	7,132.91	0.00	0.00	0.00
15,500.00	90.39	90.37	7,828.54	-58.25	7,232.67	7,232.91	0.00	0.00	0.00
15,600.00	90.39	90.37	7,827.87	-58.89	7,332.67	7,332.90	0.00	0.00	0.00
15,700.00	90.39	90.37	7,827.19	-59.53	7,432.66	7,432.90	0.00	0.00	0.00
15,800.00	90.39	90.37	7,826.52	-60.17	7,532.66	7,532.90	0.00	0.00	0.00
15,900.00	90.39	90.37	7,825.85	-60.81	7,632.66	7,632.90	0.00	0.00	0.00
16,000.00	90.39	90.37	7,825.18	-61.45	7,732.65	7,732.90	0.00	0.00	0.00
16,100.00	90.39	90.37	7,824.50	-62.09	7,832.65	7,832.89	0.00	0.00	0.00
16,200.00	90.39	90.37	7,823.83	-62.73	7,932.64	7,932.89	0.00	0.00	0.00
16,300.00	90.39	90.37	7,823.16	-63.37	8,032.64	8,032.89	0.00	0.00	0.00
16,400.00	90.39	90.37	7,822.48	-64.01	8,132.63	8,132.89	0.00	0.00	0.00
16,500.00	90.39	90.37	7,821.81	-64.65	8,232.63	8,232.88	0.00	0.00	0.00
16,600.00	90.39	90.37	7,821.14	-65.29	8,332.63	8,332.88	0.00	0.00	0.00
16,700.00	90.39	90.37	7,820.46	-65.93	8,432.62	8,432.88	0.00	0.00	0.00
16,800.00	90.39	90.37	7,819.79	-66.57	8,532.62	8,532.88	0.00	0.00	0.00
16,900.00	90.39	90.37	7,819.12	-67.21	8,632.61	8,632.87	0.00	0.00	0.00
17,000.00	90.39	90.37	7,818.45	-67.86	8,732.61	8,732.87	0.00	0.00	0.00
17,100.00	90.39	90.37	7,817.77	-68.50	8,832.60	8,832.87	0.00	0.00	0.00
17,200.00	90.39	90.37	7,817.10	-69.14	8,932.60	8,932.87	0.00	0.00	0.00
17,300.00	90.39	90.37	7,816.43	-69.78	9,032.60	9,032.87	0.00	0.00	0.00
17,400.00	90.39	90.37	7,815.75	-70.42	9,132.59	9,132.86	0.00	0.00	0.00
17,500.00	90.39	90.37	7,815.08	-71.06	9,232.59	9,232.86	0.00	0.00	0.00
17,600.00	90.39	90.37	7,814.41	-71.70	9,332.58	9,332.86	0.00	0.00	0.00
17,700.00	90.39	90.37	7,813.73	-72.34	9,432.58	9,432.86	0.00	0.00	0.00
17,800.00	90.39	90.37	7,813.06	-72.98	9,532.57	9,532.85	0.00	0.00	0.00
17,900.00	90.39	90.37	7,812.39	-73.62	9,632.57	9,632.85	0.00	0.00	0.00
17,957.67	90.39	90.37	7,812.00	-73.99	9,690.24	9,690.52	0.00	0.00	0.00
BHL: 1532' FSL, 325' FEL									

ConocoPhillips

Planning Report

Database:	EDT 14 Central Planning	Local Co-ordinate Reference:	Well Florida 3-65 27-26 3DH
Company:	ConocoPhillips RBU Gold Data	TVD Reference:	25' RKB @ 5589.00ft (25' RKB)
Project:	Niobrara North Zone	MD Reference:	25' RKB @ 5589.00ft (25' RKB)
Site:	Florida	North Reference:	True
Well:	Florida 3-65 27-26 3DH	Survey Calculation Method:	Minimum Curvature
Wellbore:	Florida 3-65 27-26 3DH		
Design:	Design C		

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Florida 3-65 27-26 3D - plan hits target center - Point	0.00	0.00	7,812.00	-73.99	9,690.24	1,156,097.991	3,246,584.122	39° 45' 30.630 N	104° 37' 22.500 W
Florida 3-65 27-26 3D - plan hits target center - Point	0.00	0.00	7,877.00	-12.13	32.80	1,156,068.086	3,236,926.618	39° 45' 31.260 N	104° 39' 26.160 W

Casing Points

Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
2,128.00	2,128.00	9-5/8" Casing	9-5/8	12-1/4
17,957.67	7,812.00	5-1/2" Casing	5-1/2	8-1/2

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,687.00	1,687.00	Fox Hills Top		0.00	
1,928.00	1,928.00	Pierre Top - Fox Hills Base		0.00	
2,128.00	2,128.00	Surface Casing		0.00	
7,840.05	7,705.00	Niobrara Top		0.00	
8,188.69	7,867.00	D Chalk Top		0.00	

Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
100.00	100.00	0.00	0.00	SHL: 1544' FSL, 580' FWL
7,059.00	6,984.84	-2.88	-450.08	EOB: 1541' FSL, 130' FWL
7,115.04	7,034.28	-3.05	-476.47	KOP: 1541' FSL, 104' FWL
8,299.82	7,877.00	-12.13	32.80	BPI/LP: 1532' FSL, 613' FWL
17,957.67	7,812.00	-73.99	9,690.24	BHL: 1532' FSL, 325' FEL