

Well Name: Cow Canyon B #4
Well Configuration Type: Vertical
Account Category/Property ID:
Surface Location: 949' FSL & 906' FEL, SEC 10, T 38 N, R 19 W, NMPM
Latitude (°): 37.56141 **Longitude (°):** -108.92479
County: Montezuma **State:** Colorado

Field Name: McELMO DOME
API/UWI:
Objective: Leadville

Bottom Hole Location: 949' FSL & 906' FEL, SEC 10, T 38 N, R 19 W, NMPM
Datum: NAD 27 **Estimated KB Elevation (ft):** 6,633.40 **Ground Elevation (ft):** 6,633.4

A FOCUSED EFFORT WILL BE EXPECTED BY ALL PARTIES TO ELIMINATE ANY/ALL ACCIDENTS DURING THE EXECUTION OF THIS DRILLING PROJECT. H2S IS ANTICIPATED WHILE DRILLING THE PARADOX SALTS

Vertical - Proposed Original Hole, 11/28/2017 12:27:48 PM			DRILLING PROCEDURE: (add KB to measurements below)	
Formations	MD (ftKB)	Vertical schematic (proposed)	Objective	
	-214.0		16" conductor pipe will be set at ~80' prior to moving in the drilling rig.	
	0.0		A 12-1/4" hole drilled from surface to 2786' TVD/MD, ~100' below the top of the Cutler, set 9-5/8" casing run to 2786' with cement to surface.	
	40.0		An 8-3/4" hole drilled out from surface casing point to 7" casing point at 8192' TVD/MD. Run 7" 13-Chrome casing set ~25' into the Leadville.	
	80.1		A 6" production hole will be drilled out from the 7" casing point to ~400' below the Leadville Top. Production will be logged from TD to ~500' inside the 7" shoe. After logging, a 4 1/2" 13-Chrome liner will be run and cemented.	
Dakota	1,433.1		CASING/CEMENTING DETAILS:	
	1,433.1		Comment	
	1,433.1		9-5/8" 36# J-55 STC => 0'-2786' TVD/MD	
	1,433.1		Cement: Conventional => Lead 800sx Light + Tail 300sx Class G + Displacement ~200bbls Fresh Water	
	1,433.1		Comment	
	1,433.1		7" 29# 13CR BEAR => 0'-5990' TVD/MD (100' above top of Paradox Salt)	
	1,433.1		Cement: Lead 900sx + Tail 590 sx	
	1,433.1		Comment	
	1,433.1		7" 32# 13CR BEAR => 5990'-7921' TVD/MD (run to 100' below Base Salt)	
	1,433.1		Comment	
	1,433.1		7" 29# 13CR BEAR => 7921'-8192' TVD/MD (run to TD)	
	1,433.1		Comment	
	1,433.1		4-1/2" 12.6# CR13 VAMTOP => 8042'-8488' TVD/MD	
	1,433.1		DRILLING FLUIDS:	
	1,433.1		Description	Comment
	1,433.1		12-1/4" Surface (9 5/8" Casing Point)	Spud 12-1/4" surface hole with spud mud and circulate. Use paper for seepage and LCM sweeps for lost circulation problems. Pump viscous sweeps if tight connections are encountered and prior to running the 9-5/8" casing.
	1,433.1		Description	Comment
	1,433.1		8-3/4" (100' above Desert Creek)	Drill out of the 9-5/8" casing with clean spud mud and circulate. Sweep for hole cleaning or lost circulation problems and use paper for seepage.
	1,433.1		Description	Comment
	1,433.1		8-3/4" (25' into Leadville top/7" Casing Point)	Displace the spud mud system with salt saturated brine 100' above the Desert Creek formation. Pre-treat mud for H2S prior to drilling the P4 Shale.
	1,433.1		Description	Comment
	1,433.1		6" Production Hole	During the pilot hole drill, fresh water will be treated so that the Cl2 content is ~20,000ppm. Do not use LCM.
	1,433.1		SURVEY INFORMATION:	
	1,433.1		Comment	
	1,433.1		500' intervals from spud to the 9-5/8" casing point	
	1,433.1		~1000' intervals from below the 9-5/8" casing point to the top of the Paradox Salt	
	1,433.1		No surveys within the Paradox Salt formation	
	1,433.1		500' intervals from below the Paradox Salt to 7" casing point	
	1,433.1		EVALUATION PROGRAM:	
	1,433.1		Evaluation Program	
	1,433.1		6" Production Hole:	
	1,433.1		1st run dual laterolog	
	1,433.1		2nd run triple combo, monopole sonic	
	1,433.1		Cased Hole:	
	1,433.1		1st run GR, pulse neutron log from 7" casing shoe to 9-5/8" casing shoe	
	1,433.1		2nd run GR, CBL over 7" casing	
	1,433.1		3rd run GR, CBL over 4-1/2" liner	

- Objectives:**
1. Maintain a focused effort by everyone on location to eliminate all accidents.
 2. Drill, evaluate, case and complete the well at or under AFE cost estimate.
 3. Run the 7" 13-Chrome production casing to ~25' TVD into the Leadville formation.
 4. Isolate the 7" 13-Chrome to surface with high quality cement.
 5. Run the 4 1/2" 13-Chrome liner through the Leadville formation.
 6. Isolate the 4-1/2" 13-Chrome liner with high quality cement.

WELL PROGNOSIS OVERVIEW

This well prognosis is organized to follow the Bureau of Land Management (BLM) Eight Point Drilling Plan referenced in the Onshore Order #1. The Eight Points correspond to the following Eight Sections of the Prognosis

1. Estimated tops of important geological markers and formations.
2. Estimated depths at which top and bottom of anticipated water (particularly fresh water), oil, gas or other mineral-bearing formations are expected to be encountered and the lessee's or operator's plans for protecting such resources.
3. Lessee's or operator's minimum specifications for pressure control equipment to be used and a schematic diagram thereof showing sizes, pressure ratings (or API series), and the testing procedures and testing frequency.
4. Any supplementary information more completely describing the drilling equipment and casing program.
5. Type and characteristics of the proposed circulating mechanism to be employed in drilling, the quantities and types of mud and weighting material to be maintained, and the monitoring equipment to be used on the mud system.
6. The anticipated type and amount of testing, logging and coring.
7. The expected bottom hole pressure and any anticipated abnormal pressures or temperatures or potential hazards, such as hydrogen sulfide, expected to be encountered, along with contingency plans for mitigating such identified hazards.
8. Any other facets of the proposed operations which the lessee or operator wishes to point out for BLM's consideration of the application.

Two attachments are referenced in sections of the document

1. Paradox Salt Drilling Procedure (Appendix A)
2. H2S Contingency Plan

SECTION 1 & 2 – Estimated Geologic Markers/Formations, Anticipated Fluids, and Isolation Plan

Formation	Top (TVD, ft)	Bottom (TVD, ft)	Composition	Anticipated Fluids
Dakota			Sandstone/Shale	Water
Morrison	448	1052	Sandstone/Shale	None Anticipated
Entrada	1052	1660	Sandstone	Fresh Water
Chinle	1660	2686	Sandstone	Fresh Water
Cutler	2686	4642	Shales	None Anticipated
Upper Hermosa	4642	5575	Carbonate	None Anticipated
Paradox	5575	5981	Carbonate/Anhydrite	None Anticipated
Desert Creek	5981	6090	Carbonate	Gas
Paradox Salt	6090	7821	Carbonate/Anhydrite/Shale	Gas, H₂S
Base of Paradox Salt	7821	7958	Contact	N/A
Lower Hermosa	7958	8167	Carbonate/Siltstone/Shale	CO ₂ , HC Gas
Leadville	8167	8250	Carbonate/Shale	CO ₂ , Gas, Water
Leadville (Base of Karst)	8250	8443	Carbonate/Shale	CO ₂ , Gas, Water
Ouray	8443		Carbonate/Shale	CO ₂ , HC Gas, Water

9-5/8" Surface casing will be set ~100' TVD into the Cutler formation and cemented to surface to isolate the usable quality fresh water bearing sandstone formations above.

7" Intermediate casing will be set ~25'TVD into the Leadville producing formation and cemented to surface to isolate all zones above, including the Paradox Salt Shales section which may contain hydrogen sulfide gas.

4-1/2" production liner will be set ~400'TVD into the Leadville producing formation and cemented in place for completion purposes.

A detailed explanation of the casing and cementing program is shown in Section 4, and a contingency plan to mitigate the hydrogen sulfide hazard is referenced in Section 7 and attached to this prognosis.

SECTION 3 – Pressure Control Equipment

A 3M system will be utilized. The following procedures, diagrams, and guidelines are included for review with all personnel, and MUST be adhered to at all times:

- Kinder Morgan 3M BOP and Associated Equipment Installation and Testing Procedure for Doe Canyon and McElmo Dome Wells.
- Kinder Morgan BOP and Choke Manifold diagrams including minimum requirements.
- BLM 43 CFR 3160 Section III-A 3M specifications for pressure control equipment including minimum requirements.

3M BOP and Associated Equipment Installation and Testing Procedure

Kinder Morgan CO₂ Company, L.P.

Doe Canyon and McElmo Dome Wells


***While drilling the surface hole, a 13-3/8" 3M annular preventer with a diverter will be used.**

1. NIPPLE UP ON 9 5/8" X 11" 3000# SCREW ON WELLHEAD
2. INSTALL 11"X 11" 3000# SPOOL W/TWO SIDE OUTLET (4" OUTLET & 2" OUTLET)
3. INSTALL 11" 3000# SINGLE HYDRAULIC BOP (NO RAM BLOCK INSTALLED)
4. INSTALL 11"X 11" 3000# SPACER SPOOL (8" TO 10" LONG)
5. INSTALL 11" 3000# DOUBLE RAM BOP (BLIND RAMS ON BOTTOM, PIPE RAMS ON TOP)
6. INSTALL 11" 3000# HYDRIL ANNULAR BOP
7. INSTALL 11" 3000# ROTATING HEAD
8. NIPPLE UP FLOW LINES TO ROTATING HEAD
9. INSTALL 4" 3000# MANUAL VALVE ON SIDE OF SPOOL
10. INSTALL 4" 3000# HCR VALVE ON SIDE OF MANUAL VALVE
11. NIPPLE UP HCR VALVE TO 3000# CHOKE MANIFOLD (IF H2S IS EXPECTED A HYDRAULIC SUPER CHOKE SHOULD BE INSTALLED)
12. FUNCTION TEST BLIND RAMS, PIPE RAMS, HCR VALVE (USE CLEAR WATER TO TEST AND MAKE SURE ALL BOP's ARE HOOKED UP TO ACCUMULATOR AND ALL RAMS, HYDRIL AND HCR VALVE FUNCTION PROPERLY)
13. CLOSE BLIND RAMS AND TEST 9 5/8" CSG & BLIND RAMS TO 300# & 1500# FOR 30 MIN. FOR A TEST NOT UTILIZING A TEST PLUG. (IF A DECLINE OF MORE THAN 10% IN 30 MIN. OCCURS, THE TEST SHALL BE CONSIDERED FAILED)
14. INSTALL TEST PLUG IN 9 5/8" X 11" 3000# WELL HEAD (WITH ALL VALVES OPEN BELOW TEST PLUG)
15. MAKE SURE BOP's ARE FULL OF WATER AND VALVES SHALL BE TESTED FROM WORKING PRESSURE SIDE DURING BOP TEST
16. CLOSE PIPE RAMS (TEST TO 300# FOR 10 MIN. & 3000# FOR 10 MIN. WITH NO PRESSURE LOST)
17. REMOVE DRILL PIPE WITH TEST PLUG IN PLACE
18. CLOSE BLIND RAMS (TEST BLIND RAMS, HCR VALVE, MANUAL VALVE & CHOKE MANIFOLD TO 300# & 3000# 10 MIN.)
19. OPEN BLIND RAMS, INSTALL DRILL PIPE
20. CLOSE HYDRIL (TEST HYDRIL TO 300# & 2250# FOR 10 MIN. EACH WITH NO LOST IN PRESSURE)


*****EMAIL KM REGULATORY REP 24HOURS PRIOR TO BOPE TEST*****

******ALL TESTS MUST BE CHARTED FOR CO&G & BLM******

BOP CONFIGURATION

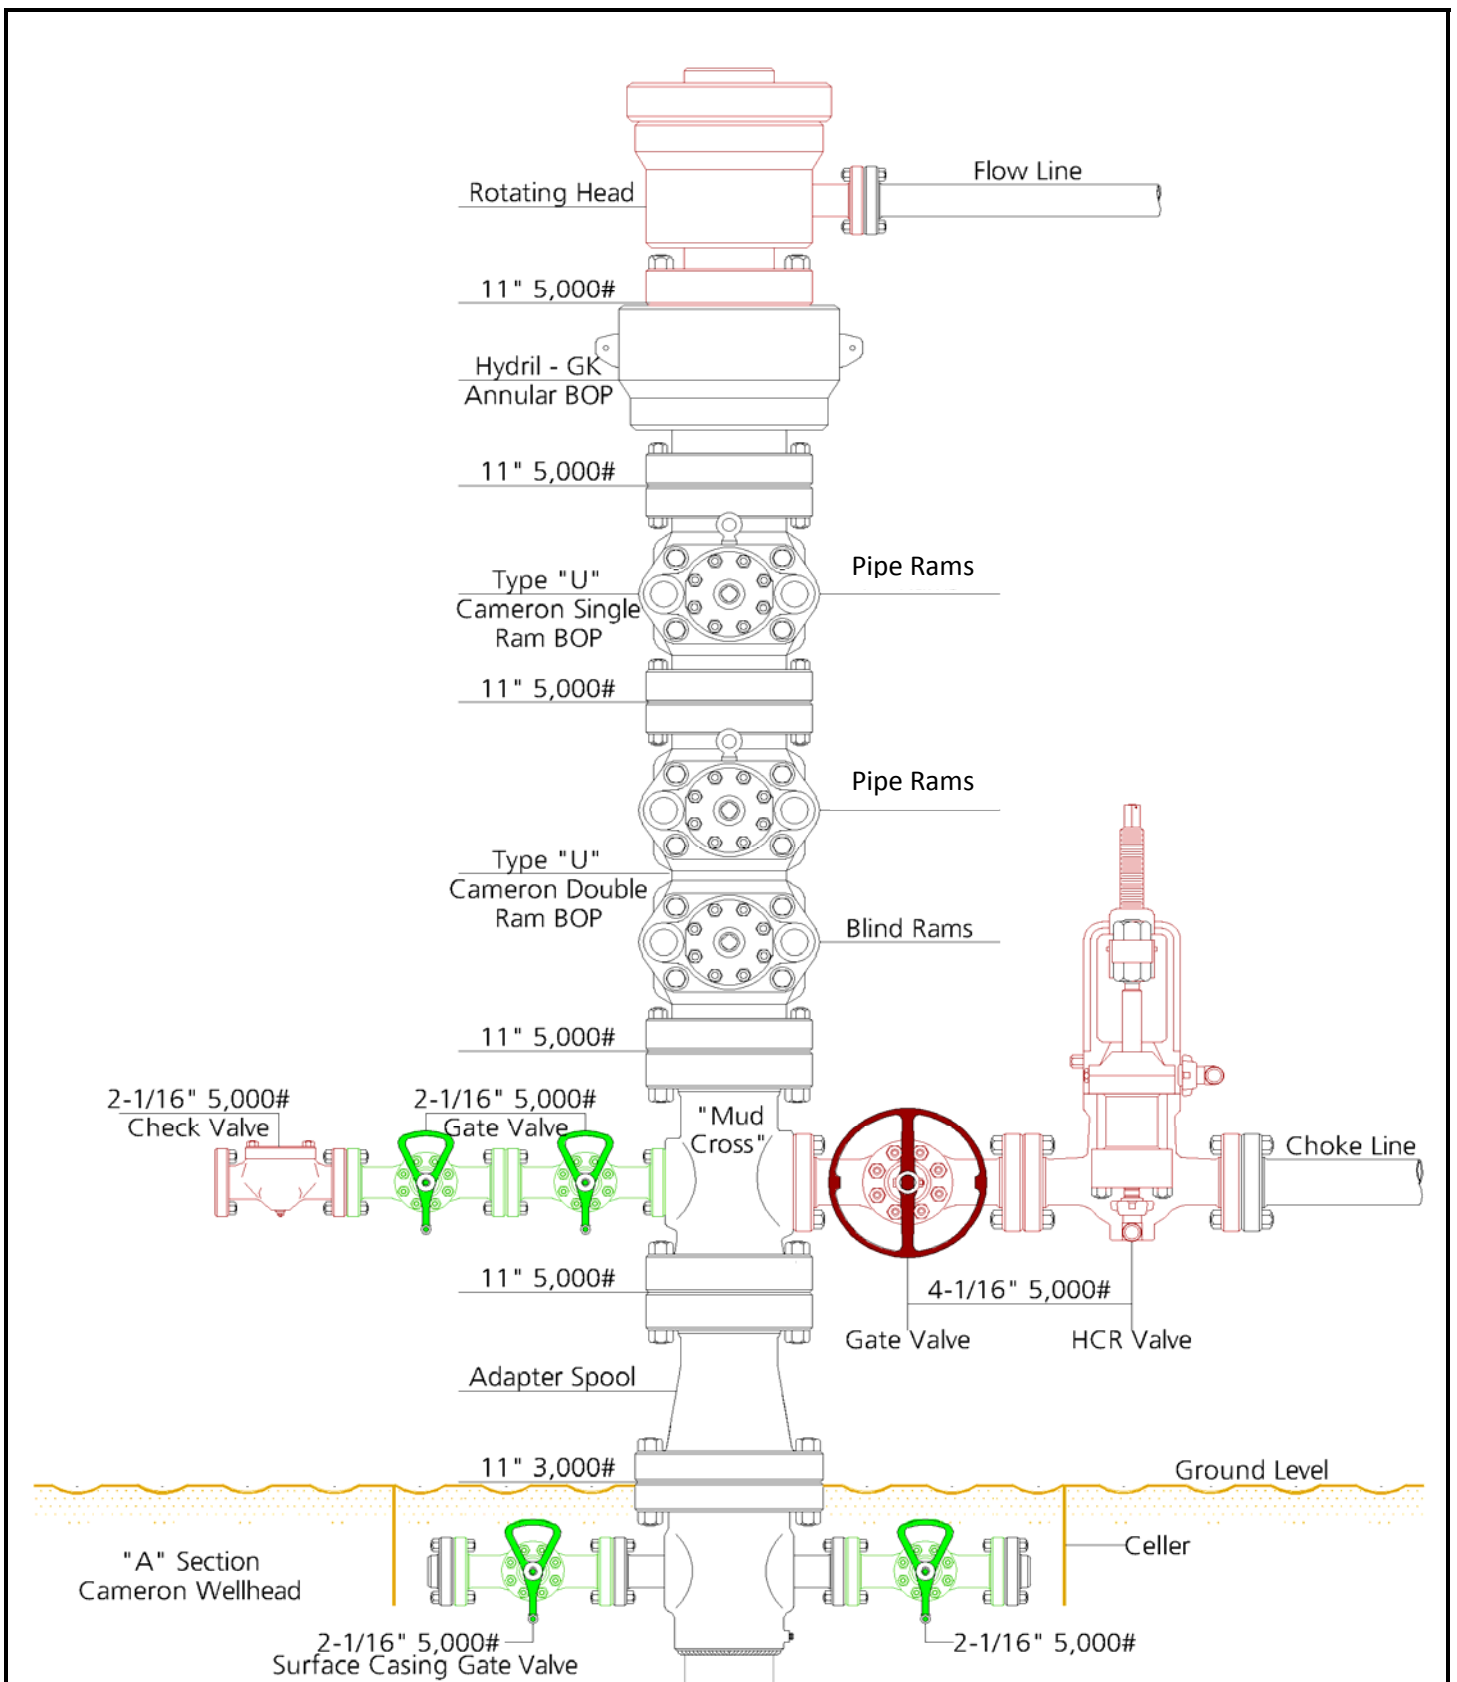

CHOKE MANIFOLD

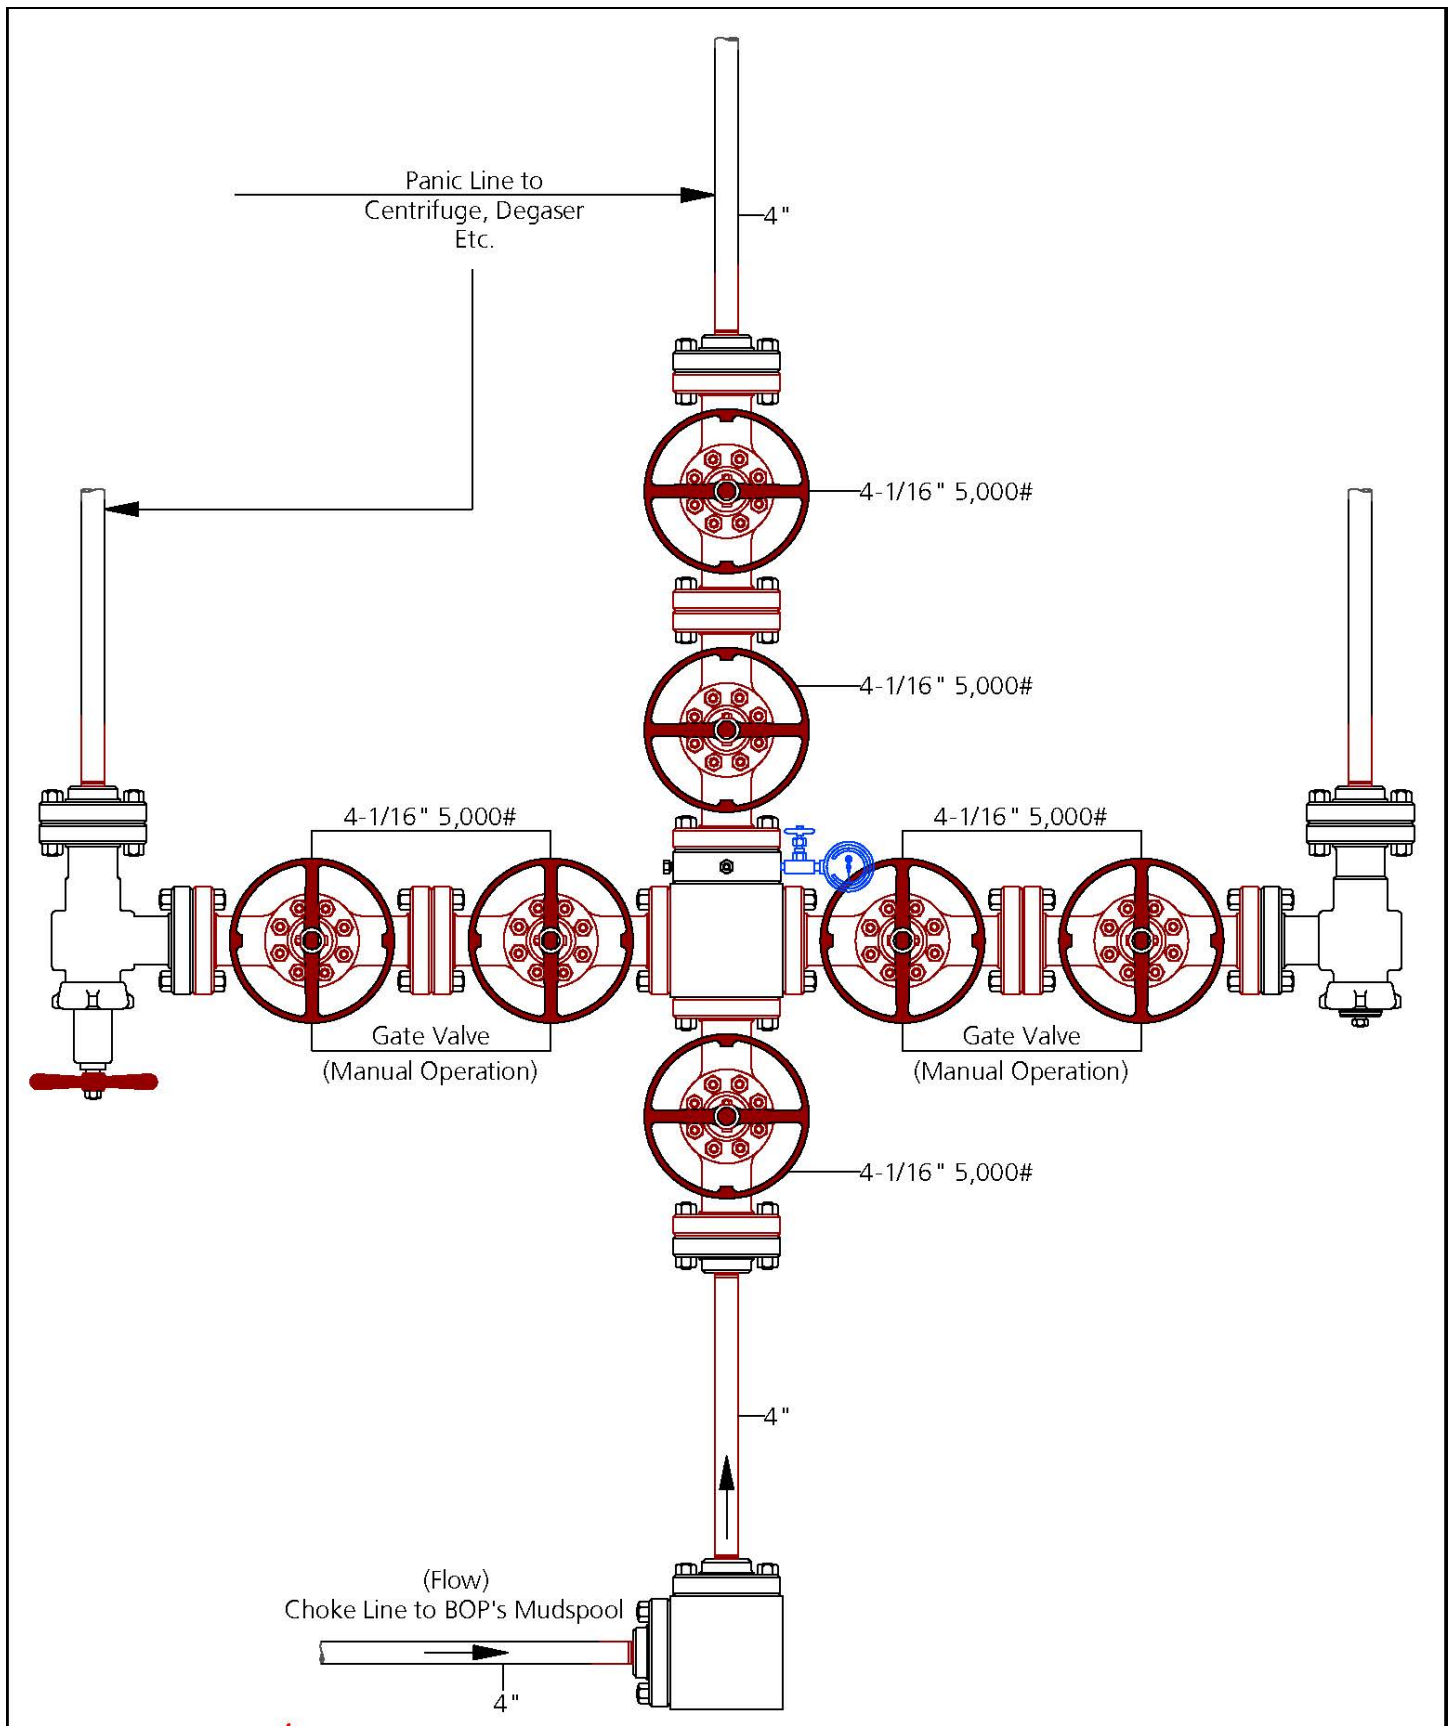

Note: 3000# equipment is minimum requirement

BUREAU OF LAND MANAGEMENT

43 CFR 3160

Federal Register / Vol. 53, No. 223

Friday, November 18, 1988

Effective date: December 19, 1988

**Onshore Oil and Gas Operations; Federal and Indian Oil and Gas Leases;
Onshore Oil and Gas Order No. 2, Drilling Operations**

III. Requirements

A. Well Control Requirements

1. Blowout preventer (BOP) and related equipment (BOPE) shall be installed, used, maintained, and tested in manner necessary to assure well control and shall be in place and operational prior to drilling the surface casing shoe unless otherwise approved by the APD. Commencement of drilling without the approved BOPE installed, unless otherwise approved, shall subject the operator to immediate assessment under 43 CFR 3163.1(b)(1). The BOP and related control equipment shall be suitable for operations in those areas which are subject to sub-freezing conditions. The BOPE shall be based on known or anticipated sub-surface pressures, geologic conditions, accepted engineering practice, and surface environment. The working pressure of all BOPE shall exceed the anticipated surface pressure to which it may be subjected, assuming a partially evacuated hole with a pressure gradient of 0.22 psi/ft.
2. The gravity of the violations for many of the well control minimum standards listed below are shown as minor. However, very short abatement periods in this Order are often specified in recognition that by continuing to drill, the violation which was originally determined to be of a minor nature may cause or threaten immediate, substantial and adverse impact on public health and safety, the environment, production accountability, or royalty income, which would require it reclassification as a major violation.

a. Minimum standards and enforcement provisions for well control equipment.

- i. A well control device shall be installed at the surface that is capable of complete closure of the well bore. This device shall be closed whenever the well is unattended.

iii. 3M system:

- Annular preventers*
- Double ram with blind rams and pipe rams*
- Drilling spool, or blowout preventer with 2 side outlets (choke side shall be a 3-inch minimum diameter, kill side shall be at least 2-inch diameter)*
- Kill line (2 inch minimum)
- A minimum of 2 choke line valves (3 inch minimum)*
- 3 inch diameter choke line
- 2 kill line valves, one of which shall be a check valve (2 inch minimum)*
- 2 chokes (refer to diagram in Attachment 1)
- Pressure gauge on choke manifold
- Upper Kelly cock valve with handle available
- Safety valve and subs to fit all drill string connections in use
- All BOPE connections subjected to well pressure shall be flanged, welded, or clamped*
- Fill-up line above the uppermost preventer.

vi. If repair or replacement of the BOPE is required after testing, this work shall be performed prior to drilling out the casing shoe.

vii. When the BOPE cannot function to secure the hole, the hole shall be secured using cement, retrievable packer or a bridge plug packer, bridge plug, or other acceptable approved method to assure safe well conditions.

b. Minimum standards and enforcement provisions for choke manifold equipment.

- i. All choke lines shall be straight lines unless turns use tee blocks or are targeted with running tees, and shall be anchored to prevent whip and reduce vibration.

Violation: Minor.
Corrective Action: Install the equipment as specified.
Normal Abatement Period: 24 hours.

ii. Choke manifold equipment configuration shall be functionally equivalent to the appropriate example diagram shown in Attachment 1 of this Order. The configuration of the chokes may vary.

Violation: Minor.
Corrective Action: Install the equipment as specified.
Normal Abatement Period: Prompt correction required.

iii. All valves (except chokes) in the kill line choke manifold, and choke line shall be a type that does not restrict the flow (full opening) and that allows a straight through flow (same enforcement as item ii).

iv. Pressure gauges in the well control system shall be a type designed for drilling fluid service (same enforcement as above).

[57 FR 3025, Jan 27, 1992]

c. Minimum standards and enforcement provisions for pressure accumulator system.

i. 2M system accumulator shall have sufficient capacity to close all BOP's and retain 200 psi above pre-charge. Nitrogen bottles that meet manufacturer's specifications may be used as the backup to the required independent power source.

Violation: Minor.
Corrective Action: Install the equipment as specified
Normal Abatement Period: 24 hours.

ii. 3M system accumulator shall have sufficient capacity to open the hydraulically-controlled choke line valve (if so equipped), close all rams plus the annual preventer, and retain a minimum of 200 psi above pre-charge on the closing manifold without the use of the closing pumps. This is a minimum requirement. The fluid reservoir capacity shall be double the usable fluid volume of the accumulator system capacity and the fluid level shall be maintained at the manufacturer's recommendations. The 3M system shall have 2 independent power sources to close the preventers. Nitrogen bottles (3 minimum) may be 1 of the independent power sources and, if so, Shall maintain a charge equal to the manufacturer's specifications.

d. Minimum standards and enforcement provisions for accumulator pre-charge pressure test. This test shall be conducted prior to connecting the closing unit to the BOP stack and at least Once every 6 months. The accumulator pressure shall be corrected if the measured pre-charge Pressure is found to be above or below the maximum or minimum limit specified below (only Nitrogen gas may be used to pre-charge):

Accumulator working pressure rating	Minimum acceptable operating pressure	Desired pre-charge pressure	Maximum acceptable pre-charge pressure	Minimum acceptable pre-charge pressure
1,500 psi	1,500 psi	750 psi	800 psi	700 psi
2,000 psi	2,000 psi	1,000 psi	1,100 psi	900 psi
3,000 psi	3,000 psi	1,000 psi	1,100 psi	900 psi

e. Minimum standards and enforcement provisions for power availability. Power for the closing unit pumps shall be available to the unit at all times so that the pumps shall automatically start when the closing valve manifold pressure has decreased to the pre-set level.

f. Minimum standards and enforcement provisions for accumulator pump capacity. Each BOP closing unit shall be equipped with sufficient number and sizes of pumps so that, with the accumulator system isolated from service, the pumps shall be capable of opening the hydraulically-operated gate valve (if so equipped), plus closing the annular

preventer on the smallest size drill pipe to be used within 2 minutes, and obtain a minimum of 200 psi above specified accumulator pre-charge pressure.

g. Minimum standards and enforcement provisions for locking devices. A manual locking device (i.e. hand wheels) or automatic locking devices shall be installed on all systems of 2M or greater. A valve shall be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve shall be maintained in the open position and shall be closed only when the power source for the accumulator system is inoperative.

h. Minimum standards and enforcement provisions for remote controls. Remote controls shall be readily accessible to the driller. Remote controls for all 3M or greater systems shall be capable of closing all preventers. Remote controls for 5M or greater systems shall be capable of both opening and closing all preventers. Master controls shall be at the accumulator and shall be capable of opening and closing all preventers and the choke line valve (if so equipped). No remote control for a 2M system is required.

i. Minimum Standards and enforcement provisions for well control equipment testing.

i. Perform all tests described below using clear water or an appropriate clear liquid for subfreezing temperatures with a viscosity similar to water.

ii. Ram type preventers and associated equipment shall be tested to approved (see item I.D.1. of this order) stack working pressure if isolated by test plug or to 70 percent of internal yield pressure of casing if BOP stack is not isolated from casing. Pressure shall be maintained for at least 10 minutes or until requirements of test are met, whichever is longer. If a test plug is utilized, no bleed-off of pressure is acceptable. For a test not utilizing a test plug, if a decline in pressure of more than 10 percent in 30 minutes occurs, the test shall be considered to have failed. Valve on casing head below test plug shall be open during test of BOP stack.

iii. Annular type preventers shall be tested to 50 percent of rated working pressure. Pressure shall be maintained at least 10 minutes or until provisions of test are met, whichever is longer.

iv. As a minimum, the above test shall be performed:

- A. When initially installed;
- B. Whenever any seal subject to test pressure is broken;
- C. Following related repairs; and
- D. At 30-day intervals.

v. Valves shall be tested from working pressure side during BOPE tests with all down stream valves open.

vi. When testing the kill line valve(s), the check valve shall be held open or the ball removed.

vii. Annular preventers shall be functionally operated at least weekly.

viii. Pipe and blind rams shall be activated each trip, however, this function need not be performed more than once a day.

ix. A BOPE pit level drill shall be conducted weekly for each drilling crew.

x. Pressure tests shall apply to all related well control equipment.

xi. All of the above described tests and/or drills shall be recorded in the drilling log.

Violation: Minor.

Corrective action: Perform the necessary test or provide documentation.

Normal Abatement Period: 24 hours or next trip, as most appropriate.

[54 FR 39528, Sept. 27, 1989]

SECTION 4 – Drilling Equipment, Casing, and Cementing Programs

PROSPECT INFORMATION

The Cow Canyon B #4 (CB-4) will be drilled as part of the 2018 drilling program at McElmo Dome. The wellplan calls for a 9-5/8" x 7" 13-Chrome casing x 4-1/2" 13-Chrome liner program.

WELL OBJECTIVE

The main objectives for the drilling operation on the CB-4 are:

1. Maintain a focused effort by everyone on location to eliminate all accidents.
2. Drill, evaluate, case and complete the well at or under the AFE cost estimate.
3. Run the 7" 13-Chrome production casing to ~25'TVD into the Leadville formation.
4. Isolate the 7" 13-Chrome to surface with high quality cement.
5. Run the 4-1/2" 13-Chrome liner through the Leadville formation.
6. Isolate the 4-1/2" 13-Chrome liner with high quality cement.

POTENTIAL PROBLEMS

The main problems for the CB-4 are the typical problems expected while drilling in the area:

1. **Lost Circulation in the 12-1/4" Surface Hole:** Lost circulation can be expected at any depth while drilling the surface hole. Maintain a clean fresh water system, utilizing the closed loop system while drilling this hole section. Pump LCM pills as required to control the losses. No losses in surface hole were encountered on offsets.
2. **Gas Kick from the Desert Creek @ 5981' TVD:** Gas kicks have been encountered while drilling the Desert Creek formation. A planned mud weight schedule will be utilized to help minimize the chance of kicks in this section.
3. **Gas and H₂S from the Paradox Salt Shales:** Geo-pressured shales from the P4 on down will contain varying amounts of gas and associated H₂S. Circulate the salt water of the closed loop system to remove excess gas. Pre-treat the mud using H₂S scavenger for H₂S contamination.
4. **Stuck Pipe in the Paradox Salt Shales:** The Paradox Salt Shale is a high pressure, low volume shale which "flows" into the well causing stuck pipe. An attached list of recommendations for drilling the Paradox Salt Shale, titled "Paradox Salt Drilling Procedure", is located in Appendix A of this prognosis. The recommendations have proven to be very successful in recent drilling programs and are strongly recommended they be followed. Educate the drillers prior to drilling the Paradox Salt Shale and discuss in detail the procedure for drilling the shale.
5. **Gas Kick from Leadville after Production Casing set:** Gas kicks have been encountered during the drilling/well stimulation within the open hole segment of the Leadville. The primary barrier is the BOPE and the hydrostatic pressure of the kill fluid (fresh water). Drill pipe/workstrings will be utilized with double float valves inserted. This will prevent kicks from occurring up the drill pipe/workstring during drilling or stimulation in the Leadville.

GENERAL DRILLING PROCEDURE

16" conductor pipe will be set at ~80' prior to moving in the drilling rig. It is necessary to rig up a 13-3/8" 3M annular preventer with diverter to drill the surface hole.

A 12-1/4" hole will be drilled from surface to 2786' TVD, located ~100' TVD below the top of the Cutler. A full string of 9-5/8" surface casing will be run to 2786' TVD with cement circulated to surface. The 9-5/8" surface casing will protect the groundwater in the area. After the casing is run and cemented, screw on the 9-5/8" X 11" 3M casing head housing and nipple-up the 11" 3M BOP. Wait on cement 12 hours and pressure test the casing to 1500 psi and the BOP's to their rating prior to drilling out.

An 8-3/4" hole will be drilled out from the surface casing point to the 7" casing point at 8192' TVD, located ~25' TVD into the Leadville formation. At ~8000' TVD a measurement while drilling (MWD) tool including gamma ray (GR) will be picked up to drill the well to TD. This along with mud logging will be used to determine the casing setting depth. A string of 7" 13-Chrome casing will be run and set ~25' TVD into the Leadville. The well integrity is dependent on the 13-Chrome casing being handled and run correctly. The 7" 13-Chrome requires special handling and is to be handled according to the procedures specified on site. The 7" casing will be cemented back to surface in one stage. A CBL log will be run.

A 6" production hole will be drilled out from the 7" casing to ~400' below the Leadville top. A gyro will be dropped at TD before tripping out of the hole. The pilot hole will then be logged from TD to ~500' inside the 7" casing shoe. After logging, a 4-1/2" 13-Chrome liner will be run and cemented in place. The liner will then be perforated, tested for CO₂ production and/or acid stimulated.

This well will be drilled with a closed loop, pitless system.

SURVEY DETAIL

Normal well deviation is not a concern.

Inclination surveys:

- 500' intervals from spud to the 9-5/8" casing point
- ~1000' intervals from below the 9-5/8" casing point to the top of the Paradox Salt
- **Do not drop surveys while drilling below the Paradox Salt due to potential sticking**
- 500' intervals from below the Paradox Salt Shales to TD

CASING DETAIL

CASING RATING / DESIGN FACTORS

<u>SIZE</u>	<u>INTERVAL</u>	<u>DESCRIPTION</u>	<u>COLLAPSE</u> (psi / SF)	<u>BURST</u> (psi / SF)	<u>TENSION</u> (klbs / SF)
9-5/8"	0' – 2786'	36# J-55 STC	2020 / 1.24	3520 / 1.64	394 / 1.89
7"	0' – 5990'	29# 13CR FOX	7030 / 2.57	8160 / 2.70	676 / 2.21 (100' TVD above top of Paradox Salt)
7"	5990' – 7921'	32# 13CR FOX	9000 / 3.17	9630 / 3.02	792 / 3.62 (run to 100' TVD below Base Salt)
7"	7921' – 8192'	29# 13CR FOX	7030 / 2.57	8160 / 2.54	676 / 3.23 (run to TD)
4-1/2"	8042' – 8488'	12.6# 13CR Vam Top	7500 / 2.04	8430 / 8.43	288 / 2.61 (hanger set ~150' TVD in 7" to TD)

All of the 32# casing will be coated with Rytwrap (ICO in Odessa) prior to arriving on location.

DESIGN ASSUMPTIONS:

9-5/8" Surface	Tension:	Buoyed weight in 8.4 ppg fresh water (Min SF = 1.6)
	Collapse:	Full evacuation w/ 9.0 ppg on outside (Min SF = 1.0)
	Burst:	2000 psi shut in pressure at the surface (Min SF = 1.32)
7" Intermediate	Tension:	Buoyed weight in 10.0 ppg brine
	Collapse:	Full evacuation in 10.0 ppg brine for 29#, 1.0 psi/ft for 32#
	Burst:	2500 psi shut in pressure at the surface with 10.0 ppg inside and 9.0 ppg outside
4-1/2" Liner	Tension:	Buoyed weight in 8.4 ppg fresh water
	Collapse:	Full evacuation in 9.0 ppg on outside
	Burst:	3000 psi shut in pressure at the surface

CEMENTING PROCEDURE

9-5/8" SURFACE CASING → Single stage

Use API 8-3/4" drift on location

Shoe Type: Regular Guide Shoe
Collar Type: Regular Float collar, 40' above shoe
Centralizers: 15 required → Place centralizers on shoe joint, and every 4th joint to surface
Flag Joints: None Required
Other Equipment: Stop clamp, thread lock the bottom 2 joints of casing + all float equipment, top and bottom plugs

Reciprocate: Not required, limit of 294,000 lbs based on 36# J-55 STC w/ a 1.6 SF

Preflush: 10 bbls → Fresh water
20 bbls → Chemical wash
10 bbls → Fresh water

Lead CMT Slurry: 800 sks → VersaCem™ System → 6% Bemtonite+5 lbm/sk KOL-SEAL+0.125 lbm/sk POLY-E-FLAKE+0.1% Halad®-9
Specifications: 12.4 ppg / 1.92 ft³ / sk / 9.91 gal / sk
100% Excess

Tail CMT Slurry: 300 sks → HalCem™ System → 0.125 lbm/sk POLY-E-Flake+0.1% Halad-9
Specifications: 15.8 ppg / 1.16 ft³ / sk / 5.08 gal / sk
100% Excess

Displacement: ~200 bbls → Fresh Water @ 8 - 10 bbls / min

Volume Based: All volumes listed are estimates only, for calculations use 12-1/4" X 9-5/8" annulus + 100% excess + shoe joints + ~100 sks circulated @ surface, attempt to circulate cement to surface, excess volume is based on experience.

Pressure Limits: 2000 psi while pumping or bumping plug due to collapse rating of the 9-5/8" 36# J-55 STC w/ a 1.0 SF

Test Required: Lab test w/ field water, want a 2 hr minimum @ 105° BHST

Temperature Survey: Required if cement does not circulate at surface, call Todd Gentles @ (713) 369-8487 or 713-249-2805 for details

Wellhead: Install section "A" assembly

Special Note:

1. Report the volume of cement circulated to the surface.
2. WOC for a minimum of 12 hours prior to drilling out.
3. NU 3M - 11 - BOP and test to rating.
4. Test the casing to 500 psi.
5. Cement Co. → Send copy of pressure charts, job log and summary to:
Kinder Morgan, Attn: Todd Gentles, 1001 Louisiana St, Suite 1000, Houston, TX 77002

CEMENTING PROCEDURE

7" PRODUCTION CASING → Single stage

Shoe Type:	Differential Fill Float Shoe
Collar Type:	Differential Fill Float Collar, 40' above shoe
Centralizers:	78 required → 10' above shoe and every other joint excluding wrapped casing
Flag Joints:	Cross over from 32# to 29# will serve as flag joints
Other Equipment:	Thread lock the bottom 3 joints of casing + all float equipment.
Reciprocate:	If required, limit @ 100,000 lbs
Preflush:	15 bbls → Fresh water 40 bbls → Chemical wash 10 bbls → Fresh water
Lead Slurry:	900 sks → NeoCem™ System → 0.125% Poly-E-Flake + 0.125% Tuf Fiber 594
Specifications:	12.0 ppg / 2.318 ft ³ / sk / 6.61 gal / sk
50% Excess	
Tail Slurry:	590 sks → HalCem™ System → 0.25% Poly-E-Flake + 0.125% Tuf Fiber 594
Specifications:	13 ppg / 1.456 ft ³ / sk / 12.1 gal / sk
50% Excess	
Displacement:	~300 bbls freshwater @ 8 - 10 bbls / min
Volume Based:	Use 9" hole diameter to calculate cement volume
Test Required:	Lab test w/ field water, 3.25 hr minimum @ 200° BHST Lab test w/ field water, 3.50 hr minimum @ 170° BHST
Temperature Survey:	Possible survey if severe lost circulation occurs
CBL Survey:	A CBL will be run after setting and cementing of this casing.
Wellhead:	Install section "B" assembly
Special Note:	<ol style="list-style-type: none">1. Circulate 3 annular volumes prior to cementing @ maximum rate possible.2. Displace cement at the maximum rate possible.3. Report volumes of cement circulated.4. Report any circulation problems on the morning report.5. Cement Co. → Send copy of pressure charts, job log and summary to: Kinder Morgan, Attn: Todd Gentles 1001 Louisiana St., Suite 1000, Houston, TX 77002

CEMENTING PROCEDURE

4-1/2" PRODUCTION LINER → Single stage

Shoe Type:	Differential Fill Float Shoe
Collar Type:	None
Centralizers:	None
Flag Joints:	None
Other Equipment:	Thread lock the bottom 3 joints of casing + all float equipment.
Reciprocate:	If required, limit @ 50,000 lbs
Preflush:	10 bbls → Fresh water 20 bbls → Chemical wash 10 bbls → Fresh water
Lead Slurry:	100 sks → HalCem™ System → 0.3% Halad®-9 + 0.1% HR-5 + 5lbm Kol-Seal + 0.05% SA-1015
Specifications:	13.0 ppg / 1.449 ft ³ / sk / 6.45 gal / sk
50% Excess	
Displacement:	~70 bbls freshwater @ 8 - 10 bbls / min
Volume Based:	Use 6" hole diameter to calculate cement volume
Test Required:	Lab test w/ field water, 3.25 hr minimum @ 200° BHST Lab test w/ field water, 3.50 hr minimum @ 170° BHST
Temperature Survey:	None
CBL Survey:	A CBL will be run after setting and cementing of this casing.
Wellhead:	None
Special Note:	1. Displace cement at the maximum rate possible. 2. Report any circulation problems on the morning report. 3. Cement Co. → Send copy of pressure charts, job log and summary to: Kinder Morgan, Attn: Todd Gentles 1001 Louisiana St., Suite 1000, Houston, TX 77002

SECTION 5 – Mud Program

The “standard” mud program and procedures used during the previous drilling programs at McElmo will be employed during the drilling operation of the well.

Surface – 2786’ TVD (9-5/8” Casing Point):

Hole Size: 12-1/4”
Mud Type: Spud mud
Mud Weight: 8.5 – 9.0 ppg
pH: 9.5
Salt Conc: 1,200 ppm

Spud the 12-1/4” surface hole with spud mud and circulate the closed loop system. Maintain the fluid as clean as possible to help prevent lost circulation. Use paper to control any seepage and pump LCM sweeps if lost circulation becomes a problem. Pump viscous sweeps if tight connections are encountered and prior to running the 9-5/8” casing.

2786’ – 5881’ TVD (100’ above the Desert Creek):

Hole Size: 8-3/4”
Mud Type: Spud mud
Mud Weight: 8.5 – 9.0 ppg
pH: 9.5
Salt Conc: 1,200 ppm
Problems: Seepage, hole cleaning

Drill out of the 9-5/8” casing with clean spud mud. Circulate the closed loop system to keep solids to a minimum. Sweep the hole as required for hole cleaning and / or lost circulation problems. Use paper to control any seepage problems.

5881’ – 8192’ MD/TVD (25’ into the Leadville / 7” Casing Point):

Hole Size: 8-3/4”
Mud Type: Salt saturated brine
Mud Weight: 10+ ppg
pH: 11+, as required to control H2S
Salt Conc: 190,000 ppm
Problems: H2S, Paradox Salt shale gas influx, hole cleaning

Displace the fresh water system with salt saturated brine 100’ above the Desert Creek formation. Circulate through the closed loop system to maintain a clean fluid and to assist in breaking out any entrained gas. Pre-treat mud for H2S prior to drilling the P4 Shale.

Follow the attached guidelines for drilling the Paradox Salt Shales, titled “Paradox Salt Drilling Procedure”, which is located in Appendix A of this prognosis. The recommendations have proven to be very successful in recent drilling programs.

8192’ – 8488’ MD/TVD (Production Hole):

Hole Size: 6”
Mud Type: Fresh water
pH: 9-9.5 with caustic soda
Problems: LC, Hole cleaning, Lubricity

During the production hole drill the fresh water will be treated so that the Cl₂ content is ~20,000ppm. This is for logging purposes. Acid soluble LCM will be added to mitigate lost circulation. If circulation is lost and unable to be regained, nitrogen (or air) will be added to the mud system to help lift the fluid for circulation and cuttings movement. A specific description of this process is discussed in Section 8 of this prognosis.

SECTION 6 – Evaluation Program

Mud logging services will be used from surface to TD. Samples will be collected in 10' intervals

A measure while drilling (MWD) tool with gamma ray (GR) capability will be run from ~8000' TVD to 7" casing point. GR response, mud logs, and penetration rate will be used to determine the top of the Leadville formation and final casing point.

The 6" production hole will be logged with 2 runs as follows:

- 1st run dual laterolog
- 2nd run triple combo, monopole sonic

The vertical wellbore will be logged to the surface casing shoe through casing with 3 runs as follows (COGCC Rule 317.p)

- 1st run GR, pulsed neutron from 7" casing shoe to surface casing shoe
- 2nd run CBL from 7" casing shoe to surface
- 3rd run CBL from TD to top of 4-1/2" liner

SECTION 7 – Expected Pressures and Identified Hazards

BOTTOM HOLE PRESSURE

The Leadville/Ouray formation is approximately 325' thick in the Doe Canyon and McElmo Dome area. This vertical hole will be drilled through the Leadville and Ouray formations. The expected bottom-hole pressure is currently about 2100 psi in the McElmo Dome area. Original field pressures were in the range of 2500 psi; 2500 psi would be the maximum pressure expected should there be compartmentalization within the reservoir. This reservoir is under pressured; given the well depth of approximately 8500' TVD, a fresh water column provides approximately 3680 psi for well control. During drilling/well stimulation operations, the drill pipe/workstring will have double float valves installed to prevent kicks from coming up the string.

H₂S POTENTIAL

H₂S is expected to be circulated to the surface during the drilling of the Paradox Salt Shales located at 6090' – 7821' TVD. The H₂S contingency plan that was used in the previous programs has been updated and revised and will be in force. This plan is located in Appendix A of this prognosis. All the necessary precautions, drills, and training will be done to protect personnel on location. H₂S monitors and safety equipment will be on location and operational prior to drilling the section and remain until rig release.

SECTION 8 – Other Items

LOST CIRCULATION CONTINGENCY PLAN

Circulation may be lost in the 6" production hole. In this situation, managed pressure drilling techniques will be implemented. A normal fresh water fluid column of water is approximately 3680 psi downhole pressure, and the reservoir pressure is 2500 psi - therefore an overbalanced condition exists. The fracture gradient of the formation is estimated at 0.6 to 0.7 psi/ft, which equates to approximately 5100 to 5950 psi downhole pressure, which indicates fractures are not being induced; however, when a high porosity zone is encountered in the Leadville, and the pore volume exists to take the fluid. At this point, there is a high probability of sticking drill pipe as the cuttings flowing up the annulus immediately fallback.

A nitrogen managed pressure drilling package can be brought out to location while drilling the production hole should this situation occur. The nitrogen will be added into the mud system to lighten the hydrostatic pressure and regain circulation in a managed pressure scenario. Managed pressure drilling equipment will be used to handle the return flow of nitrogen and any influx of CO₂ gas through a separator and vent stack. Well control is maintained by reducing or stopping the flow of nitrogen, which will kill the well. A dedicated rig pump and kill line are also hooked up and ready to boost the water flow if needed.

GENERAL COMPLETION PROCEDURE

The well will be completed by perforating the 4.5" liner in the Leadville formation. Log analysis will determine placement of the perforations and whether the perforations will be acidized. A static pressure test may be collected prior to the well being tested for CO₂ production. The well will then be shut in until production facilities are constructed.

CONTACT INFORMATION	OFFICE	CELL
Operations Manager – Todd Gentles	713-369-8487	713-249-2805
Drilling Director – Doug Frederick	713-369-9208	281-421-2333
Drilling Engineer – Valerie Cawthorn	713-369-8509	281-798-8769
Geologist – Michael Schneider	713-420-3901	361-550-3165

APPROVAL

Douglas A. Frederick
Drilling Director
Kinder Morgan CO2 Company, L.P.

Appendix A: Paradox Salt Drilling Procedure

Twelve distinct shale bodies occur in the Paradox Salt formation. Most notably, shale numbers 4, 5 and 6, and their associated anhydrite, in the sequence of the Paradox Salt that has the potential for high H₂S content and tendency to stick pipe.

This section lies approximately 400'-500' into the Paradox and usually has a 20'-30' salt section between shale number 4 and 5. Because these shales are subject to plastic flow, to prevent sticking, the following procedure has worked in the past and is recommended.

Preparing to drill the Paradox Salt Formation

1. Test the BOPs on the last bit trip prior to drilling the Paradox Salt.
2. Pick up a set of mechanical drilling jars on the last bit trip prior to drilling into the Paradox.
3. Run a survey to the top of the salt. This will help to avoid shutting down while drilling the sticky shales.
4. Use the salt formation cross-section as an indicator for predicting where each of the shale bodies will be encountered. Shales number 4, 5 and 6 are considered to be the most troublesome.
5. Increase flow rate to an annular velocity of at least 200 ft/min. Limitations of the rig's hydraulic system should be considered when selecting bit nozzle sizes.

Drilling the Paradox Salt Formation

6. The Driller will hand drill the interval beginning at the top of the Paradox Salt and continue until all problem shales have been penetrated and normal conditions return.
7. Control drill the Paradox while noting the normal torque values for the salts. If there is any fluctuation in pump pressure or torque, pick up off bottom and ream until hole conditions stabilize. Drill a maximum of 5' of salt and 1'-2' of shale before picking up 15'-20' and reaming to bottom slowly to clean the wellbore. The severity of torque, and increases in pump pressure, should dictate the interval lengths. Some portions of the hole may require drilling only a few inches before picking up and reaming.
8. After 1' to 2' of shale is penetrated, expect 50,000-100,000 lbs drag to free the bit initially. After freeing the bit, pick up 15'-20' and start reaming back to bottom. If the torque increases 20-30 ft-lb above normal, pick up and expect 25,000-50,000 lb drag.
9. On each joint down, have the Driller pick up two joints, then ream back to bottom. Reaming serves two purposes:
 - a. It conditions the walls of the wellbore
 - b. It allows for the cuttings to be carried away from the bit and collars before making a connection.
10. Pipe should be pulled and run slowly to avoid problems in the tight sections of the hole. Torque should dictate the frequency of the short trips. Periodic short trips through the entire salt section have proven useful in reducing high torque due to sticky shale.

At the present time, the key to drilling these sticky shales in the Paradox Salt is **PATIENCE**. It should be noted that good gas shows are also present in these shale stringers, and as the gas out of the sticky shales starts to subside, the hole starts to stabilize.