

Noble Energy

Weld County, CO (NAD 83)
Sec. 2-T4N-R64W (Hoffman 2 PAD)
Hoffman C02-25D - A3

Design: MWD Survey

Sperry Drilling Services

Final Survey Report

20 August, 2012

Well Coordinates: 1,368,486.68 N, 3,273,613.58 E (40° 20' 26.66" N, 104° 31' 06.31" W)
Ground Level: 4,620.00 ft

Local Coordinate Origin:	Centered on Well Hoffman C02-25D - Slot A3
Viewing Datum:	KB @ 4633.00ft (Ensign 132)
TVDs to System:	N
North Reference:	Grid
Unit System:	API - US Survey Feet - Custom

Geodetic Scale Factor Applied
Version: 2003.16 Build: 43I

HALLIBURTON

Design Report for Hoffman C02-25D - MWD Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
698.00	0.00	0.00	698.00	0.00	0.00	0.00	0.00
Surface Casing Assumed Vertical at 698.00ft							
918.00	0.44	119.25	918.00	-0.41	0.74	-0.23	0.20
First MWD Survey							
1,013.00	3.70	218.61	1,012.93	-2.99	-0.86	2.72	4.00
1,108.00	4.99	233.08	1,107.66	-7.86	-6.07	9.86	1.77
1,203.00	6.62	235.14	1,202.17	-13.48	-13.87	19.34	1.73
1,297.00	8.63	238.86	1,295.33	-20.22	-24.35	31.51	2.20
1,390.00	10.15	227.59	1,387.09	-29.36	-36.38	46.47	2.56
1,483.00	11.80	217.04	1,478.40	-42.48	-48.16	64.08	2.79
1,575.00	13.38	217.57	1,568.18	-58.42	-60.32	83.96	1.72
1,667.00	14.48	226.14	1,657.49	-74.83	-75.10	106.02	2.54
1,758.00	16.04	227.15	1,745.27	-91.27	-92.52	129.96	1.74
1,851.00	18.14	227.01	1,834.16	-109.88	-112.54	157.27	2.26
1,942.00	20.46	224.34	1,920.05	-130.92	-134.02	187.33	2.73
2,035.00	23.29	225.56	2,006.34	-155.42	-158.51	221.98	3.08
2,128.00	22.73	223.41	2,091.94	-181.35	-183.98	258.32	1.09
2,219.00	23.96	224.76	2,175.49	-207.24	-209.08	294.38	1.47
2,315.00	24.40	225.15	2,263.07	-235.06	-236.86	333.70	0.49
2,409.00	22.86	221.85	2,349.19	-262.36	-262.81	371.35	2.16
2,504.00	24.11	223.22	2,436.32	-290.25	-288.41	409.17	1.44
2,599.00	23.69	224.09	2,523.17	-318.09	-314.98	447.65	0.58
2,694.00	25.28	225.70	2,609.63	-345.97	-342.78	487.02	1.81
2,790.00	25.18	224.94	2,696.47	-374.74	-371.87	527.94	0.35
2,884.00	24.77	223.66	2,781.68	-403.14	-399.59	567.62	0.72
2,980.00	25.32	226.47	2,868.66	-431.83	-428.36	608.25	1.37
3,075.00	24.12	226.12	2,954.95	-459.28	-457.08	647.97	1.27
3,170.00	22.08	225.34	3,042.33	-485.29	-483.78	685.23	2.17
3,265.00	21.80	224.97	3,130.45	-510.32	-508.94	720.73	0.33
3,360.00	22.69	224.90	3,218.38	-535.78	-534.34	756.69	0.94
3,455.00	21.40	230.34	3,306.44	-559.82	-560.62	792.27	2.54
3,550.00	23.04	228.39	3,394.38	-583.23	-587.87	828.08	1.89
3,645.00	24.61	227.31	3,481.28	-608.99	-616.31	866.40	1.72
3,740.00	26.72	227.25	3,566.91	-636.90	-646.54	907.51	2.22
3,835.00	27.29	222.28	3,651.56	-667.52	-676.88	950.61	2.45
3,930.00	25.12	222.02	3,736.79	-698.61	-705.03	992.51	2.29
4,025.00	22.43	222.35	3,823.72	-726.99	-730.74	1,030.76	2.84
4,121.00	20.84	223.14	3,912.95	-752.99	-754.76	1,066.13	1.68
4,216.00	21.88	224.72	4,001.43	-777.90	-778.77	1,100.73	1.25
4,311.00	22.70	223.91	4,089.33	-803.69	-803.94	1,136.76	0.92
4,406.00	22.65	224.68	4,176.99	-829.90	-829.51	1,173.38	0.32
4,502.00	20.38	224.11	4,266.29	-855.05	-854.15	1,208.58	2.37
4,597.00	21.79	224.93	4,354.93	-879.41	-878.11	1,242.75	1.52
4,692.00	22.87	226.97	4,442.80	-904.49	-904.06	1,278.84	1.40
4,787.00	23.56	227.90	4,530.11	-929.82	-931.64	1,316.24	0.82
4,882.00	21.62	228.50	4,617.82	-954.14	-958.84	1,352.67	2.06
4,978.00	19.95	222.16	4,707.58	-978.01	-983.09	1,386.69	2.92
5,072.00	18.06	222.01	4,796.45	-1,000.72	-1,003.60	1,417.26	2.01
5,168.00	16.97	222.11	4,888.00	-1,022.17	-1,022.96	1,446.12	1.14

Design Report for Hoffman C02-25D - MWD Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)
5,263.00	16.12	221.38	4,979.07	-1,042.35	-1,040.97	1,473.13	0.92
5,358.00	10.82	227.63	5,071.42	-1,058.27	-1,056.29	1,495.22	5.78
5,453.00	8.02	224.28	5,165.13	-1,069.03	-1,067.51	1,510.76	3.00
5,548.00	5.50	215.75	5,259.47	-1,077.47	-1,074.79	1,521.88	2.85
5,643.00	2.21	201.13	5,354.24	-1,082.87	-1,078.12	1,528.05	3.59
5,737.00	1.54	192.07	5,448.19	-1,085.80	-1,079.03	1,530.78	0.78
5,832.00	1.46	194.18	5,543.16	-1,088.22	-1,079.60	1,532.89	0.10
5,927.00	1.34	181.69	5,638.13	-1,090.51	-1,079.93	1,534.74	0.34
6,117.00	1.17	183.45	5,828.09	-1,094.66	-1,080.11	1,537.81	0.09
6,403.00	0.81	217.69	6,114.05	-1,099.18	-1,081.52	1,542.01	0.24
6,688.00	0.15	218.45	6,399.03	-1,101.06	-1,082.98	1,544.38	0.23
6,974.00	0.20	152.27	6,685.03	-1,101.80	-1,082.98	1,544.90	0.07
7,162.00	0.44	53.20	6,873.03	-1,101.66	-1,082.25	1,544.28	0.27
Final MWD Survey							
7,218.00	0.44	53.20	6,929.03	-1,101.40	-1,081.91	1,543.86	0.00
Survey Projection to TD - Estimated BHL: 1301' FSL, 1316' FWL							

Design Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
698.00	698.00	0.00	0.00	Surface Casing Assumed Vertical at 698.00ft
918.00	918.00	-0.41	0.74	First MWD Survey
7,162.00	6,873.03	-1,101.66	-1,082.25	Final MWD Survey
7,218.00	6,929.03	-1,101.40	-1,081.91	Survey Projection to TD
7,218.00	6,929.03	-1,101.40	-1,081.91	Estimated BHL: 1301' FSL, 1316' FWL

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (ft)
				+N/-S (ft)	+E/-W (ft)	
Target	Hoffman C02-25D_PlanA - Rev1_BHL Tgt	224.87	Slot	0.00	0.00	0.00

Survey tool program

From (ft)	To (ft)	Survey/Plan	Survey Tool
698.00	7,218.00	Sperry MWD Surveys	MWD

Design Report for Hoffman C02-25D - MWD Survey

Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
Hoffman	0.00	0.00	1.00	0.47	41.81	1,368,487.15	3,273,655.39	40° 20' 26.664 N	104° 31' 5.772 W
- actual wellpath misses target center by 41.81ft at 1.00ft MD (1.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1				-2,388.19	-2,416.53	1,366,070.25	3,271,225.49		
Point 2				-2,406.19	2,837.47	1,371,324.03	3,271,207.49		
Point 3				2,835.81	2,913.47	1,371,400.02	3,276,449.27		
Point 4				2,861.81	-2,358.53	1,366,128.24	3,276,475.27		
Point 5				-2,388.19	-2,416.53	1,366,070.25	3,271,225.49		
Hoffman	0.00	0.00	6,896.00	-1,083.04	-1,078.10	1,367,403.69	3,272,535.52	40° 20' 16.080 N	104° 31' 20.388 W
- actual wellpath misses target center by 29.86ft at 7162.00ft MD (6873.03 TVD, -1101.66 N, -1082.25 E)									
- Point									
Hoffman	0.00	0.00	1.00	0.47	41.81	1,368,487.15	3,273,655.39	40° 20' 26.664 N	104° 31' 5.772 W
- actual wellpath misses target center by 41.81ft at 1.00ft MD (1.00 TVD, 0.00 N, 0.00 E)									
- Polygon									
Point 1				-1,928.19	-1,956.53	1,366,530.23	3,271,685.47		
Point 2				-1,946.19	2,377.47	1,370,864.05	3,271,667.47		
Point 3				2,375.81	2,453.47	1,370,940.04	3,275,989.29		
Point 4				2,401.81	-1,898.53	1,366,588.23	3,276,015.29		
Point 5				-1,928.19	-1,956.53	1,366,530.23	3,271,685.47		
Hoffman	0.00	0.00	5,500.00	-1,083.04	-1,078.10	1,367,403.69	3,272,535.52	40° 20' 16.080 N	104° 31' 20.388 W
- actual wellpath misses target center by 4.28ft at 5788.71ft MD (5499.89 TVD, -1087.14 N, -1079.33 E)									
- Circle (radius 75.00)									

North Reference Sheet for Sec. 2-T4N-R64W (Hoffman 2 PAD) - Hoffman C02-25D

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to Grid North Reference.

Vertical Depths are relative to KB @ 4633.00ft (Ensign 132). Northing and Easting are relative to Hoffman C02-25D - Slot A3

Coordinate System is US State Plane 1983, Colorado Northern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Lambert Conformal Conic (2 parallel)

Central Meridian is 105° 30' 0.000 W°, Longitude Origin:0° 0' 0.000 E°, Latitude Origin:40° 47' 0.000 N°

False Easting: 3,000,000.00ft, False Northing: 1,000,000.00ft, Scale Reduction: 0.99995808


Grid Coordinates of Well: 1,368,486.68 ft N, 3,273,613.58 ft E


Geographical Coordinates of Well: 40° 20' 26.66" N, 104° 31' 06.31" W

Grid Convergence at Surface is: 0.63°

Based upon Minimum Curvature type calculations, at a Measured Depth of 7,218.00ft
the Bottom Hole Displacement is 1,543.89ft in the Direction of 224.49° (Grid).

Magnetic Convergence at surface is: -7.97° (10 April 2012, , BGGM2011)

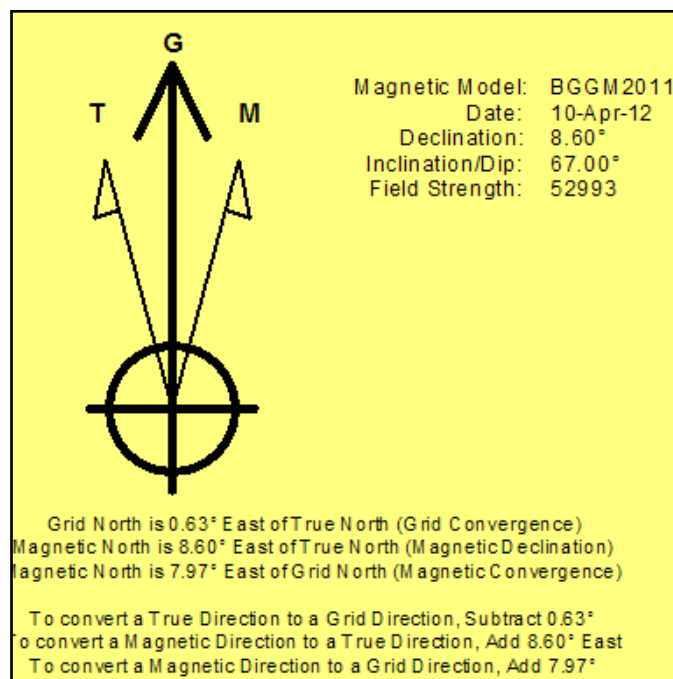

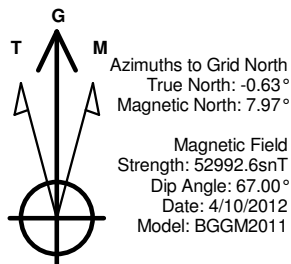

LEGEND

- Hoffman C02-25D, Plan A, Plan A - Rev 1 Proposal V0
- MWD Survey

Halliburton Energy Services, Inc. ("Halliburton") recently completed directional drilling and MWD operations at the Hoffman C02-25D well located at Weld County, CO. At the conclusion of the job Halliburton performed a final survey on the well. Noble Energy has requested that Halliburton provide them the distances from BHL to section lines from that final survey to allow Noble Energy to meet its requirements under Colorado law. These distances are generated by a mathematical algorithm based on rough data collected after the well is drilled. Halliburton considers it to be a rough estimate only and it is not to be relied upon in any application where accurate data is required. In consideration for Halliburton releasing this data to Noble Energy, Noble Energy agrees to release Halliburton from any consequences of it or anyone else relying on such data.

Permitted BHL: 1320' FSL, 1320' FWL

