

COMPANY	KERR-MCGEE OIL & GAS ONSHORE LP		
WELL	HEIN 2-1		
FIELD	WATTENBERG		
COUNTY	WELD		
STATE	CO		
Permanent Datum	GL	Sect. 1	Twp. 1N Rge. 67W
Log measured from	KB		
Drilling measured from	KB		
Date	14-Apr-12		
Run No.	ONE		
Depth - Driller	8245.00 ft		Elev. 4896.0 ft
Depth - Logger	7796.0 ft		15.0 ft above perm. Datum
Bottom - Logged Interval	7794 ft		
Top - Logged Interval	CSG		
Casing - Driller	8.625 in	@	943.0 ft
Casing - Logger	937.0 ft		
Bit Size	7.875 in		@
Type Fluid in Hole	WATER BASED MUD		
Density	8.4 ppq	26.00	s/qt
PH	8.00	0.0	cpH
Source of Sample	MUD CELL		
Rm @ Meas. Temperature	1.060 ohm	@	76.60 degF
Rmf @ Meas. Temperature	0.92 ohm	@	75.00 degF
Rmc @ Meas. Temperature	0.972 ohm	@	75.00 degF
Source Rmf	CHART		CHART
Rm @ BHT	0.43 ohm	@	198.0 degF
Time Since Circulation	7.0 hr		
Time on Bottom	14-Apr-12 06:03		
Max. Rec. Temperature	198.0 degF	@	7796.0 ft
Equipment	10800785		BRIGHTON
Recorded By	A. ZWALI		J. PINKETT
Witnessed By	BEN BENJAMIN		ROBIN BRACKMAN

API No. 05123350760000
 Location SHL: 1923' FNL & 1867' FEL SWNE
 BHL: 633' FNL & 2065' FEL NWNE ESTIMATED
 LAT: 40 08 21.49 Deg
 LONG: -104 83 66.26 Deg

Other Services:
 RWCH
 IDT

Fold here

Service Ticket No.: N/A		API Serial No.: 05123350760000		PGM Version: WL INSITE R3.4.4 (Build 2)			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES			
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole
Depth-Driller							
Type Fluid in Hole							
Density	Viscosity						
Ph	Fluid Loss						
Source of Sample				RESISTIVITY EQUIPMENT DATA			
Rm @ Meas. Temp	@	@		Run No.	Tool Type & No.	Pad Type	Tool Pos.
Rmf @ Meas. Temp.	@	@		ONE	ACRT	N/A	1.25" S.O.
Rmc @ Meas. Temp.	@	@			E5787-S5797		
Source Rmf	Rmc						
Rm @ BHT	@	@					
Rmf @ BHT	@	@					
Rmc @ BHT	@	@					
EQUIPMENT DATA							
GAMMA		ACOUSTIC		DENSITY		NEUTRON	
Run No.	ONE	Run No.		Run No.	ONE	Run No.	ONE
Serial No.	11215095	Serial No.		Serial No.	M319_P123	Serial No.	11277440
Model No.	GTET	Model No.		Model No.	SDLT	Model No.	DSNT
Diameter	3.625"	No. of Cent.		Diameter	4.5"	Diameter	3.625"
Detector Model No.	GTET	Spacing		Log Type	GAM/GAM	Log Type	NEU/NEU
Type	SCINT			Source Type	Cs137	Source Type	Am 241Be
Length	8"	LSA [Y/N]		Serial No.	5256GW	Serial No.	DSN-430
Distance to Source	10'	FWDA [Y/N]		Strength	1.5 Ci	Strength	15 Ci
LOGGING DATA							
GENERAL		GAMMA		ACOUSTIC		DENSITY	
NEUTRON		NEUTRON		NEUTRON		NEUTRON	

DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.250	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT Pad	DNOK	Process Density?	Yes	
SDLT Pad	DNOK	Process Density EVR?	No	
SDLT Pad	CB	Logging Calibration Blocks?	No	
SDLT Pad	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT Pad	DTWN	Disable temperature warning	No	
SDLT Pad	DMA	Formation Density Matrix	2.710	g/cc
SDLT Pad	DFL	Formation Density Fluid	1.000	g/cc
Microlog Pad	MLOK	Process MicroLog Outputs?	Yes	
IDT	WRTI	Survey Writing Interval	30	ft
IDT	SOPT	Smoothing Option	None	
ACRt Sonde	RTOK	Process ACRt?	Yes	
ACRt Sonde	MNSO	Minimum Tool Standoff	1.25	in
ACRt Sonde	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt Sonde	TPOS	Tool Position	Free Hanging	
ACRt Sonde	RMOP	Rmud Source	Mud Cell	
ACRt Sonde	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt Sonde	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt Sonde	THQY	Threshold Quality	0.50	

BOTTOM


Data: HEIN 2-1\0001 ANADARKO_IDT003.01 14-Apr-12 07:27 Up


Date: 14-Apr-12 07:31:06


HALLIBURTON


Plot Time: 16-Apr-12 12:12:49
 Plot Range: 927 ft to 7798 ft
 Data: HEIN 2-1\Well Based\DAQ-0001-003.01*
 Plot File: \COMP\MAIN


MAIN PASS 5" = 100'

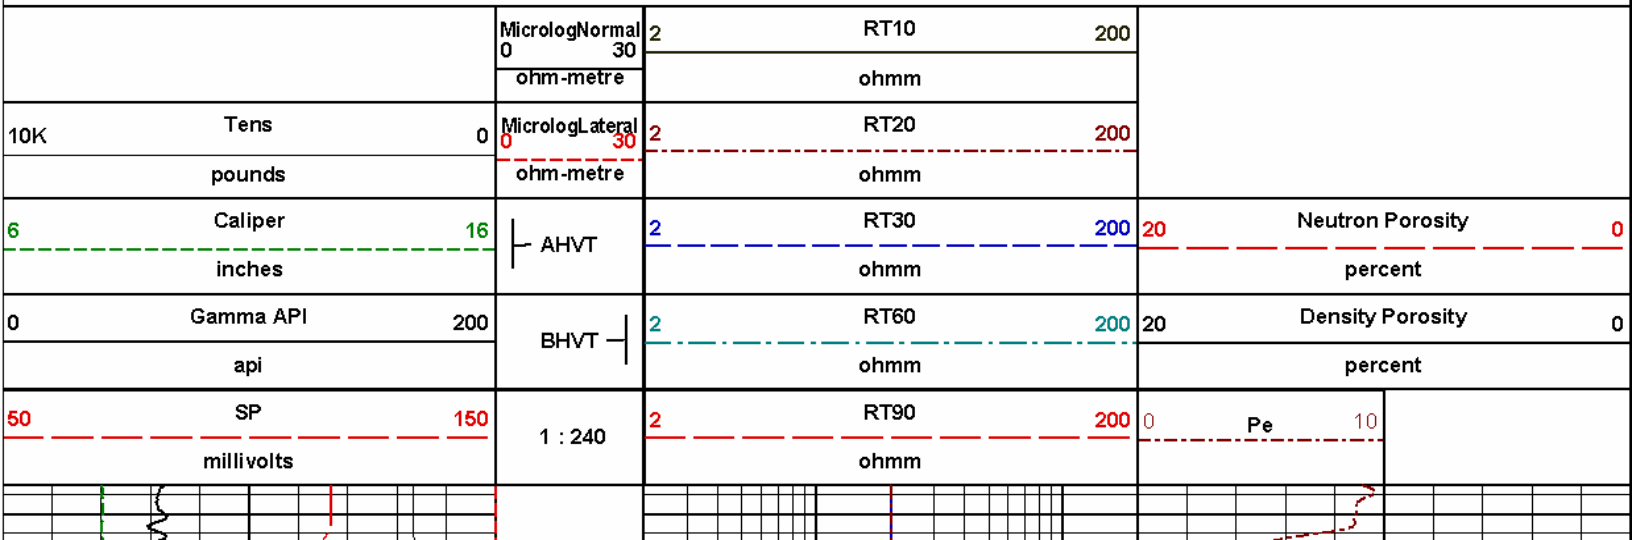


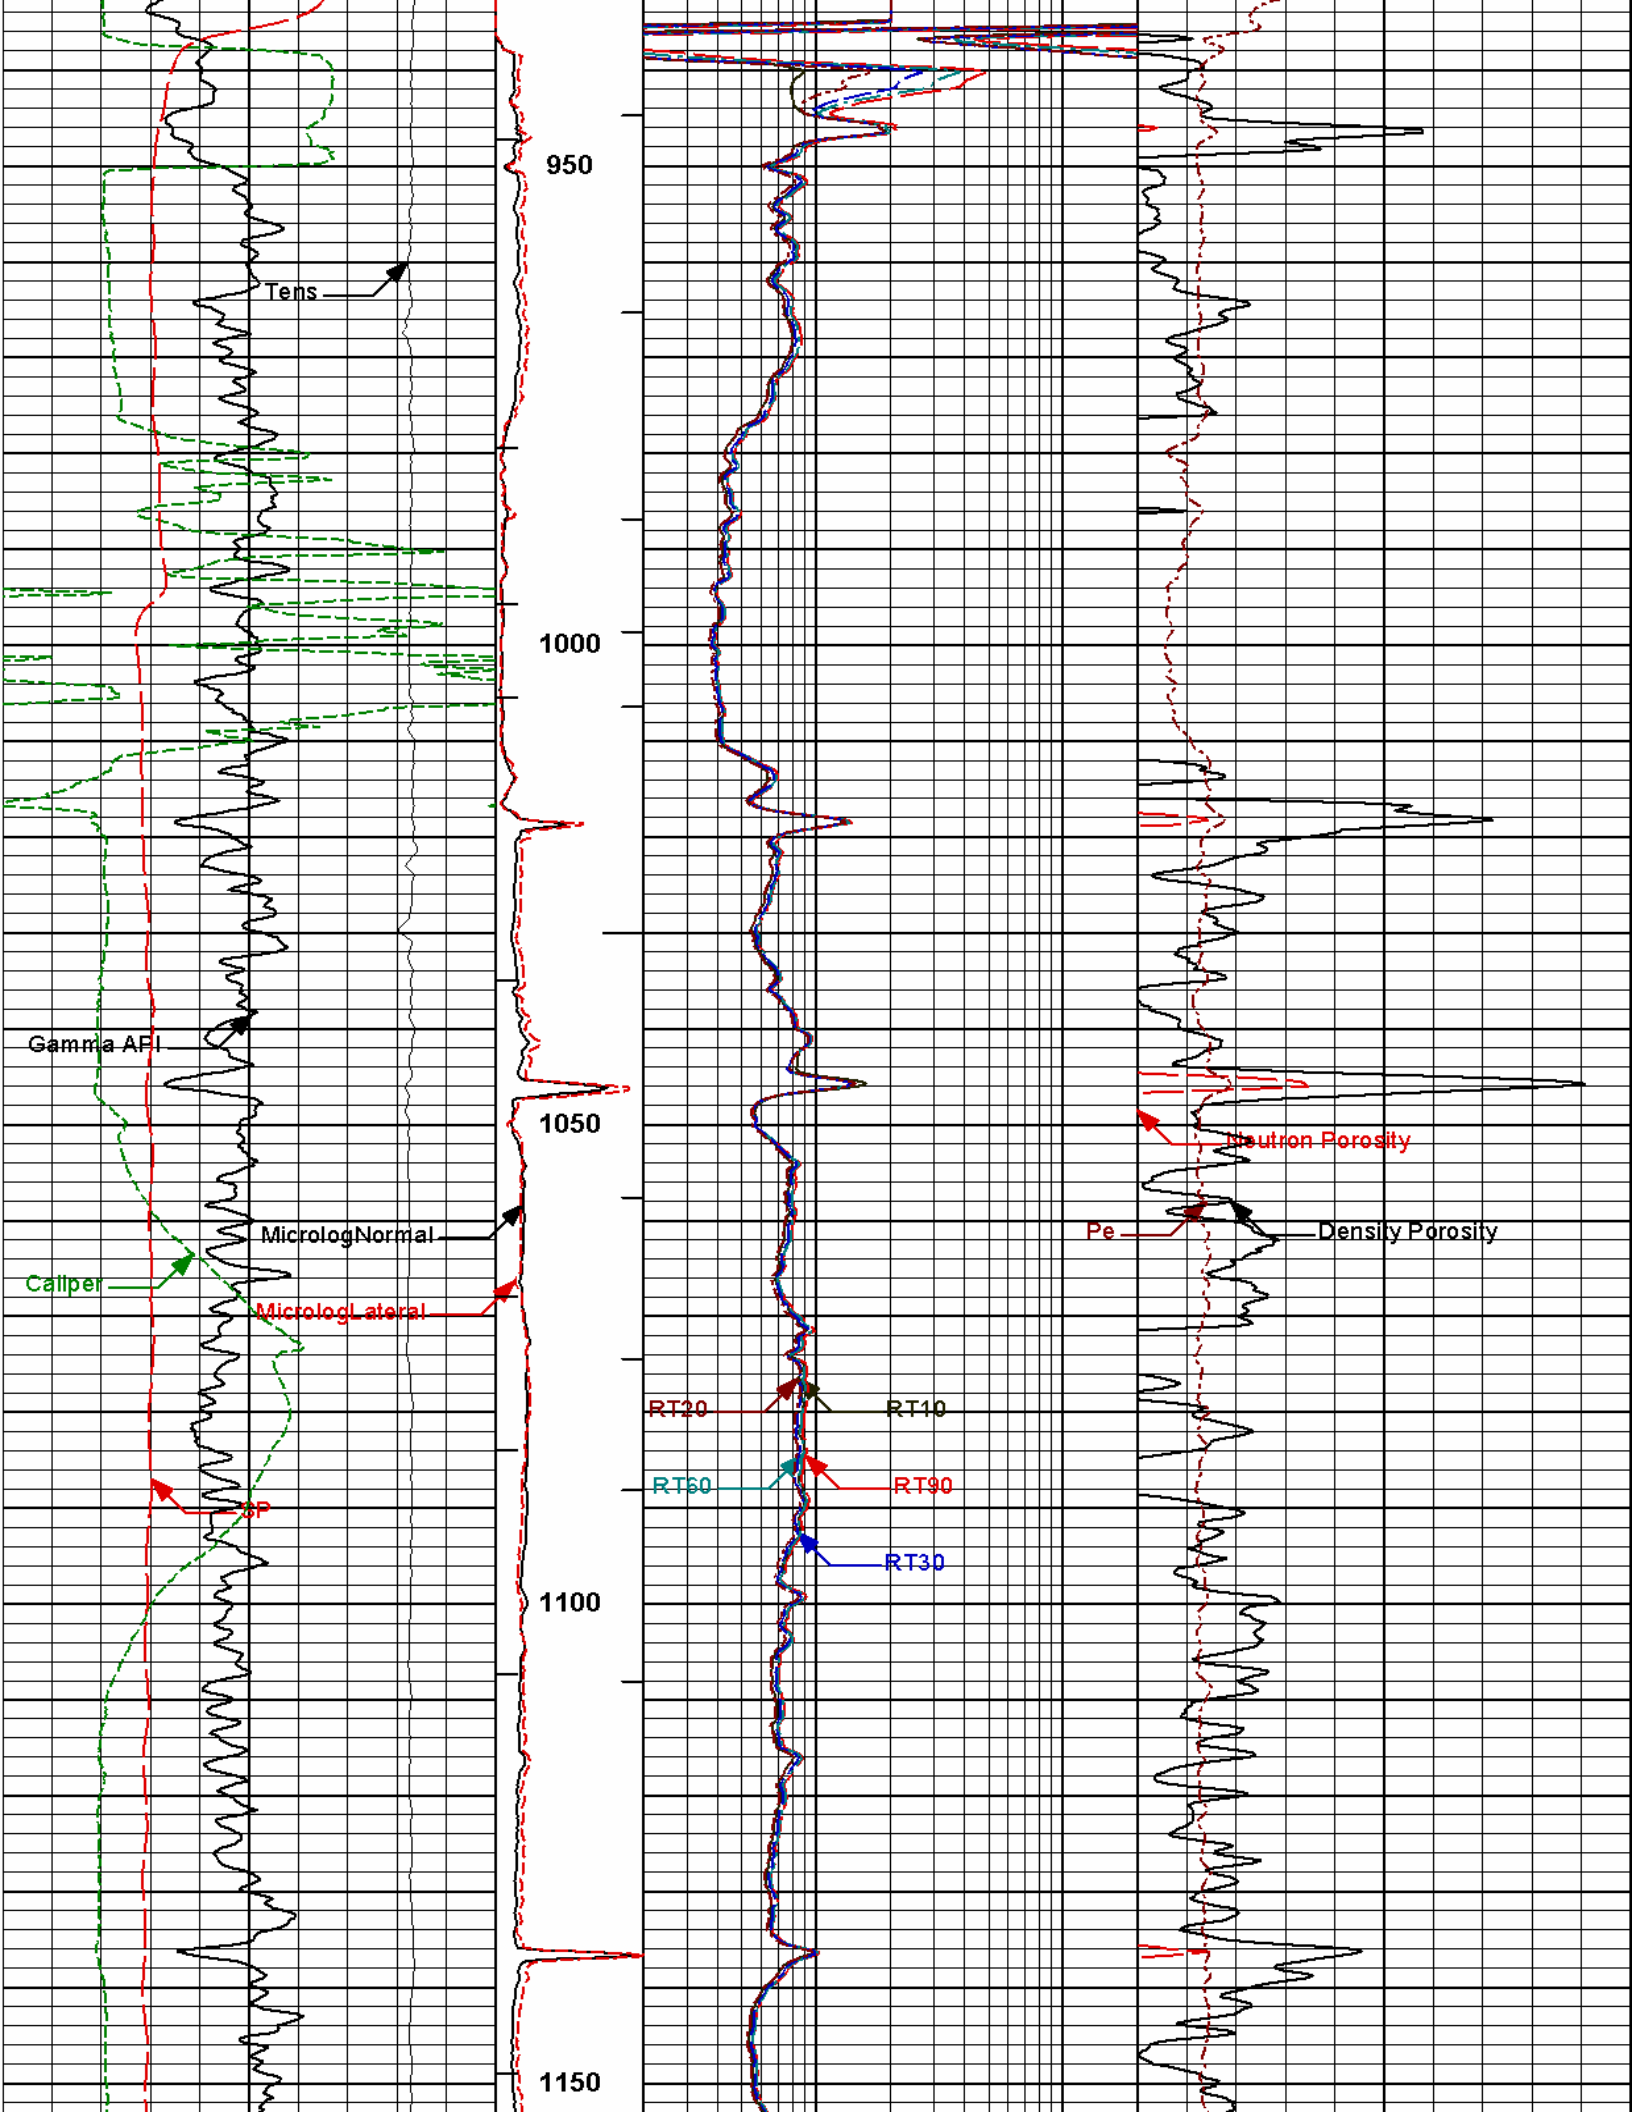


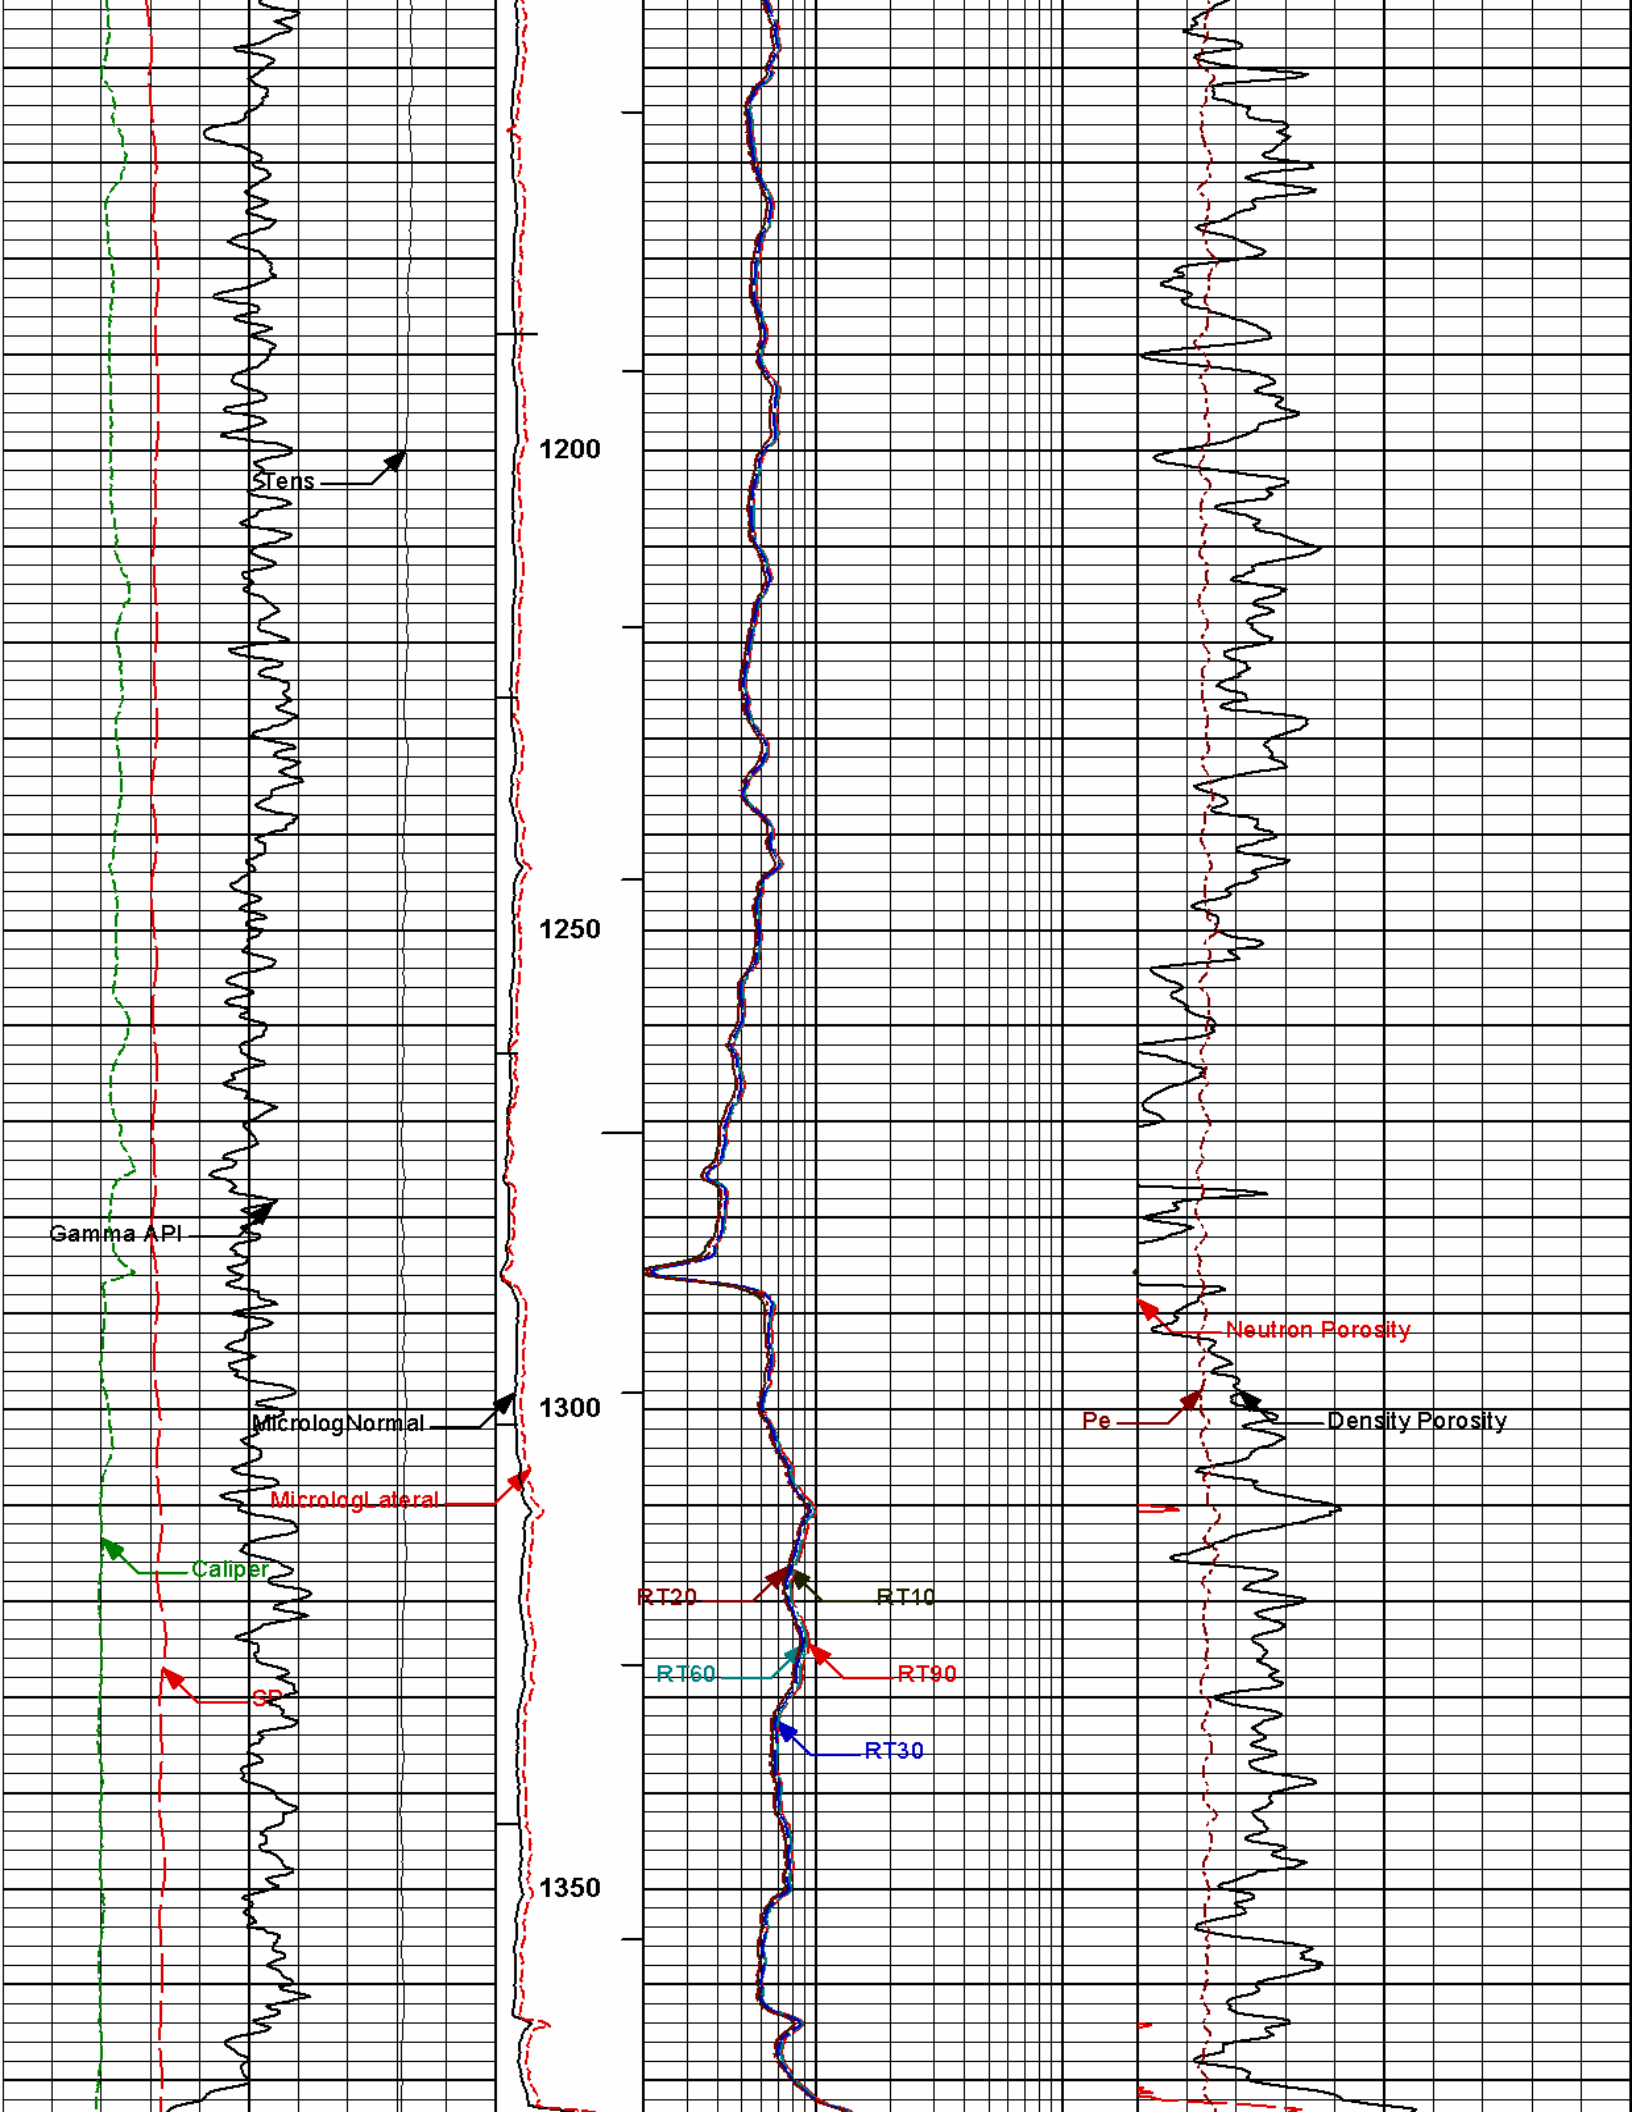

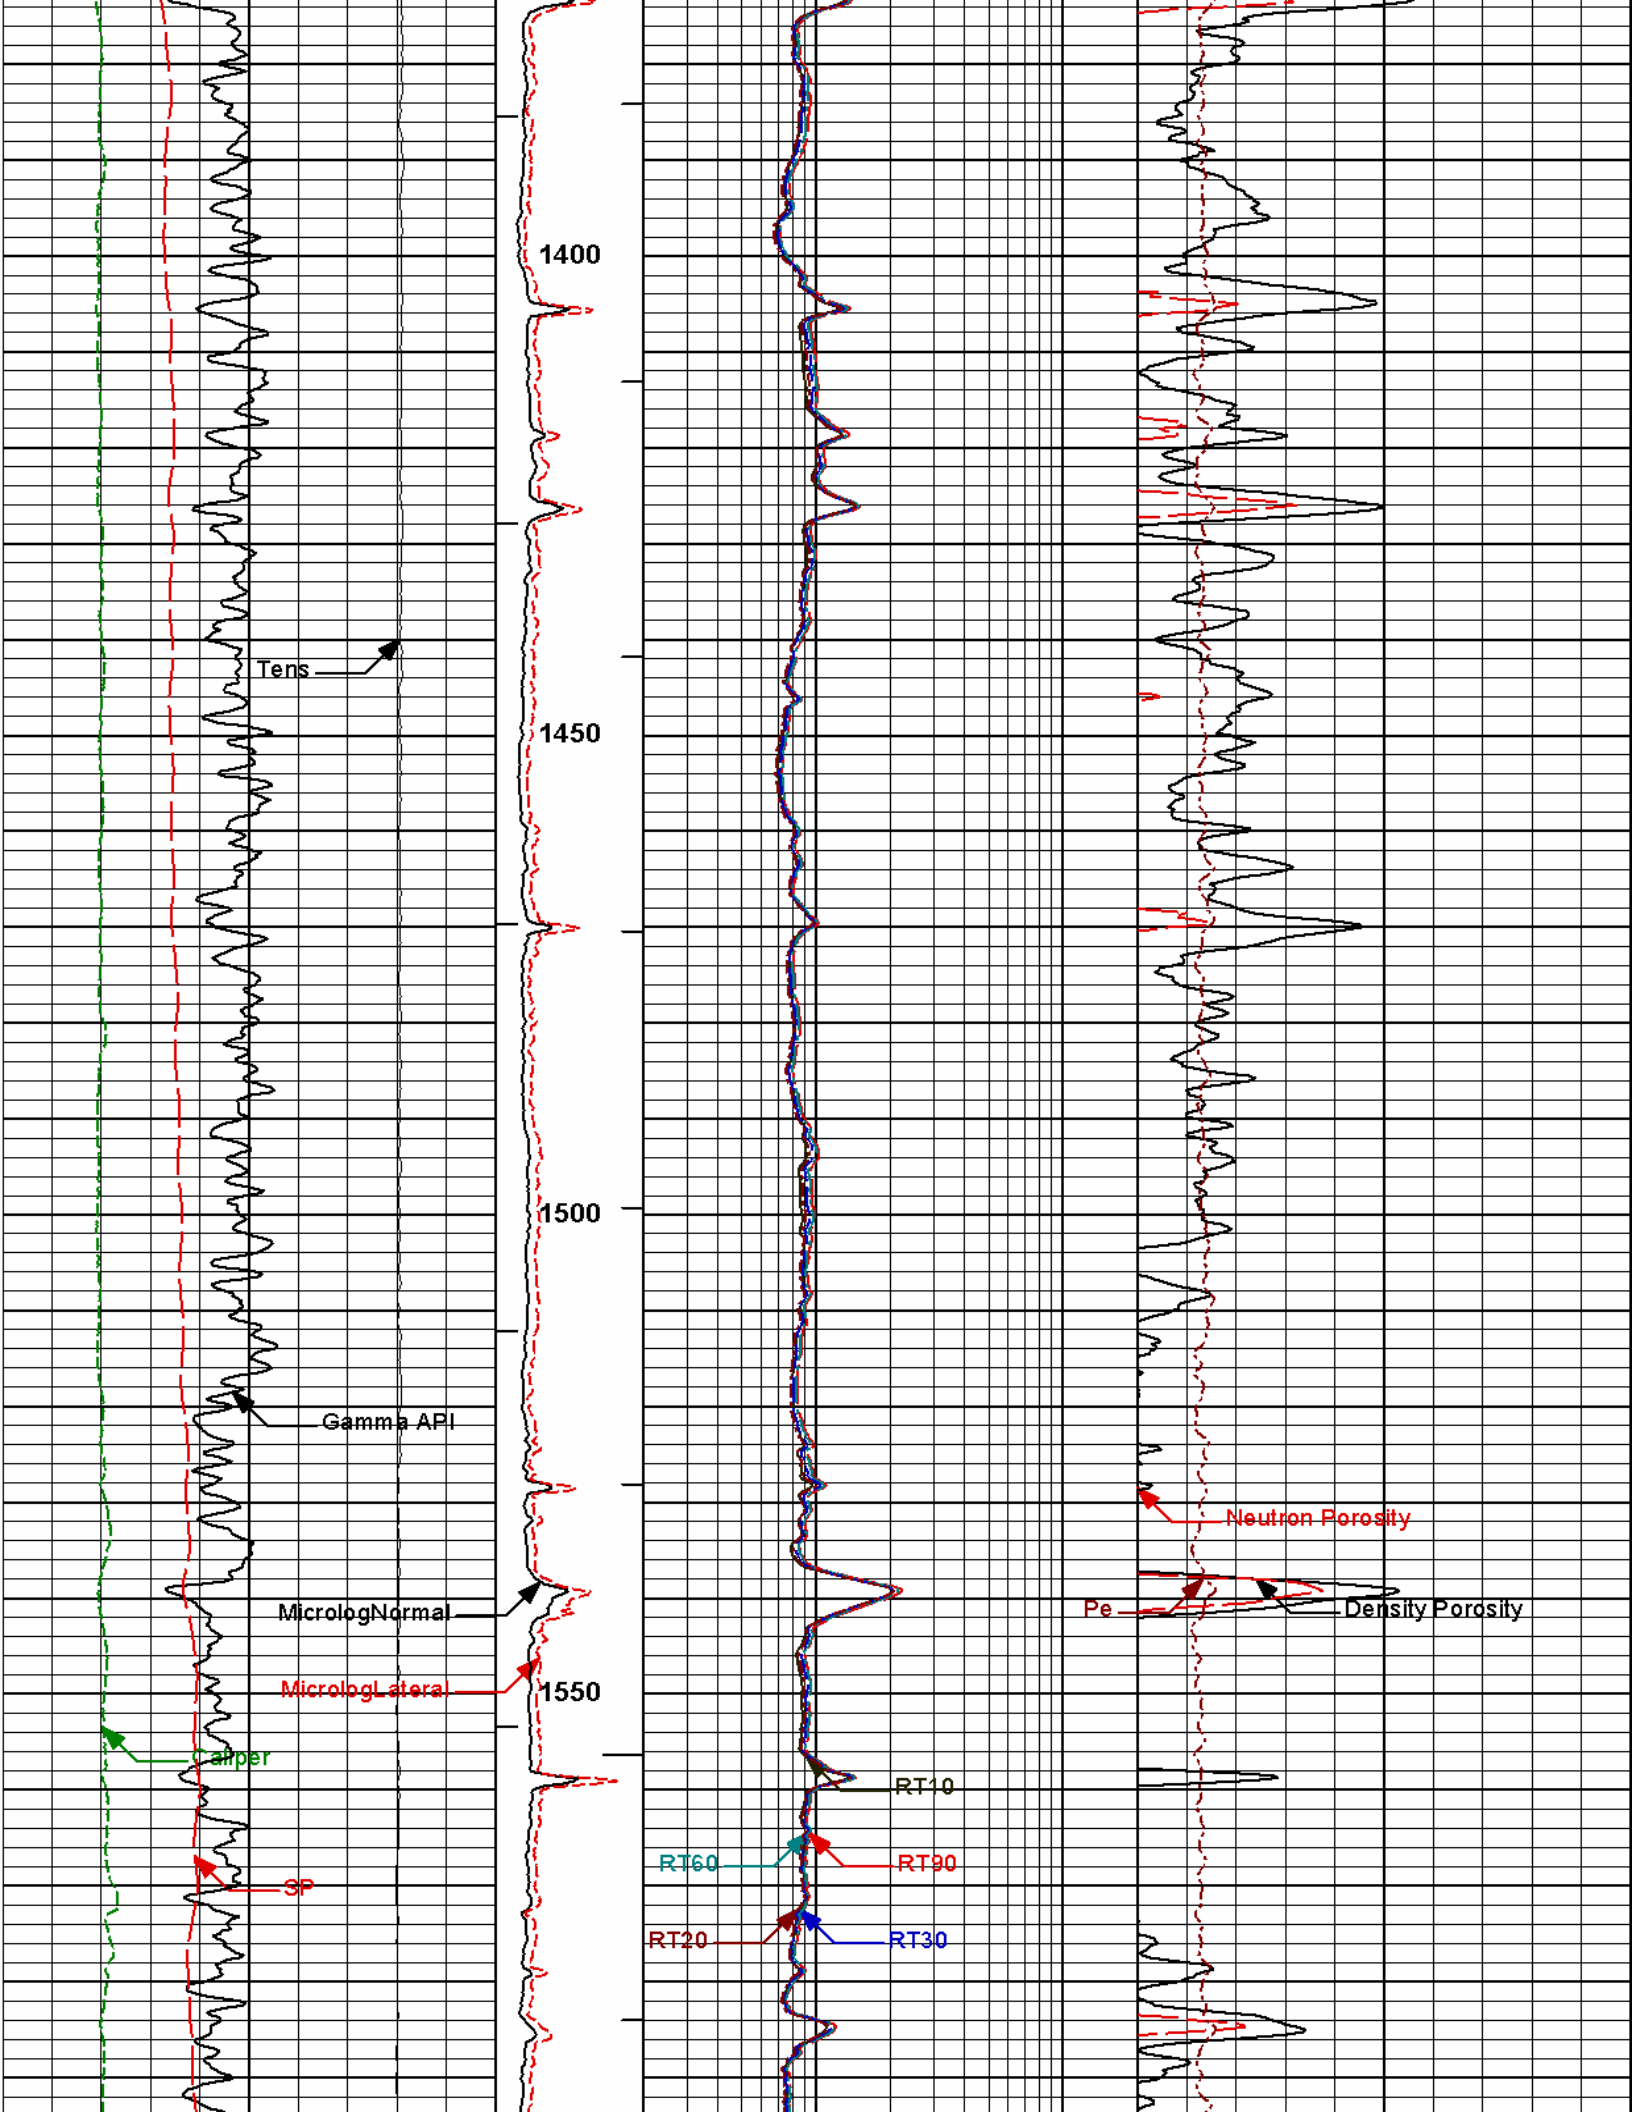

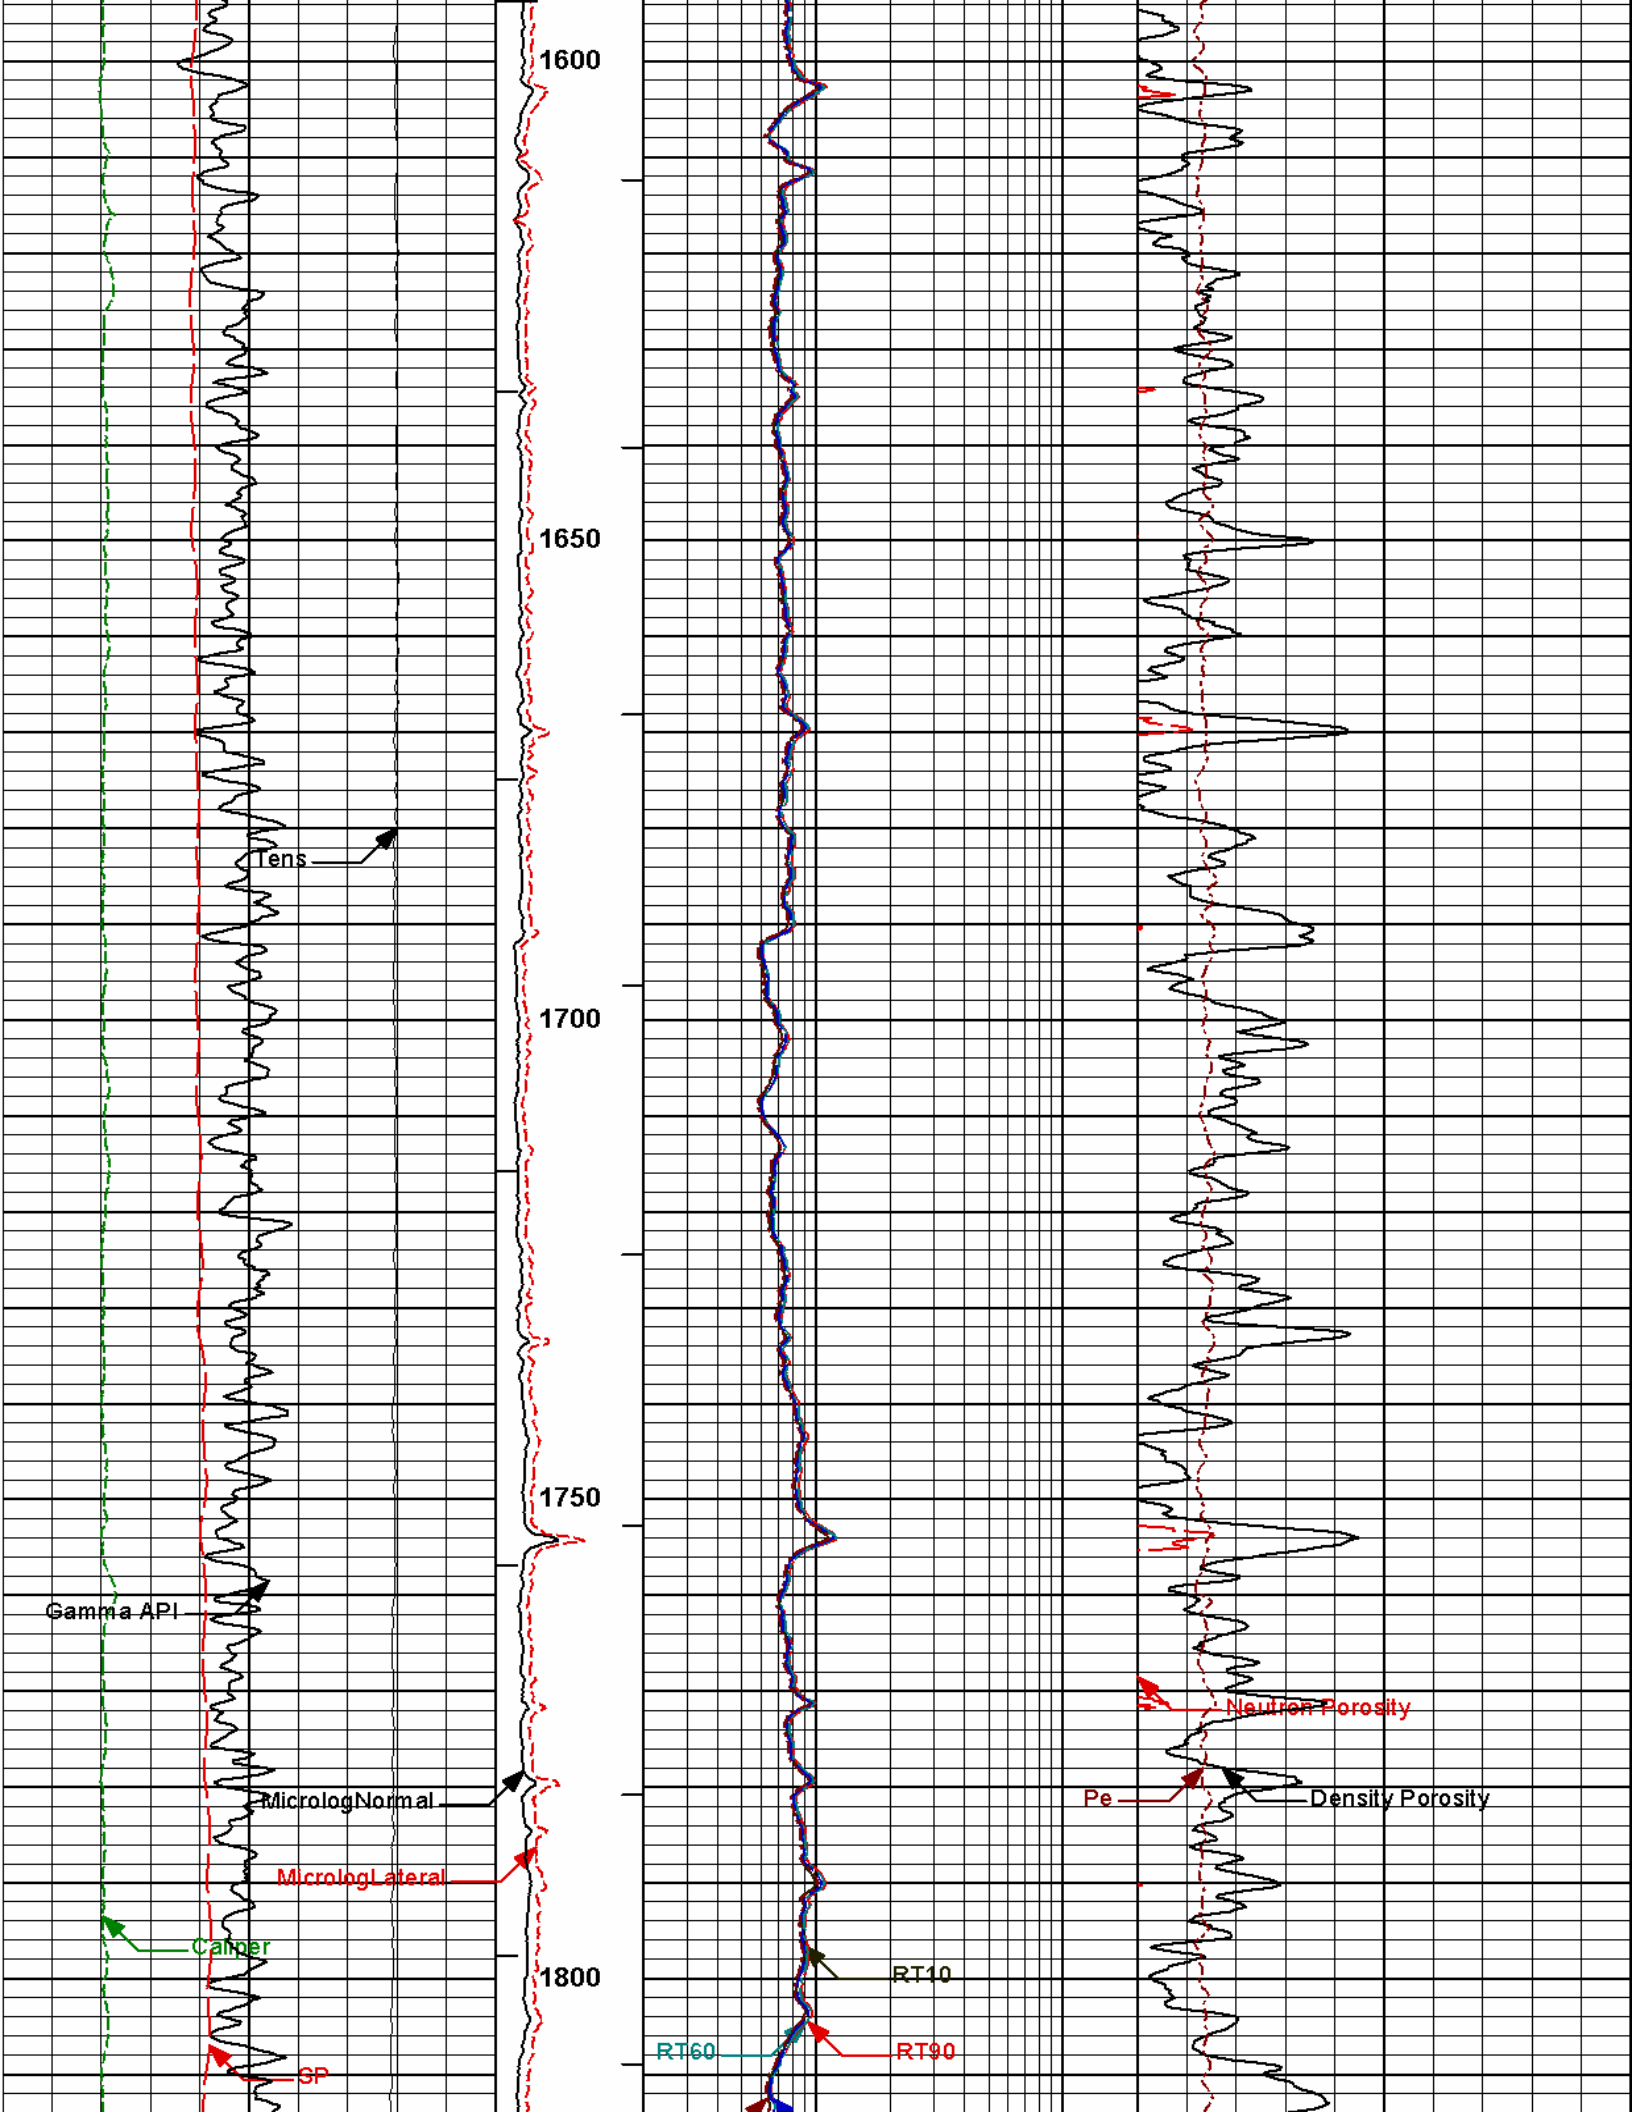

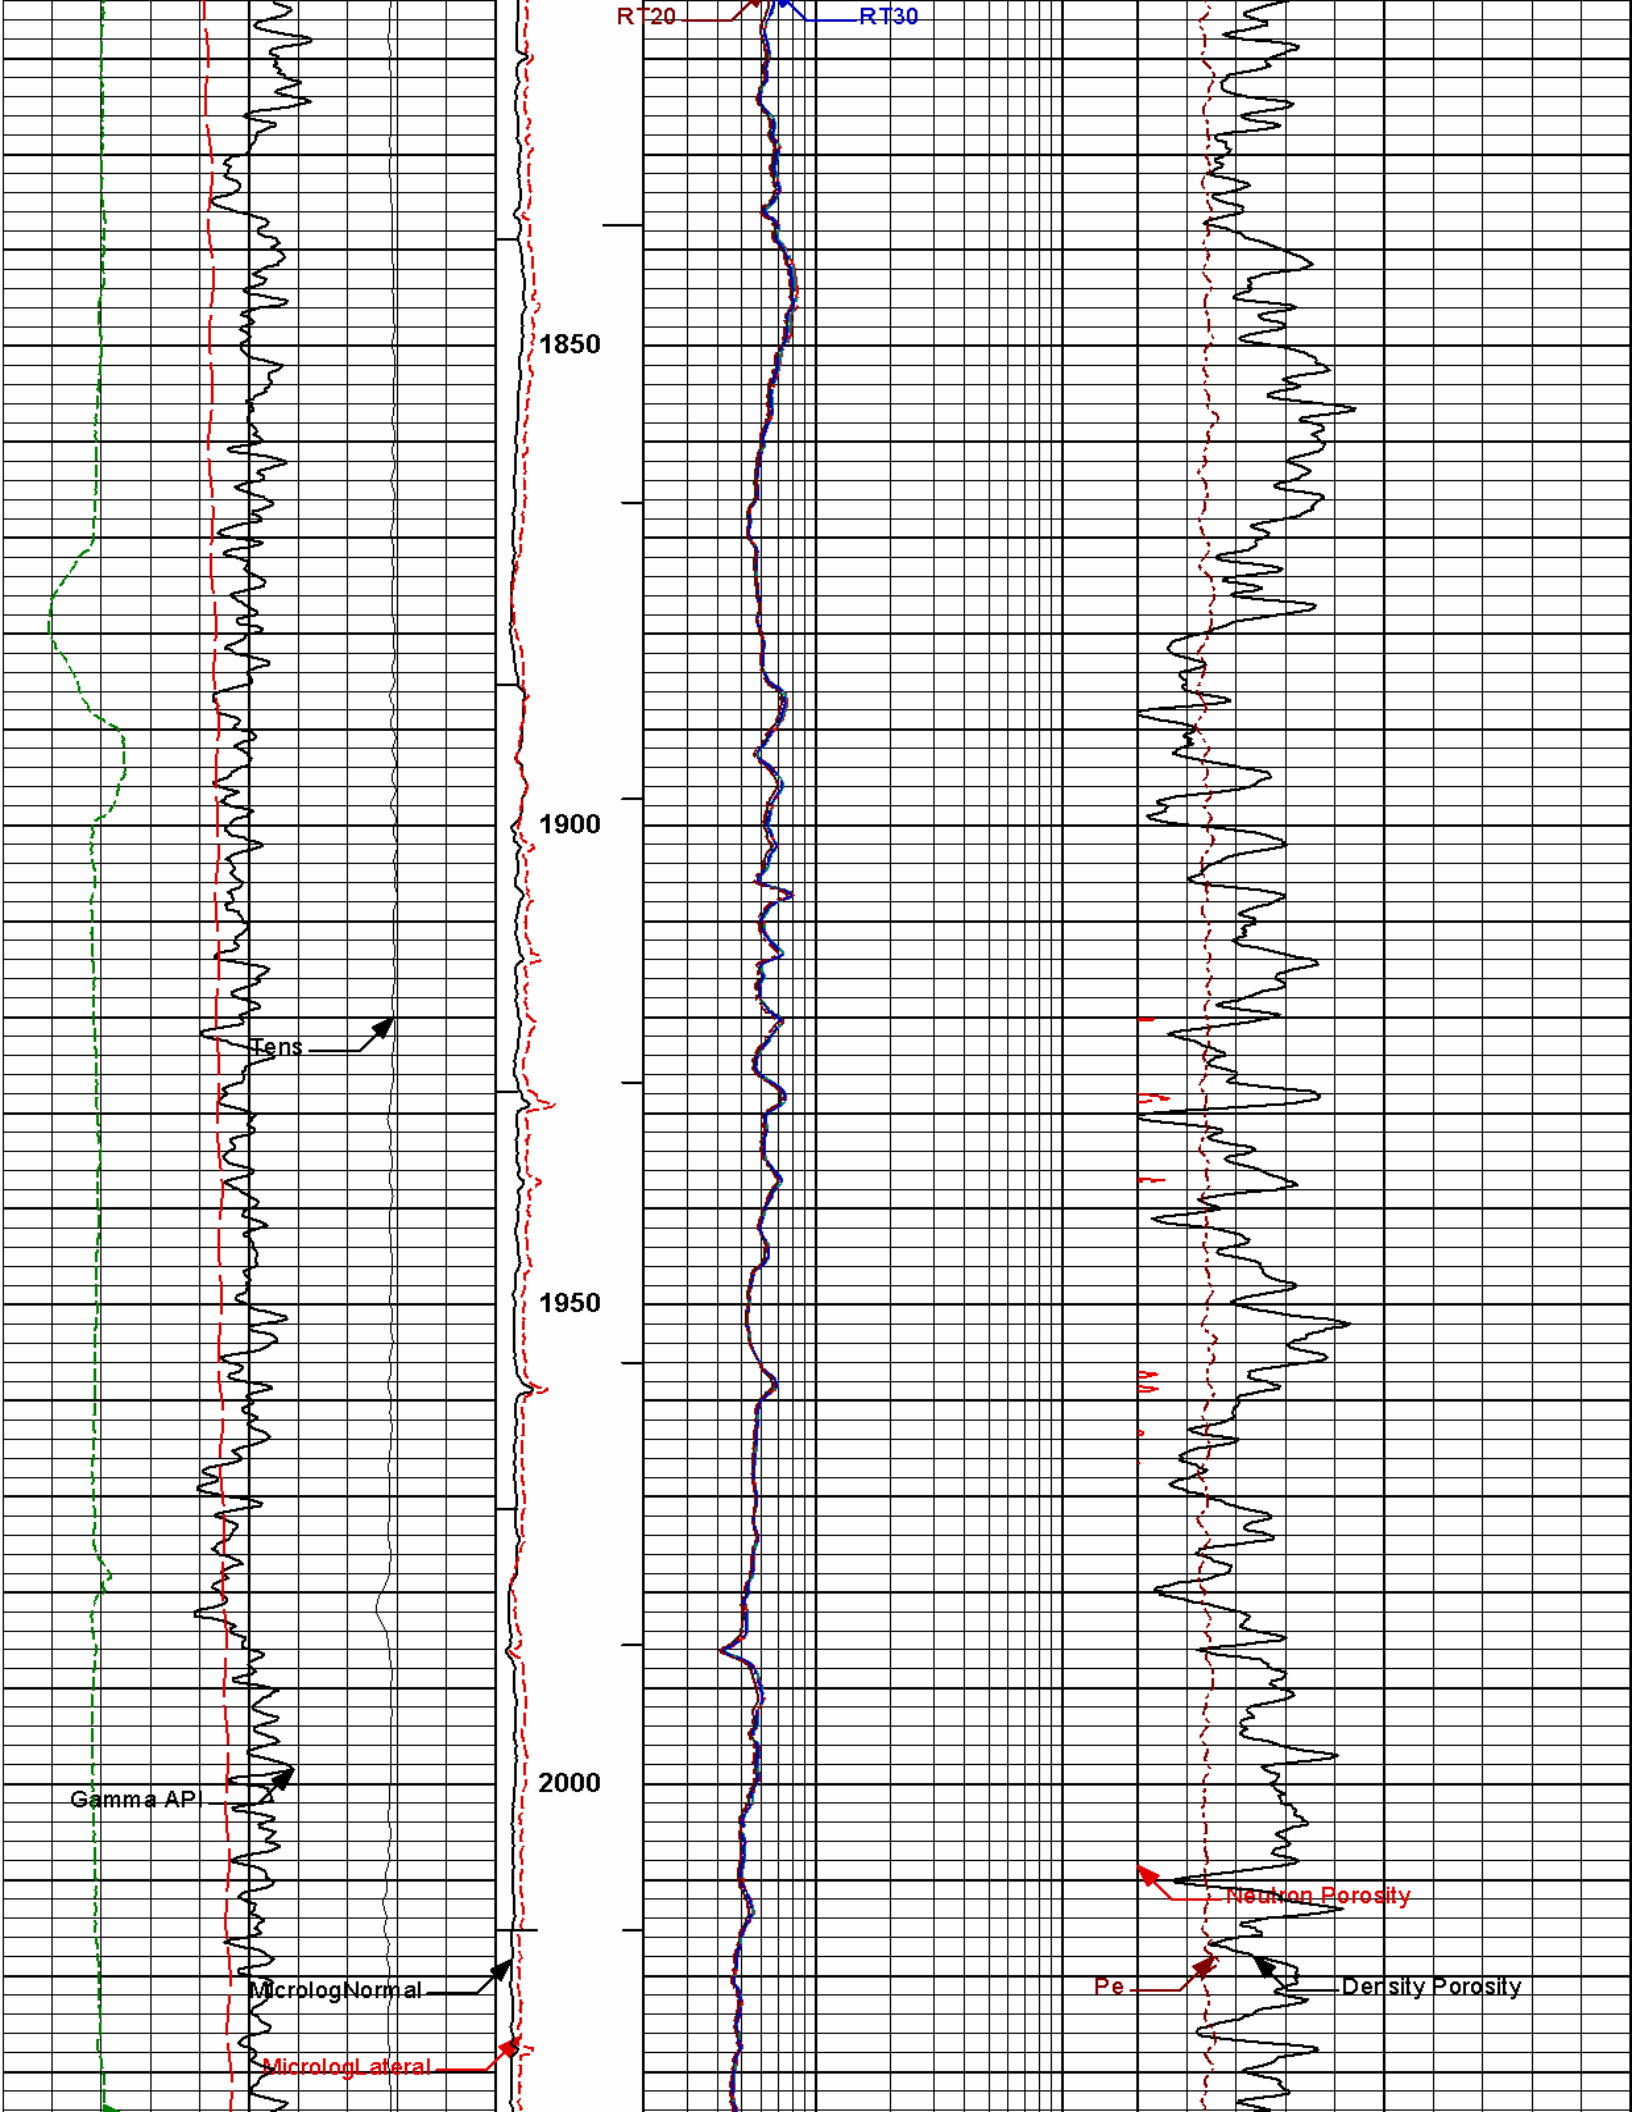

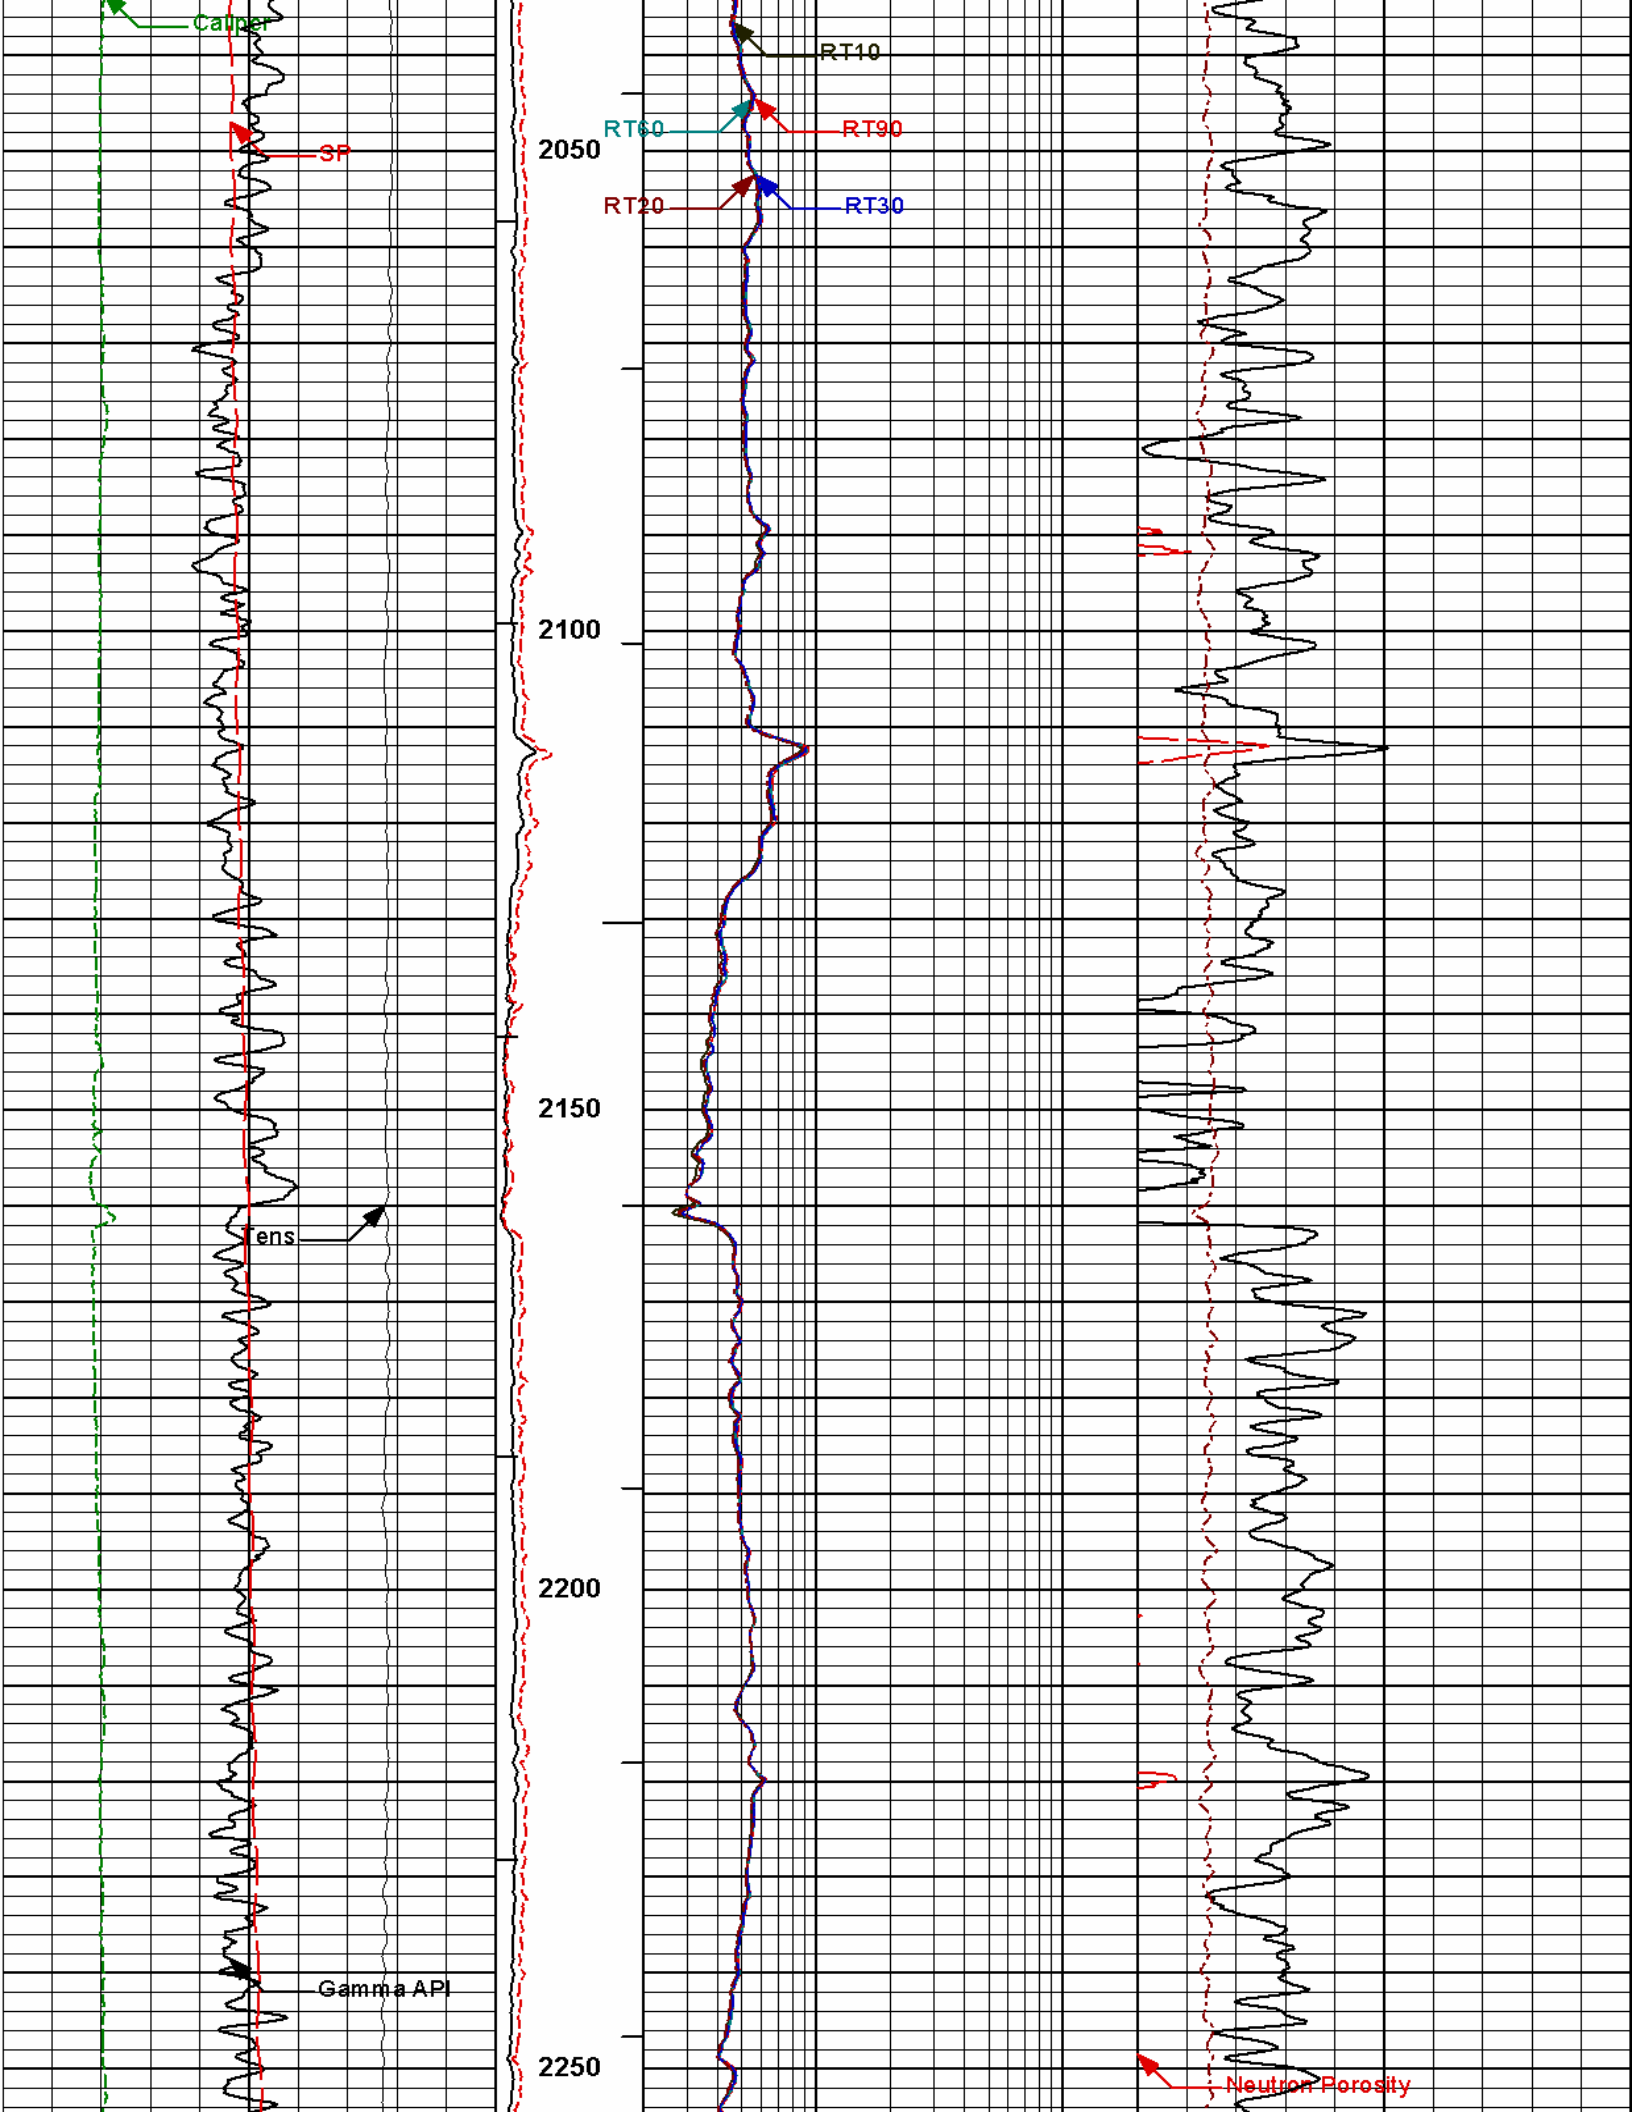

Gamma API

MicrologNormal

MicrologLateral

Caliper

SP

Tens

2500

2550

2600

2650

RT10

RT60

RT20


RT90


RT30


Neutron Porosity


Pe


Density Porosity

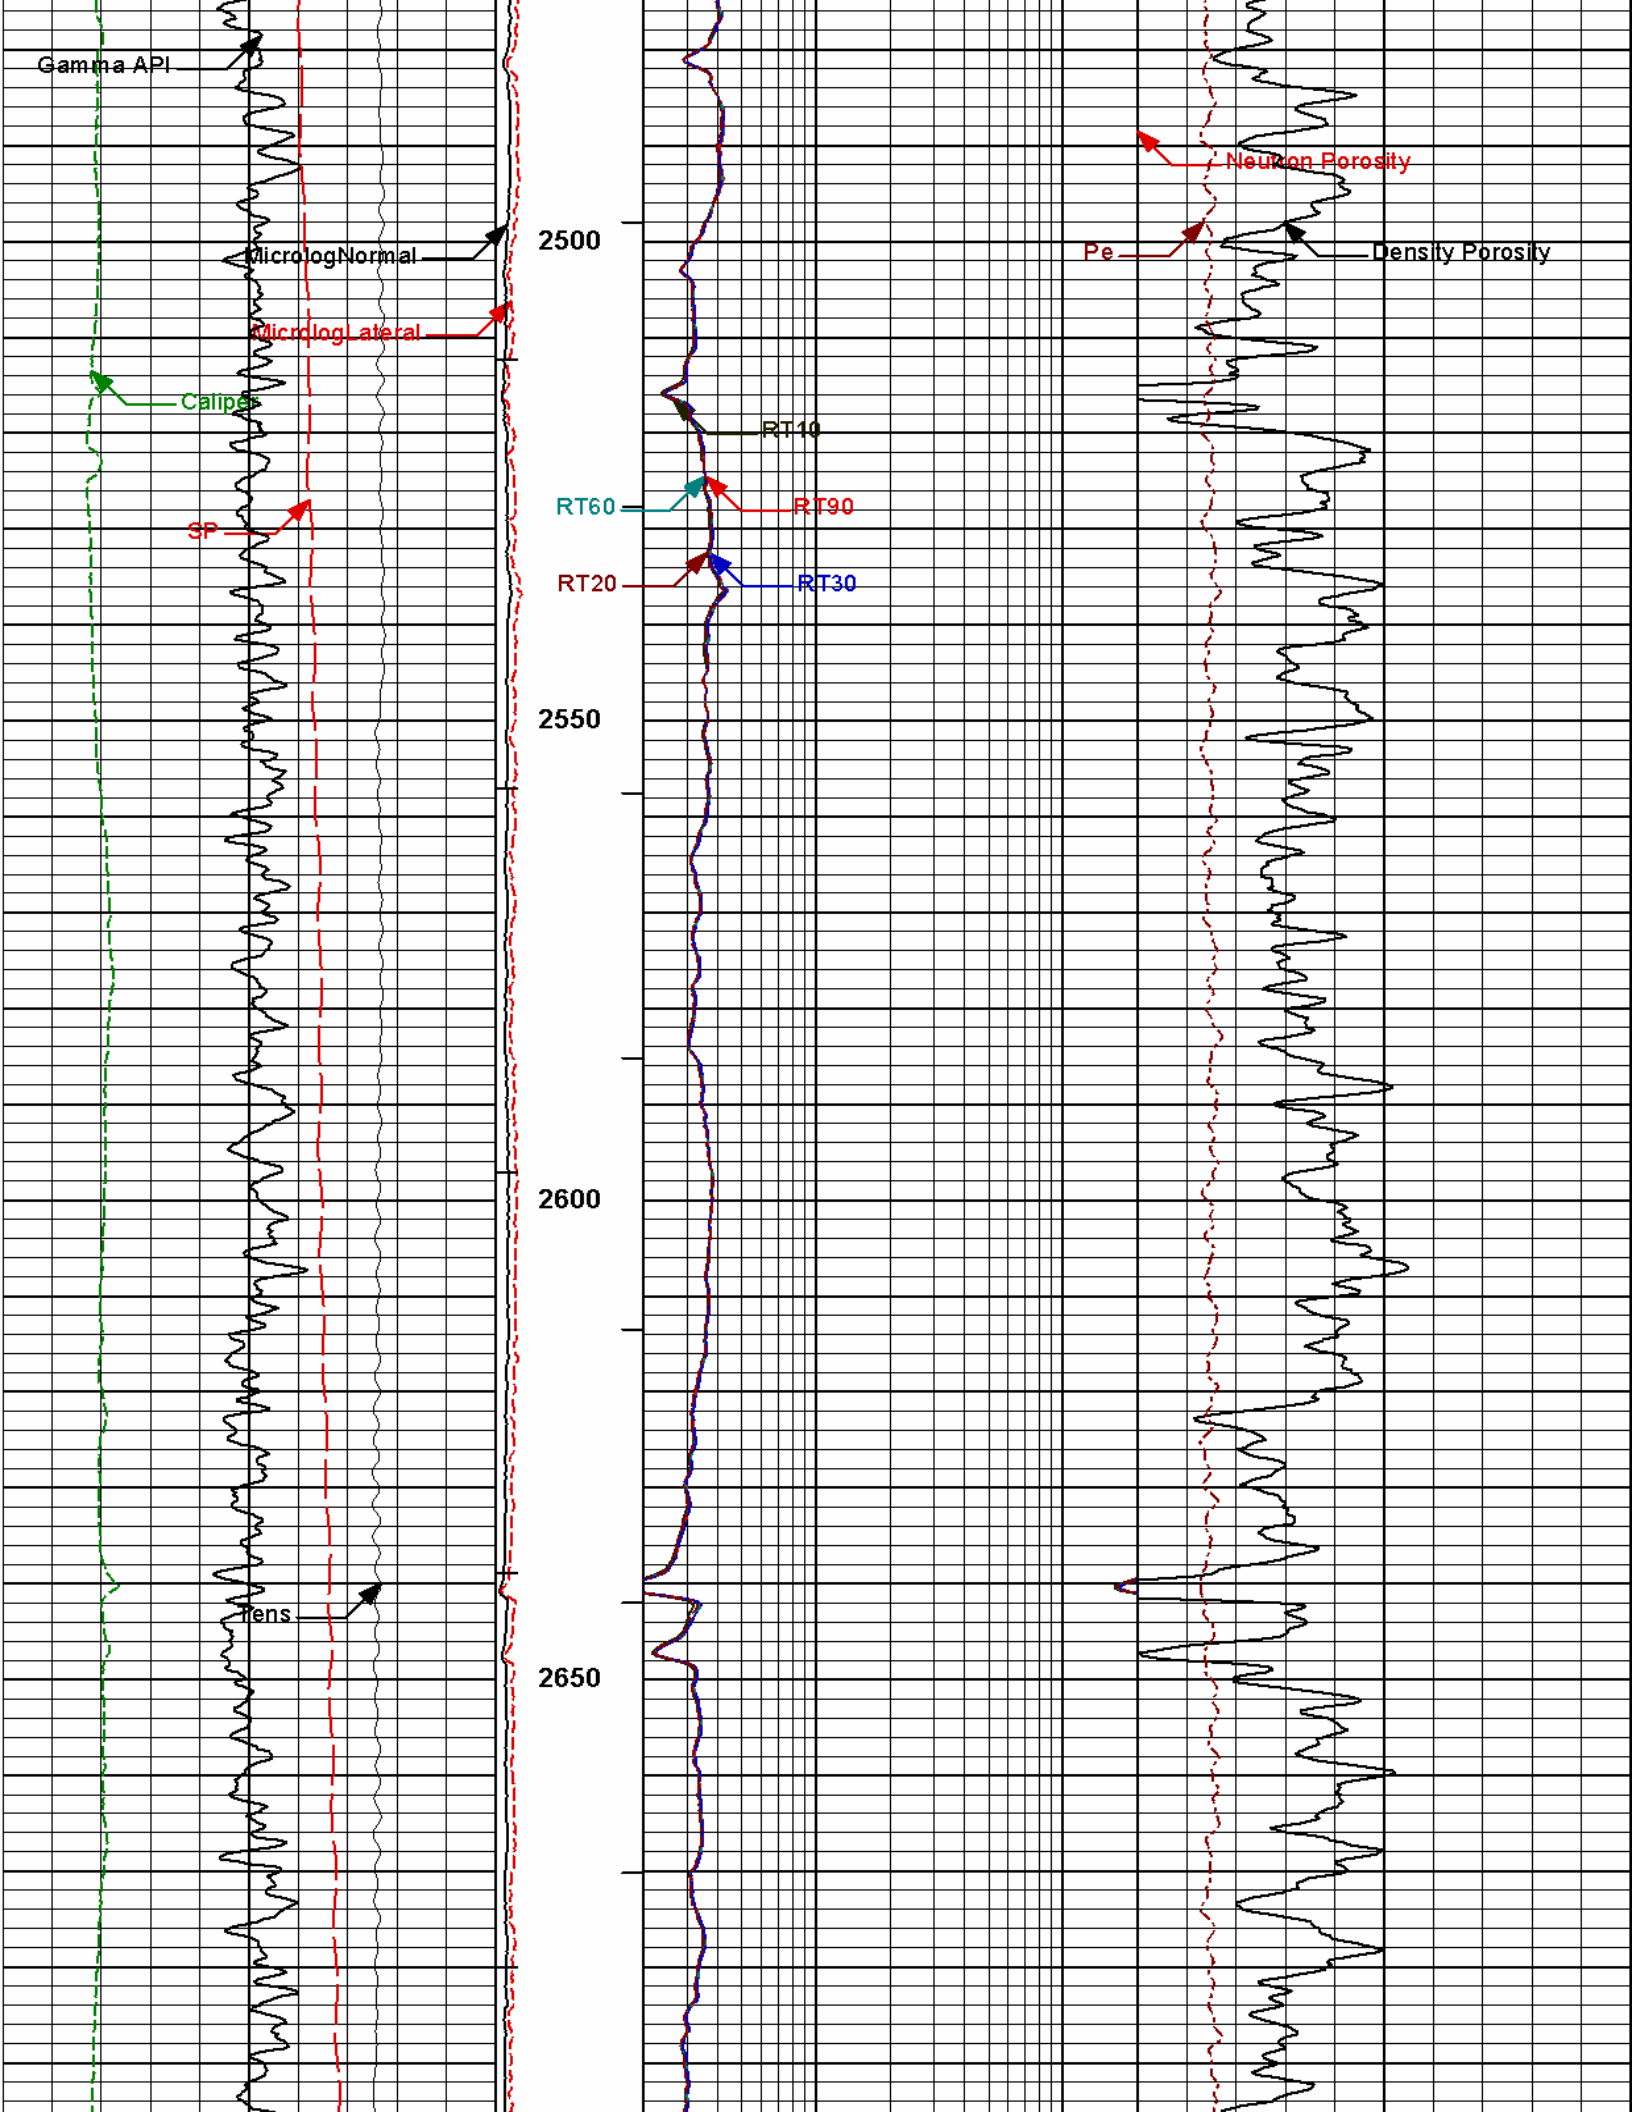


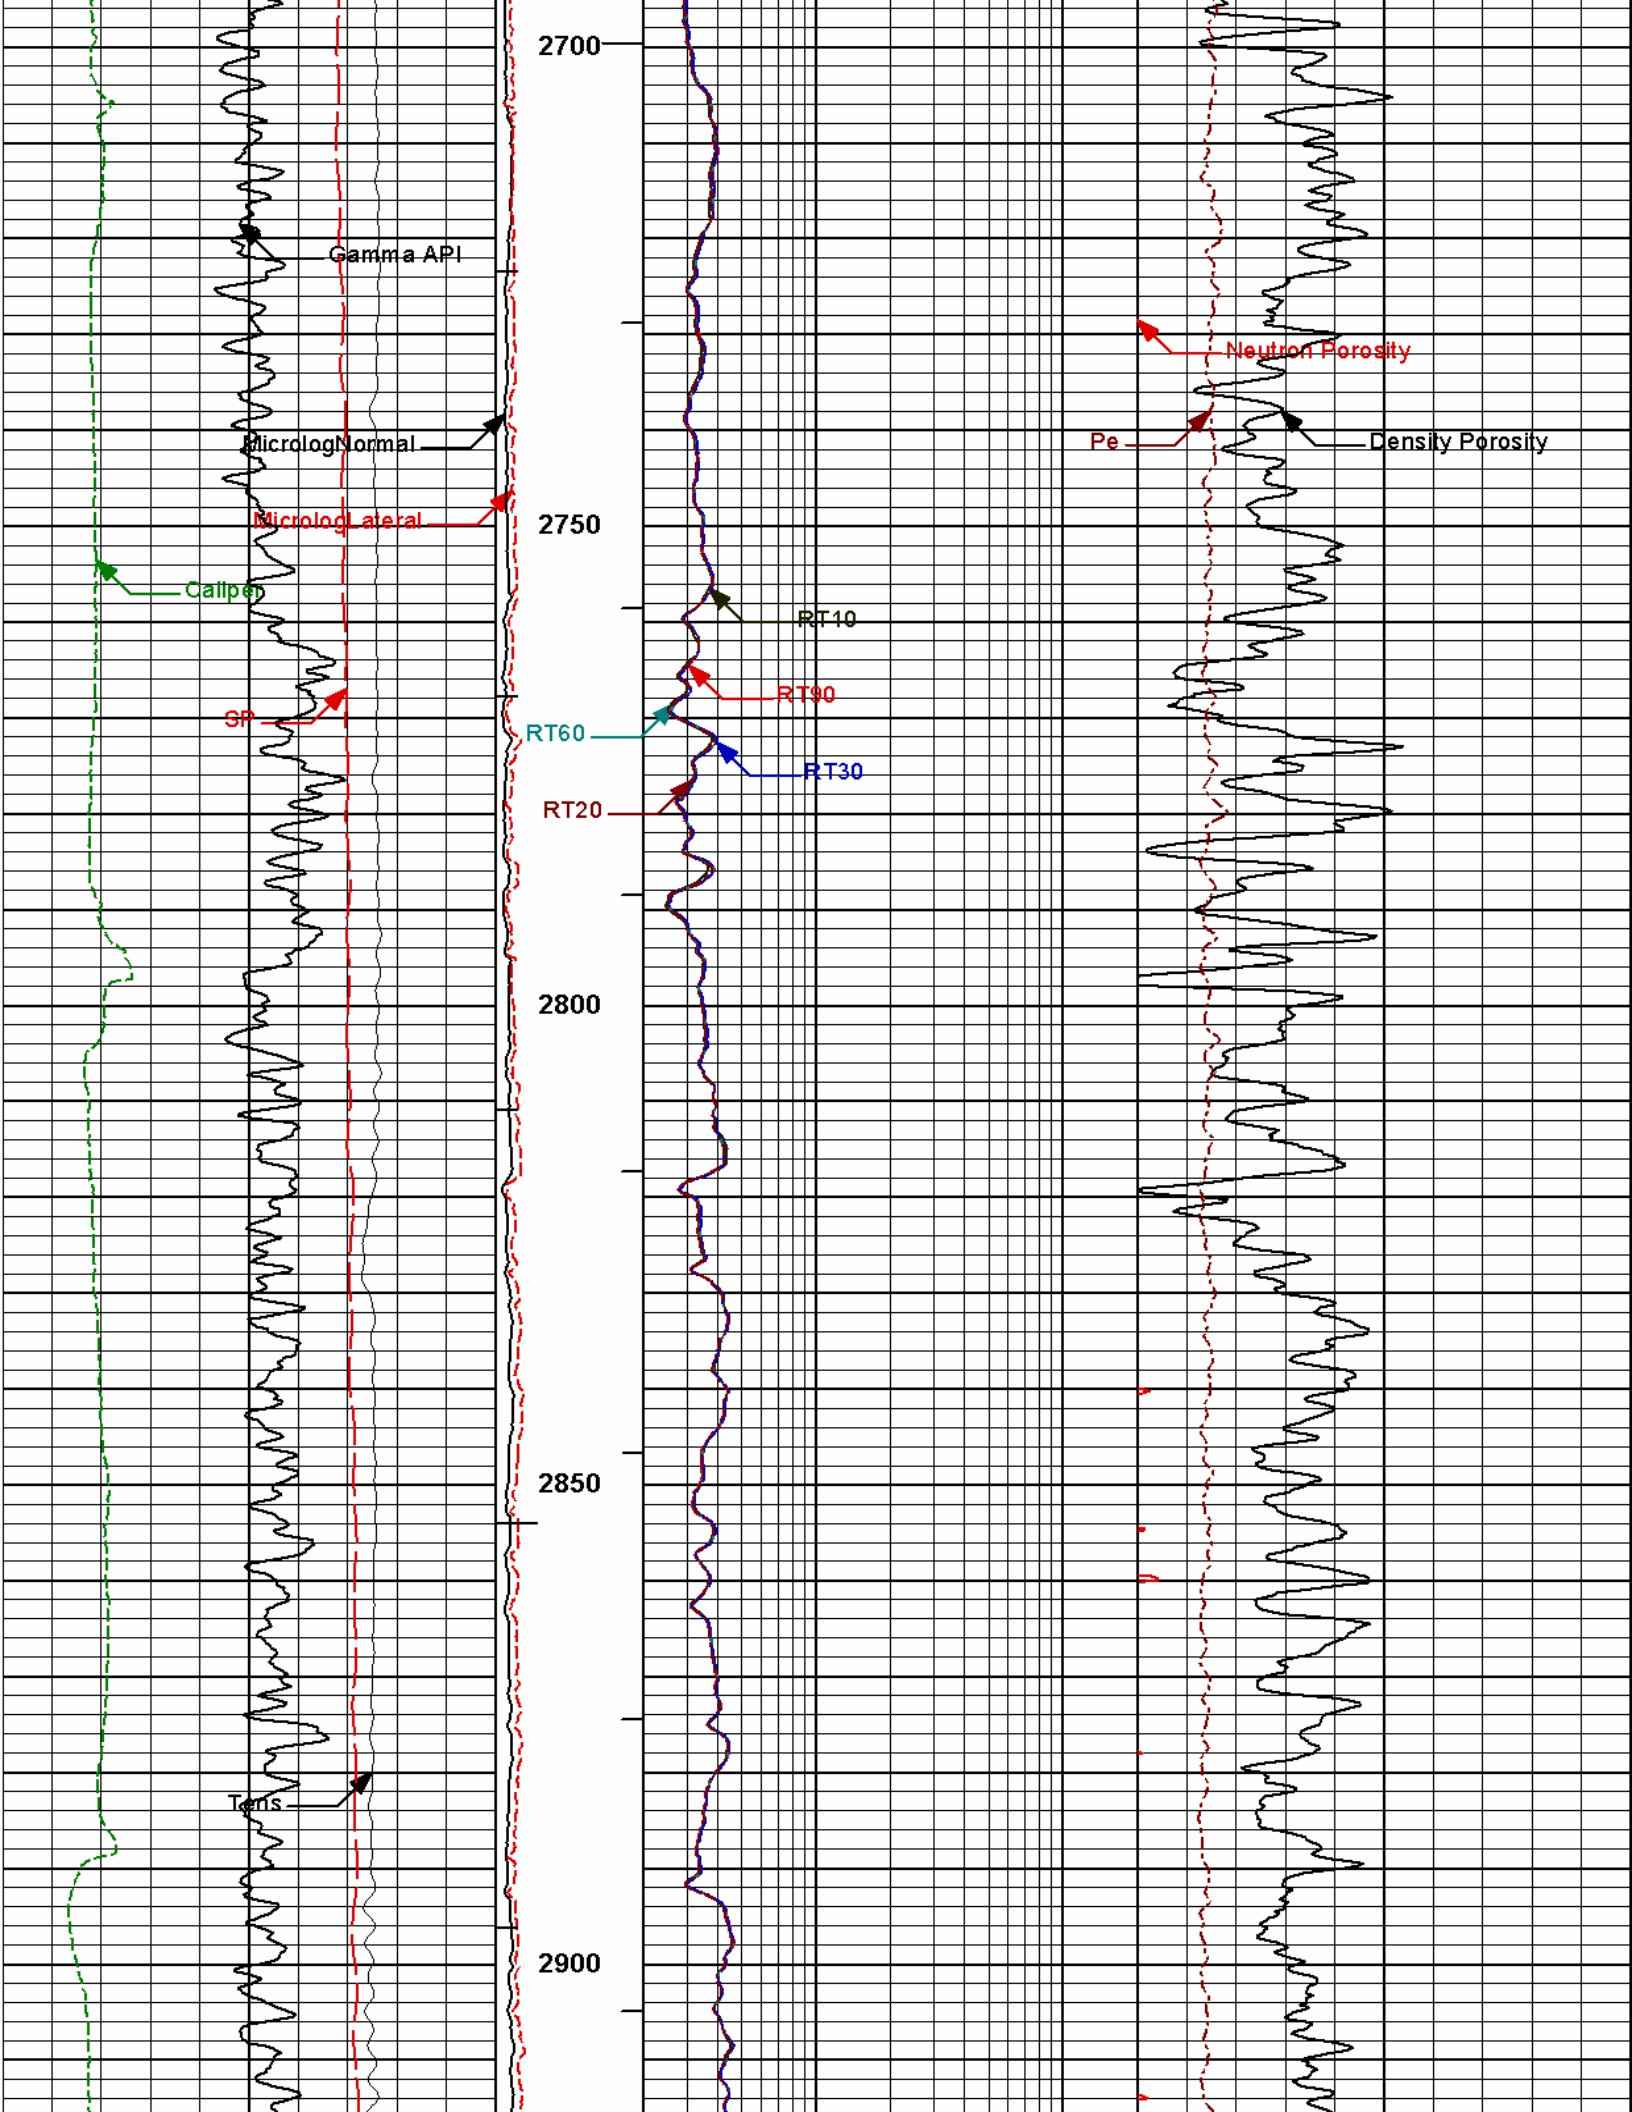


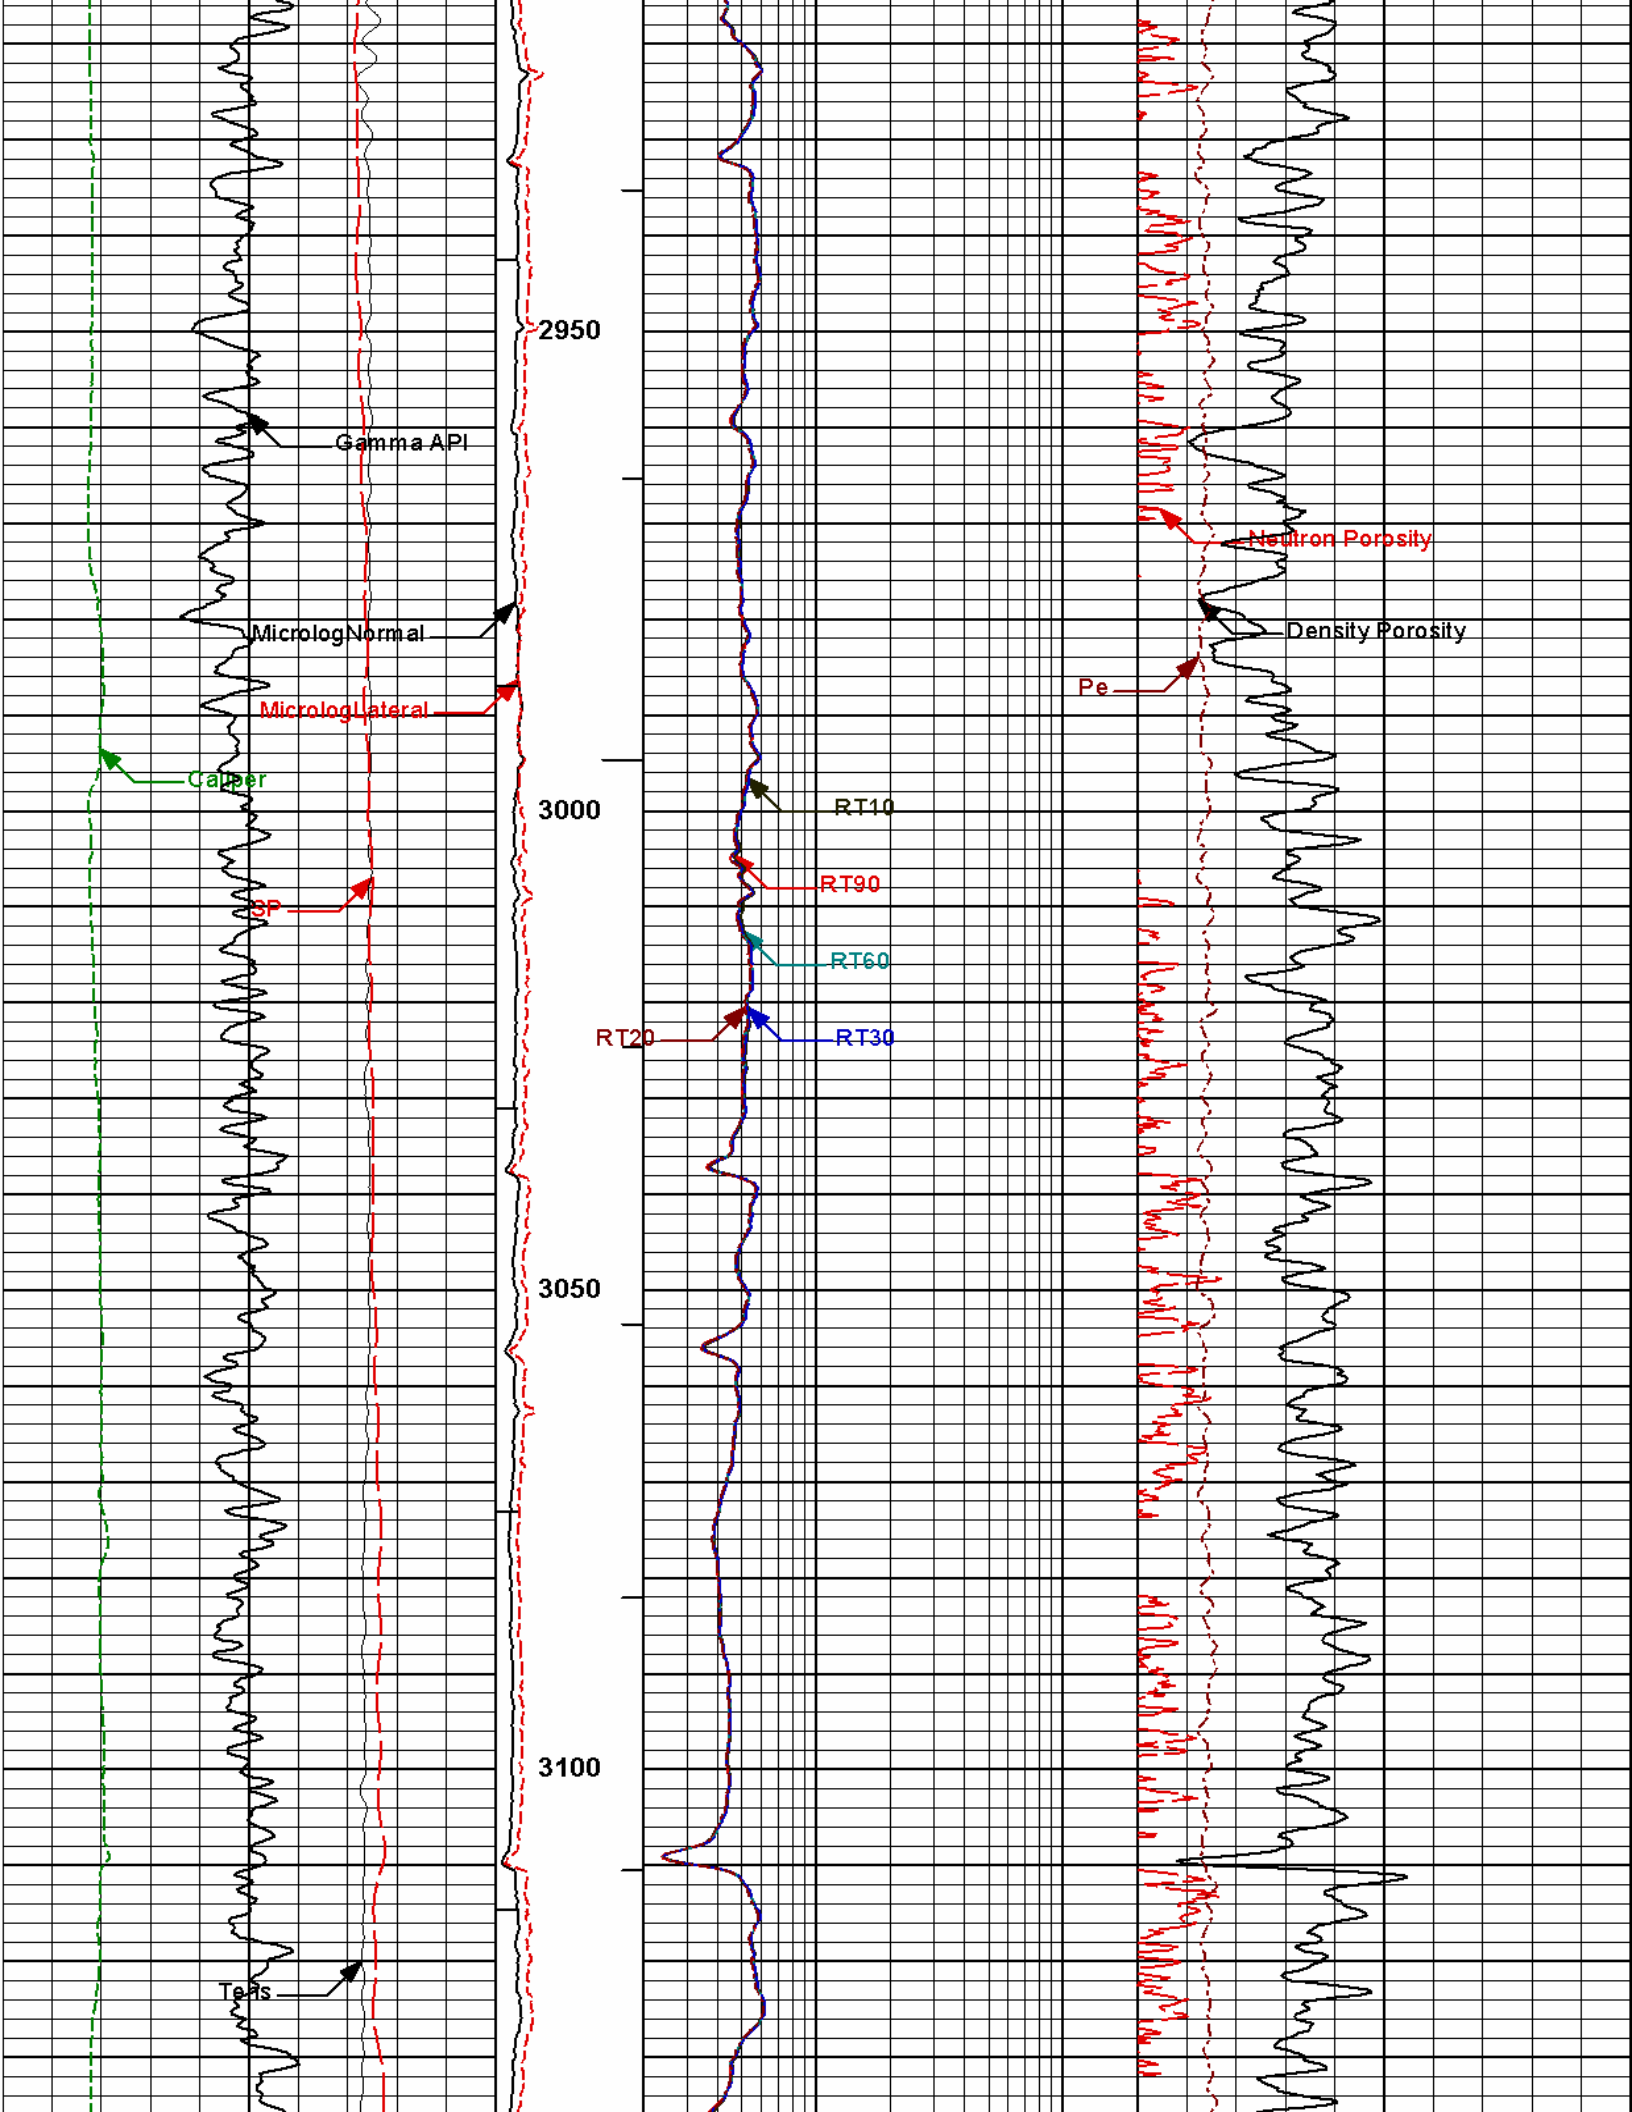


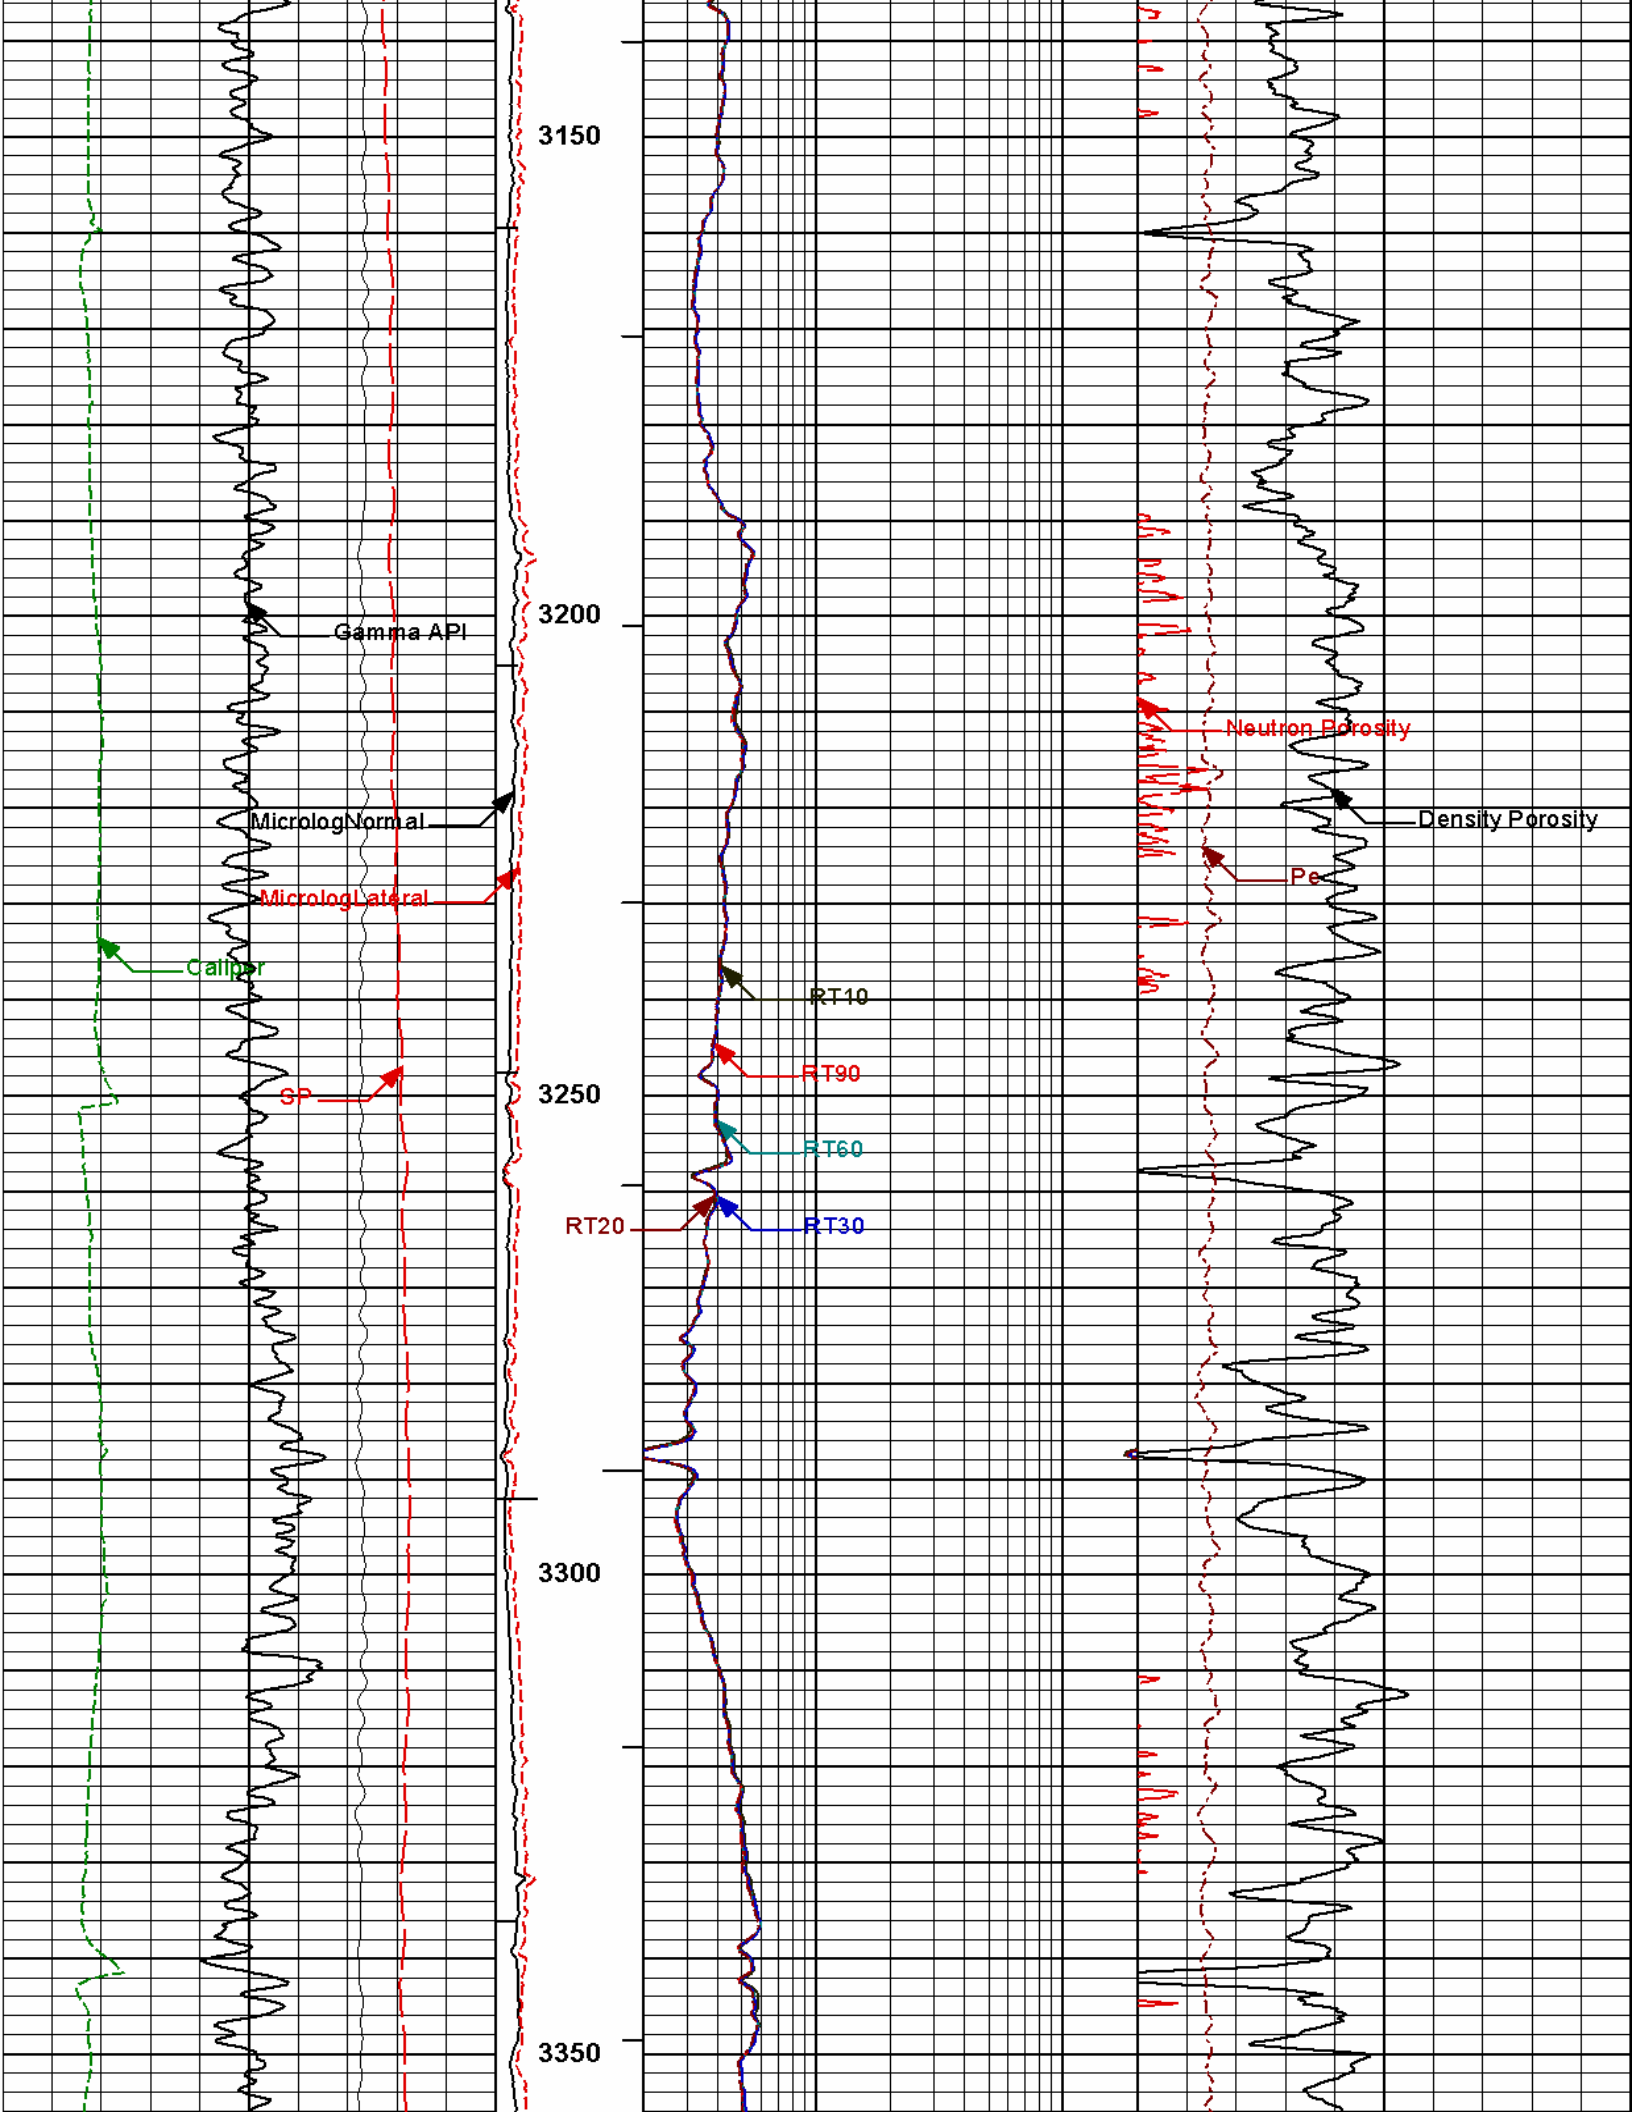


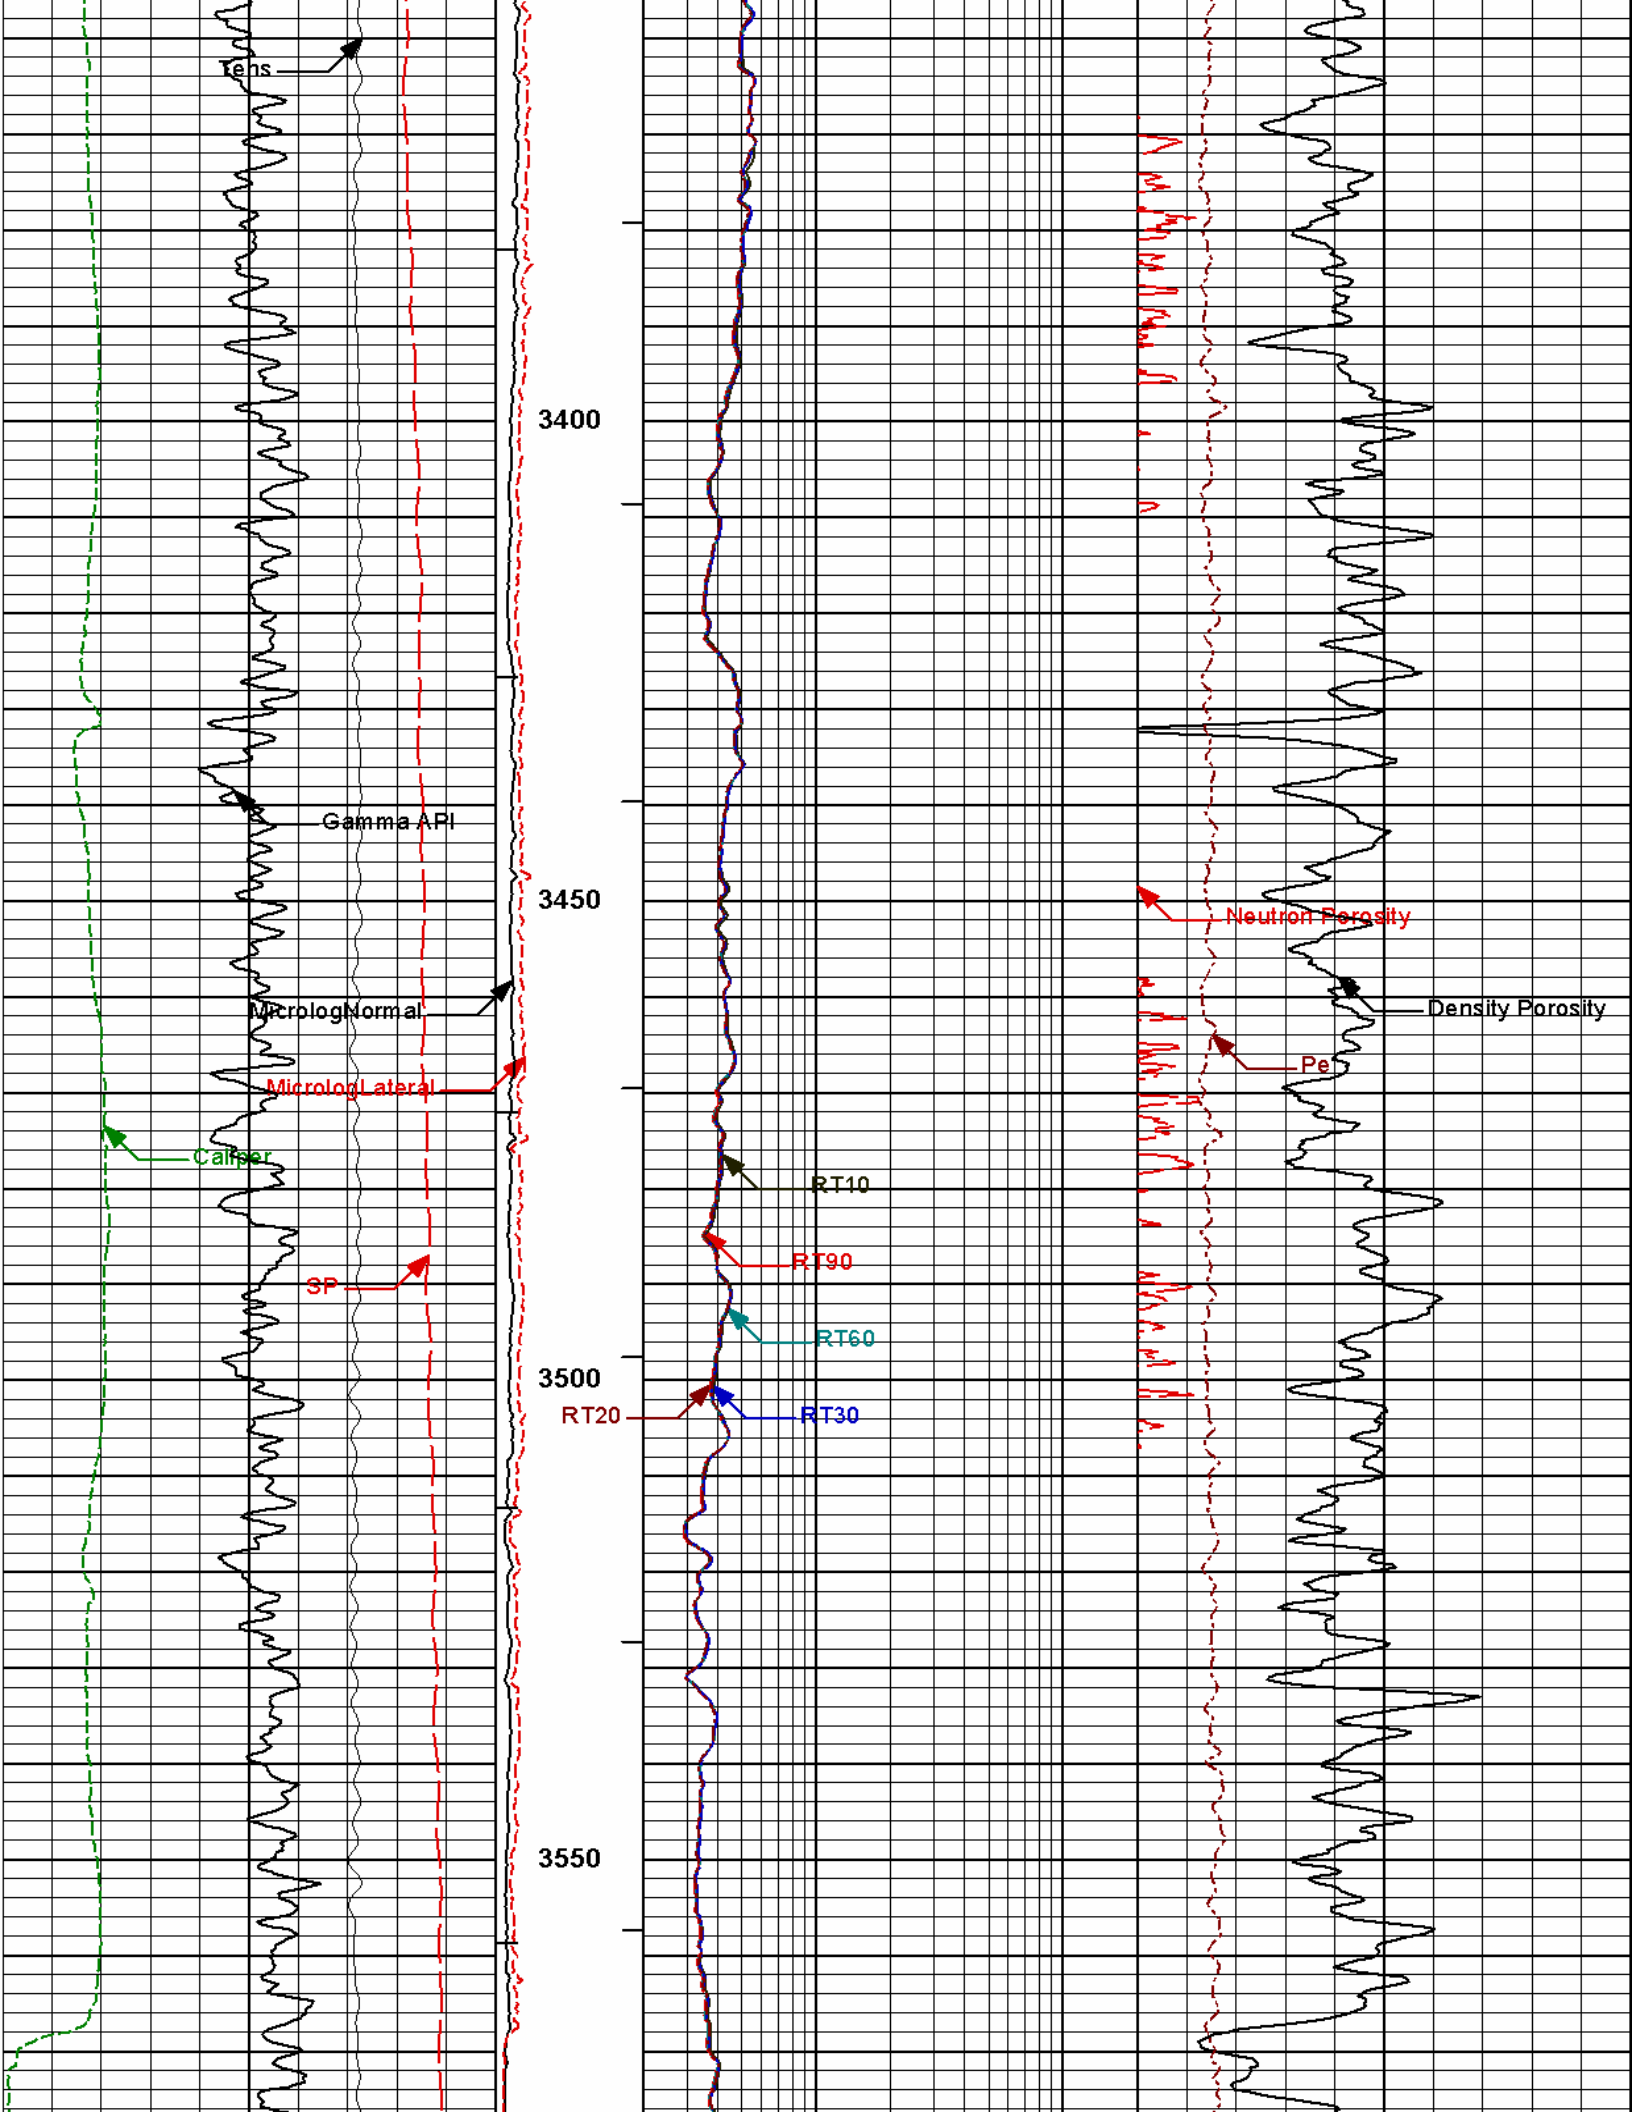


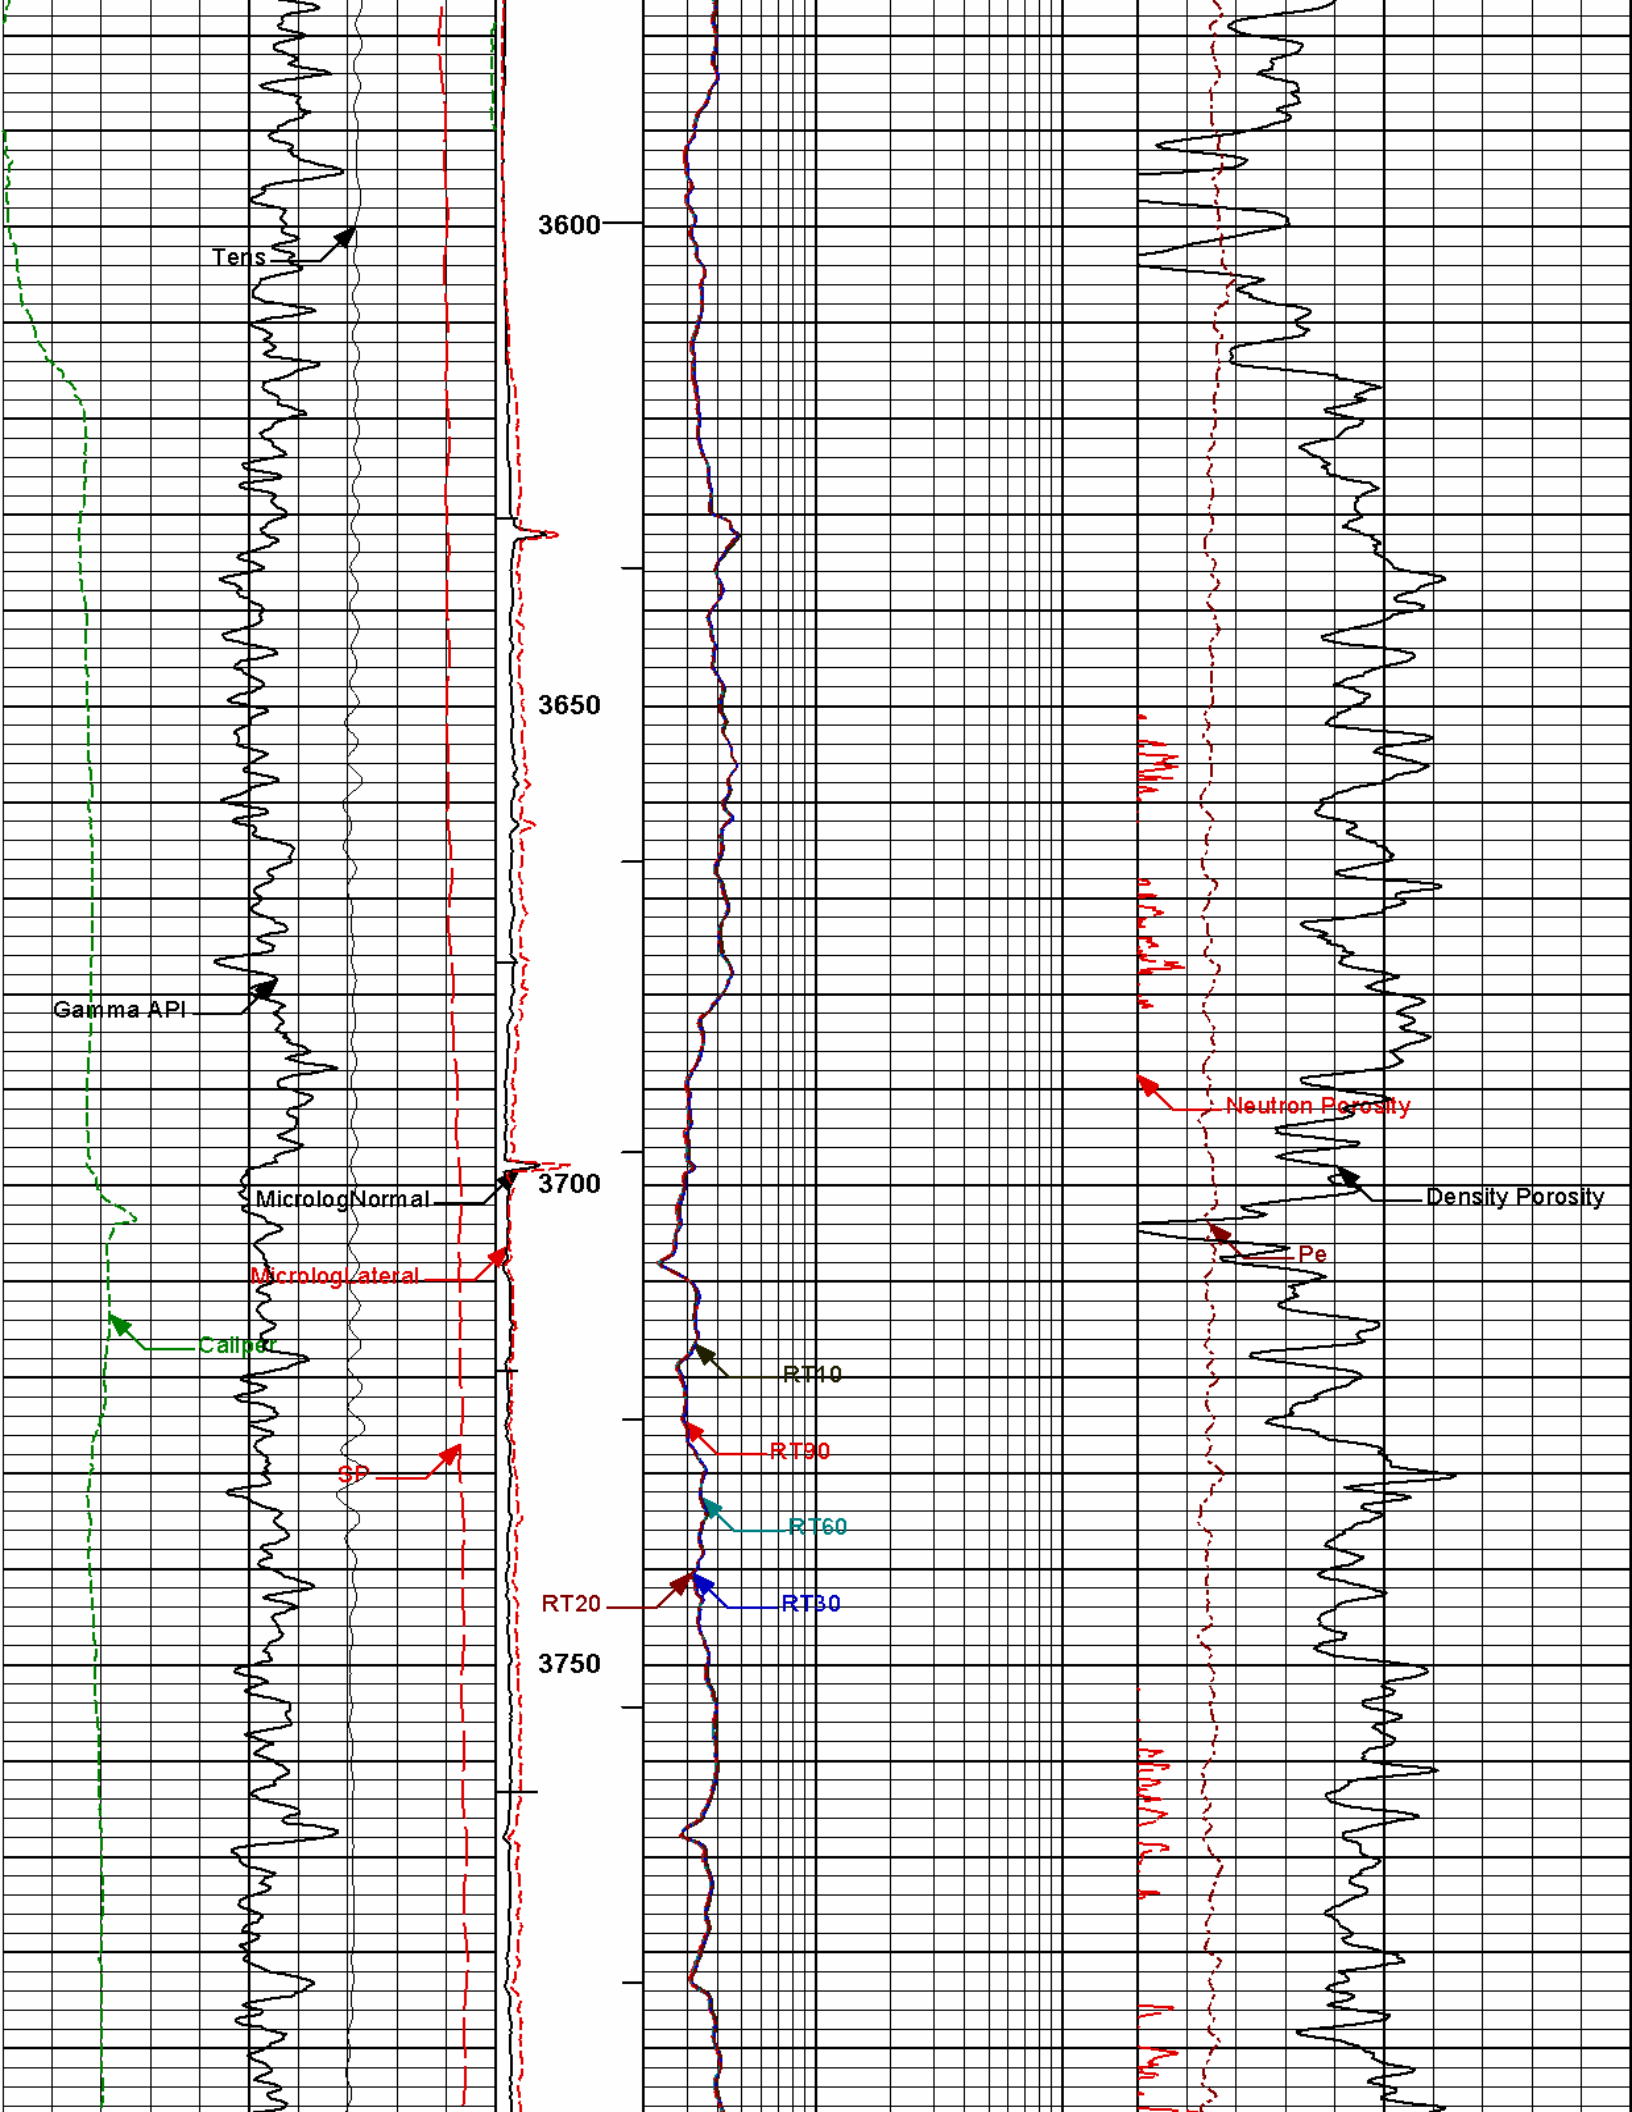


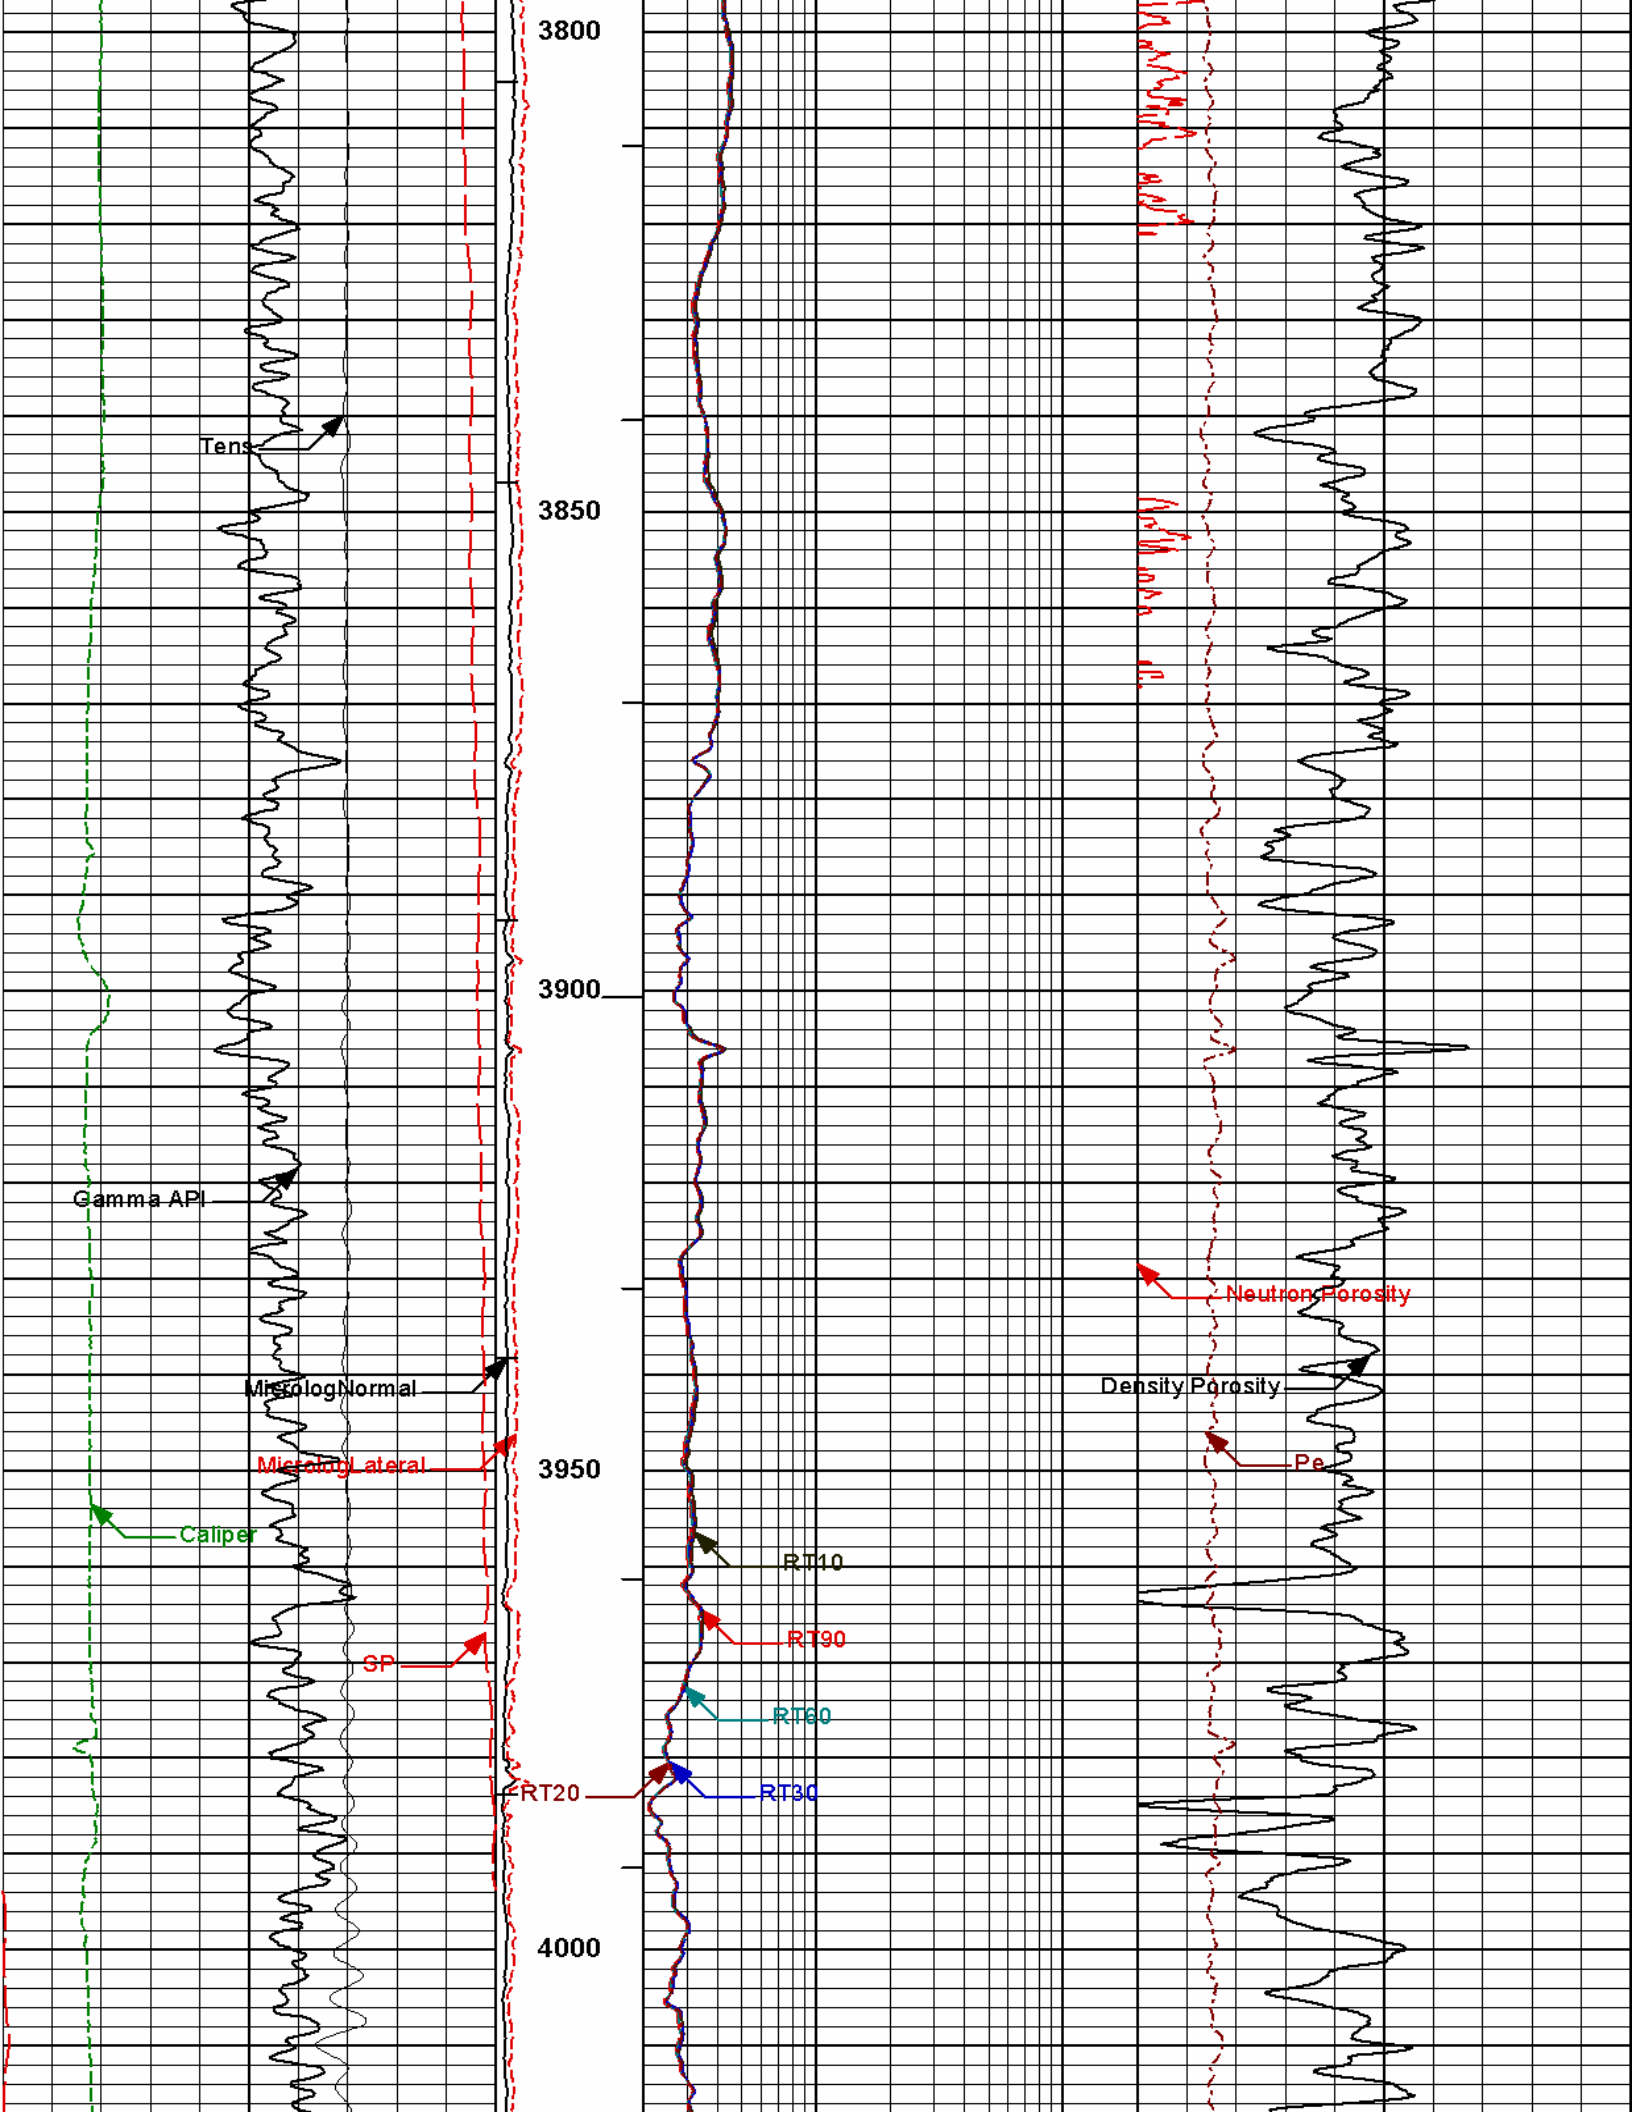


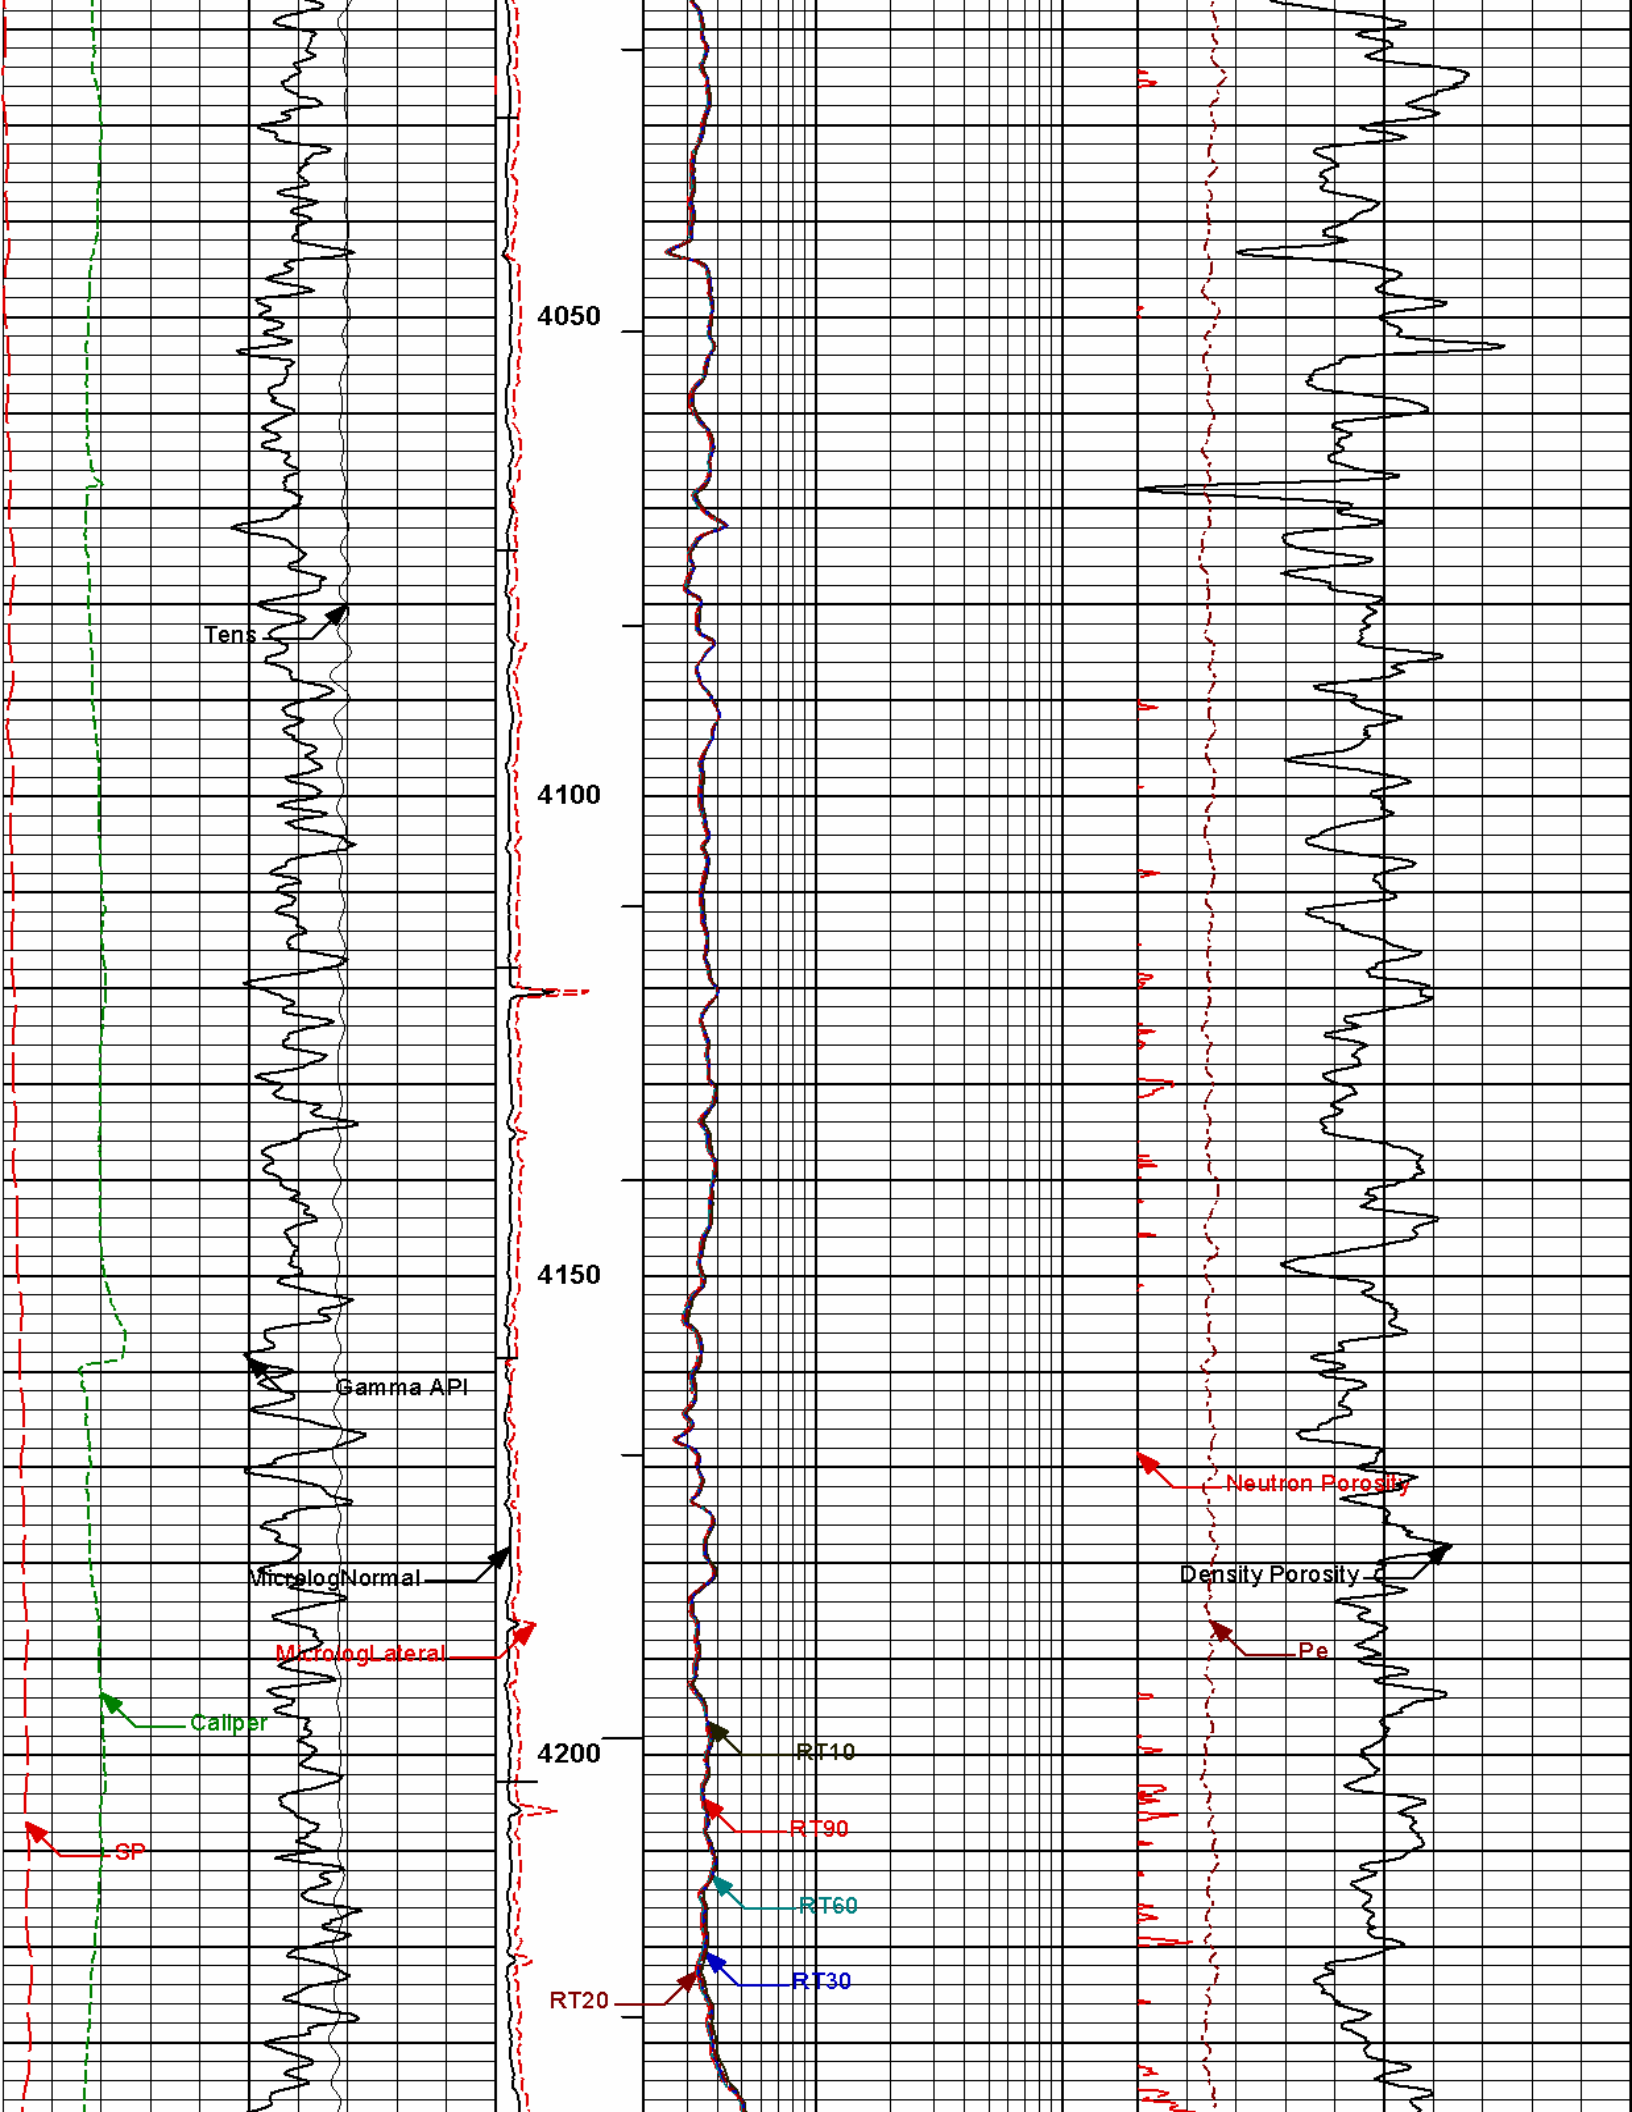


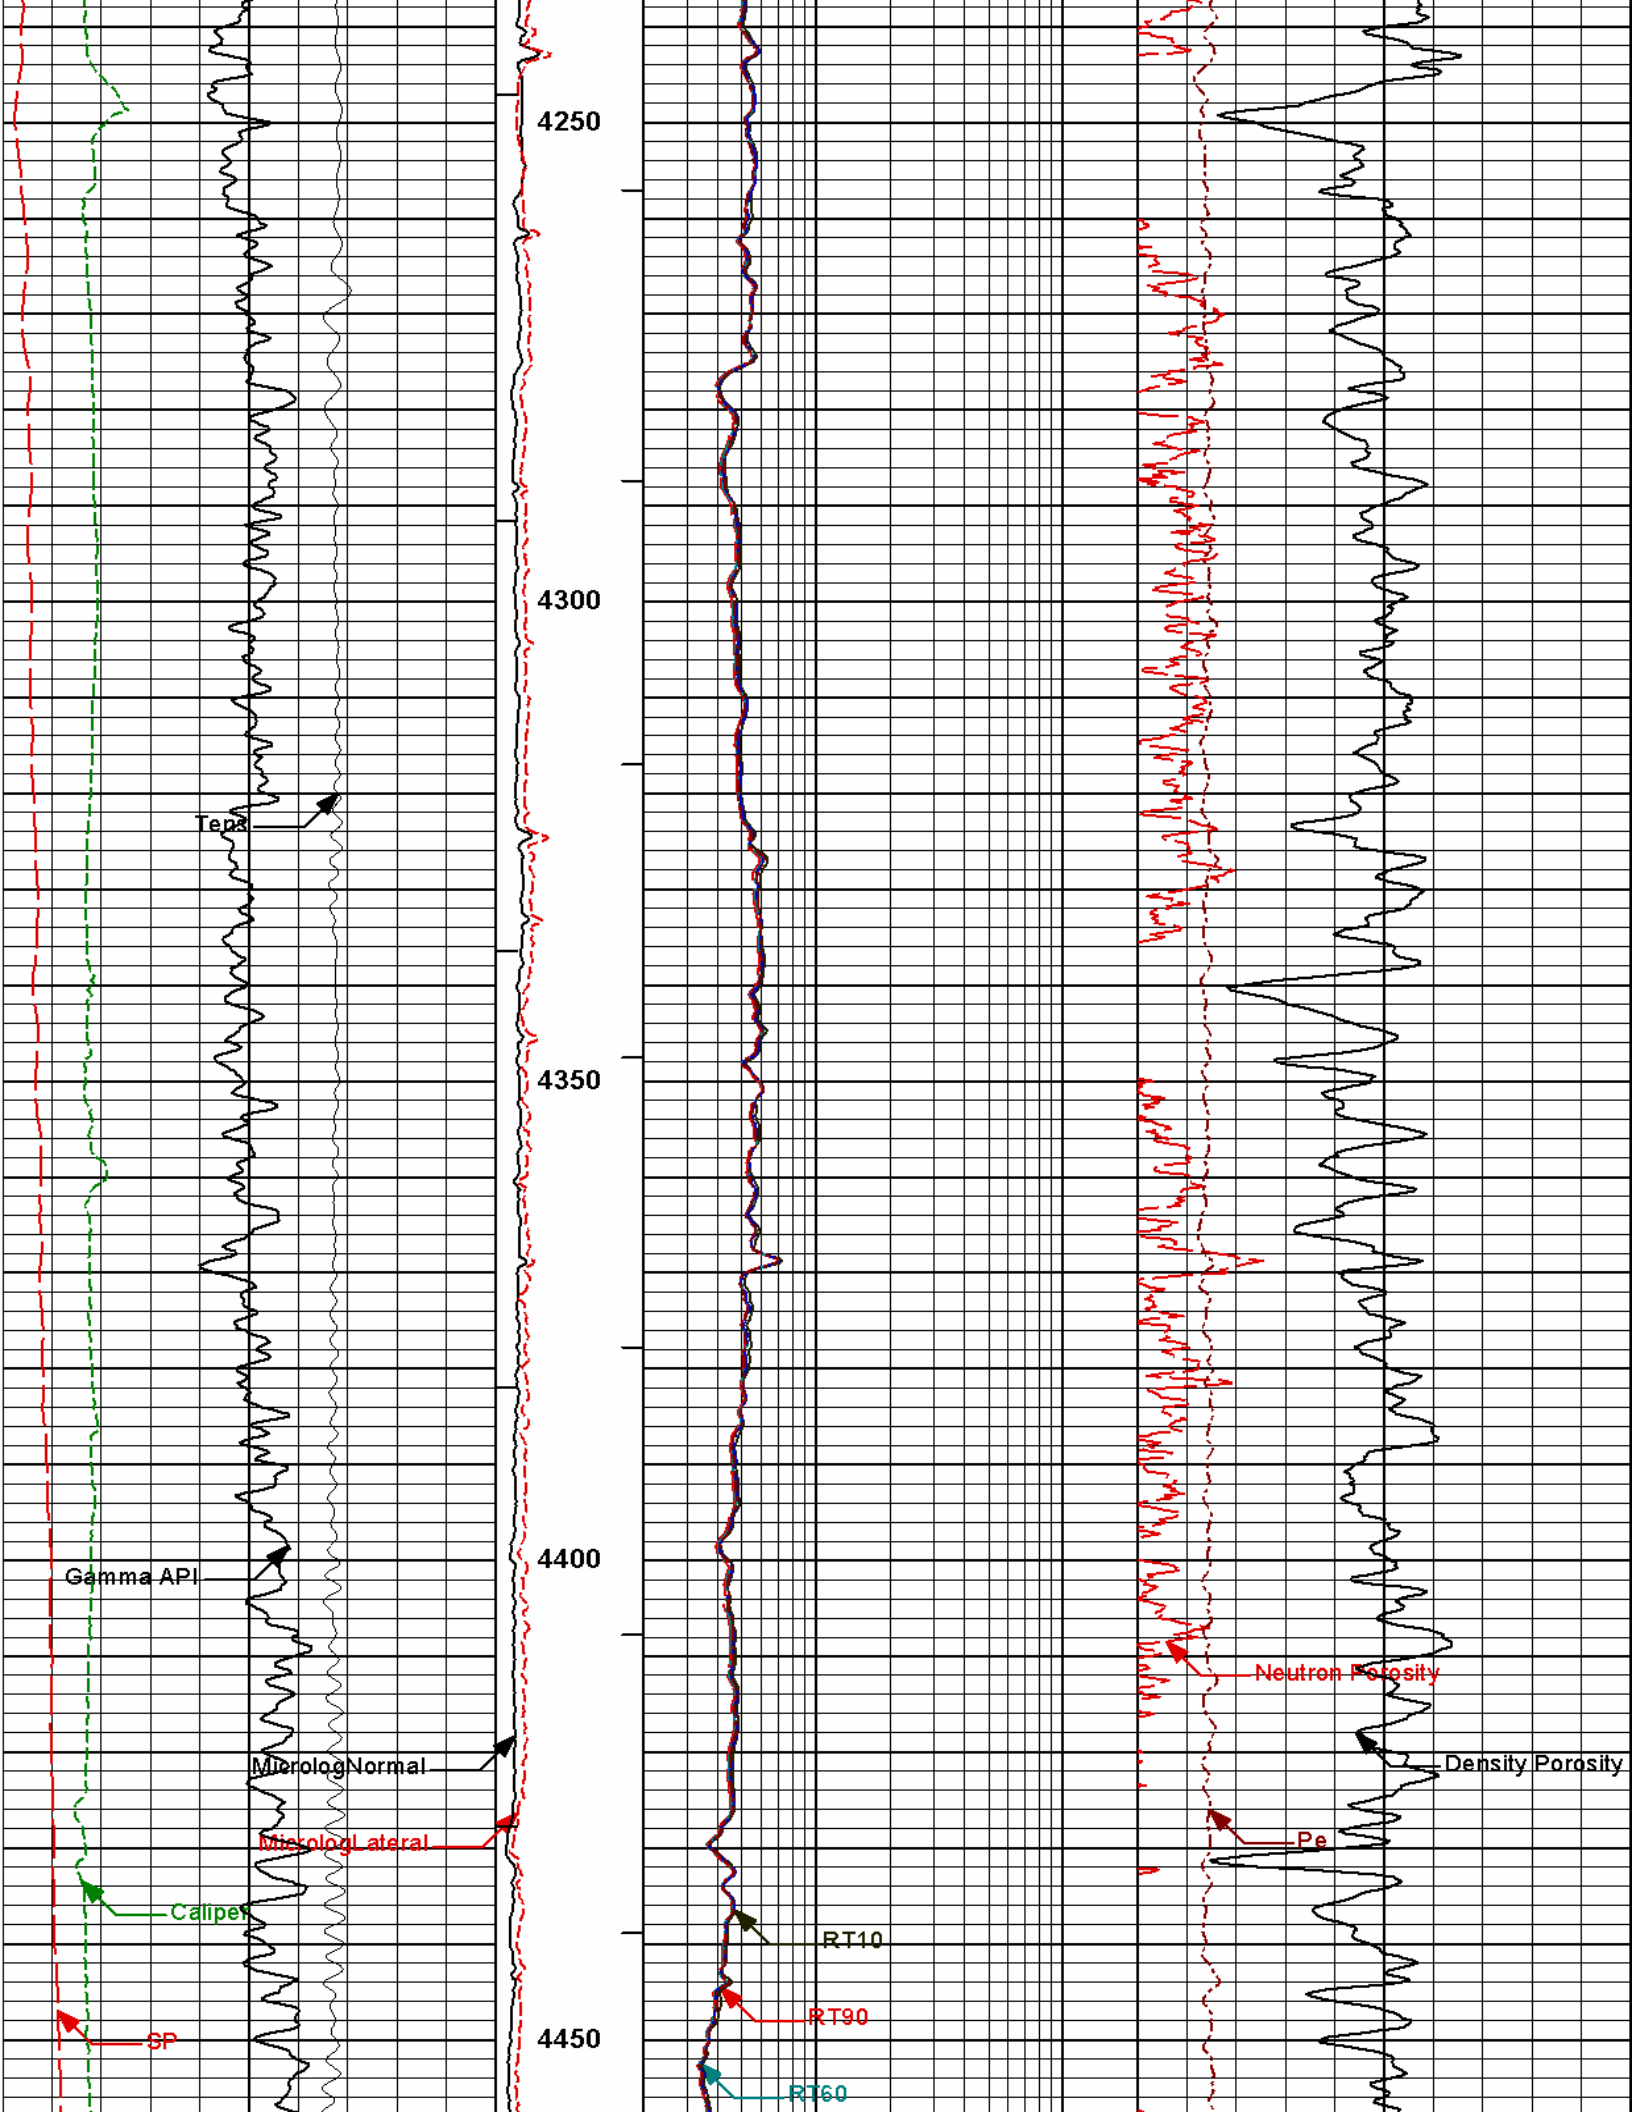


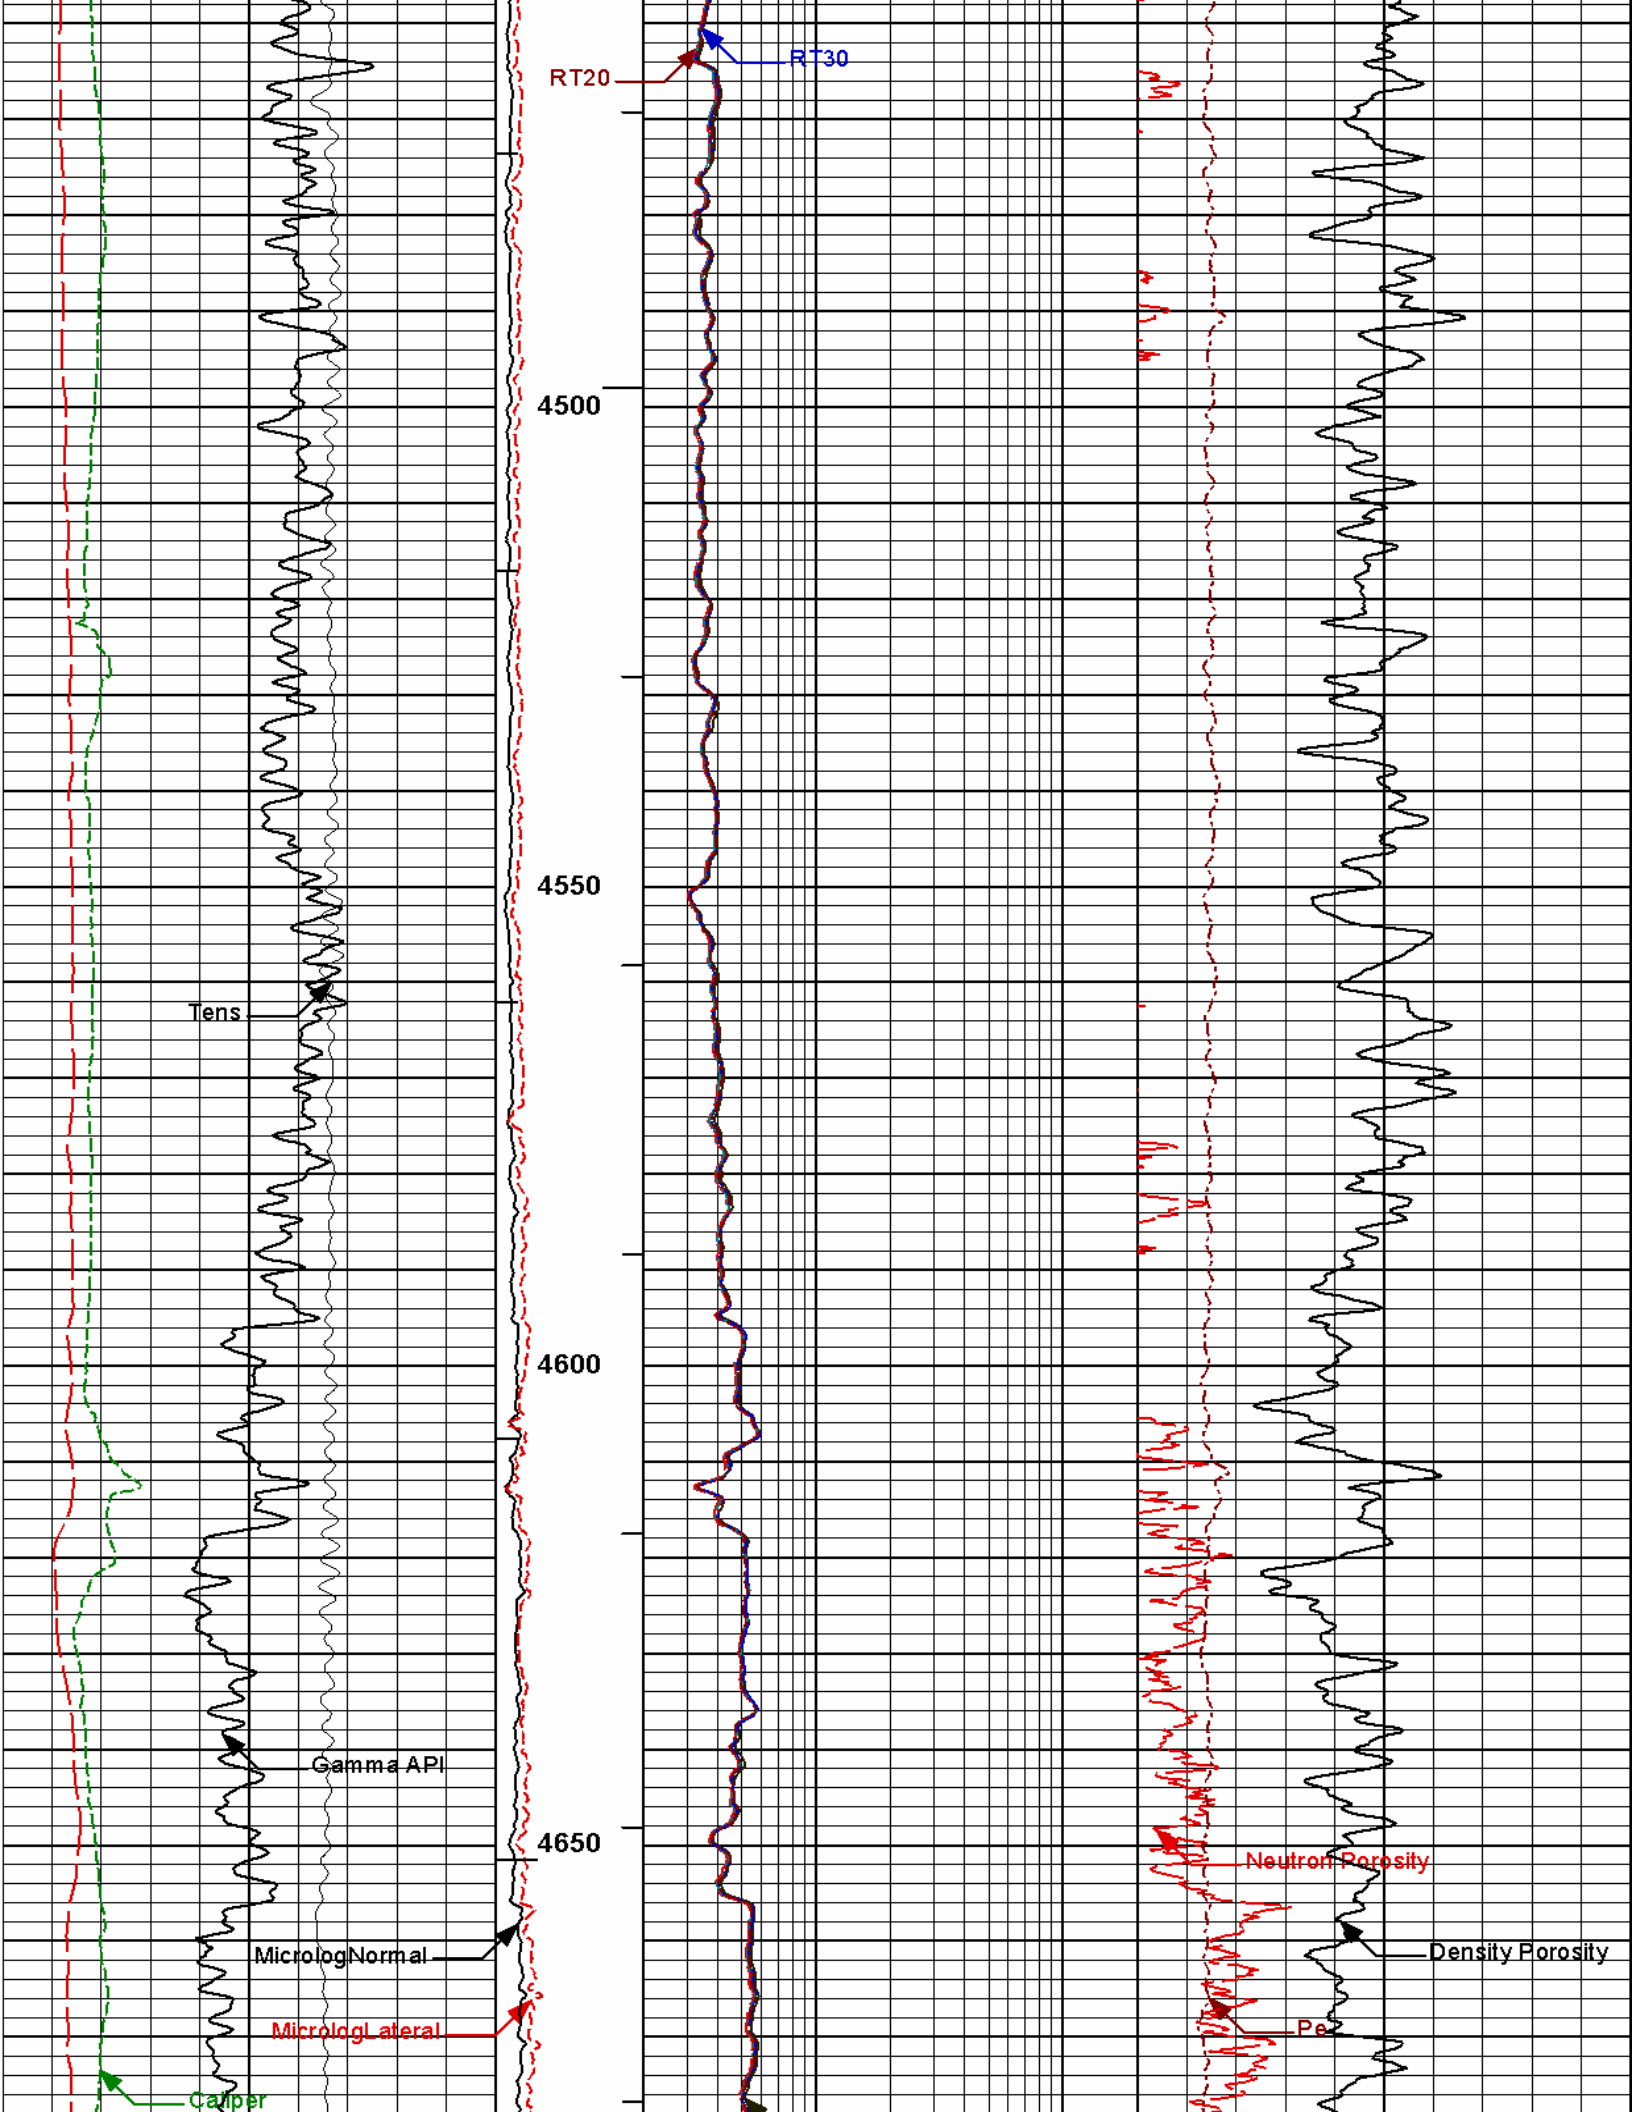


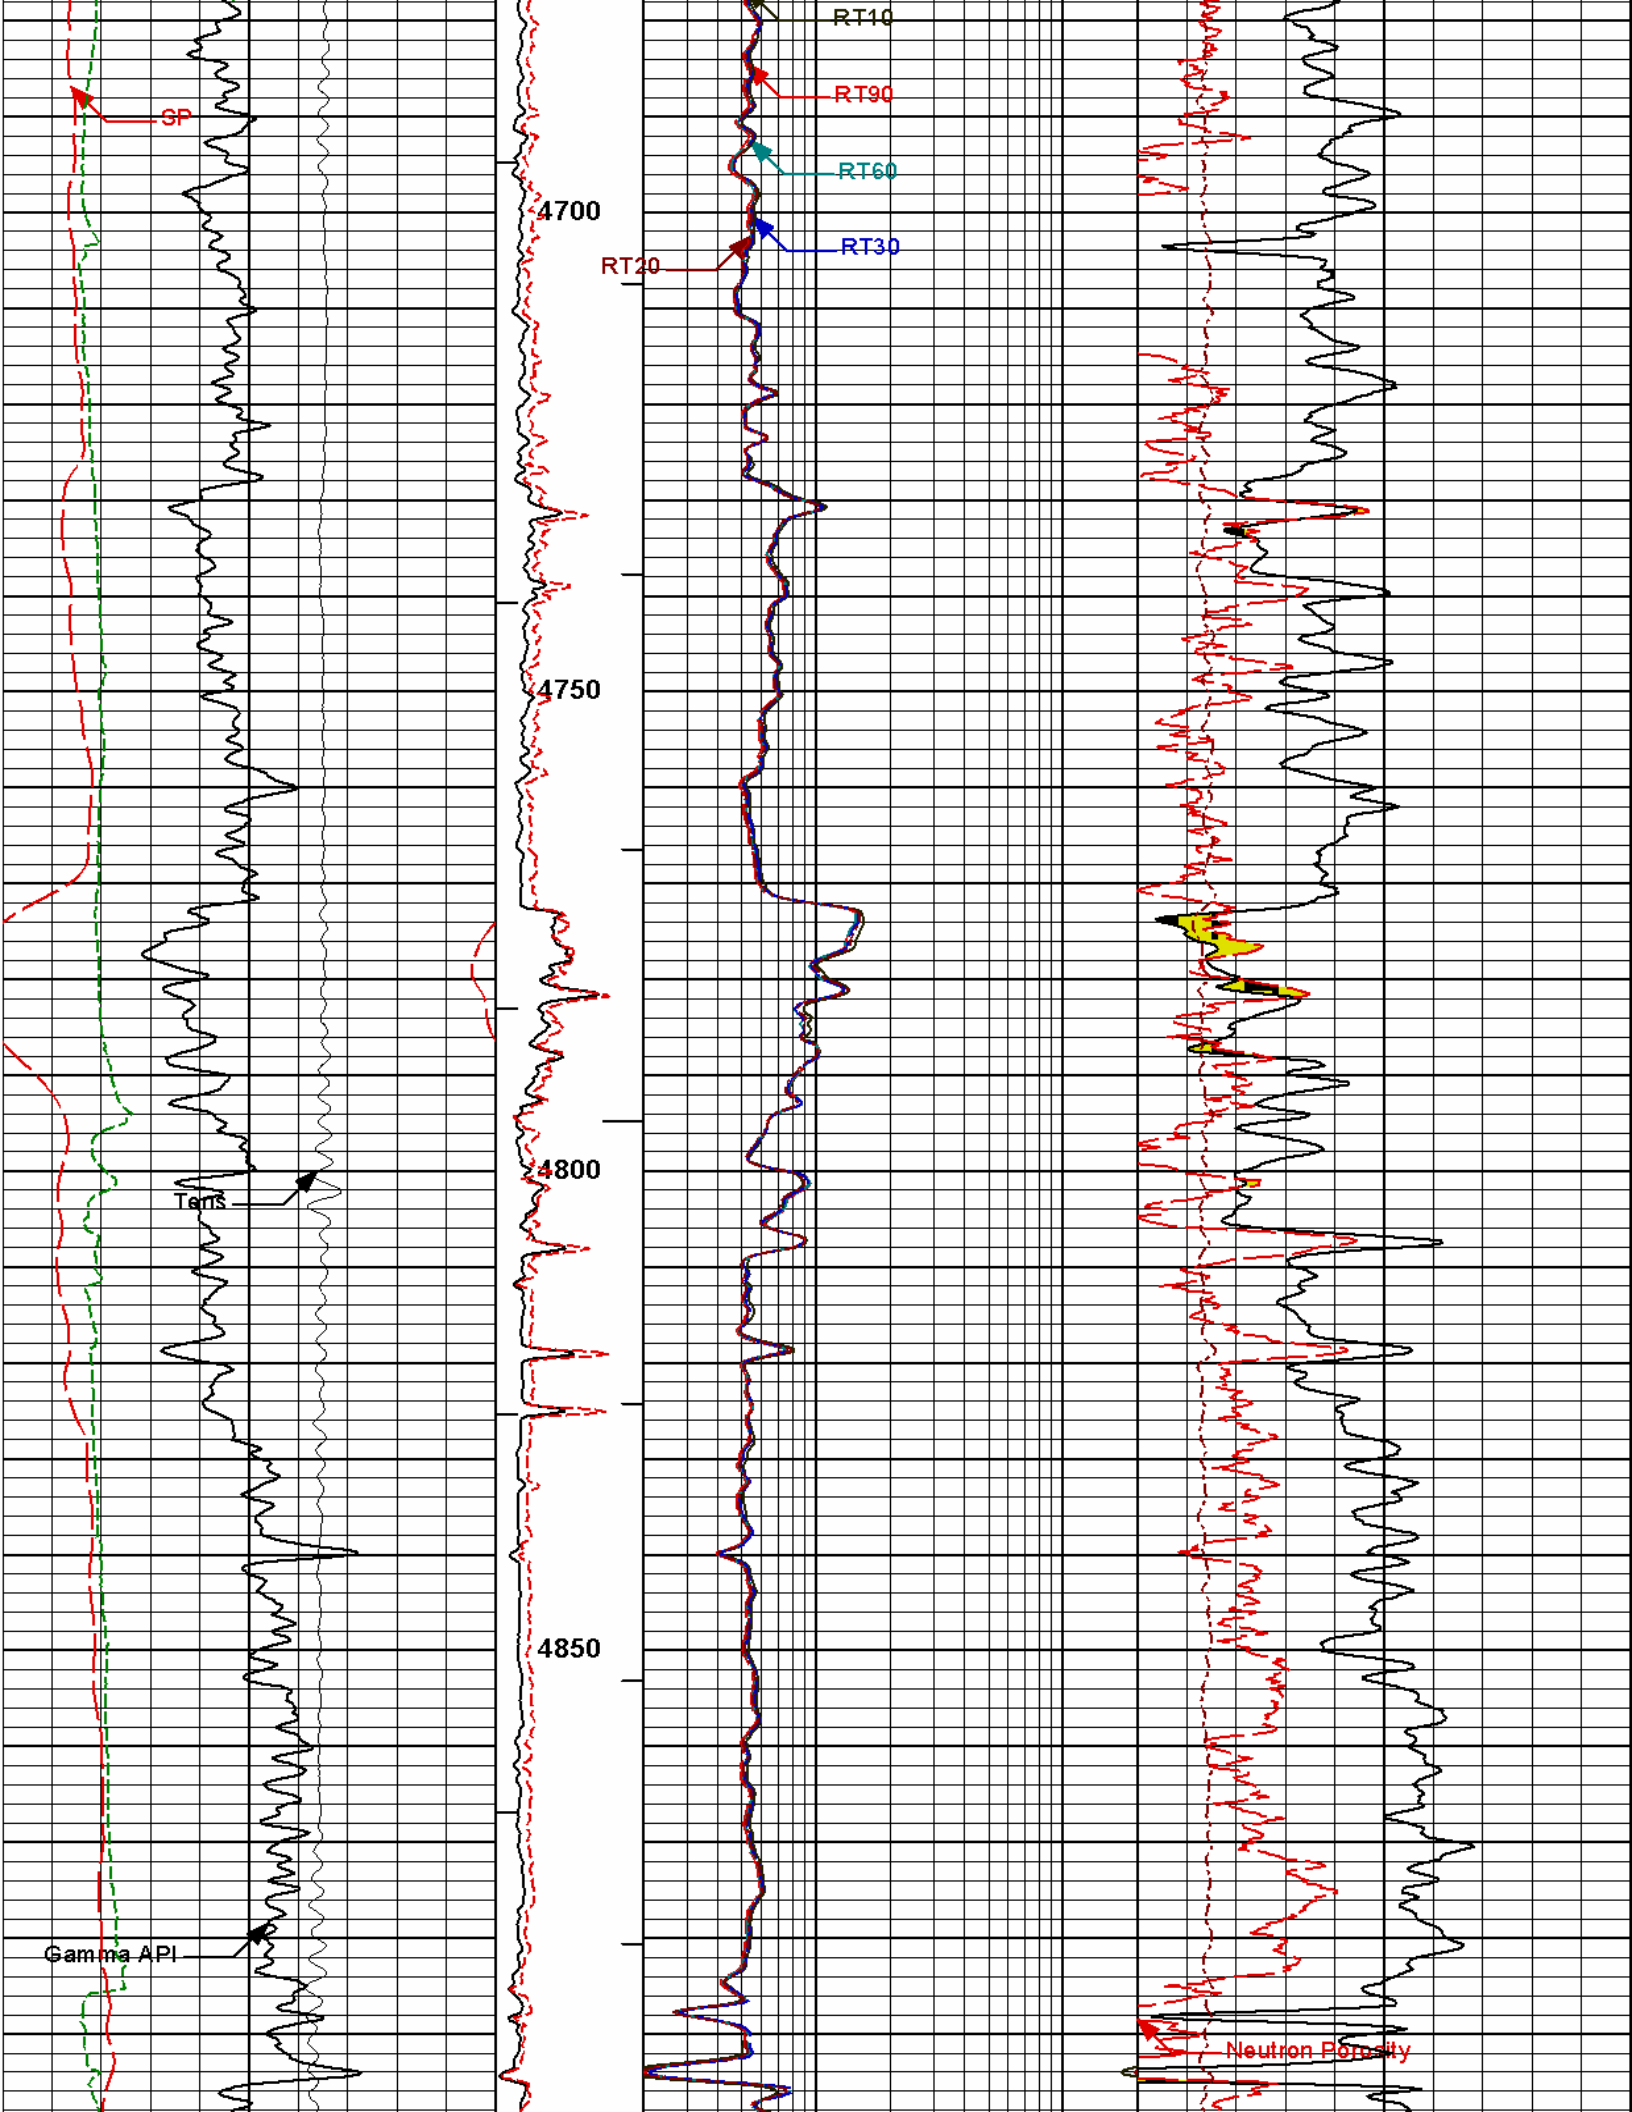


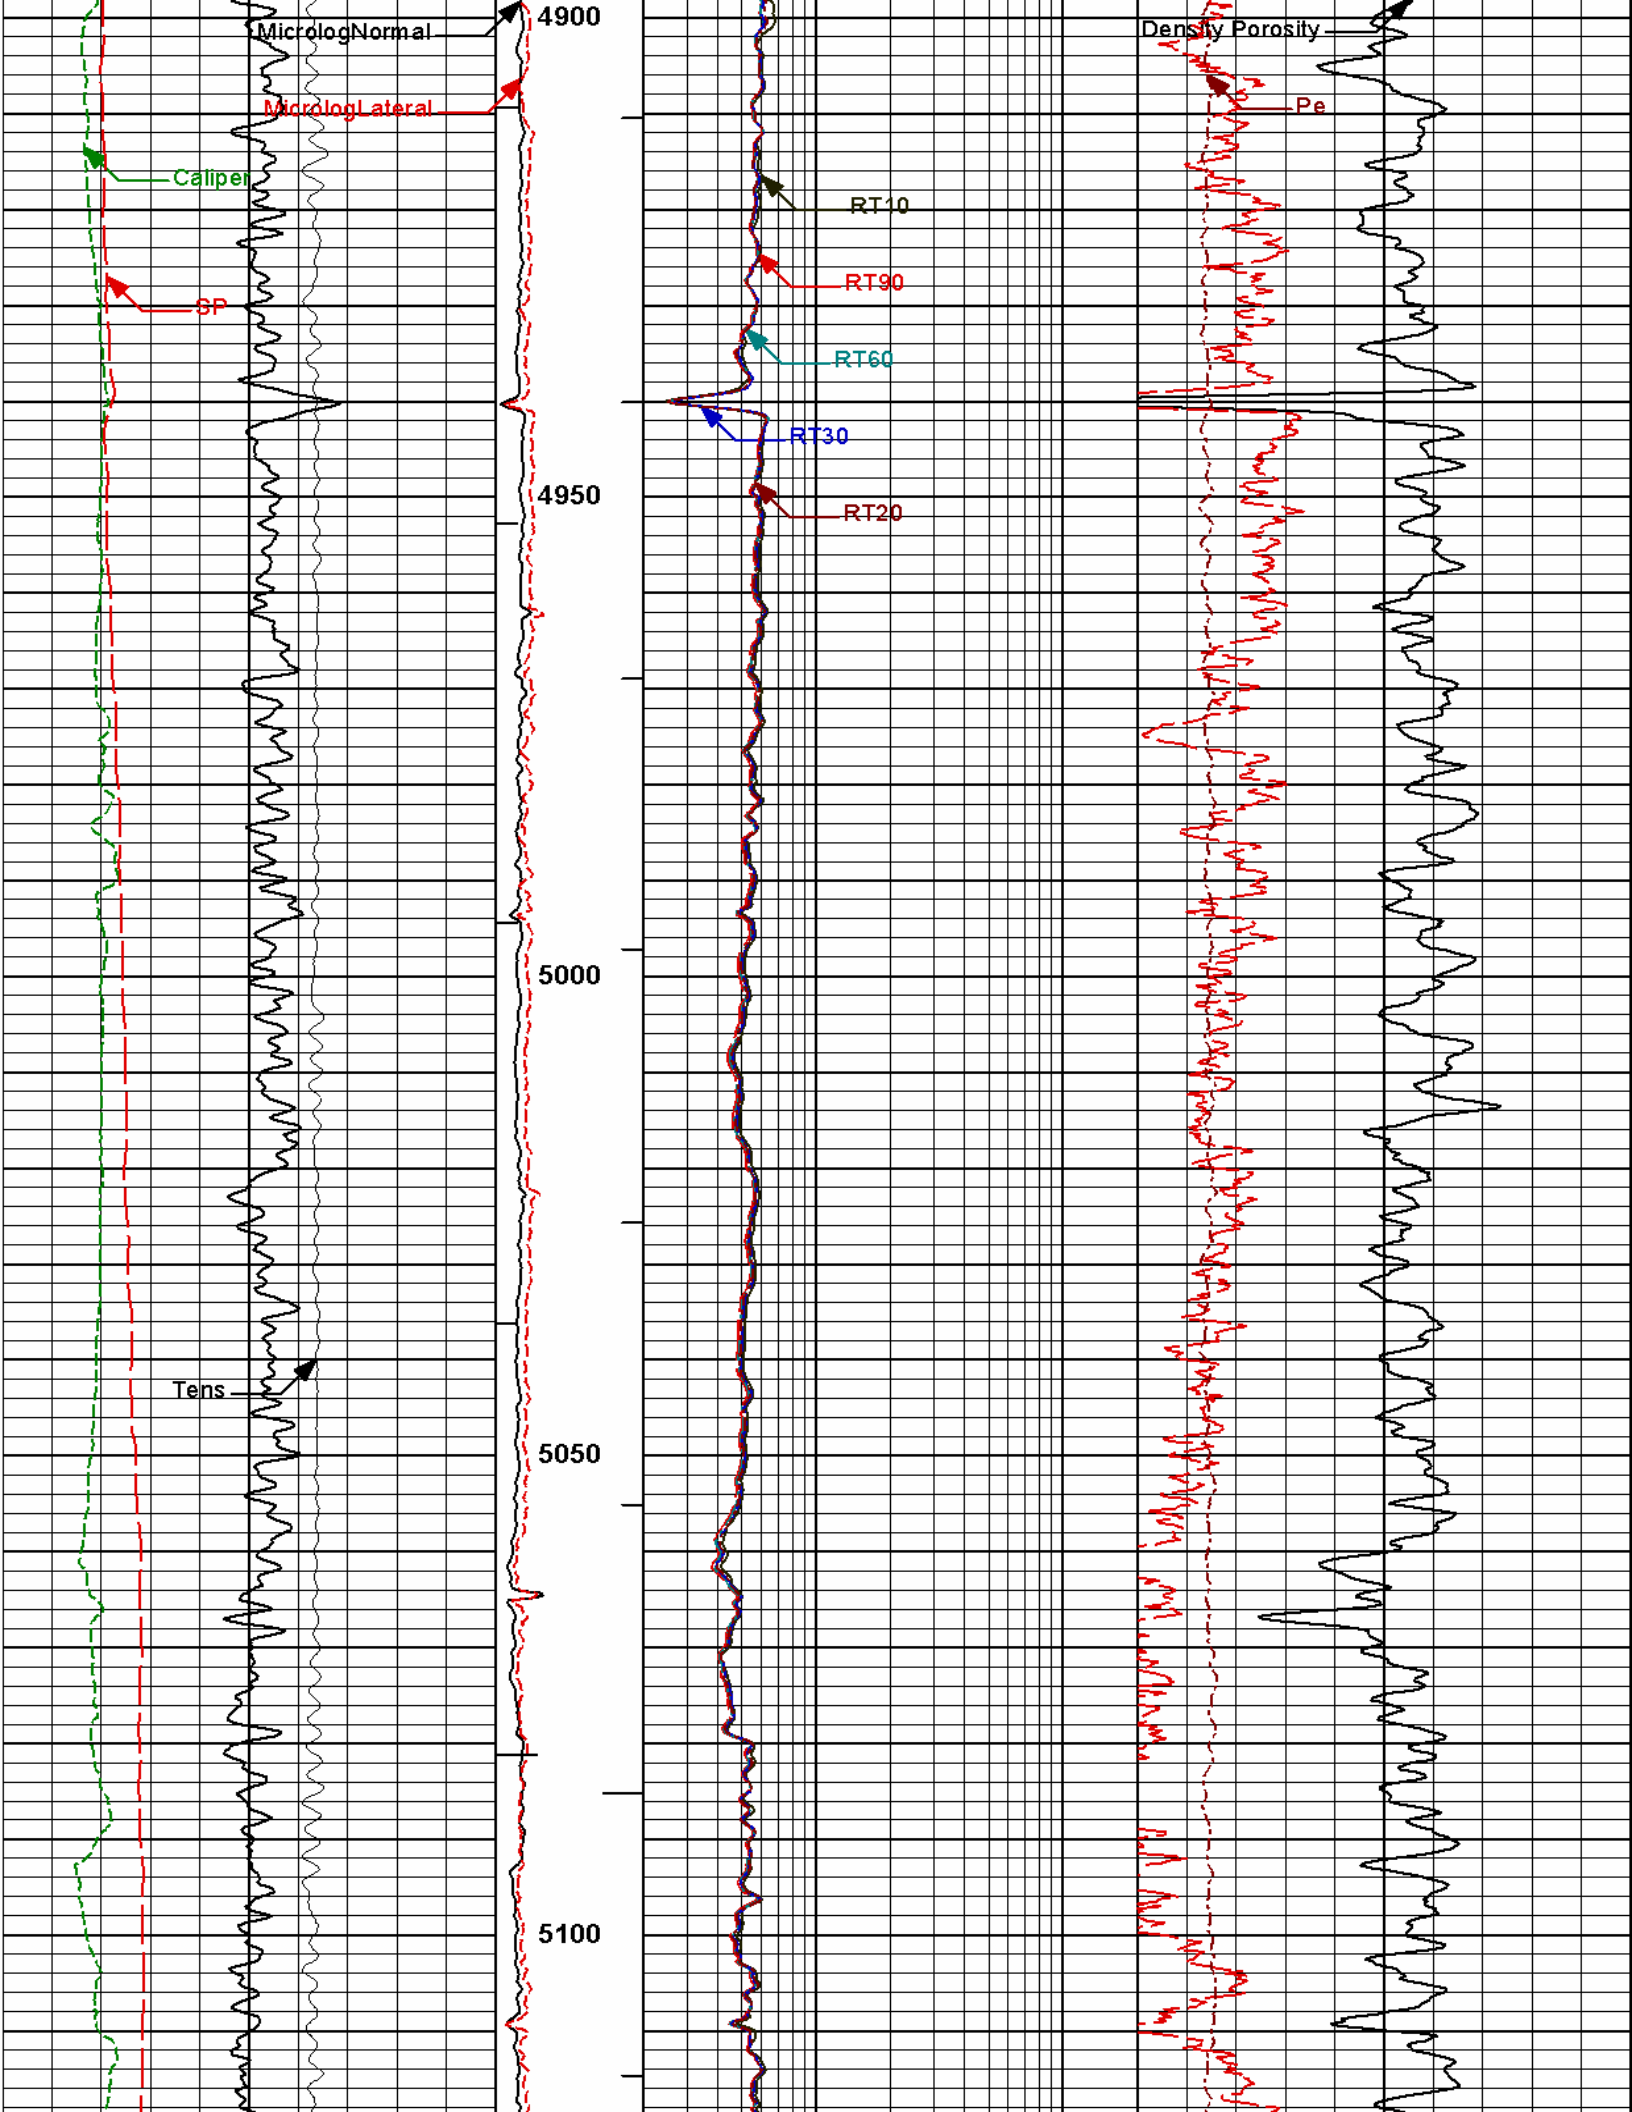


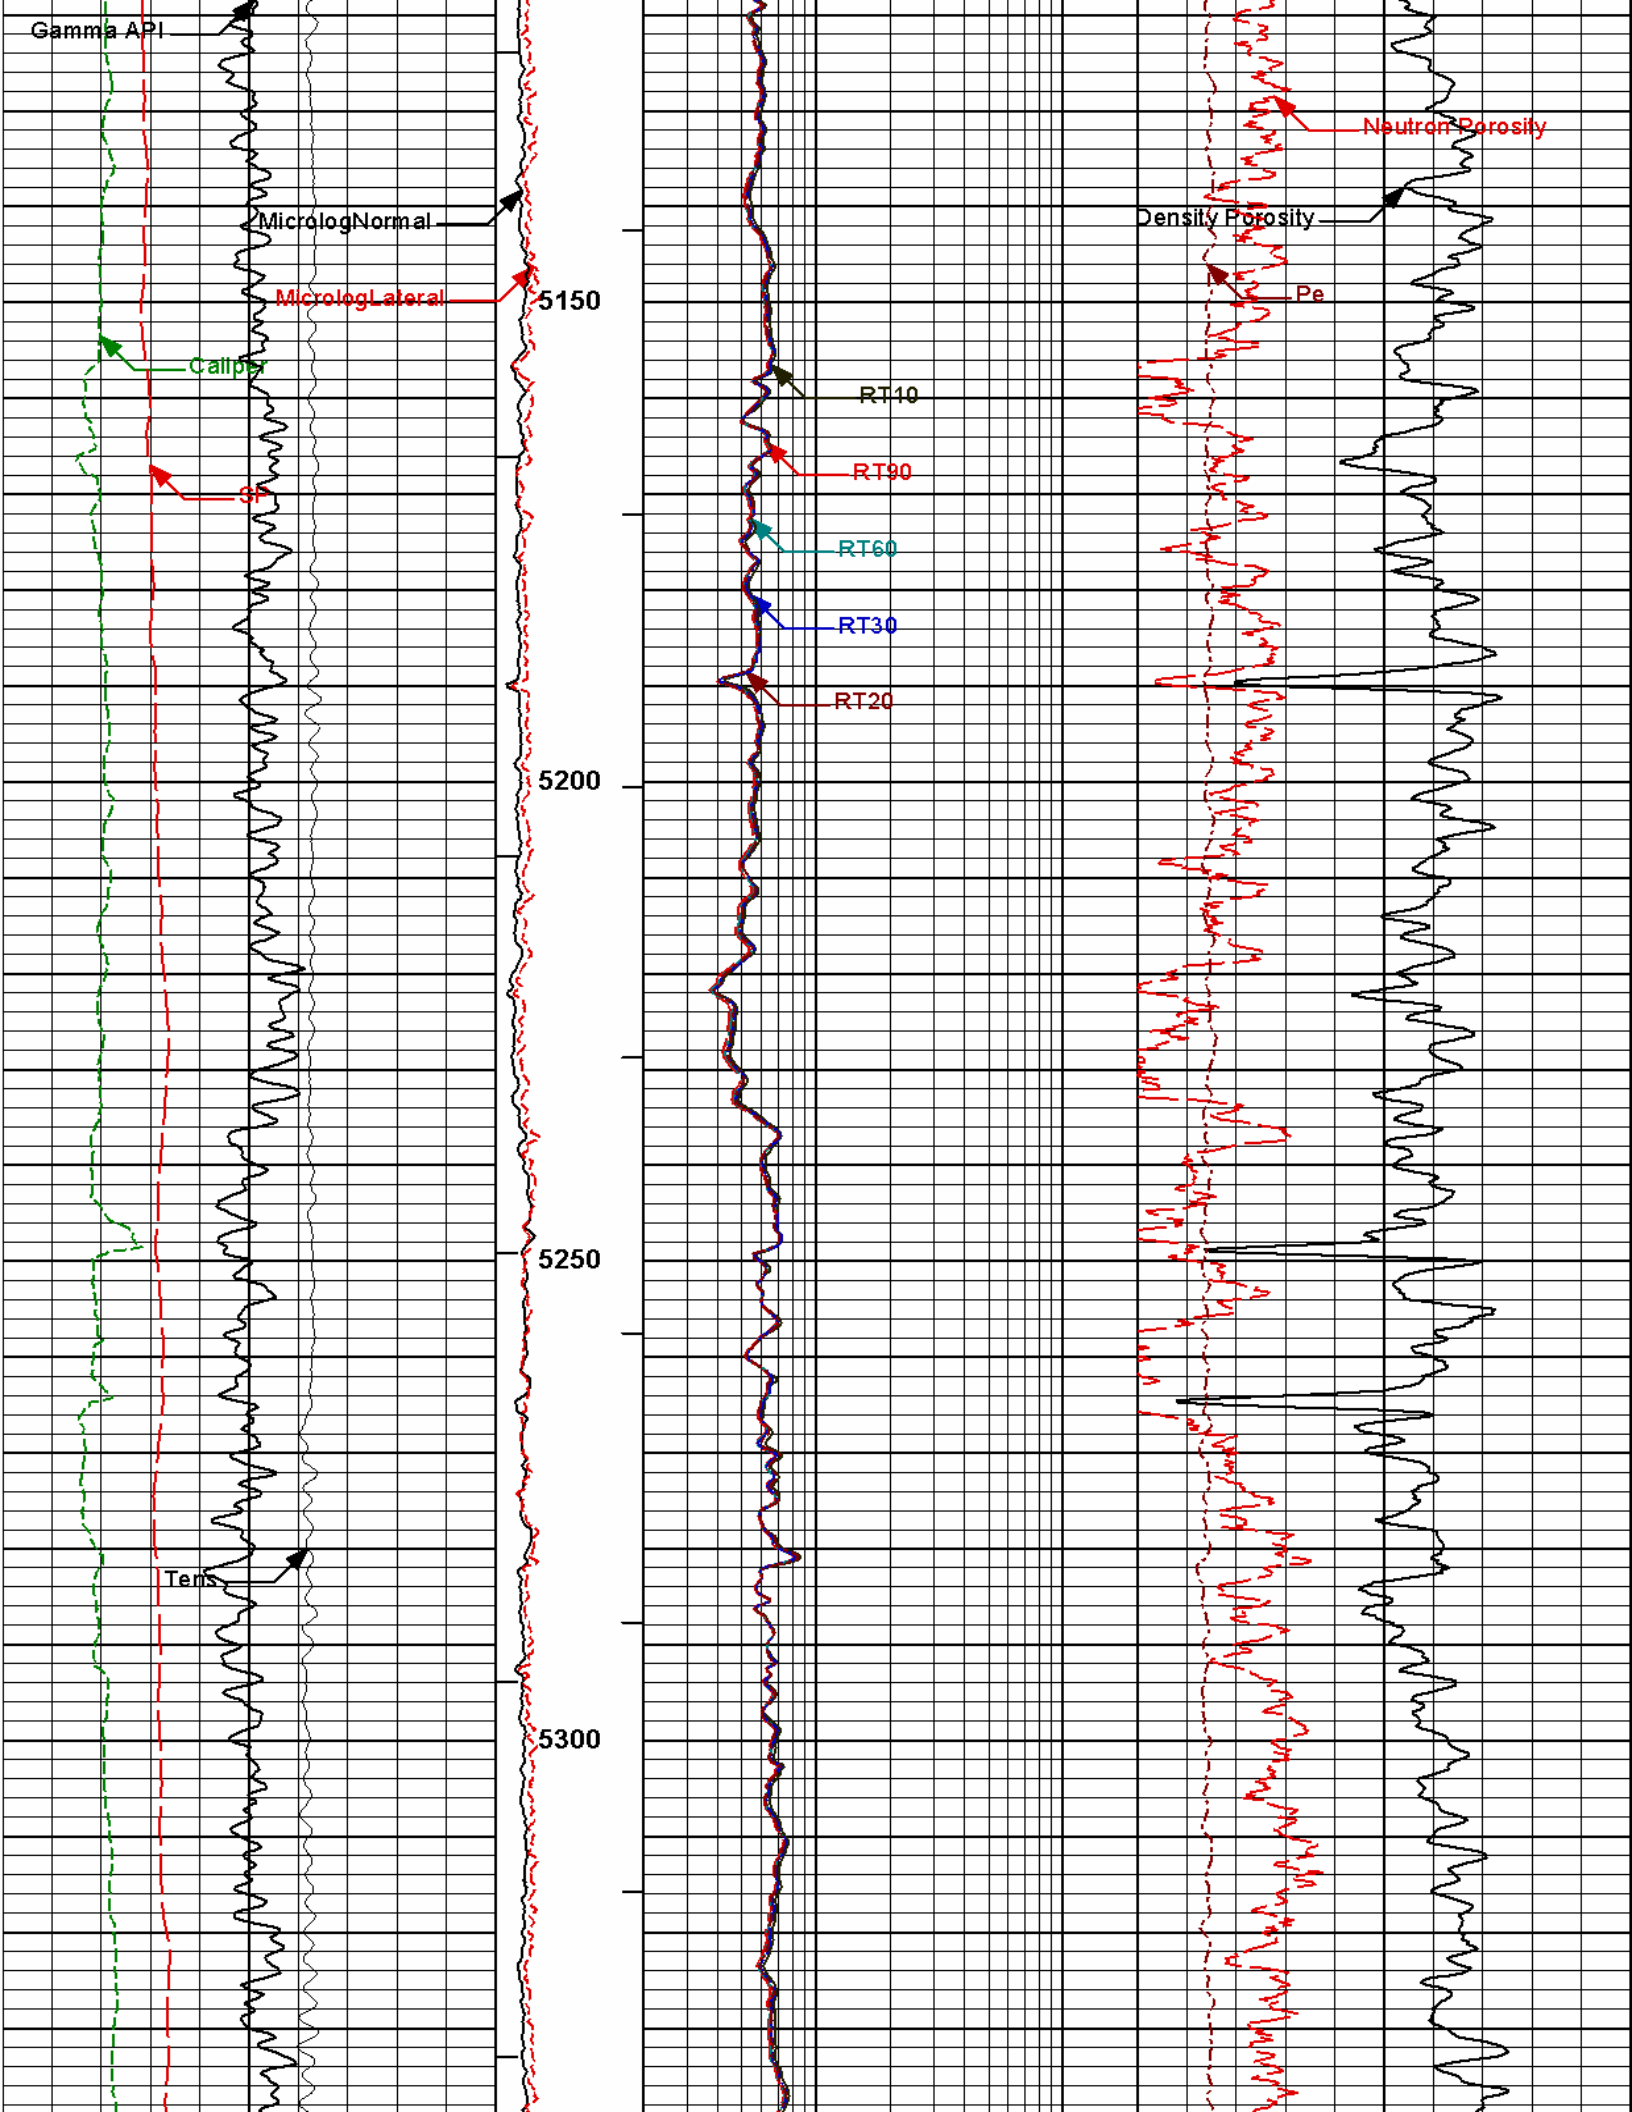


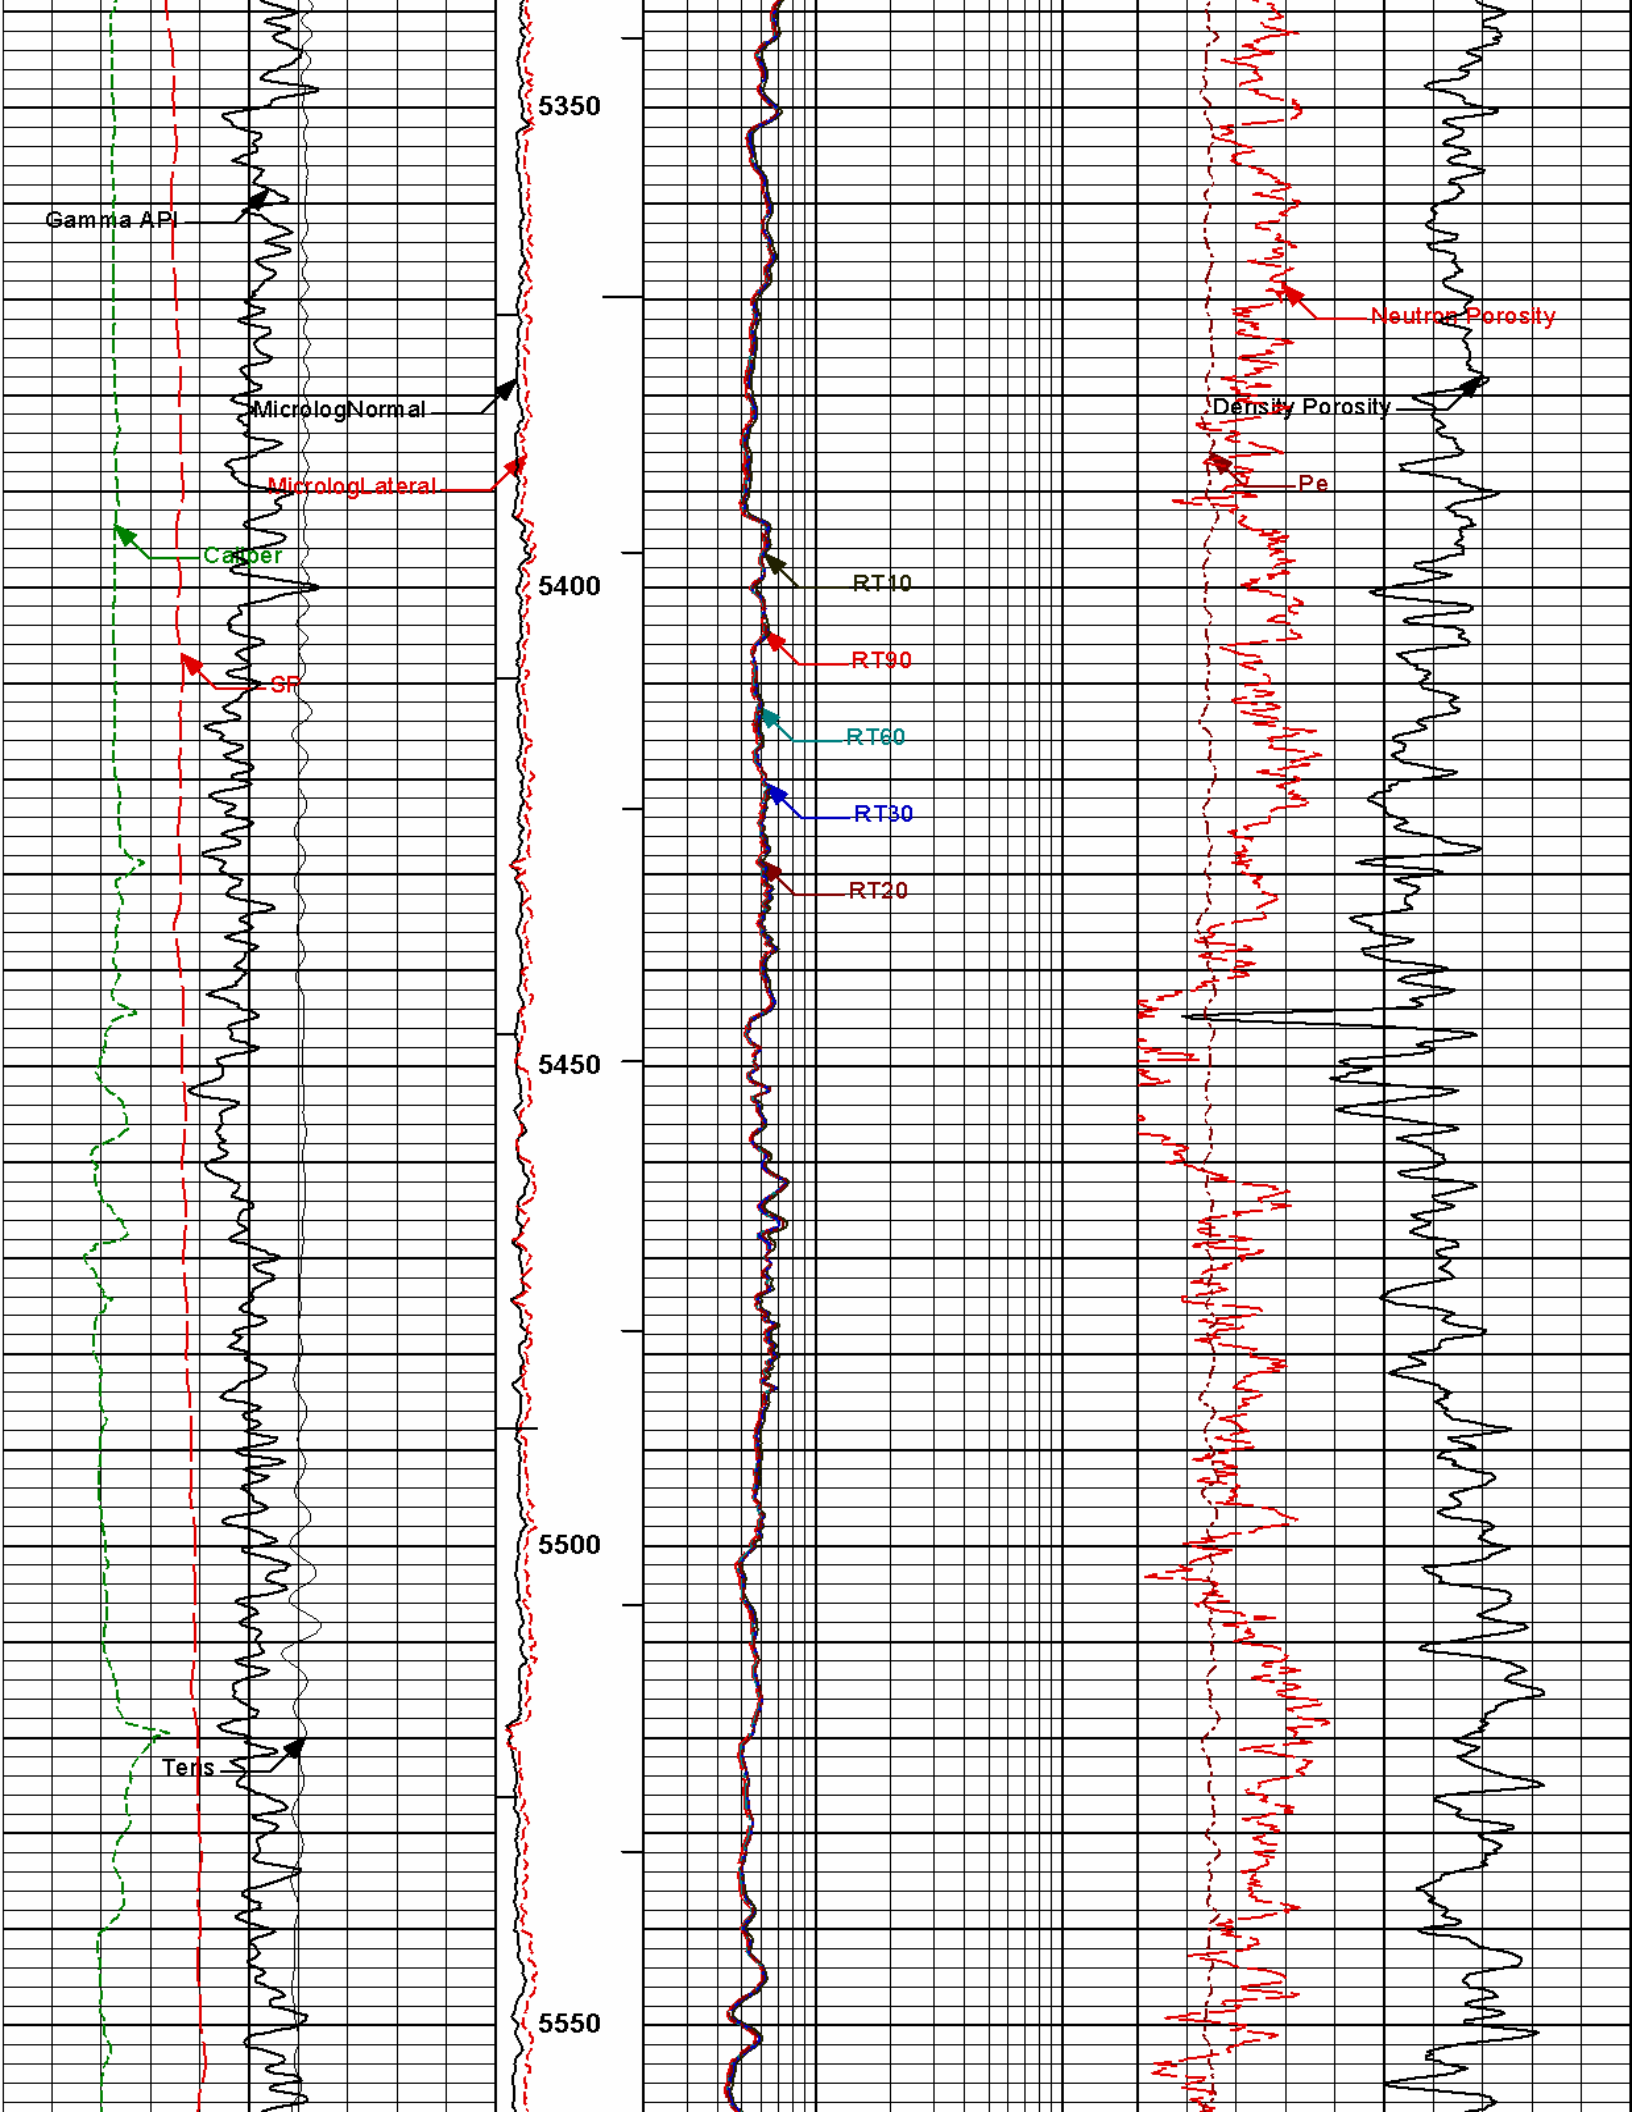


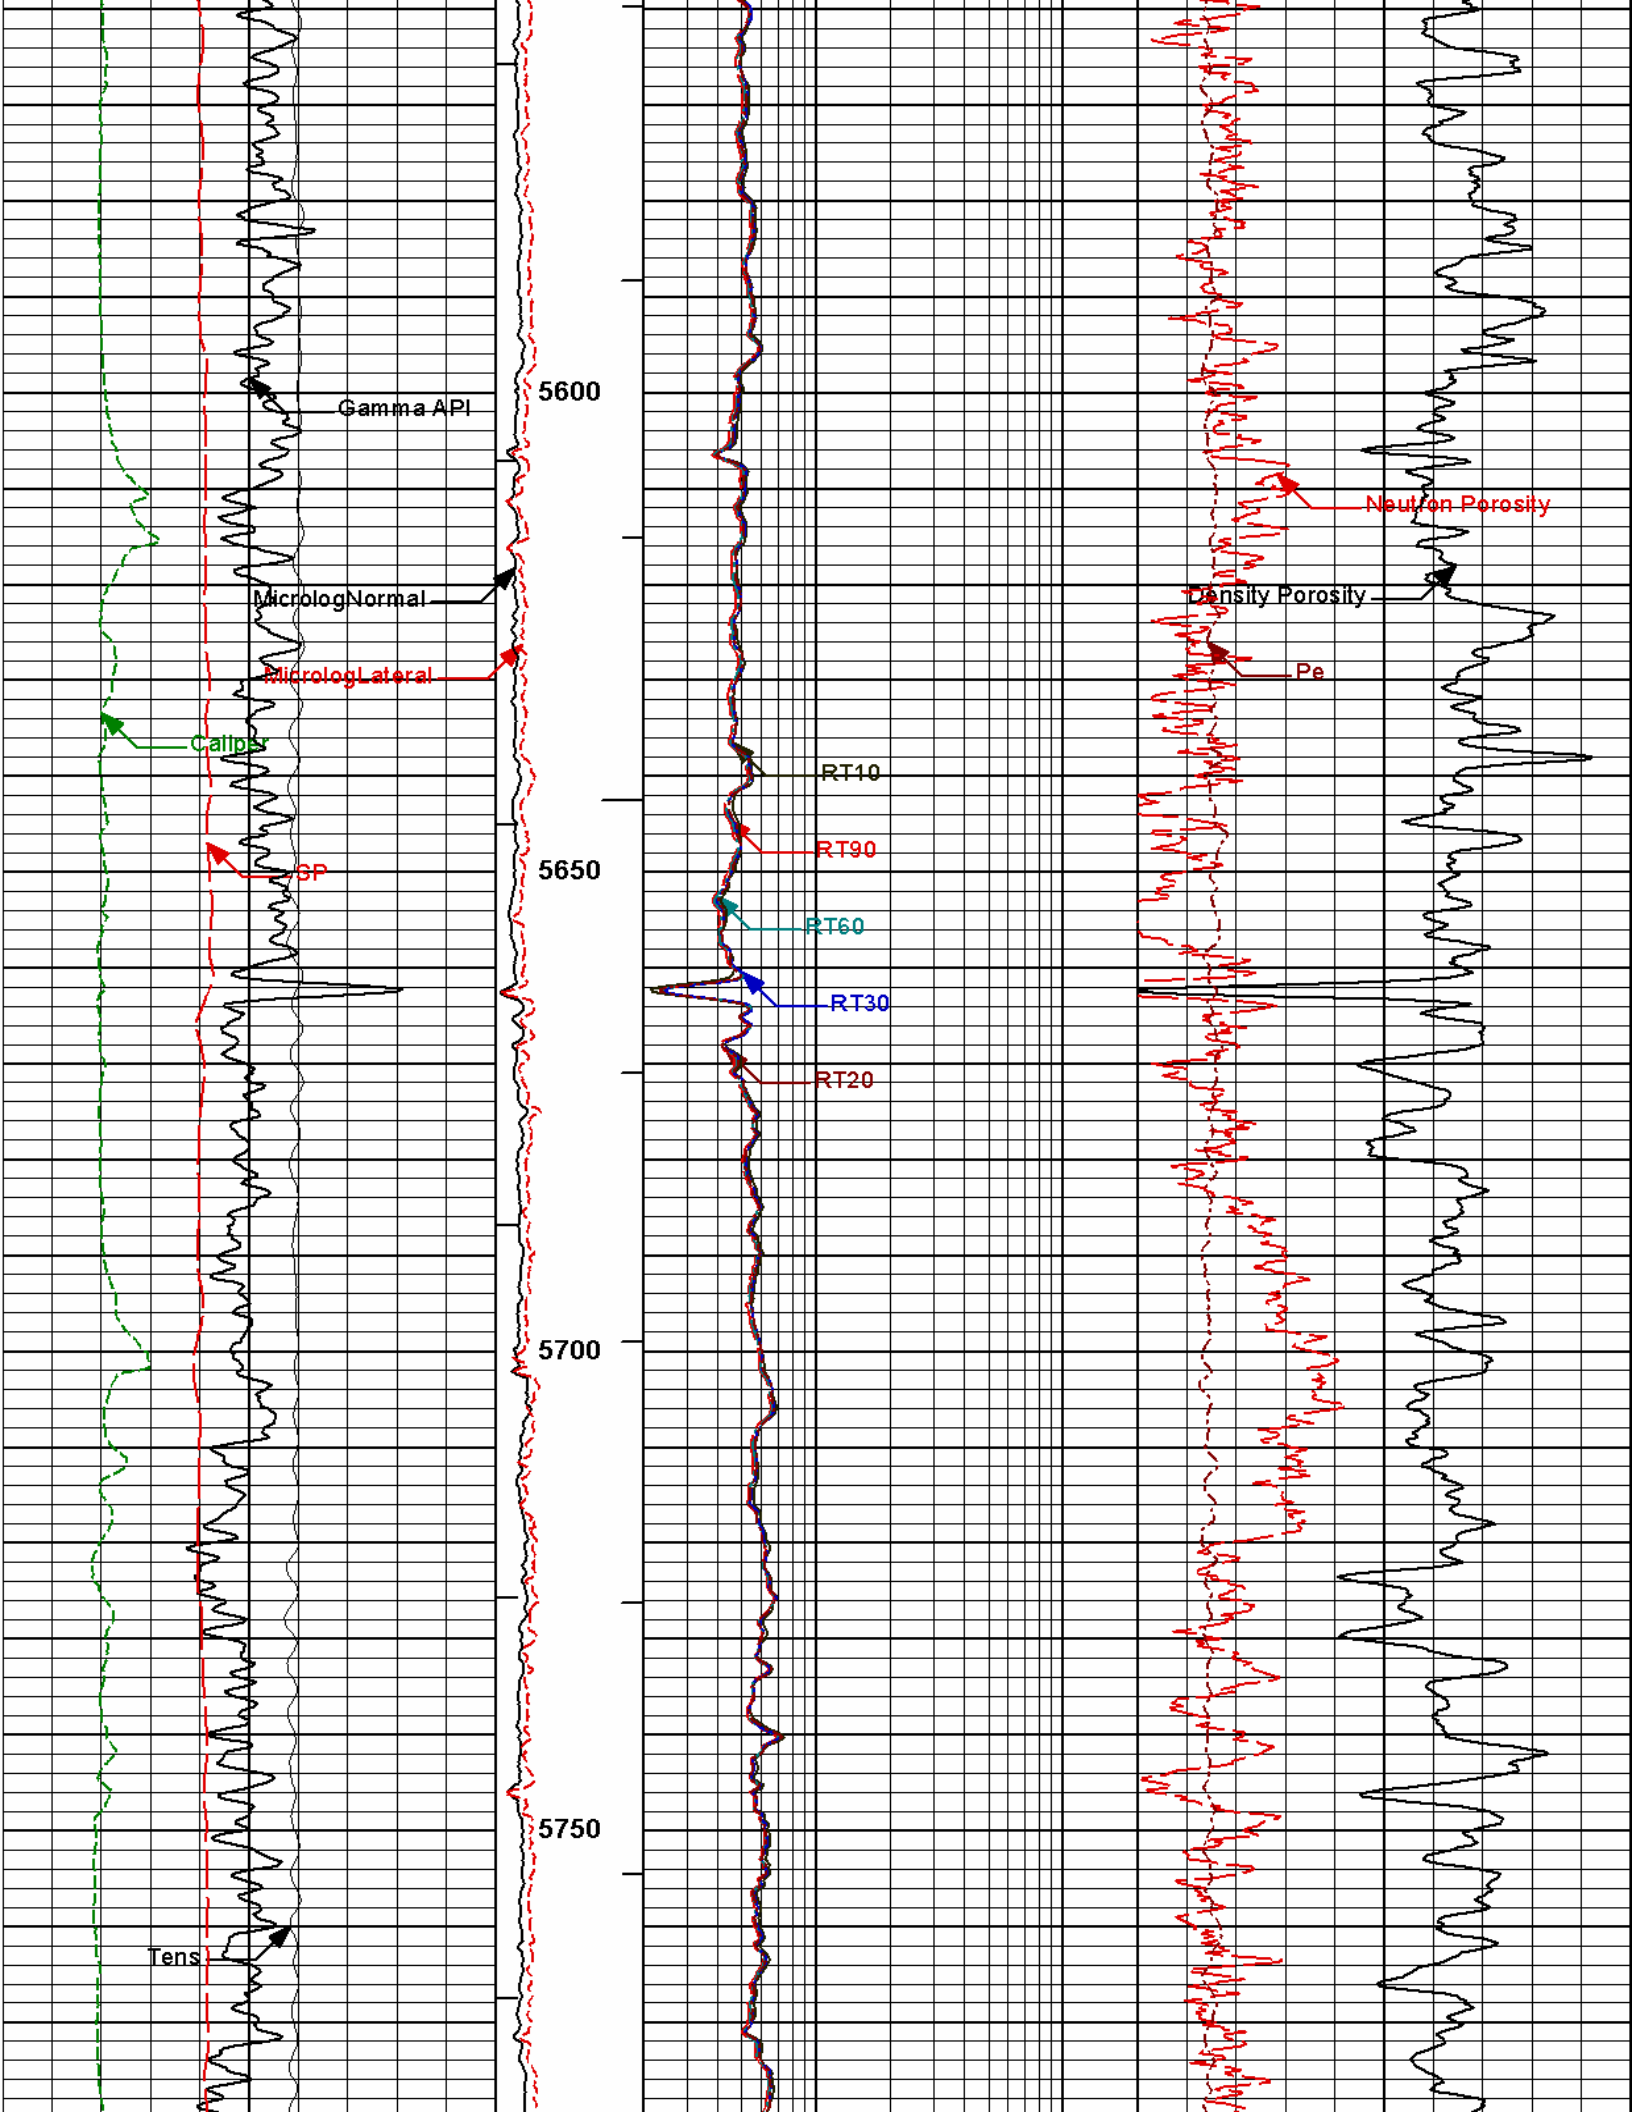


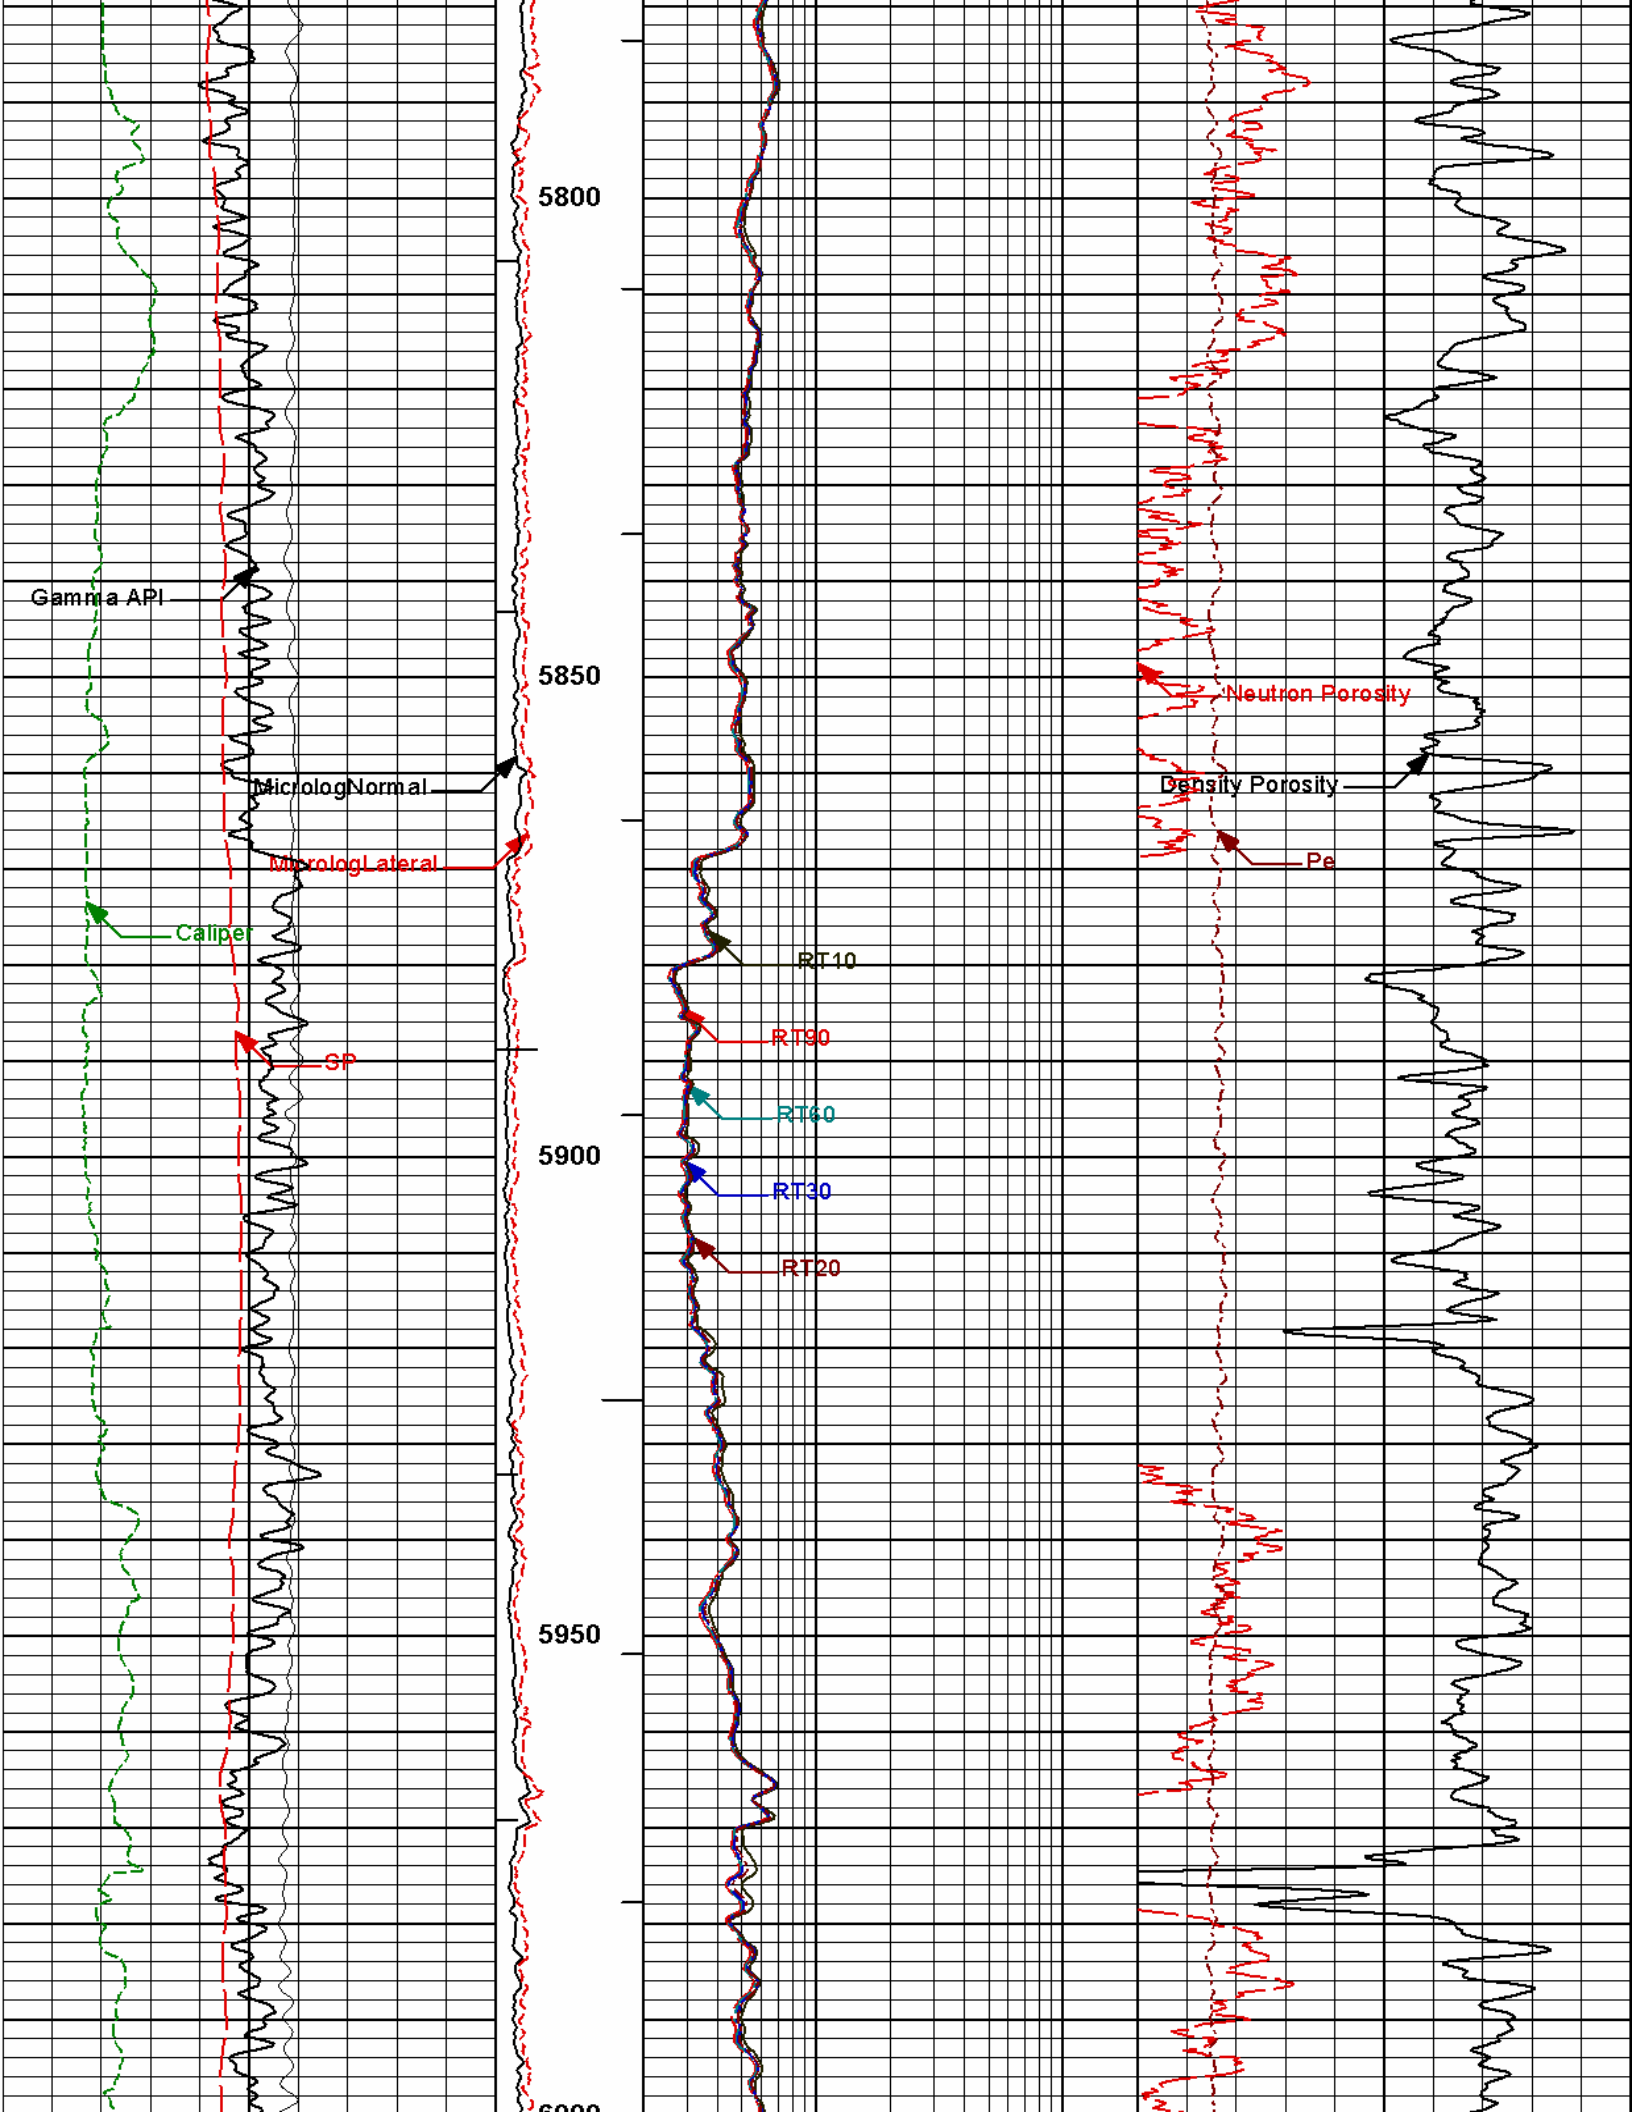


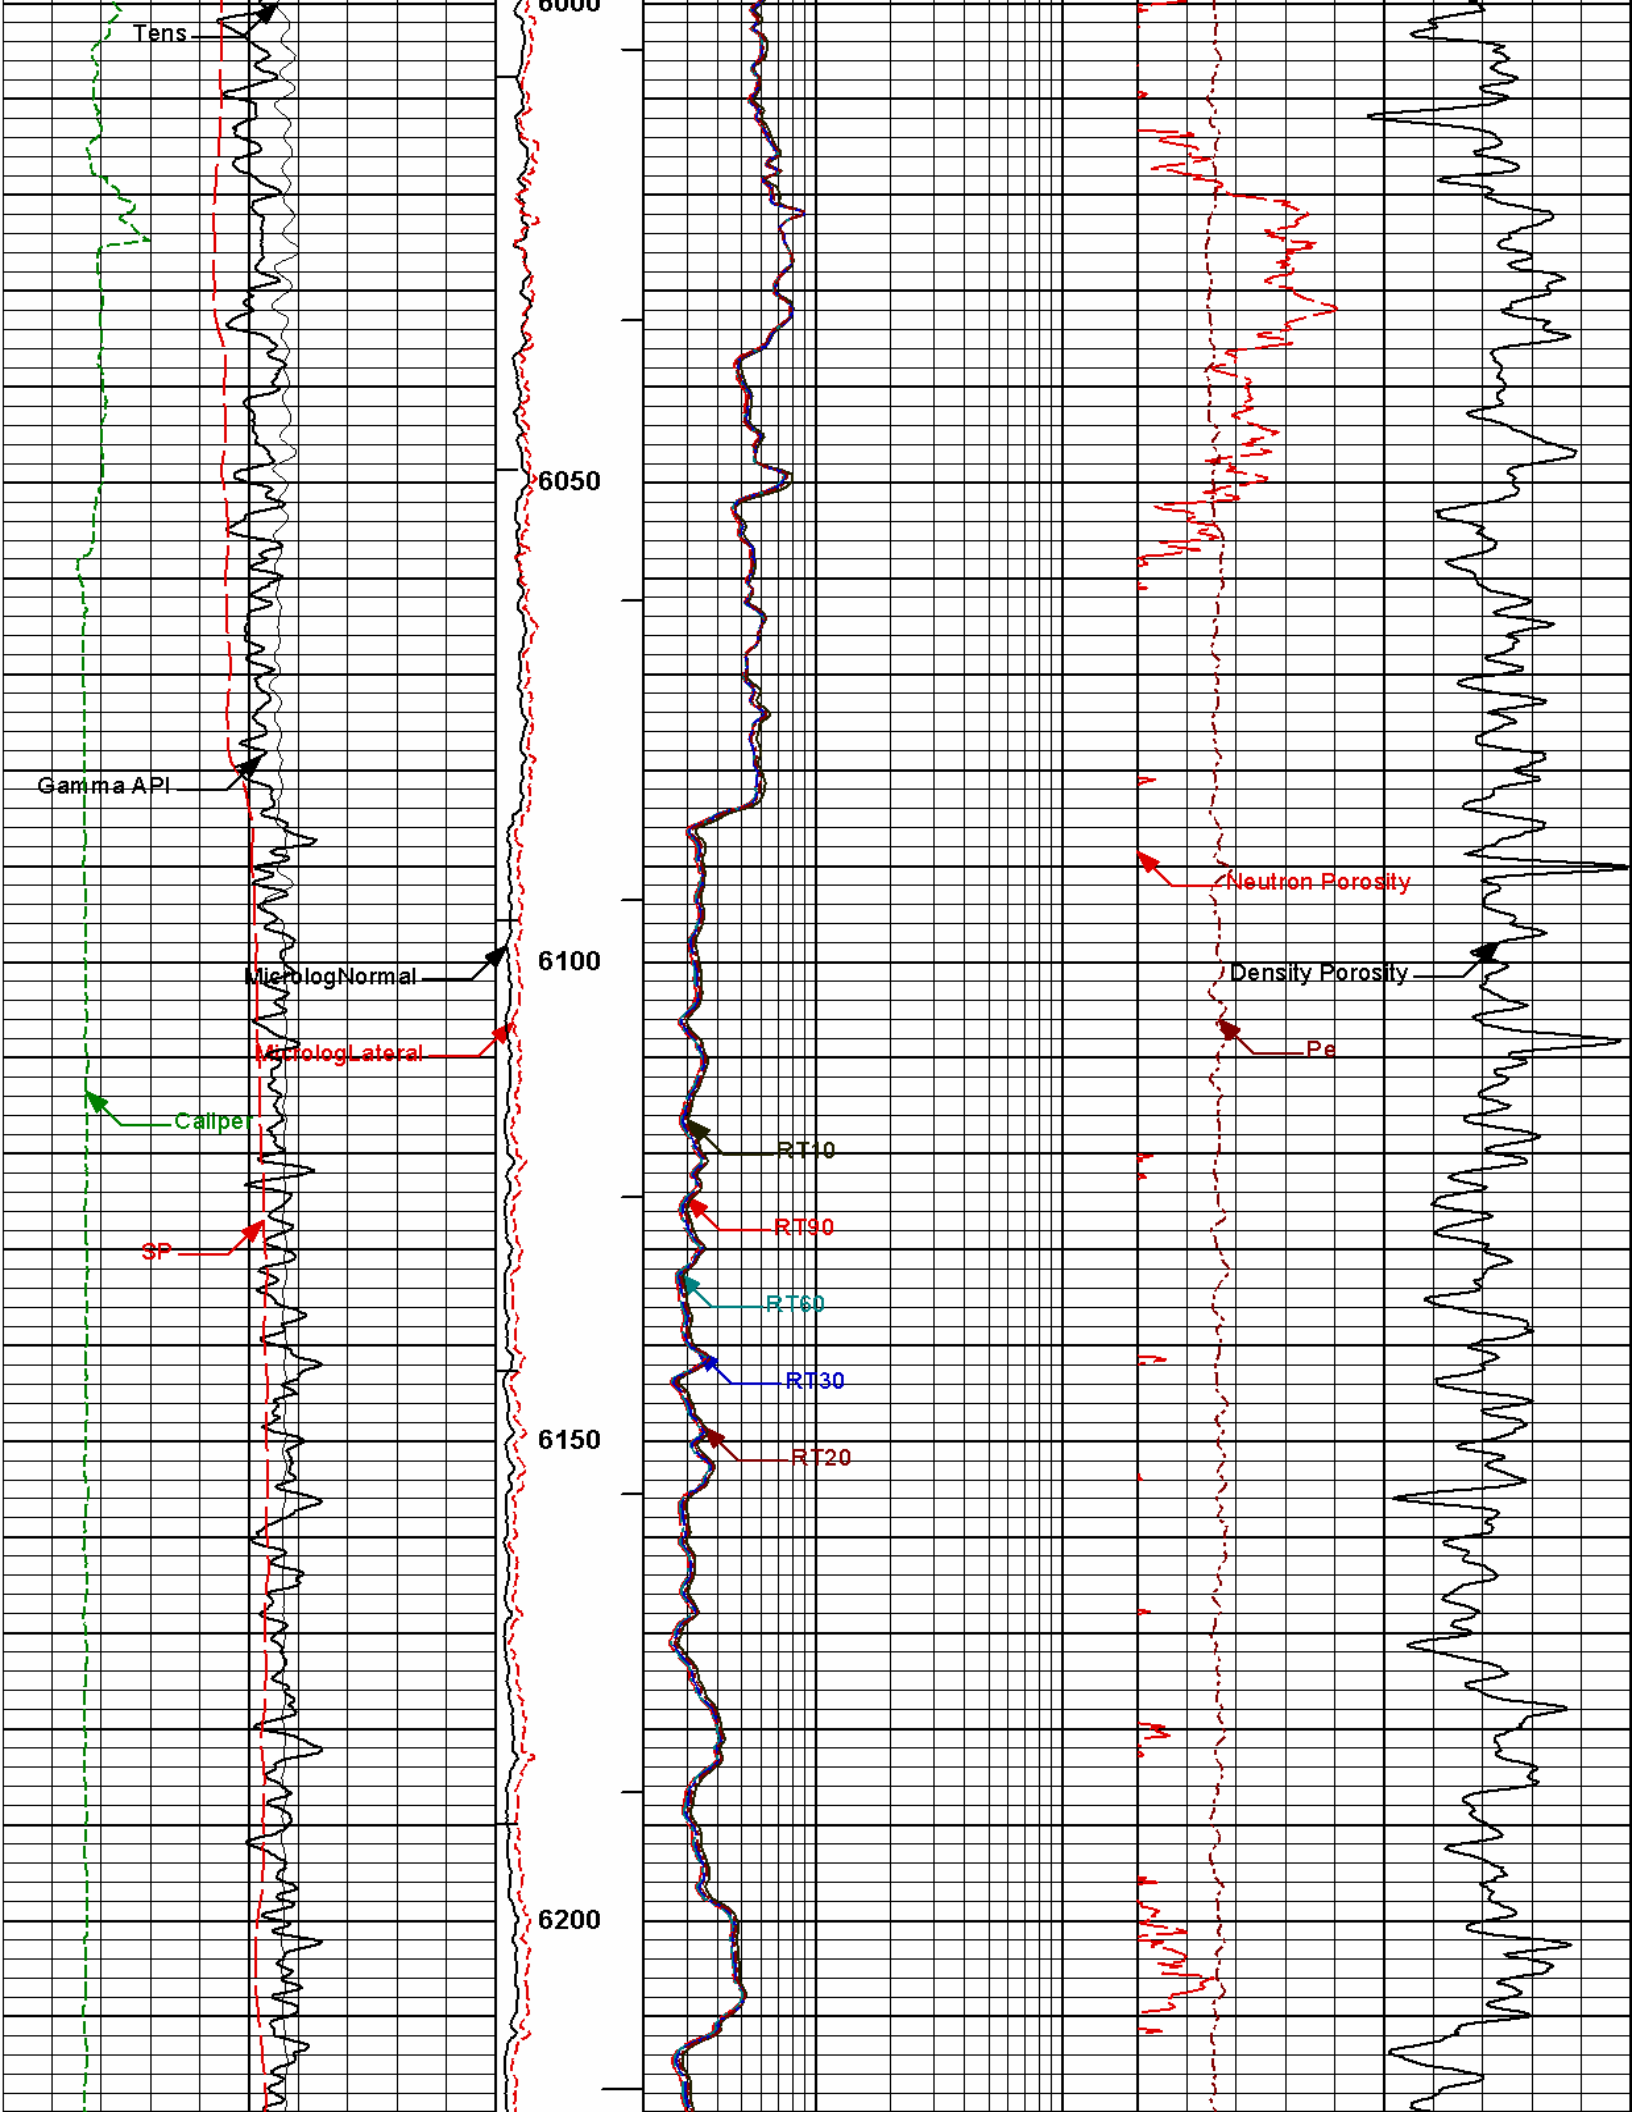


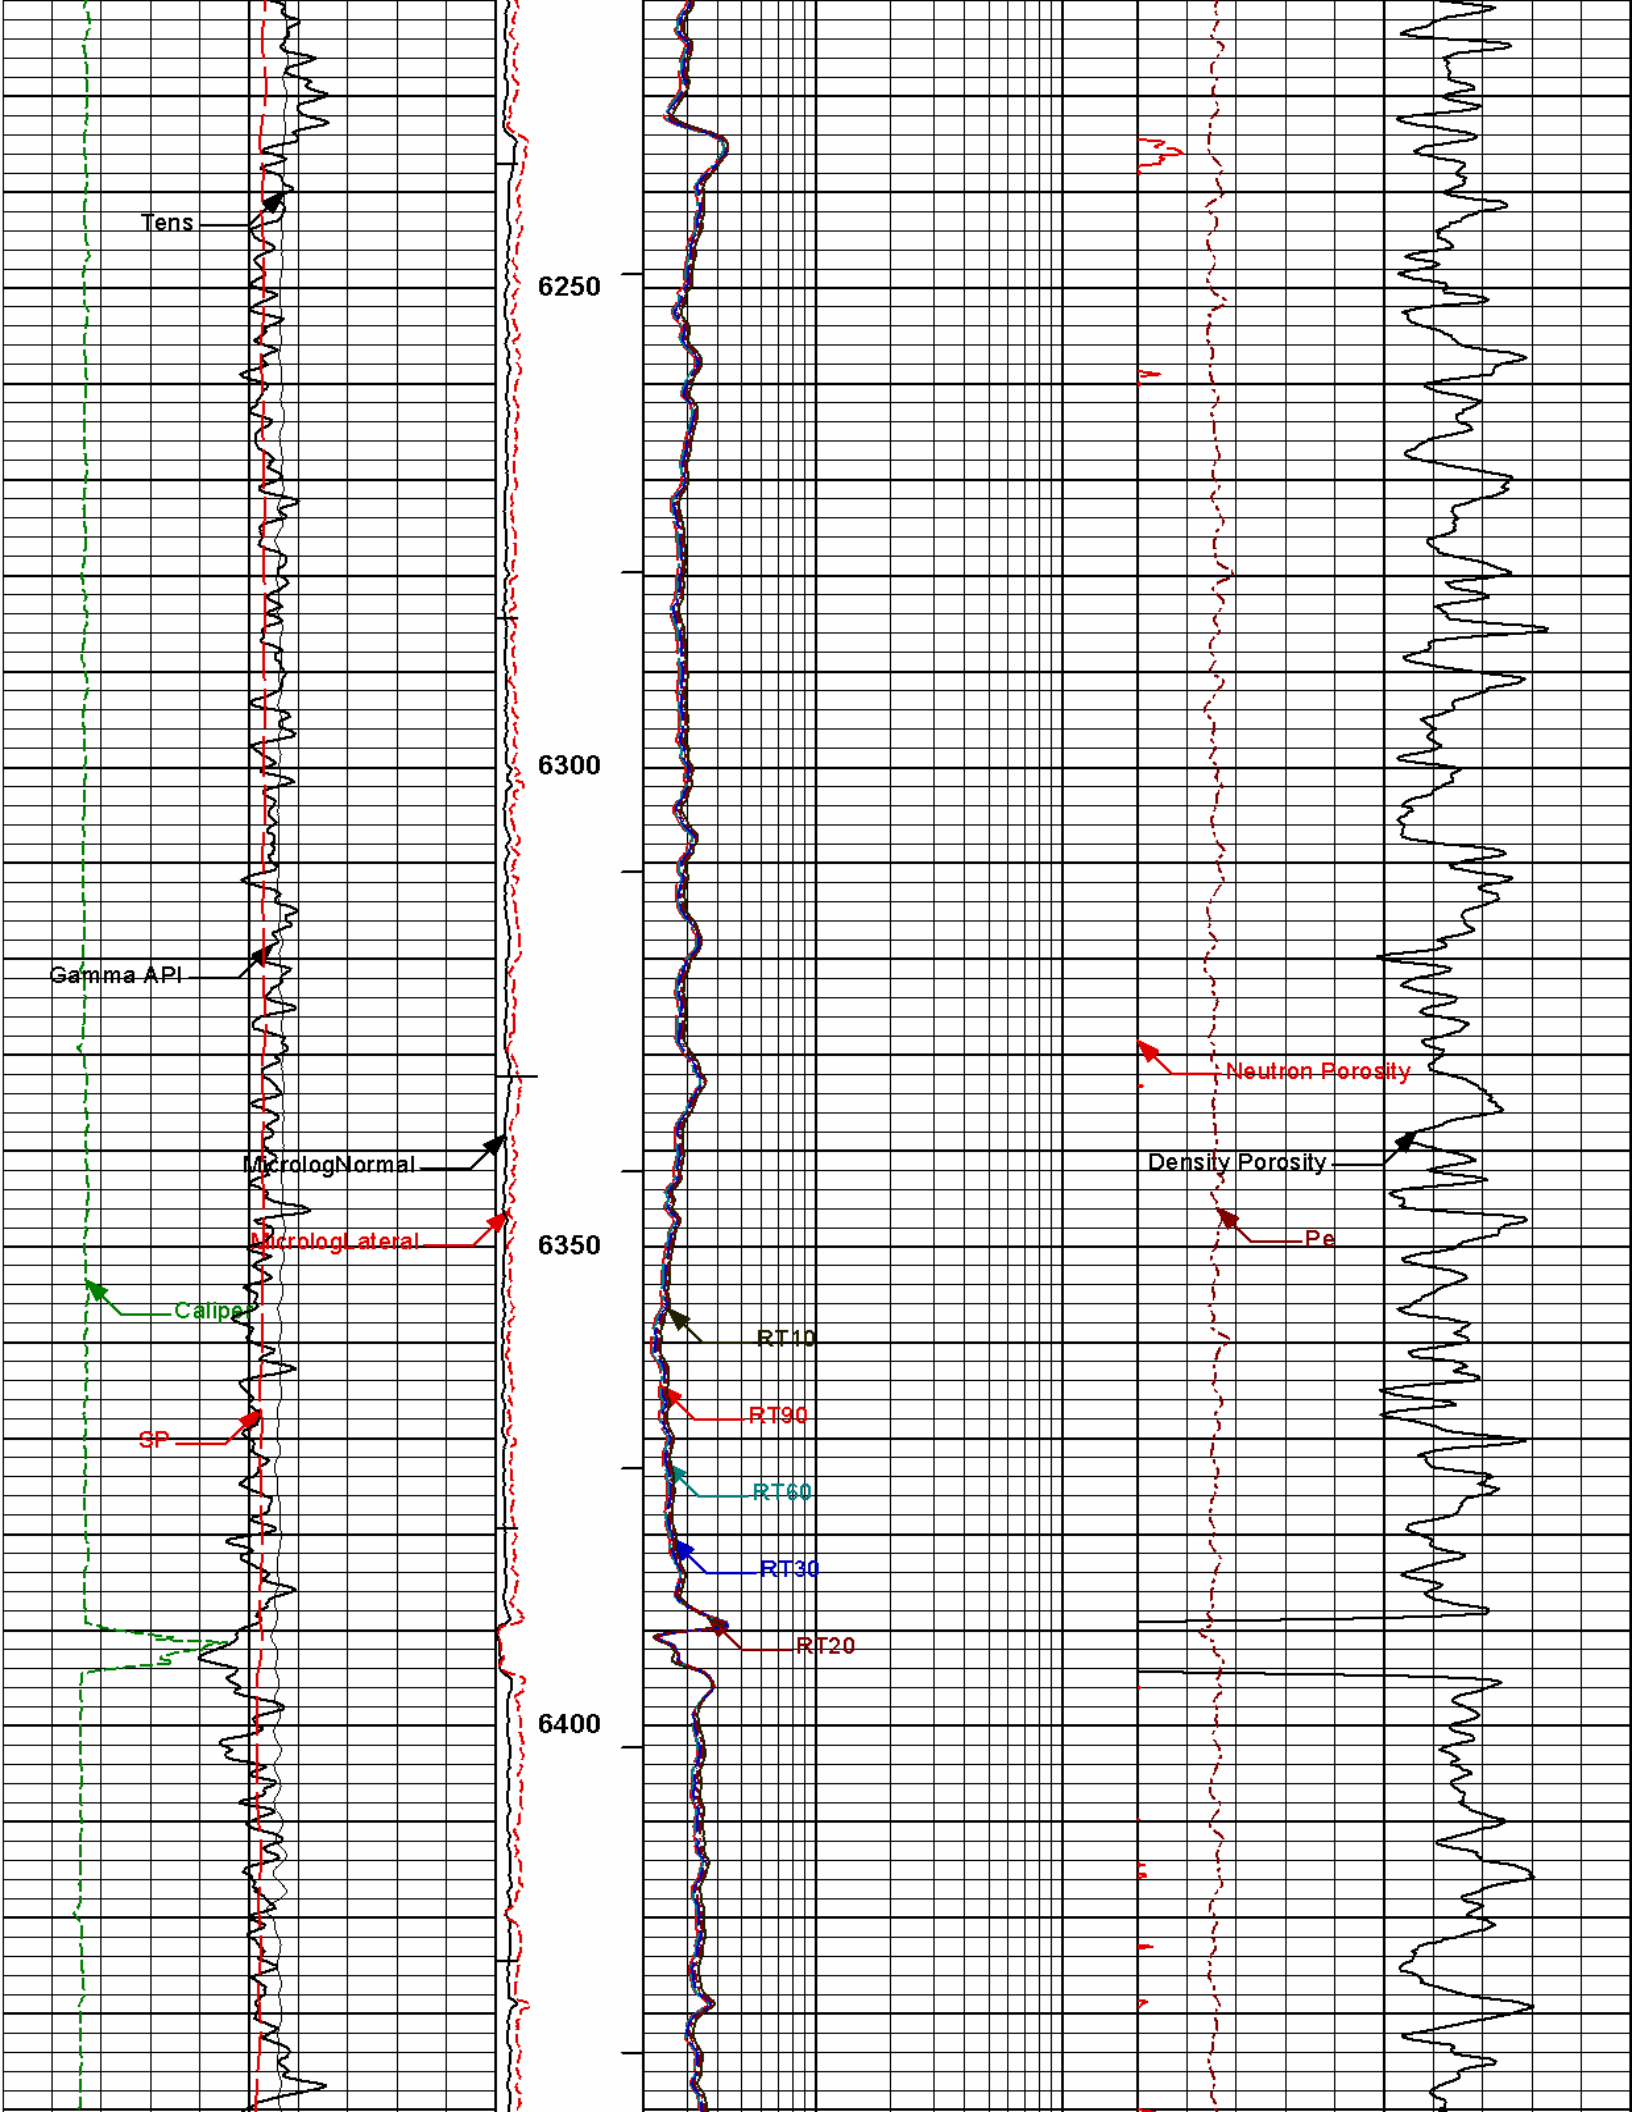


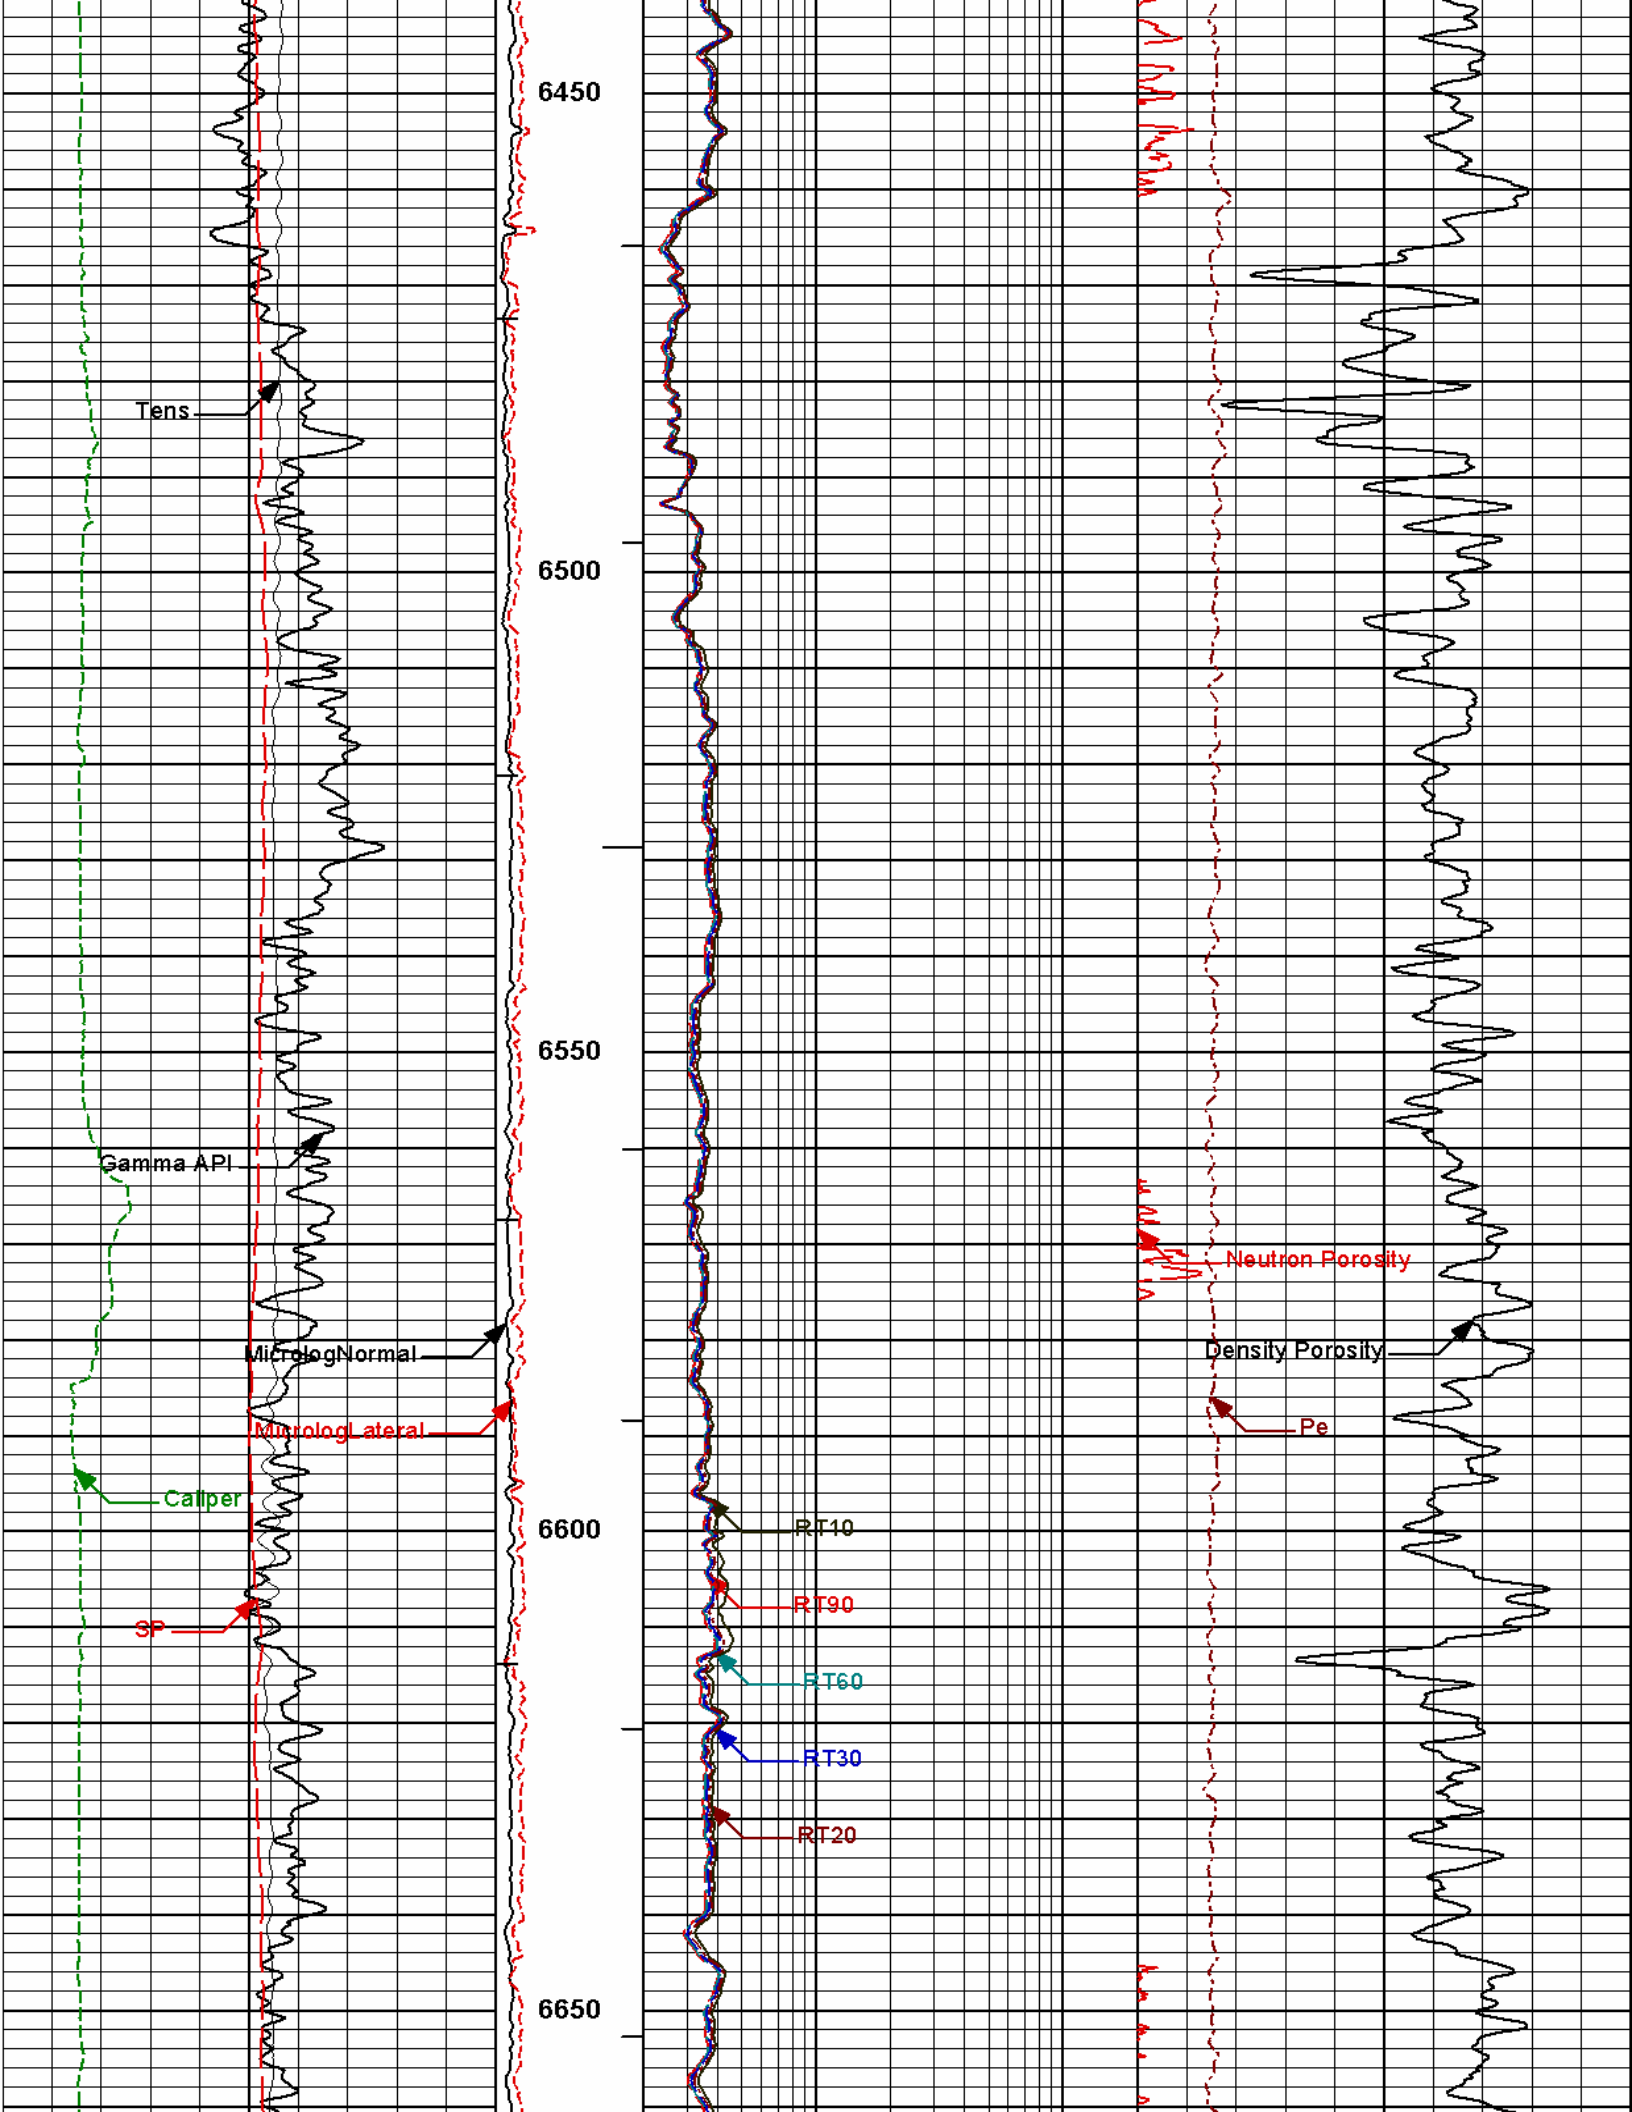


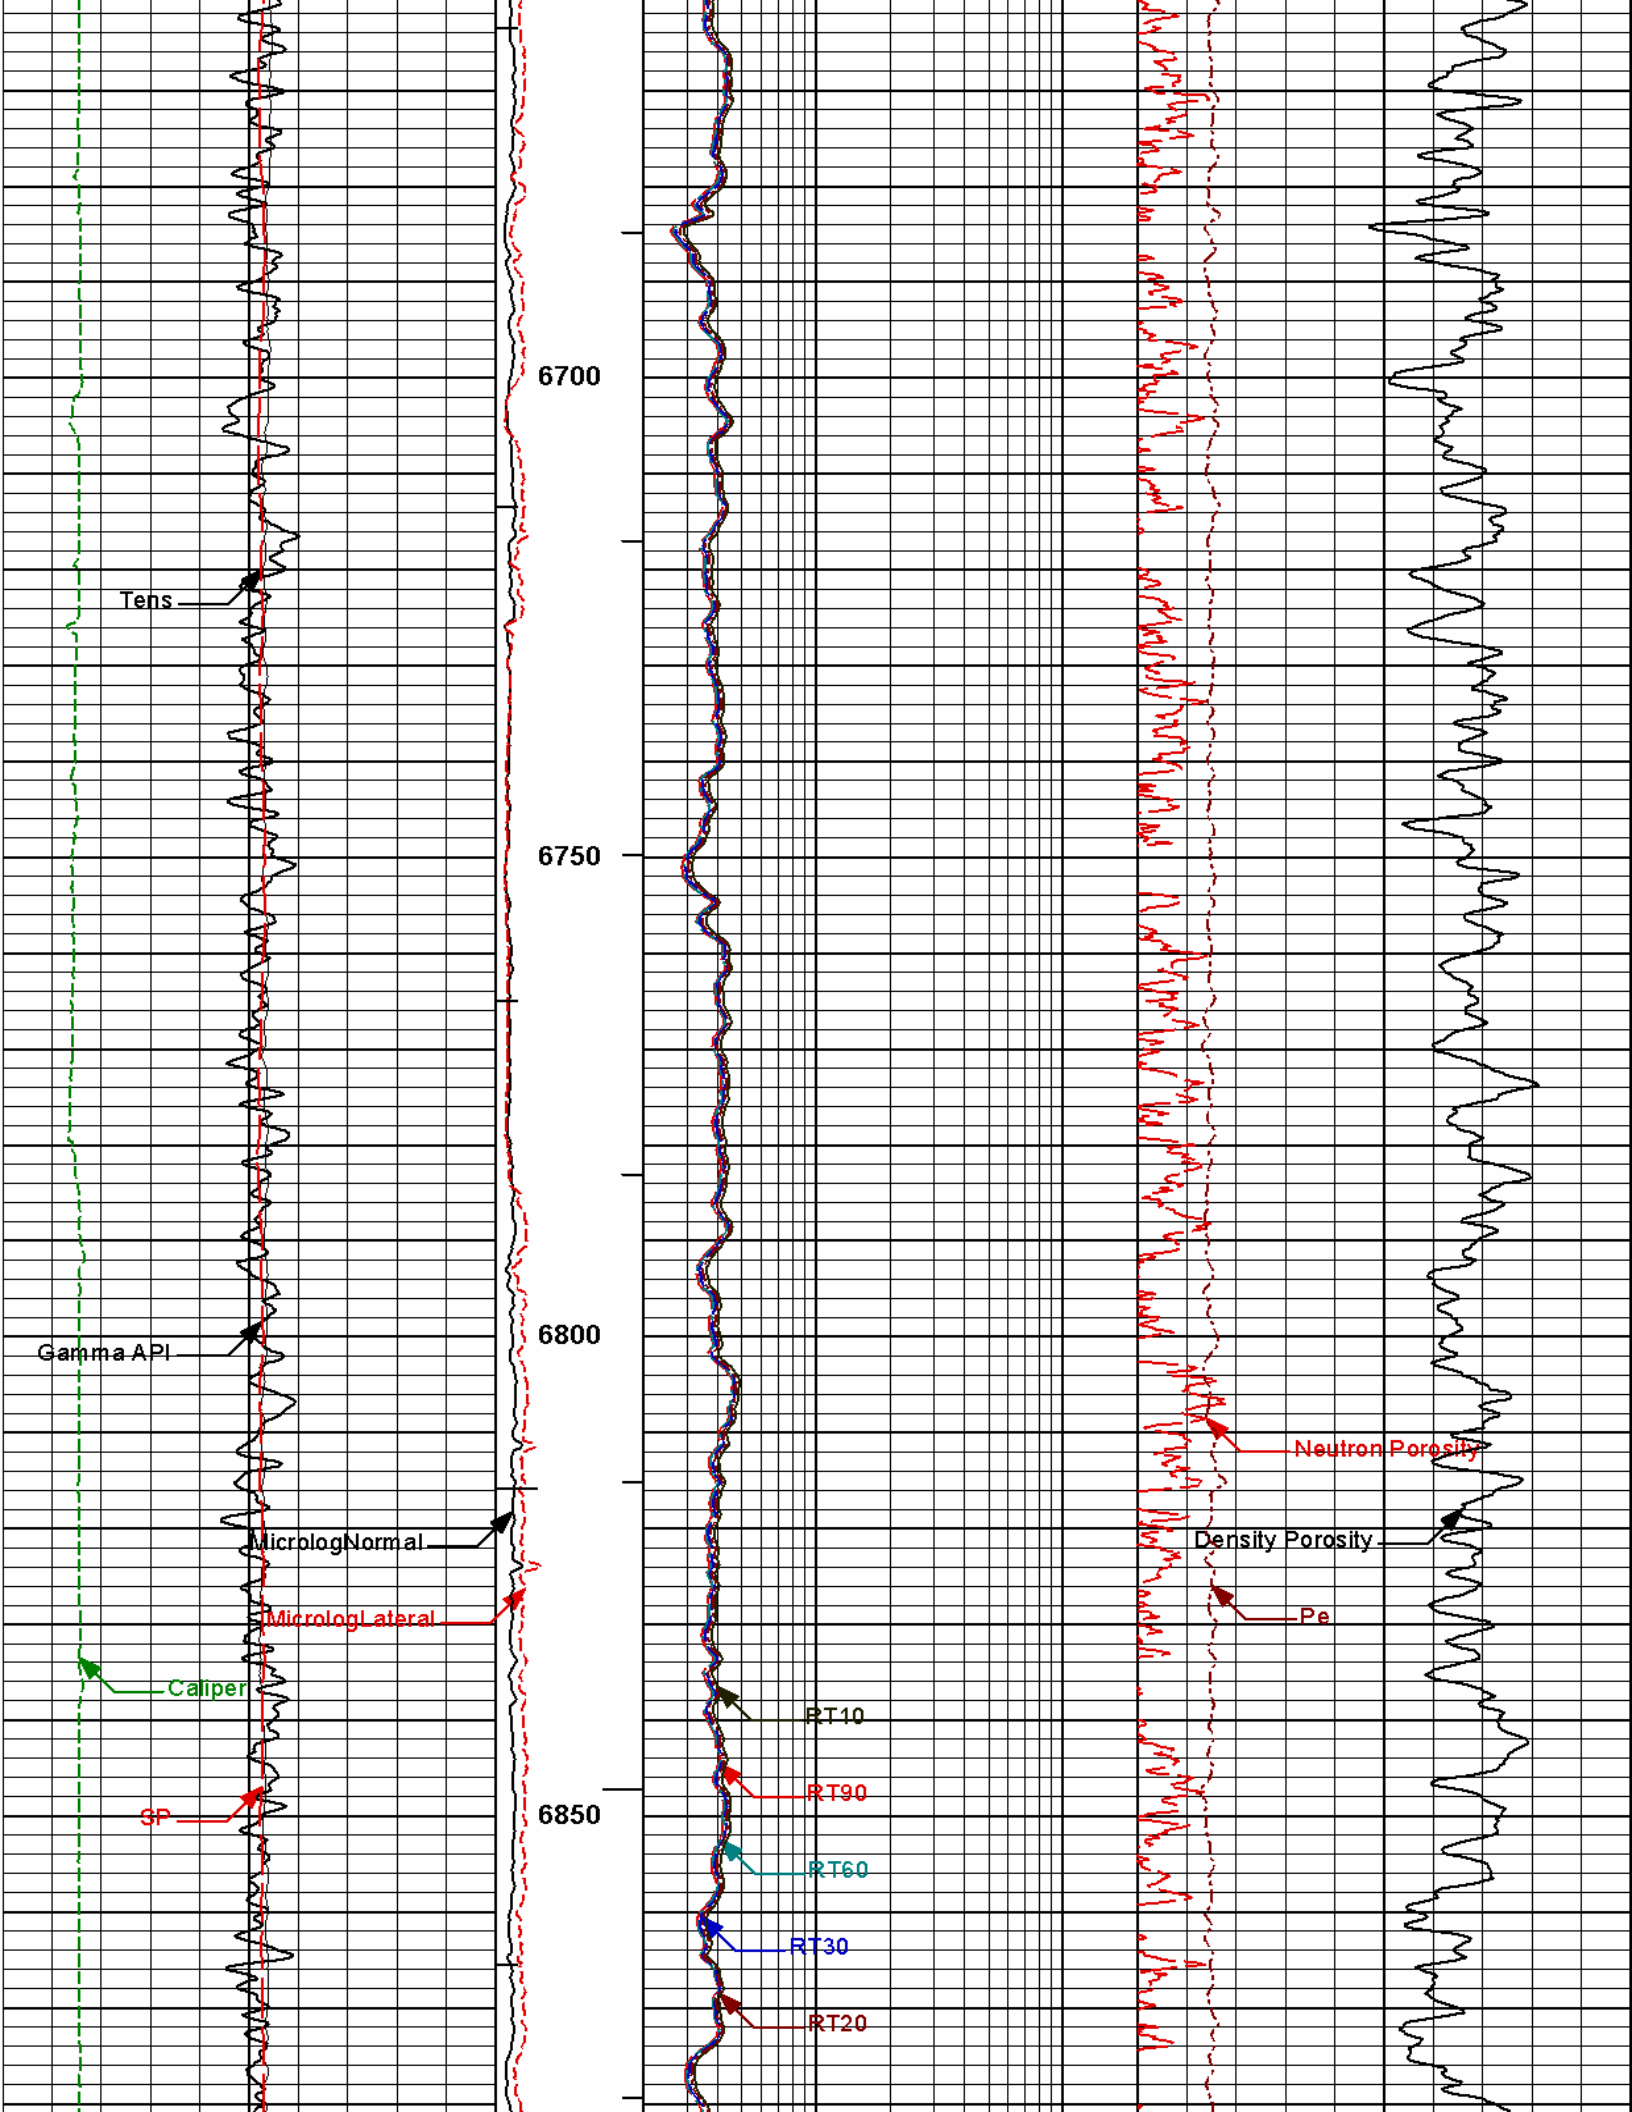


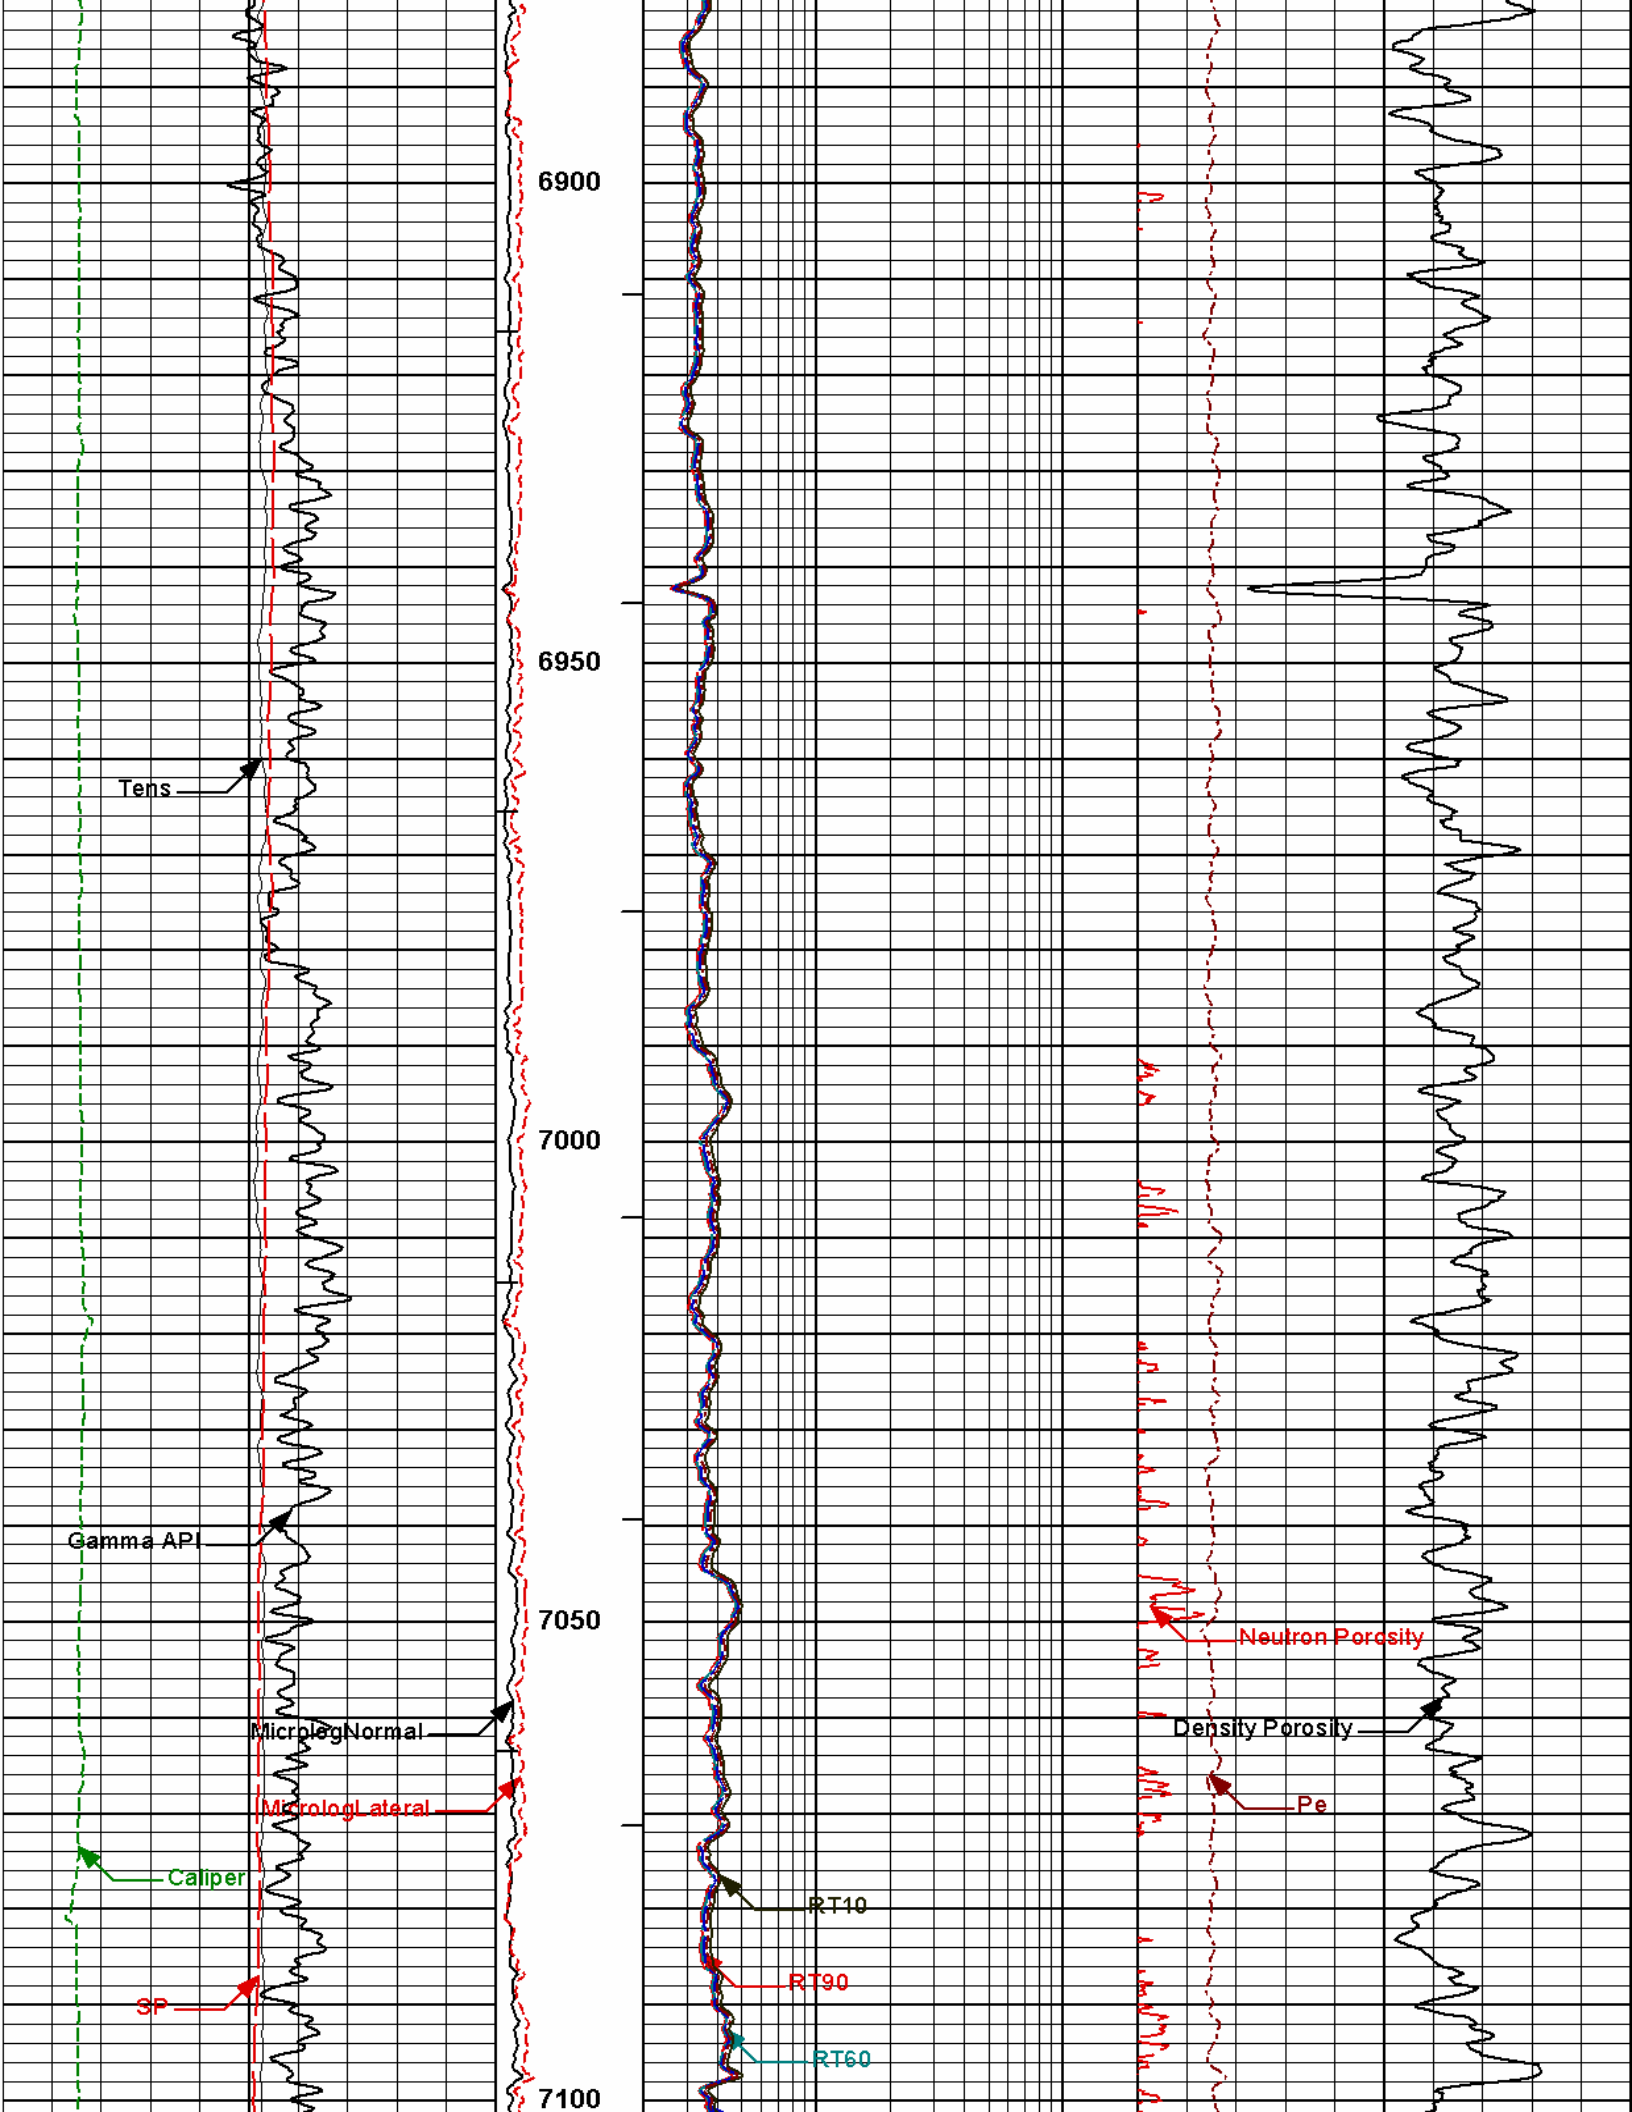

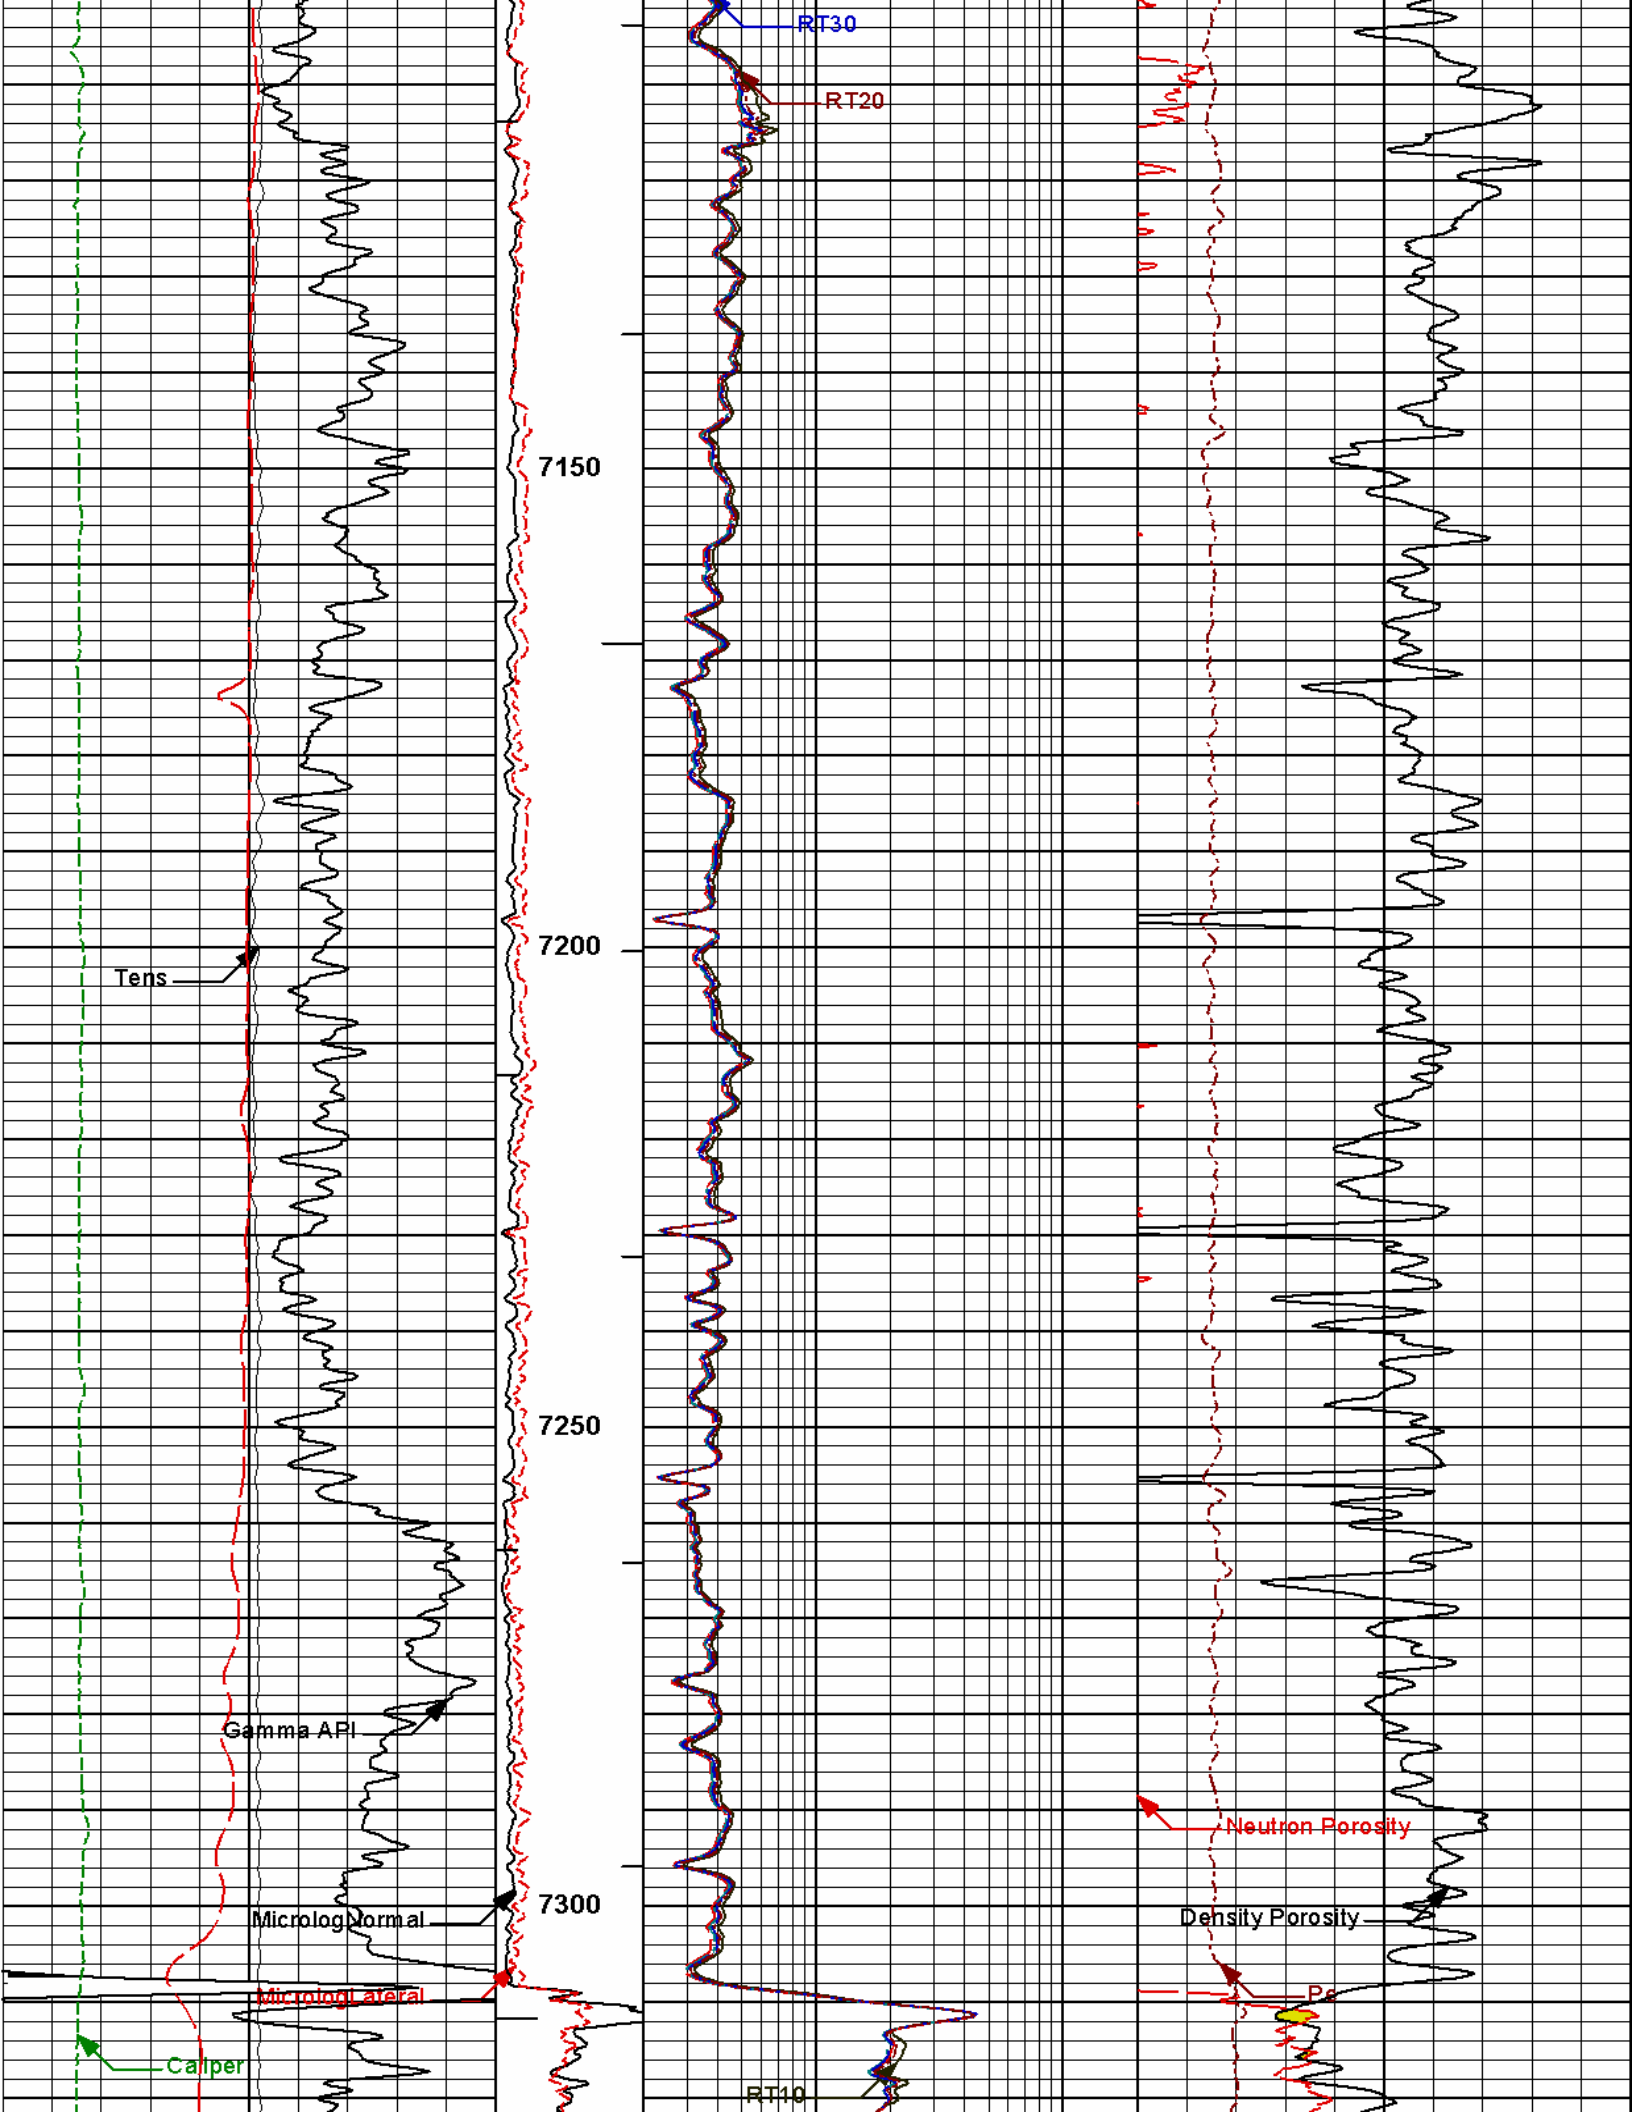

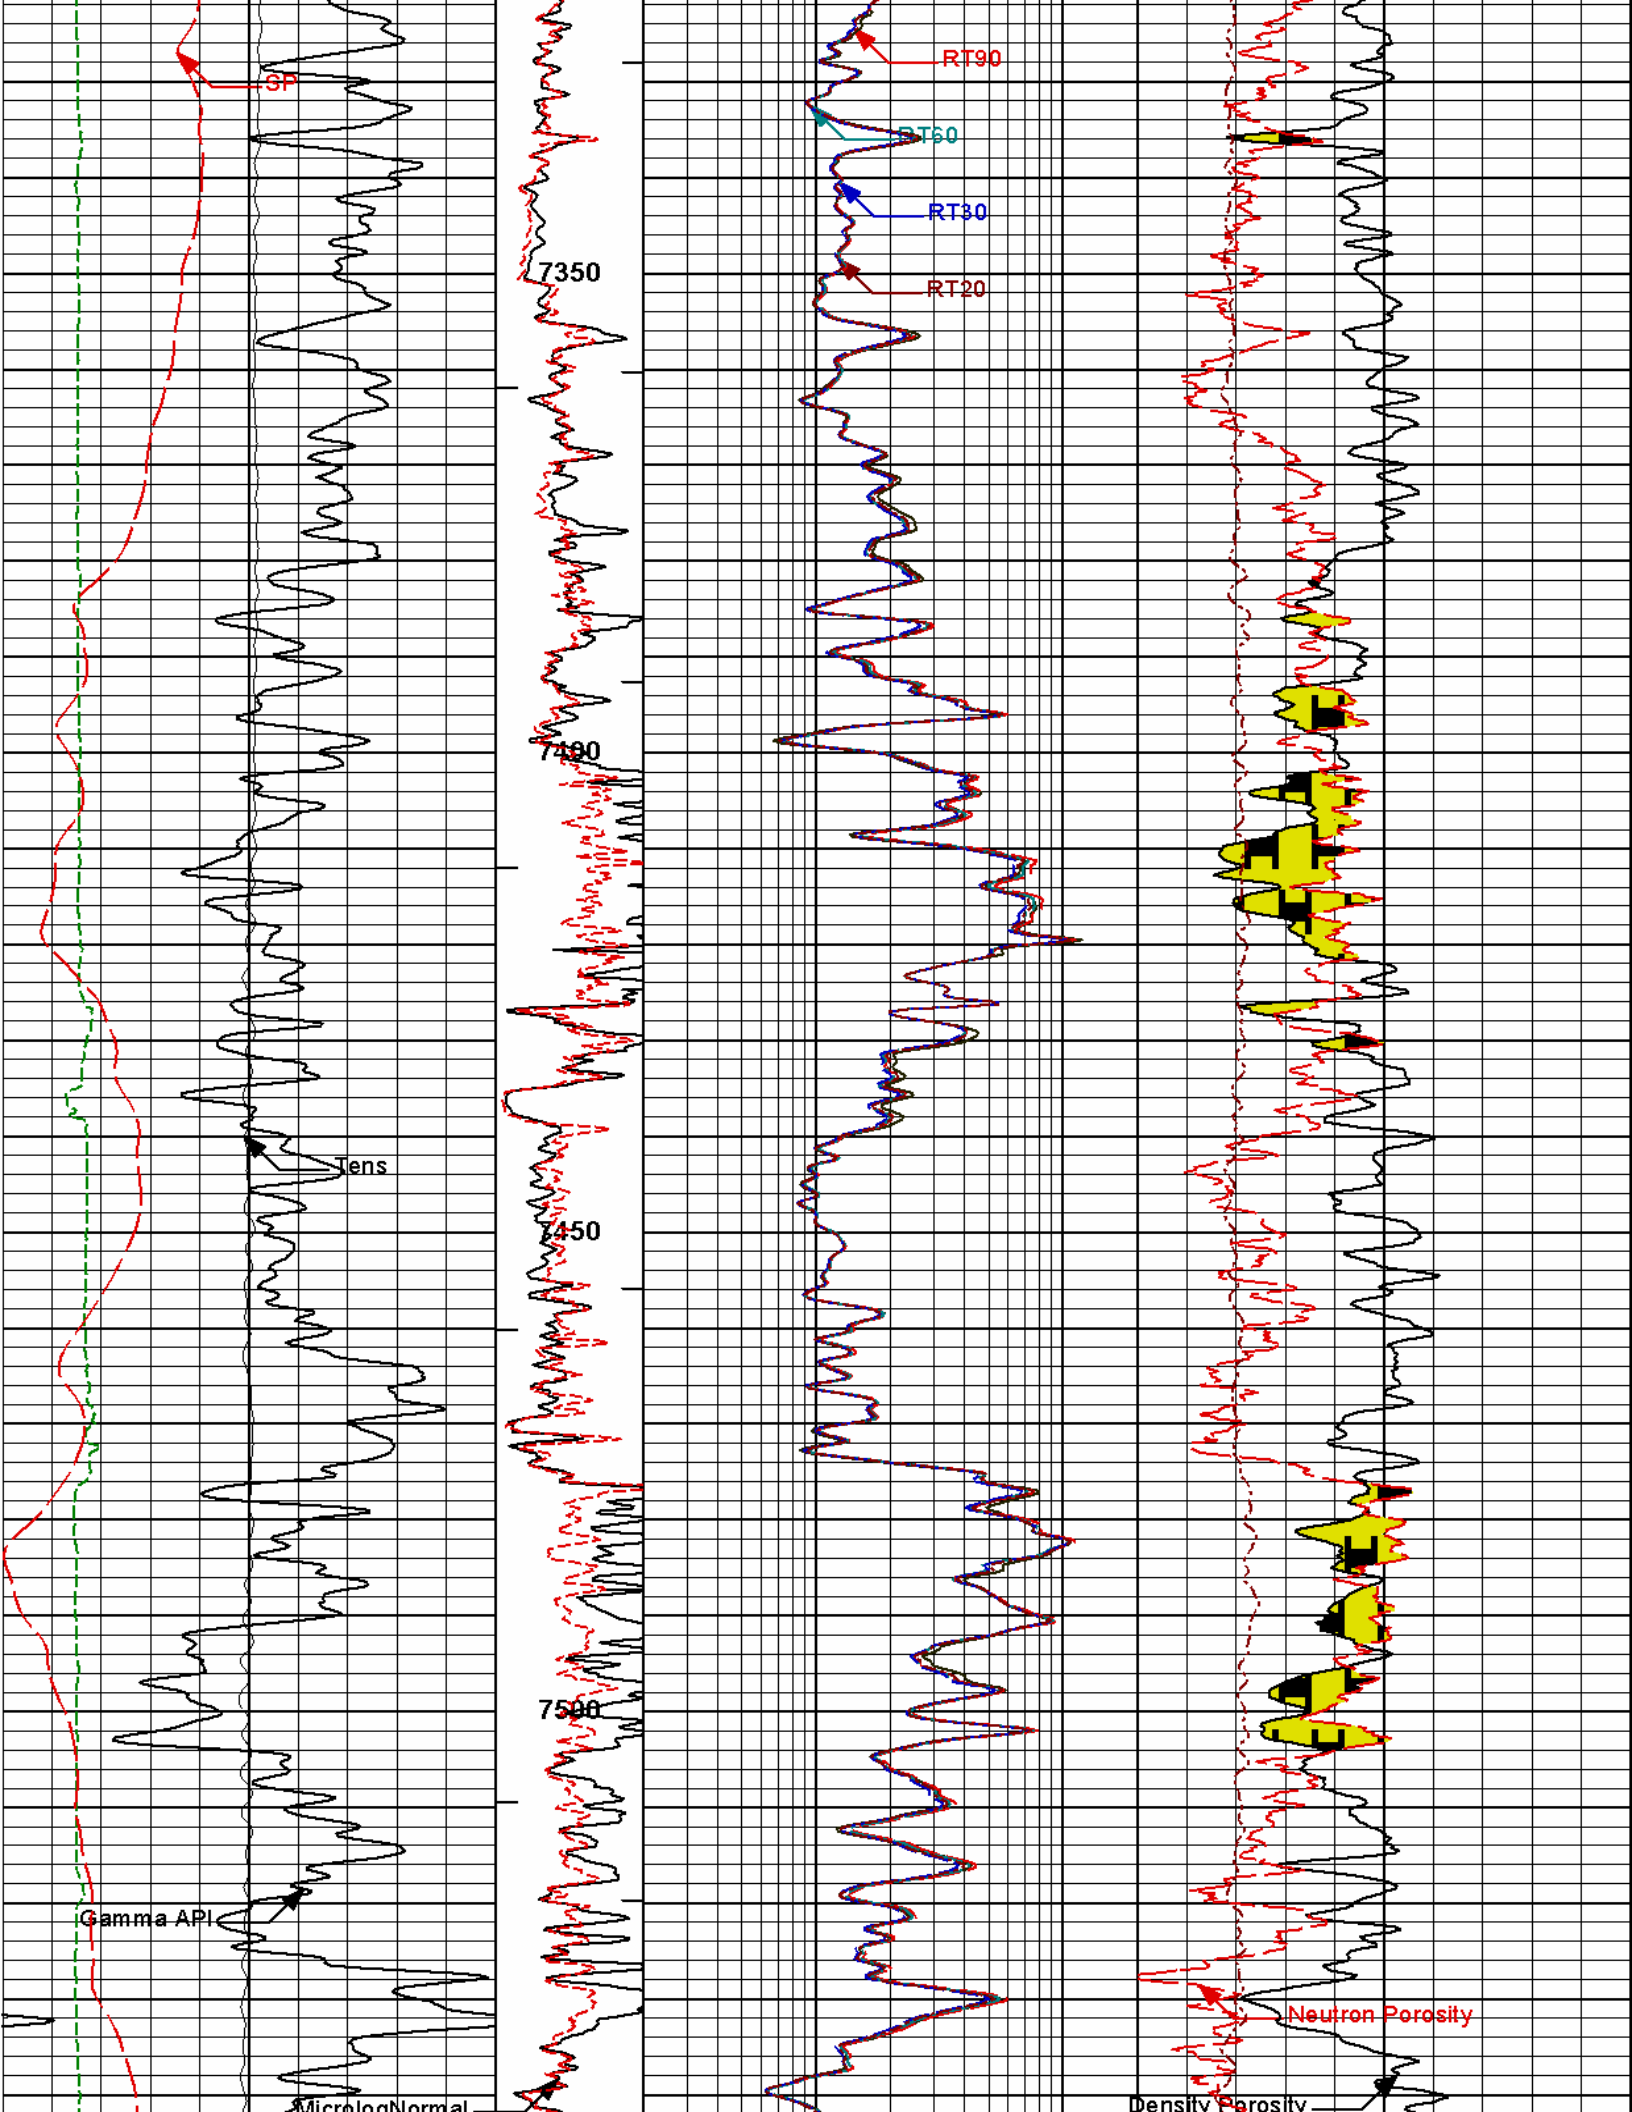

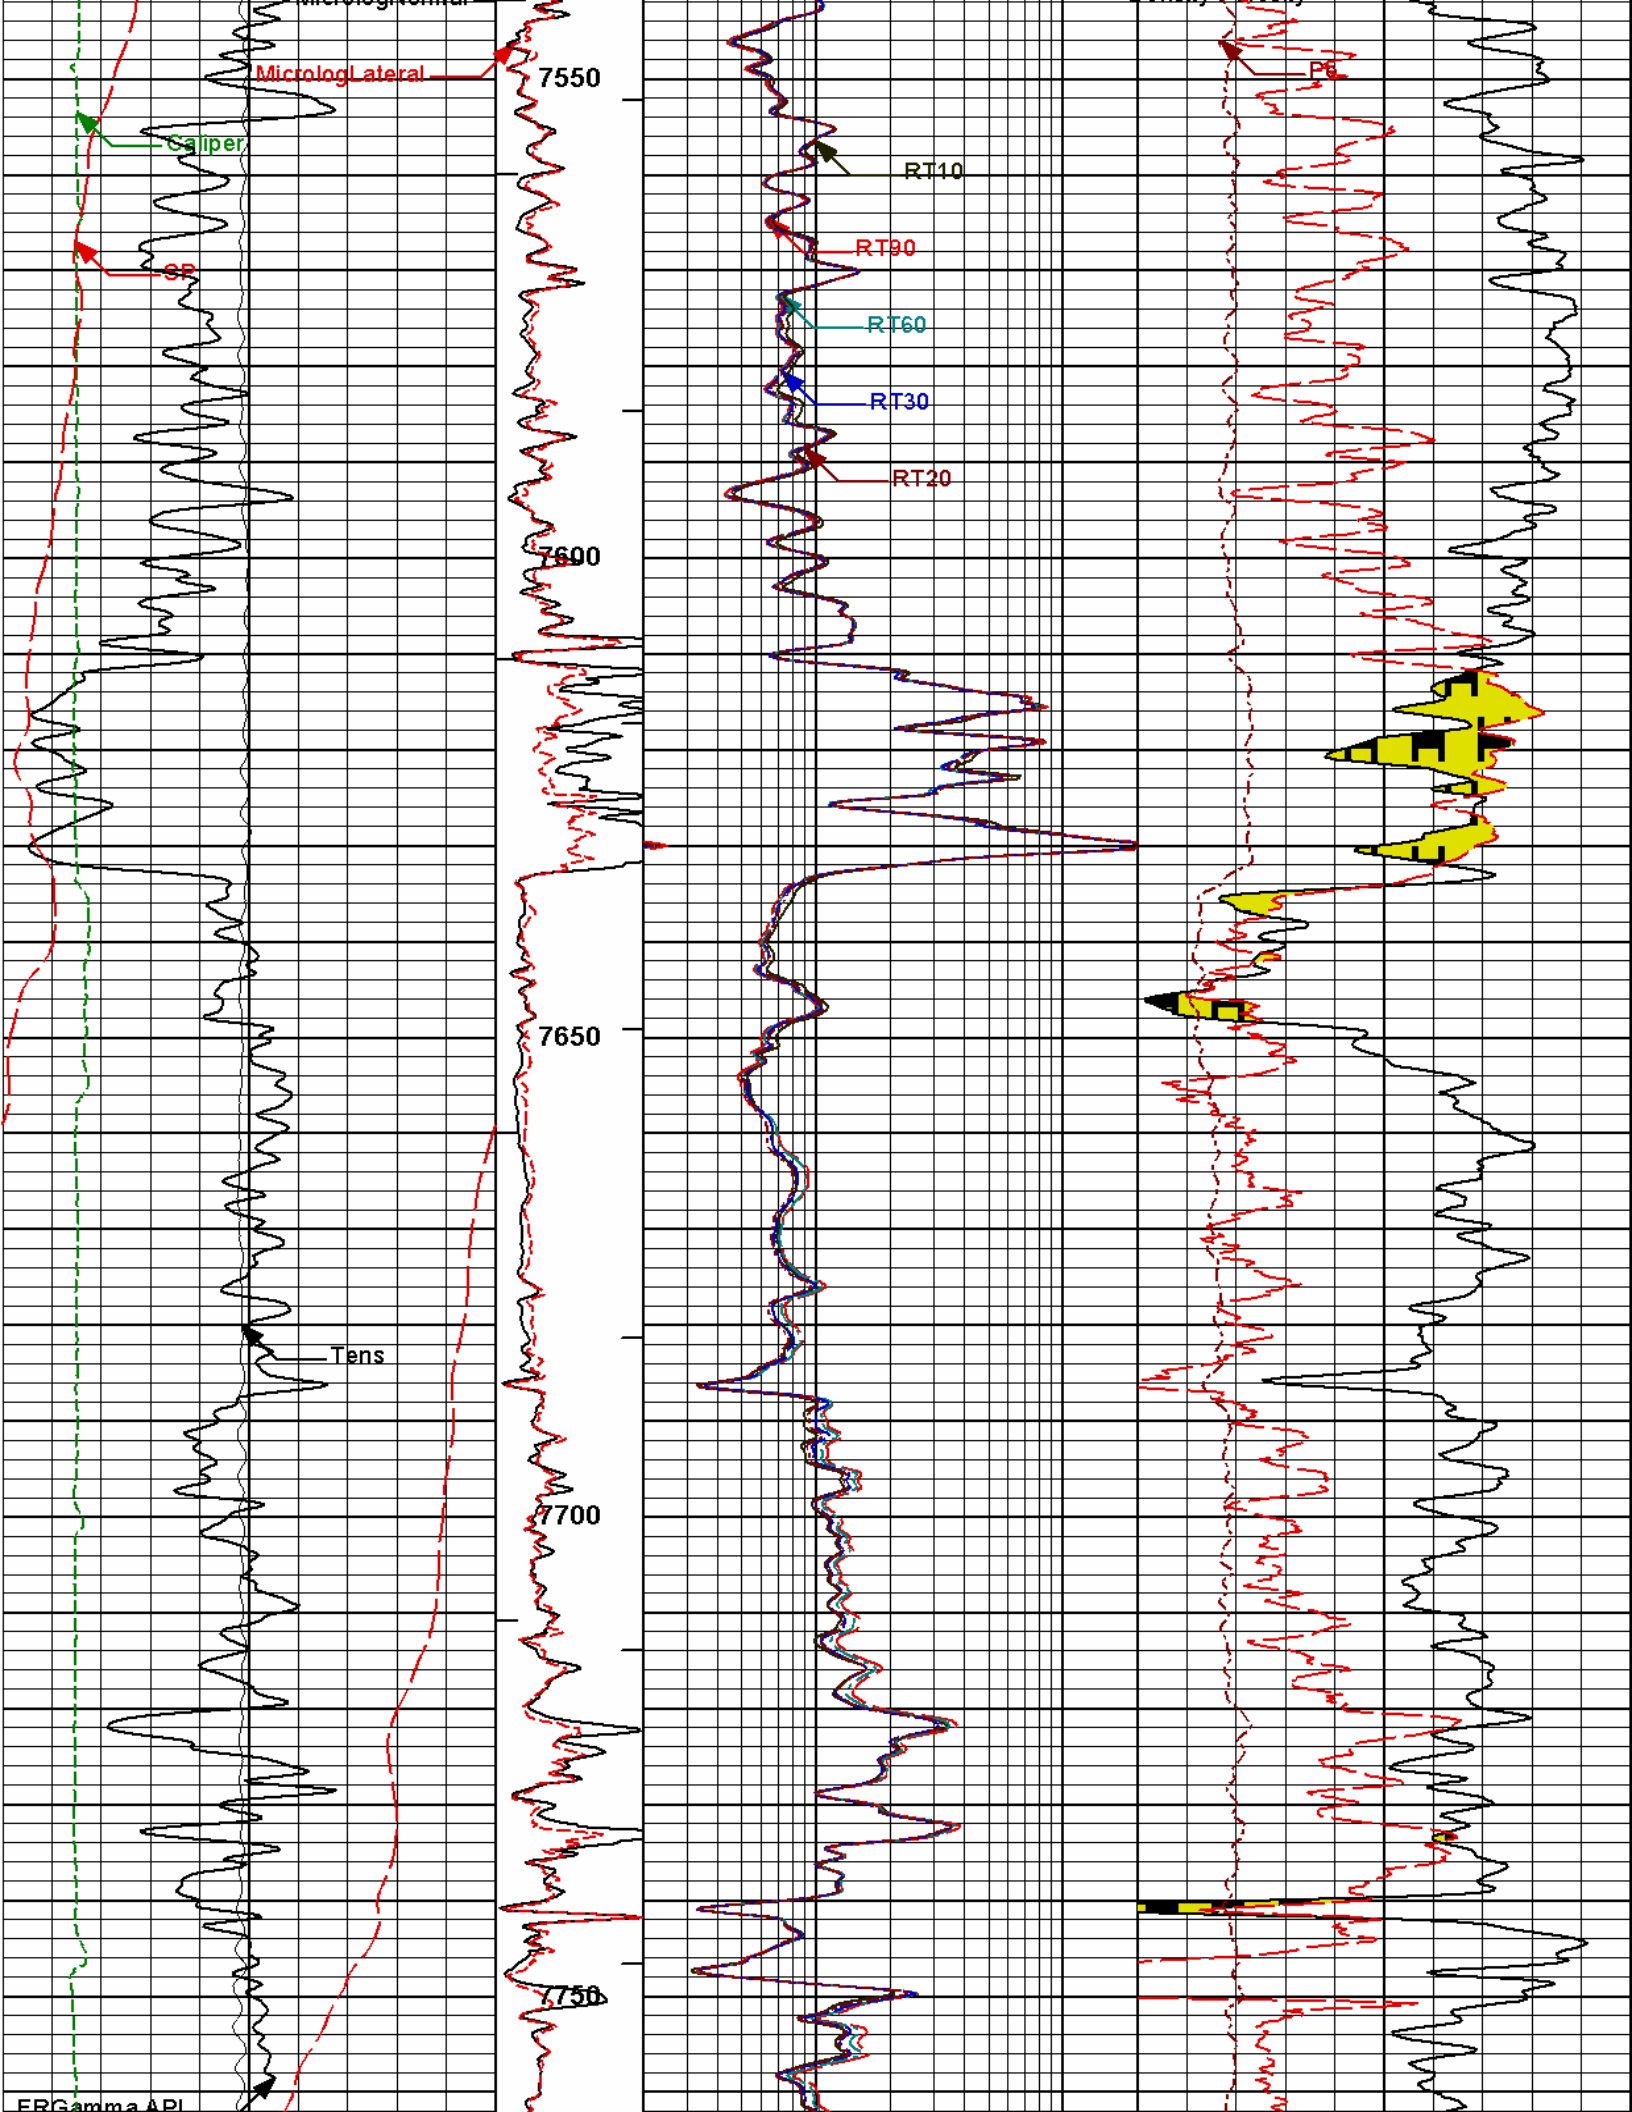

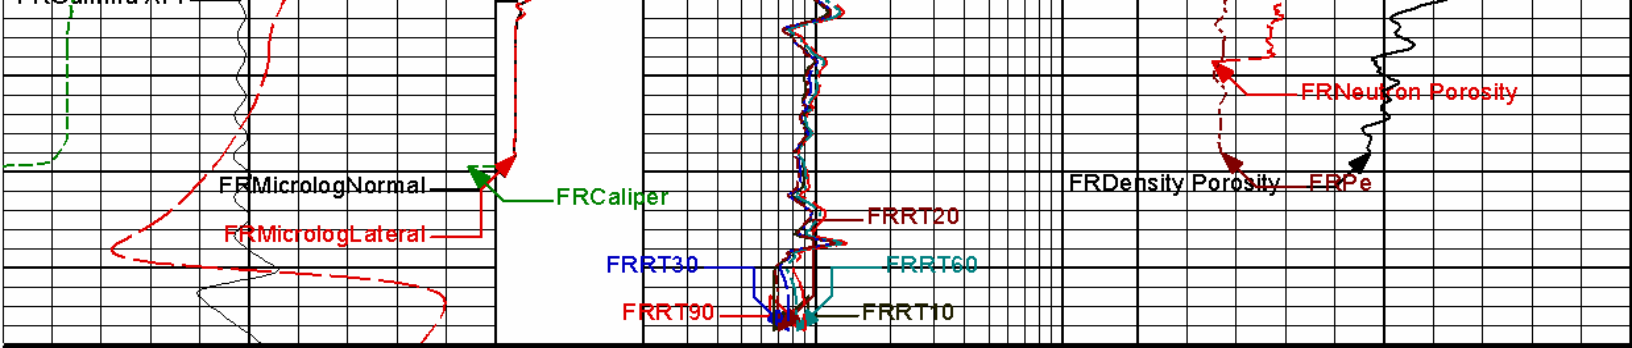

50	SP	150	1 : 240	2	RT90	200	0	Pe	10
	millivolts				ohmm				
0	Gamma API	200	BHVT	2	RT60	200	20	Density Porosity	0
	api				ohmm			percent	
6	Caliper	16	AHVT	2	RT30	200	20	Neutron Porosity	0
	inches				ohmm			percent	
10K	Tens	0	Microlog Lateral	2	RT20	200			
	pounds		ohm-metre		ohmm				
			Microlog Normal	2	RT10	200			
			ohm-metre		ohmm				

HALLIBURTON

Plot Time: 16-Apr-12 12:13:02
 Plot Range: 927 ft to 7798 ft
 Data: HEIN 2-1Well Based\DAQ-0001-003.01"
 Plot File: \\COMP\MAIN

MAIN PASS 5" = 100'

HALLIBURTON

CALIBRATION REPORT

NATURAL GAMMA RAY TOOL SHOP CALIBRATION

Tool Name: GTET - 11215095	Reference Calibration Date: 13-Apr-12 10:08:49
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 10:21:55
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

Calibrator Source S/N: TB 290
 Calibrator API Reference: 230.00 api
 Equivalent Calibrator API Reference: 234.0 api

Measurement	Measured	Calibrated	Units
Background	68.6	70.8	api
Background + Calibrator	291.6	300.8	api
Calibrator	232.2	230.0	api

NATURAL GAMMA RAY TOOL FIELD CALIBRATION

Tool Name: GTET - 11215095	Reference Calibration Date: 13-Apr-12 10:21:55
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 10:25:25
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

Calibrator Source S/N: TB 290

Field Verification	Shop	Field	Units
Background	70.8	70.9	api
Background + Calibrator	300.8	300.1	api
Calibrator	230.0	229.2	api
Shop	Field	Difference	Tolerance
230.0	229.2	0.8	+/- 9.00

DUAL SPACED NEUTRON SHOP CALIBRATION

Tool Name:	DSNT - 11277440	Reference Calibration Date:	13-Apr-12 12:27:11
Engineer:	J. PINKETT	Calibration Date:	13-Apr-12 12:42:50
Software Version:	WL INSITE R3.4.4 (Build 2)	Calibration Version:	1

Logging Source S/N: DSN-430

Tank Serial Number: 11068236

Reference value assigned to Tank: 53.720

Snow Block S/N: 37526

Calibration Tank Water Temperature: 68 degF

Min. Tool Housing Outside Diameter: 3.625 in

CALIBRATION CONSTANTS

Measurement	Prev. Value	New Value	Control Limit On New Value
Gain:	1.004	1.002	0.900 - 1.100

WATER TANK SUMMARY (Horizontal Water Tank)

Measurement	Current Reading (Previous Coef.)	Calibrated (New Coef.)	Change	Control Limit On Change
Porosity (decp):	0.2229	0.2224	0.0006	+/- 0.0020
Calibrated Ratio:	10.13	10.11	0.020	+/- 0.050

VERIFIER

Measurement	Value	Control Limit
Snow-Block Porosity (decp):	0.0671	0.02000 - 0.09000

PASS/FAIL SUMMARY

Background Check:	Passed
Gain-Range Check:	Passed
Snow-Block Check:	Passed

DUAL SPACED NEUTRON FIELD CALIBRATION

Tool Name:	DSNT - 11277440	Reference Calibration Date:	13-Apr-12 12:42:50
Engineer:	J. PINKETT	Calibration Date:	13-Apr-12 12:47:19
Software Version:	WL INSITE R3.4.4 (Build 2)	Calibration Version:	1

Logging Source S/N: DSN-430

Snow Block S/N: 37526

NEUTRON FIELD-CHECK SUMMARY

	Shop	Field	Difference	Control Limit On Change
Snow-Block Porosity (decp):	0.0671	0.0800	0.0129	+/- 0.0150

PASS/FAIL SUMMARY

Block Change Check:	Passed
Snow Block Stat Check:	Passed
Temperature Check:	Passed

DENSITY CALIPER SHOP CALIBRATION

Tool Name: SDLT - M319_P123_BLUE	Reference Calibration Date: 13-Apr-12 10:06:31
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 10:12:25
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

CALIBRATION COEFFICIENTS

Measurement	Previous Value	New Value	Control Limit On New Value
Pad Offset	-2747.71	-2760.54	-7000.00 - -1000.00
Pad Gain	0.0003864	0.0003890	0.000200 - 0.000600
Arm Offset	-1879.95	-1286.22	-5000.00 - 3000.00
Arm Gain	0.0005413	0.0004847	0.000300 - 0.000700
Arm Power	-0.000006916	-0.000003541	-0.000010 - 0.000010

The ring diameter is computed from: $DIAMETER = PAD\ EXTENSION + ARM\ EXTENSION + TOOL\ DIAMETER$

Tool Diameter: 4.50 in

CALIBRATION RINGS

Measurement	Current Reading (Previous Coeff.)	Calibrated (New Coeff.)	Change	Control Limit On New Value
PAD EXTENSION:				
Small Ring (in)	1.99	2.00	0.01	+/- 0.20
Medium Ring (in)	3.73	3.75	0.02	+/- 0.20
RING DIAMETER:				
Small Ring (in)	6.42	6.50	0.08	+/- 0.20
Medium Ring (in)	8.30	8.25	-0.05	+/- 0.20
Large Ring (in)	14.99	15.00	0.01	+/- 0.20

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
Ring-Measurement Check:	Passed

PASS/FAIL SUMMARY

Calibration-Coefficients Range Check:	Passed
---------------------------------------	--------

SDLT CALIPER FIELD CALIBRATION

Tool Name: SDLT - M319_P123_BLUE	Reference Calibration Date: 13-Apr-12 10:12:25
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 10:21:39
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

MEASURED CALIPER VALUES

Measurement	Shop	Field	Change	Control Limit On New Value
Pad Extension	3.75	3.68	-0.07	+/- 0.10
Ring Diameter	8.25	8.16	-0.09	+/- 0.15

PASS/FAIL SUMMARY

Pad Extension Check:	Passed
Diameter Check:	Passed

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt Sonde - E5787-S5797	Reference Calibration Date: 28-Jul-11 17:33:20
Engineer: C. BLUE	Calibration Date: 17-Feb-12 03:46:27

TYPICAL GAIN RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0074	1.05	0.95	1.0078	1.05	0.95	1.0038	1.05
A2 (50")	0.95	1.0089	1.05	0.95	1.0116	1.05	0.95	1.0121	1.05
A3 (29")	0.95	1.0002	1.05	0.95	1.0009	1.05	0.95	1.0000	1.05
A4 (17")	0.95	0.9907	1.05	0.95	0.9889	1.05	0.95	0.9911	1.05
A5 (10")	N/A	N/A	N/A	0.95	0.9880	1.05	0.95	0.9887	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9726	1.05	0.95	0.9728	1.05

TYPICAL SONDE OFFSET RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	-5	-2.992	2	-6	-4.284	-2	-8	-5.526	-2
A2 (50")	-7	-1.100	-1	-6	-3.385	-2	-7	-4.538	-2
A3 (29")	-27	-15.583	-9	-9	-4.174	-3	-7	-3.135	-1
A4 (17")	-180	-117.008	-60	-45	-35.477	-15	-39	-27.073	-13
A5 (10")	N/A	N/A	N/A	-150	-90.891	-50	-80	-47.397	-10
A6 (6")	N/A	N/A	N/A	175	297.724	525	90	151.286	270

TRANSMITTER CURRENT GAIN

Signal	Lower	R	Upper
12K	0.6	0.7906	1.3
36K	1.0	1.8311	2.0
72K	1.0	1.0474	2.0

R-MUD VERIFICATION

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
Mud Cell	0.95	1.006	1.05

SPECTRAL DENSITY SHOP CALIBRATION

Tool Name: SDLT Pad - M319_P123_BLUE

Reference Calibration Date: 13-Apr-12 11:11:41

Engineer: J. PINKETT

Calibration Date: 13-Apr-12 11:31:11

Software Version: WL INSITE R3.4.4 (Build 2)

Calibration Version: 1

Logging Source S/N: 5256GW

Aluminum Block S/N: 63066 (BRIGHTON AL BLOCK)

Density: 2.602g/cc

Pe: 3.100

Magnesium Block S/N: 12345

Density: 1.691g/cc

Pe: 2.650

DENSITY CALIBRATION SUMMARY

Measurement	Previous Value	New Value	Control Limit
Near Bar Gain	1.0228	1.0144	0.90 - 1.10
Near Dens Gain	0.9790	0.9748	0.90 - 1.10
Near Peak Gain	0.9776	0.9545	0.90 - 1.10
Near Lith Gain	0.9946	0.9786	0.90 - 1.10
Far Bar Gain	0.9987	0.9960	0.90 - 1.10
Far Dens Gain	0.9894	0.9876	0.90 - 1.10
Far Peak Gain	0.9841	0.9840	0.90 - 1.10
Far Lith Gain	0.9632	0.9625	0.90 - 1.10
Near Bar Offset	-0.0287	0.0480	NONE
Near Dens Offset	0.3841	0.4196	NONE
Near Peak Offset	0.4723	0.6614	NONE
Near Lith Offset	0.3896	0.5175	NONE
Far Bar Offset	0.0215	0.0450	NONE

Far Dens Offset	0.0839	0.0987	NONE
Far Peak Offset	0.1117	0.1089	NONE
Far Lith Offset	0.2668	0.2698	NONE
<hr/>			
Near Bar Background	824.04	829.45	700 - 1450
Near Dens Background	272.42	272.67	230 - 480
Near Peak Background	118.21	117.61	100 - 210
Near Lith Background	145.49	146.89	125 - 260
Far Bar Background	526.67	528.67	450 - 900
Far Dens Background	201.85	205.02	175 - 345
Far Peak Background	79.25	78.80	70 - 140
Far Lith Background	83.56	83.59	75 - 145

CALIBRATION BLOCK SUMMARY

Measurement	Current Reading (Previous Coef)	Calibrated (New Coef)	Change	Control Limit On Change
MAGNESIUM				
Density (g/cc)	1.691	1.691	-0.000	+/- 0.015
Pe	2.575	2.601	0.026	+/- 0.150
ALUMINUM				
Density (g/cc)	2.601	2.602	0.002	+/- 0.01500
Pe	3.050	3.061	0.011	+/- 0.150

TOOL SUMMARY

Measurement	Near Detector		Far Detector	
	Value	Control Limits	Value	Control Limits
QUALITY				
Background	0.0009	+/- 0.0110	0.0004	+/- 0.0140
Magnesium Block	-0.0009	+/- 0.0110	-0.0007	+/- 0.0140
Aluminum Block	0.0001	+/- 0.0110	-0.0011	+/- 0.0140
Resolution	9.48	6.00 - 11.50	9.69	6.00 - 11.50
Internal Verifier(B+D+P+L)	1367	1200 - 2700	896	800 - 1700

PASS/FAIL SUMMARY

Background Quality Check:	Passed
Background Range Check:	Passed
Background Resolution Check:	Passed
Background Verification Check:	Passed
Magnesium Quality Check:	Passed
Aluminum Quality Check:	Passed
Gains Check:	Passed
Changes in Calibration Blocks:	Passed

SPECTRAL DENSITY FIELD CHECK

Tool Name: SDLT Pad - M319_P123_BLUE	Reference Calibration Date: 13-Apr-12 11:31:11
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 11:44:44
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

Pad Temperature: 68.2 degF

DENSITY FIELD CALIBRATION SUMMARY

Measurement	Shop	Field	Change	Control Limit +/-
Near (B+D+P+L) cps	1366.622	1369.013	2.391	14.941

Far (B+D+P+L) cps	896.085	895.065	-1.020	16.289
Near Resolution	9.48	9.44	-0.040	0.50
Far Resolution	9.69	9.88	0.190	1.00

PASS/FAIL SUMMARY

Bkg Quality Check:	Passed
Bkg Resolution Check:	Passed
Bkg Verification Check:	Passed

MICRO LOG SHOP CALIBRATION

Tool Name: Microlog Pad - M319_P123_BLUE	Reference Calibration Date: 13-Apr-12 11:46:20
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 11:48:38
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.41	-0.42	-0.00	-0.00	ohmm
Calibration Point #1	0.00	0.00	-0.00	0.00	ohmm
Calibration Point #2	20.01	20.00	20.02	20.00	ohmm
Internal Reference	19.60	19.60	20.01	19.99	ohmm

Measurement	Micro Log Normal	Micro Log Lateral	Units
	Tool Value	Tool Value	
Tool Zero	-0.89	0.13	V
Calibration Point #1	110.27	1.15	V
Calibration Point #2	5444.82	6890.93	V
Internal Reference	5337.47	6888.76	V

MICRO LOG FIELD CHECK

Tool Name: Microlog Pad - M319_P123_BLUE	Reference Calibration Date: 13-Apr-12 11:48:38
Engineer: J. PINKETT	Calibration Date: 13-Apr-12 11:49:26
Software Version: WL INSITE R3.4.4 (Build 2)	Calibration Version: 1

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Shop	Field	Shop	Field	
Tool Zero	-0.42	-0.42	-0.00	-0.00	ohmm
Internal Reference	19.60	19.60	19.99	20.00	ohmm

Summary

Signal	Shop	Field	Difference	Tolerance
Microlog Normal	19.60	19.60	0.00	+/- 0.80
Microlog Lateral	19.99	20.00	-0.01	+/- 0.80

CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
GTET-11215095						
Gamma Ray Calibrator	230.0	229.2	-----	0.8	+/- 9.00	api
DSNT-11277440						
Snow-Block Porosity	0.0671	0.0800	-----	-0.0129	+/- 0.0150	decp
SDLT-M319_P123_BLUE						
Pad Extension	3.75	3.68	-----	0.07	+/-0.10	in
Ring Diameter	8.25	8.16	-----	0.090	+/-0.15	in

Mud Cell	1.006	-----	-----	0.000	-----	ohm-m
SDLT Pad-M319_P123_BLUE						
Near(B+D+P+L)	1366.622	1369.013	-----	-2.391	+/-14.941	cps
Far(B+D+P+L)	896.085	895.065	-----	1.020	+/-16.289	cps
Microlog Pad-M319_P123_BLUE						
MicroLog Normal	19.60	19.60	-----	0.00	+/-0.80	ohm m
MicroLog Lateral	19.99	20.00	-----	-0.01	+/-0.80	ohm m

Data: HEIN 2-110001 ANADARKO IDTIDLE Date: 14-Apr-12 04:53:31



TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
RWCH-11078326 135.00 lbs		Ø 3.625 in →		← Load Cell @ 58.75 ft ← BH Temperature @ 58.19 ft	6.25 ft	52.44 ft
GTET-11215095 165.00 lbs		Ø 3.625 in →		← GammaRay @ 50.12 ft	8.52 ft	56.19 ft
DSNT-11277440 174.00 lbs		Ø 3.625 in →		← DSN Far @ 40.73 ft ← DSN Near @ 39.98 ft	9.69 ft	47.67 ft
SDLT-M319_P123_BLUE 360.00 lbs	SDLT Pad-M319_P123_BLUE 65.00 lbs Microlog Pad-M319_P123_BLUE 8.00 lbs	Ø 4.500 in → Ø 4.750 in* → Ø 4.750 in* →		← Microlog @ 30.17 ft ← SDL Caliper @ 29.98 ft ← SDL @ 29.97 ft	10.81 ft	37.98 ft
IDT-10937715 150.00 lbs		Ø 3.625 in →			7.58 ft	27.17 ft

ACRt Instrument-
11585787
50.00 lbs

∅ 3.625 in →

5.03 ft

19.58 ft

ACRt Sonde-E5787-
S5797
200.00 lbs

∅ 3.625 in →

14.22 ft

14.55 ft

SP Ring-1
0.00 lbs

∅ 3.625 in →

← SP @ 1.61 ft

0.33 ft

Bull Nose-01
5.00 lbs

∅ 2.750 in →

0.33 ft

0.00 ft

← Mud Resistivity @ 13.19 ft

← ACRt @ 9.21 ft

← SP @ 1.61 ft

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
RWCH	Releasable Wireline Cable Head	11078326	135.00	6.25	56.19	300.00
GTET	Gamma Telemetry Tool	11215095	165.00	8.52	47.67	60.00
DSNT	Dual Spaced Neutron	11277440	174.00	9.69	37.98	60.00
SDLT	Spectral Density Tool	M319_P123_BLUE	360.00	10.81	27.17	60.00
SDLP	Density Insite Pad	M319_P123_BLUE	65.00	2.55 *	29.38	60.00
MICP	Microlog Pad	M319_P123_BLUE	8.00	1.00 *	29.67	60.00
IDT	Insite Directional Tool	10937715	150.00	7.58	19.58	30.00
ACRt	Array Compensated True Resistivity Instrument Section	11585787	50.00	5.03	14.55	300.00
ACRt	Array Compensated True Resistivity	E5787-S5797	200.00	14.22	0.33	300.00
SP	SP Ring	1	0.00	0.25 *	1.61	300.00
BLNS	Bull Nose	01	5.00	0.33	0.00	300.00

Total **1,312.00** **62.44**

* Not included in Total Length and Length Accumulation.

Data: HEIN 2-1\0001 ANADARKO_IDTIDLE

Date: 14-Apr-12 04:54:23

COMPANY	KERR-MCGEE OIL & GAS ONSHORE LP		
WELL	HEIN 2-1		
FIELD	WATTENBERG		
COUNTY	WELD	STATE	CO
HALLIBURTON		SPECTRAL DENSITY DUAL SPACED NEUTRON ARRAY COMPENSATED TRUE RESISTIVITY	