





Project: Mamm Creek
Site: J24 Pad
Well: ALP FEDERAL 24-11B
Wellbore: OH
Design: Plan #1





SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	250.0	0.00	0.00	250.0	0.0	0.0	0.00	0.00	0.0	
3	946.3	20.89	267.53	931.0	-5.4	-125.4	3.00	267.53	125.5	
4	4990.7	20.89	267.53	4709.5	-67.6	-1566.2	0.00	0.00	1567.7	ALP FEDERAL 24-11B TGT
5	6035.2	0.00	0.00	5731.0	-75.7	-1754.3	2.00	180.00	1756.0	ALP FEDERAL 24-11B PBHL (2,378' FSL, 1,614' FWL)
6	8123.2	0.00	0.00	7819.0	-75.7	-1754.3	0.00	0.00	1756.0	
7	8223.2	0.00	0.00	7919.0	-75.7	-1754.3	0.00	0.00	1756.0	

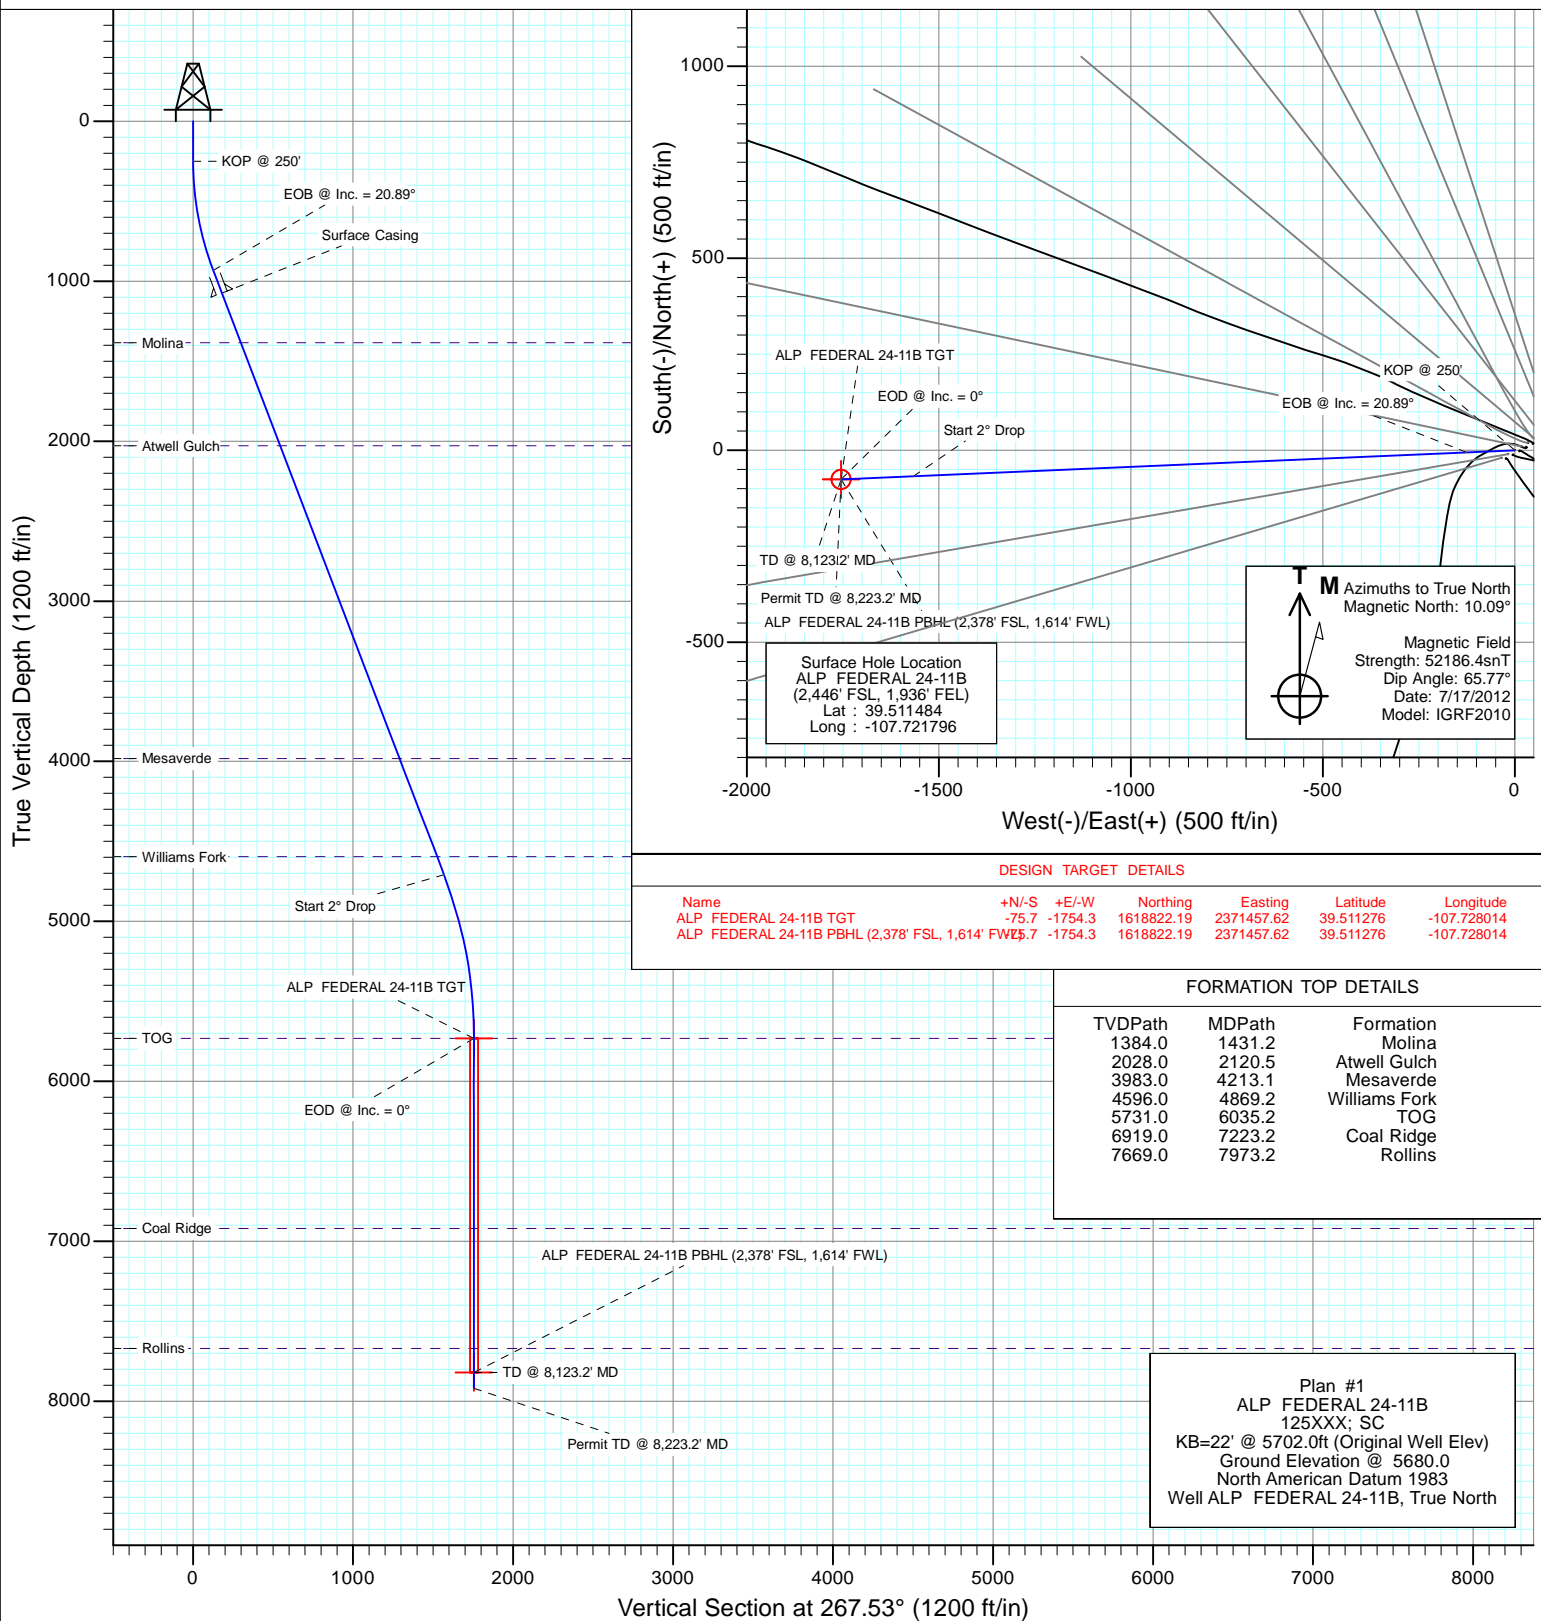

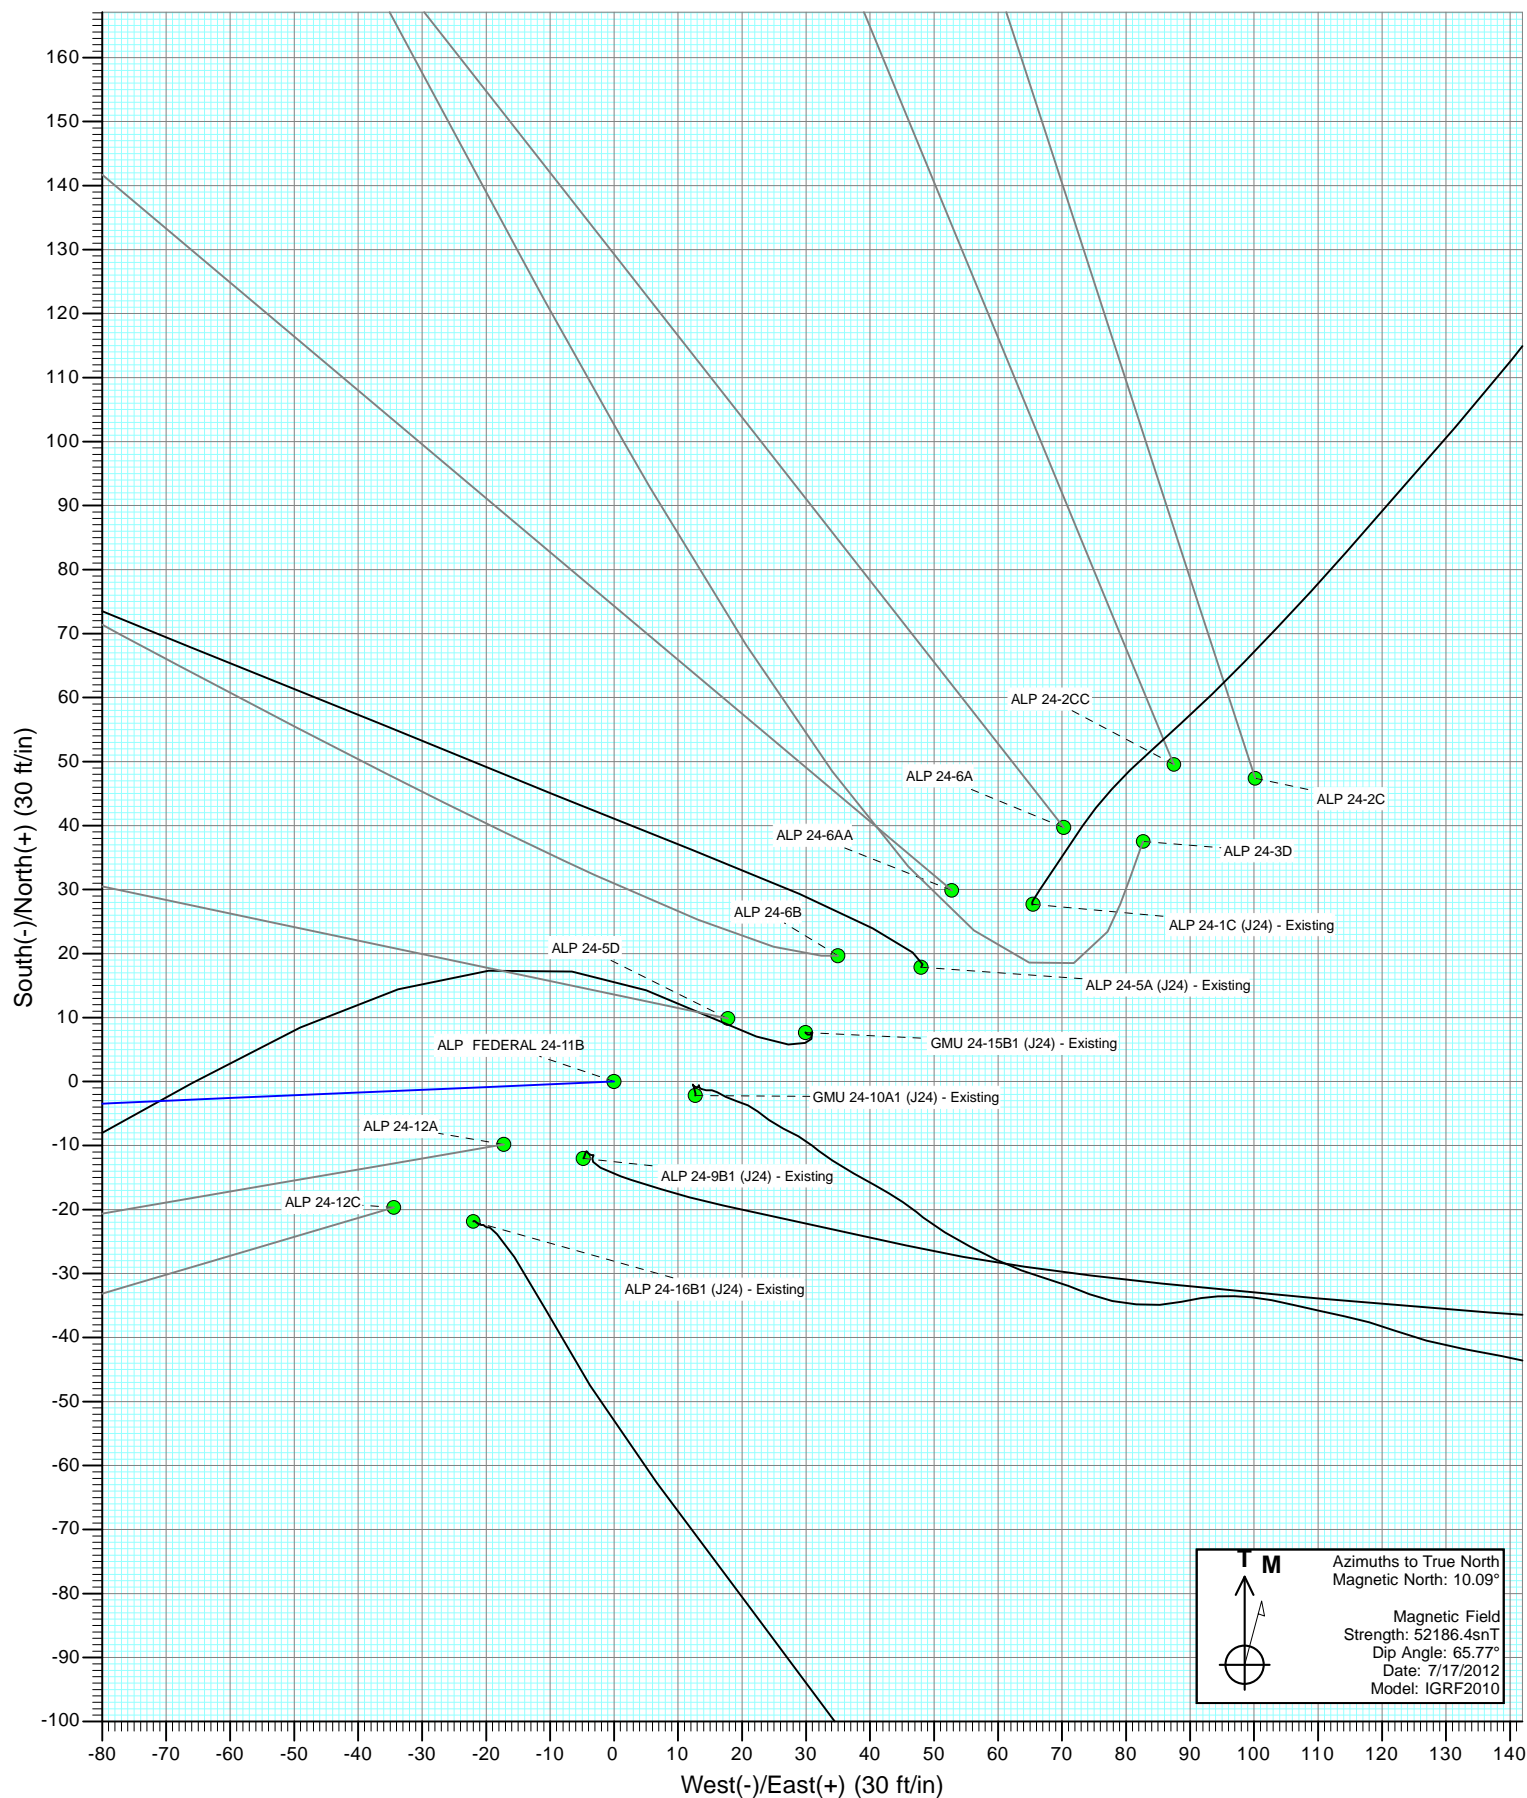

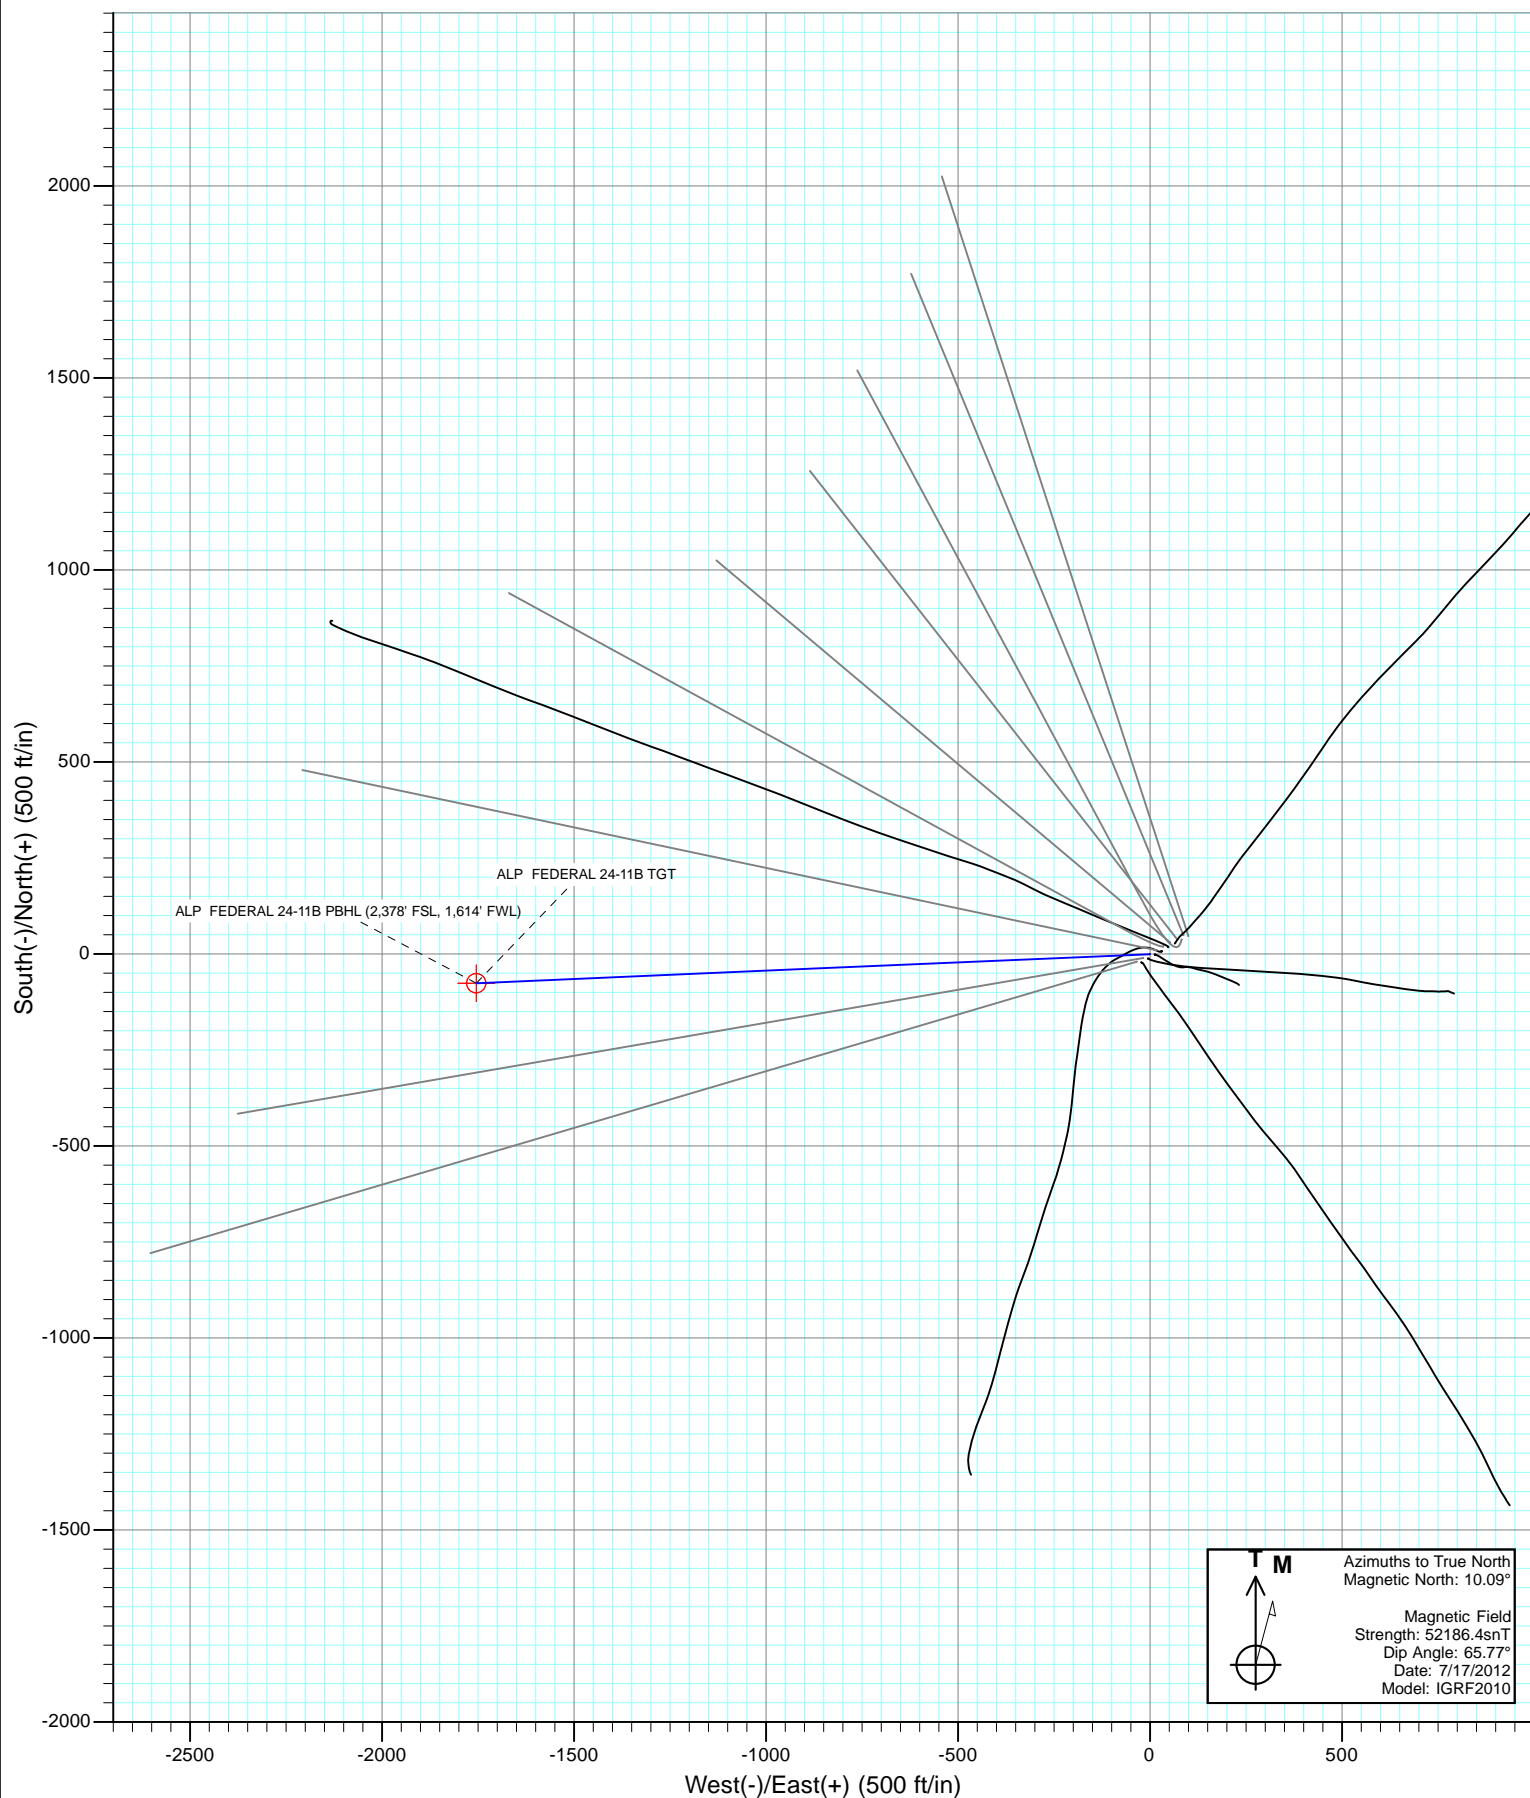

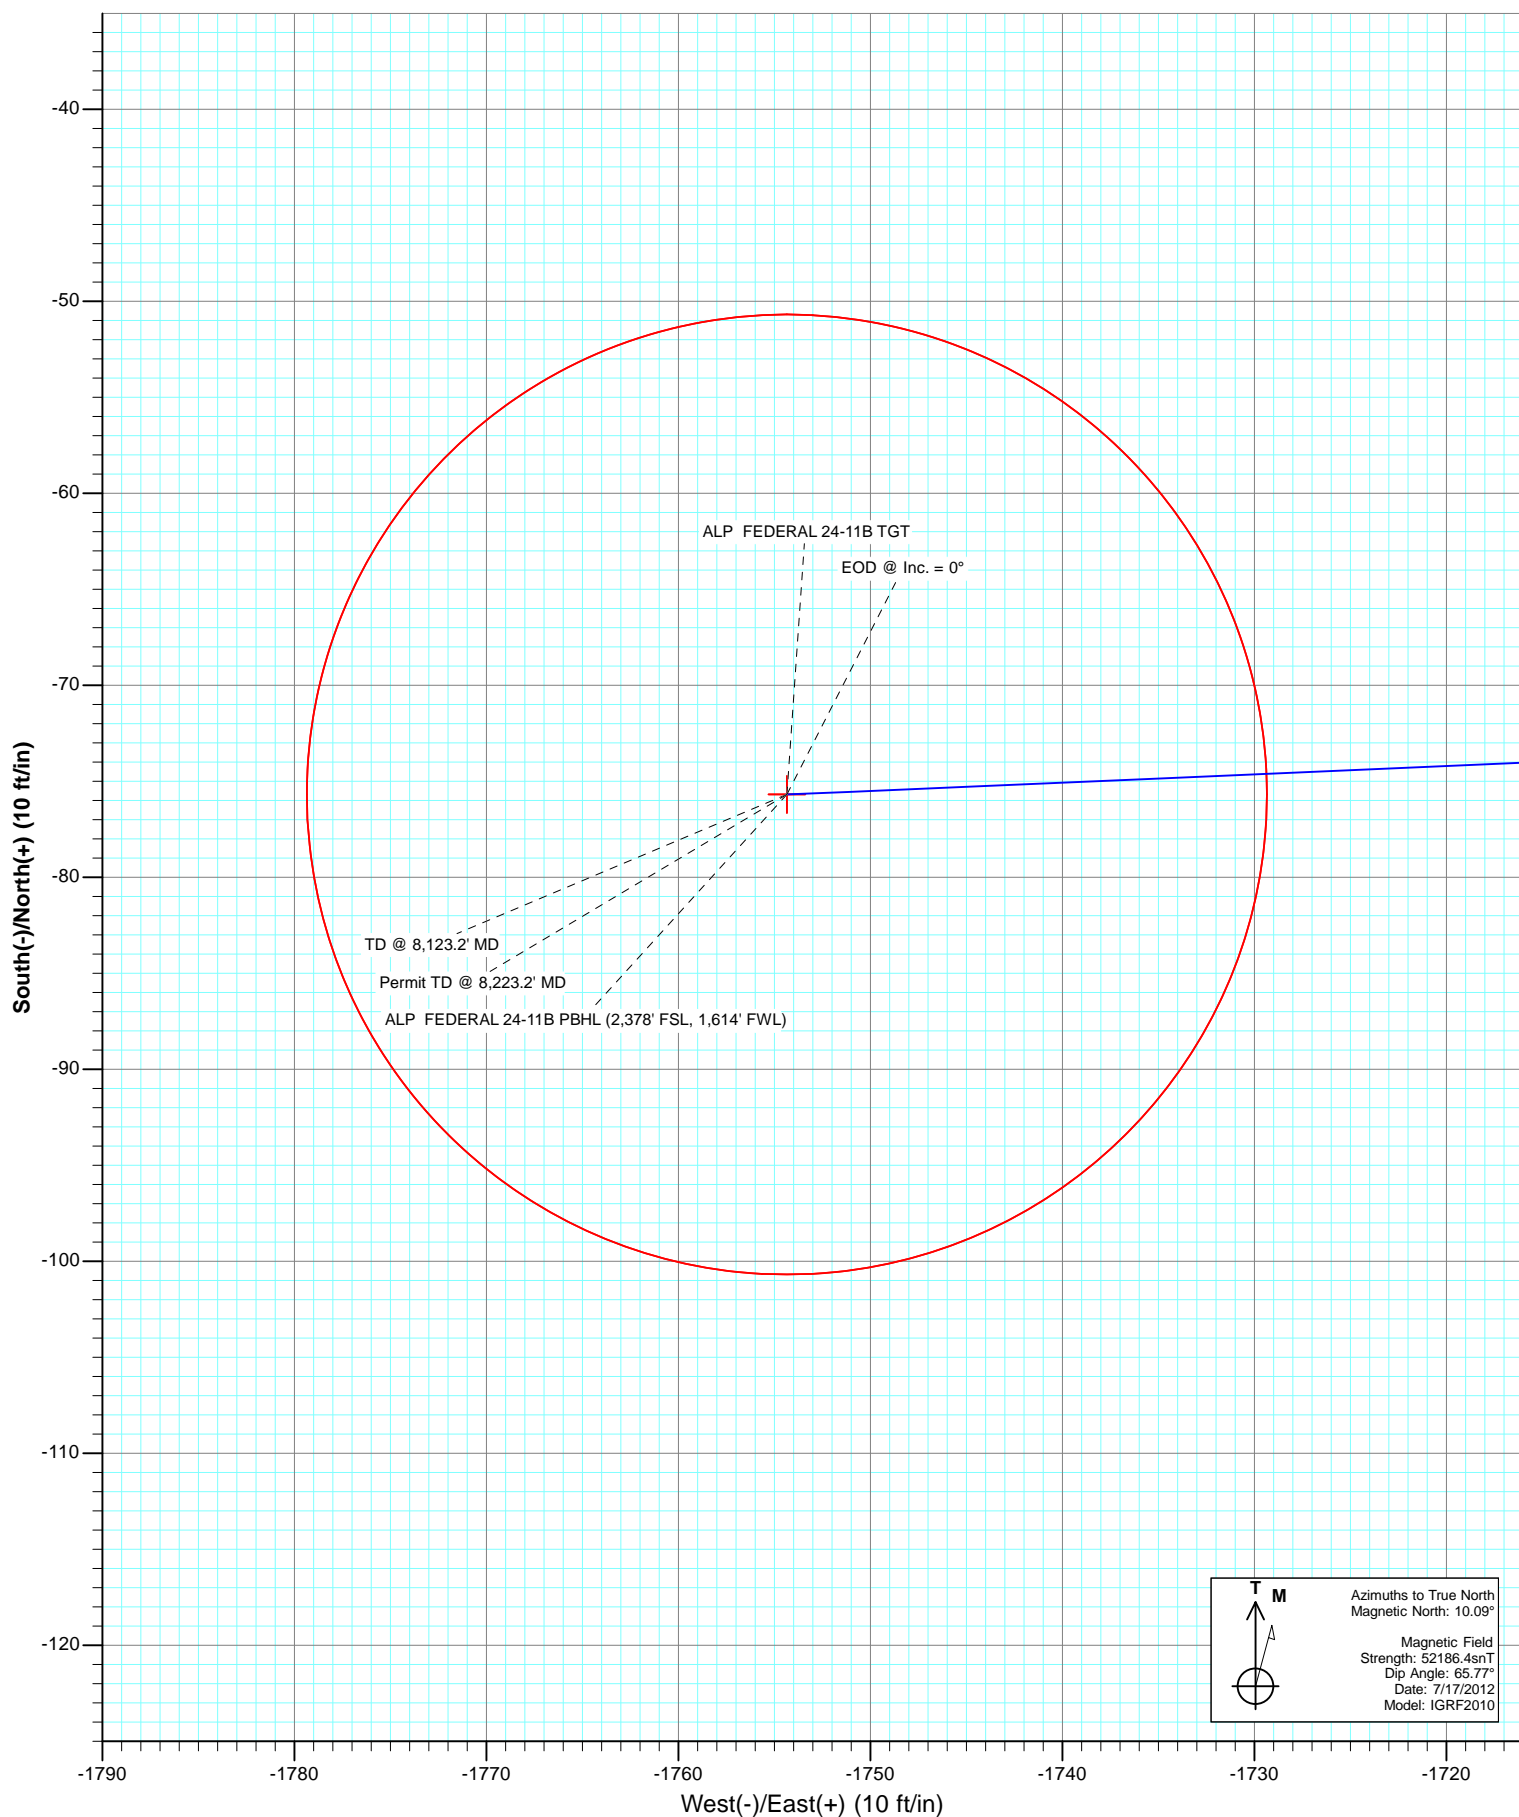

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP FEDERAL 24-11B
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP FEDERAL 24-11B	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Mamm Creek		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Colorado Central Zone		

Site		J24 Pad			
Site Position:		Northing:	1,618,899.86 ft	Latitude:	39.511614
From:	Lat/Long	Easting:	2,373,314.58 ft	Longitude:	-107.721441
Position Uncertainty:	0.0 ft	Slot Radius:	13.200 in	Grid Convergence:	-1.40 °

Well	ALP FEDERAL 24-11B					
Well Position	+N/-S	0.0 ft	Northing:	1,618,854.96 ft	Latitude:	39.511484
	+E/-W	0.0 ft	Easting:	2,373,213.29 ft	Longitude:	-107.721796
Position Uncertainty		0.0 ft	Wellhead Elevation:	ft	Ground Level:	5,680.0 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	7/17/2012	10.09	65.77	52,186

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	267.53

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
250.0	0.00	0.00	250.0	0.0	0.0	0.00	0.00	0.00	0.00	
946.3	20.89	267.53	931.0	-5.4	-125.4	3.00	3.00	0.00	267.53	
4,990.7	20.89	267.53	4,709.5	-67.6	-1,566.2	0.00	0.00	0.00	0.00	
6,035.2	0.00	0.00	5,731.0	-75.7	-1,754.3	2.00	-2.00	0.00	180.00	ALP FEDERAL 24-11
8,123.2	0.00	0.00	7,819.0	-75.7	-1,754.3	0.00	0.00	0.00	0.00	ALP FEDERAL 24-11
8,223.2	0.00	0.00	7,919.0	-75.7	-1,754.3	0.00	0.00	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP FEDERAL 24-11B
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP FEDERAL 24-11B	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	
250.0	0.00	0.00	250.0	0.0	0.0	0.0	0.00	0.00	KOP @ 250'
300.0	1.50	267.53	300.0	0.0	-0.7	0.7	3.00	3.00	
400.0	4.50	267.53	399.8	-0.3	-5.9	5.9	3.00	3.00	
500.0	7.50	267.53	499.3	-0.7	-16.3	16.3	3.00	3.00	
600.0	10.50	267.53	598.0	-1.4	-32.0	32.0	3.00	3.00	
700.0	13.50	267.53	695.8	-2.3	-52.7	52.8	3.00	3.00	
800.0	16.50	267.53	792.4	-3.4	-78.6	78.6	3.00	3.00	
900.0	19.50	267.53	887.5	-4.7	-109.4	109.5	3.00	3.00	
946.3	20.89	267.53	931.0	-5.4	-125.4	125.5	3.00	3.00	EOB @ Inc. = 20.89°
1,000.0	20.89	267.53	981.1	-6.2	-144.5	144.7	0.00	0.00	
1,100.0	20.89	267.53	1,074.6	-7.8	-180.2	180.3	0.00	0.00	Surface Casing
1,200.0	20.89	267.53	1,168.0	-9.3	-215.8	216.0	0.00	0.00	
1,300.0	20.89	267.53	1,261.4	-10.8	-251.4	251.7	0.00	0.00	
1,400.0	20.89	267.53	1,354.9	-12.4	-287.0	287.3	0.00	0.00	
1,431.2	20.89	267.53	1,384.0	-12.9	-298.2	298.4	0.00	0.00	Molina
1,500.0	20.89	267.53	1,448.3	-13.9	-322.7	323.0	0.00	0.00	
1,600.0	20.89	267.53	1,541.7	-15.5	-358.3	358.6	0.00	0.00	
1,700.0	20.89	267.53	1,635.1	-17.0	-393.9	394.3	0.00	0.00	
1,800.0	20.89	267.53	1,728.6	-18.5	-429.5	429.9	0.00	0.00	
1,900.0	20.89	267.53	1,822.0	-20.1	-465.2	465.6	0.00	0.00	
2,000.0	20.89	267.53	1,915.4	-21.6	-500.8	501.3	0.00	0.00	
2,100.0	20.89	267.53	2,008.8	-23.1	-536.4	536.9	0.00	0.00	
2,120.5	20.89	267.53	2,028.0	-23.5	-543.7	544.2	0.00	0.00	Atwell Gulch
2,200.0	20.89	267.53	2,102.3	-24.7	-572.0	572.6	0.00	0.00	
2,300.0	20.89	267.53	2,195.7	-26.2	-607.7	608.2	0.00	0.00	
2,400.0	20.89	267.53	2,289.1	-27.8	-643.3	643.9	0.00	0.00	
2,500.0	20.89	267.53	2,382.5	-29.3	-678.9	679.5	0.00	0.00	
2,600.0	20.89	267.53	2,476.0	-30.8	-714.5	715.2	0.00	0.00	
2,700.0	20.89	267.53	2,569.4	-32.4	-750.2	750.9	0.00	0.00	
2,800.0	20.89	267.53	2,662.8	-33.9	-785.8	786.5	0.00	0.00	
2,900.0	20.89	267.53	2,756.3	-35.4	-821.4	822.2	0.00	0.00	
3,000.0	20.89	267.53	2,849.7	-37.0	-857.0	857.8	0.00	0.00	
3,100.0	20.89	267.53	2,943.1	-38.5	-892.7	893.5	0.00	0.00	
3,200.0	20.89	267.53	3,036.5	-40.0	-928.3	929.2	0.00	0.00	
3,300.0	20.89	267.53	3,130.0	-41.6	-963.9	964.8	0.00	0.00	
3,400.0	20.89	267.53	3,223.4	-43.1	-999.5	1,000.5	0.00	0.00	
3,500.0	20.89	267.53	3,316.8	-44.7	-1,035.2	1,036.1	0.00	0.00	
3,600.0	20.89	267.53	3,410.2	-46.2	-1,070.8	1,071.8	0.00	0.00	
3,700.0	20.89	267.53	3,503.7	-47.7	-1,106.4	1,107.4	0.00	0.00	
3,800.0	20.89	267.53	3,597.1	-49.3	-1,142.0	1,143.1	0.00	0.00	
3,900.0	20.89	267.53	3,690.5	-50.8	-1,177.7	1,178.8	0.00	0.00	
4,000.0	20.89	267.53	3,783.9	-52.3	-1,213.3	1,214.4	0.00	0.00	
4,100.0	20.89	267.53	3,877.4	-53.9	-1,248.9	1,250.1	0.00	0.00	
4,200.0	20.89	267.53	3,970.8	-55.4	-1,284.5	1,285.7	0.00	0.00	
4,213.1	20.89	267.53	3,983.0	-55.6	-1,289.2	1,290.4	0.00	0.00	Mesaverde
4,300.0	20.89	267.53	4,064.2	-57.0	-1,320.2	1,321.4	0.00	0.00	
4,400.0	20.89	267.53	4,157.6	-58.5	-1,355.8	1,357.0	0.00	0.00	
4,500.0	20.89	267.53	4,251.1	-60.0	-1,391.4	1,392.7	0.00	0.00	
4,600.0	20.89	267.53	4,344.5	-61.6	-1,427.0	1,428.4	0.00	0.00	

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP FEDERAL 24-11B
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP FEDERAL 24-11B	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Comments / Formations
4,700.0	20.89	267.53	4,437.9	-63.1	-1,462.7	1,464.0	0.00	0.00	
4,800.0	20.89	267.53	4,531.4	-64.6	-1,498.3	1,499.7	0.00	0.00	
4,869.2	20.89	267.53	4,596.0	-65.7	-1,522.9	1,524.4	0.00	0.00	Williams Fork
4,900.0	20.89	267.53	4,624.8	-66.2	-1,533.9	1,535.3	0.00	0.00	
4,990.7	20.89	267.53	4,709.5	-67.6	-1,566.2	1,567.7	0.00	0.00	Start 2° Drop
5,000.0	20.70	267.53	4,718.2	-67.7	-1,569.5	1,571.0	2.00	-2.00	
5,100.0	18.70	267.53	4,812.4	-69.2	-1,603.2	1,604.7	2.00	-2.00	
5,200.0	16.70	267.53	4,907.6	-70.5	-1,633.6	1,635.1	2.00	-2.00	
5,300.0	14.70	267.53	5,003.9	-71.6	-1,660.6	1,662.2	2.00	-2.00	
5,400.0	12.70	267.53	5,101.0	-72.7	-1,684.3	1,685.9	2.00	-2.00	
5,500.0	10.70	267.53	5,198.9	-73.5	-1,704.5	1,706.1	2.00	-2.00	
5,600.0	8.70	267.53	5,297.5	-74.3	-1,721.4	1,723.0	2.00	-2.00	
5,700.0	6.70	267.53	5,396.6	-74.8	-1,734.8	1,736.4	2.00	-2.00	
5,800.0	4.70	267.53	5,496.1	-75.3	-1,744.7	1,746.3	2.00	-2.00	
5,900.0	2.70	267.53	5,595.9	-75.6	-1,751.2	1,752.8	2.00	-2.00	
6,000.0	0.70	267.53	5,695.8	-75.7	-1,754.1	1,755.8	2.00	-2.00	
6,035.2	0.00	0.00	5,731.0	-75.7	-1,754.3	1,756.0	2.00	-2.00	EOD @ Inc. = 0° - TOG
6,100.0	0.00	0.00	5,795.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,200.0	0.00	0.00	5,895.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,300.0	0.00	0.00	5,995.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,400.0	0.00	0.00	6,095.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,500.0	0.00	0.00	6,195.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,600.0	0.00	0.00	6,295.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,700.0	0.00	0.00	6,395.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,800.0	0.00	0.00	6,495.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
6,900.0	0.00	0.00	6,595.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,000.0	0.00	0.00	6,695.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,100.0	0.00	0.00	6,795.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,200.0	0.00	0.00	6,895.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,223.2	0.00	0.00	6,919.0	-75.7	-1,754.3	1,756.0	0.00	0.00	Coal Ridge
7,300.0	0.00	0.00	6,995.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,400.0	0.00	0.00	7,095.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,500.0	0.00	0.00	7,195.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,600.0	0.00	0.00	7,295.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,700.0	0.00	0.00	7,395.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,800.0	0.00	0.00	7,495.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,900.0	0.00	0.00	7,595.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
7,973.2	0.00	0.00	7,669.0	-75.7	-1,754.3	1,756.0	0.00	0.00	Rollins
8,000.0	0.00	0.00	7,695.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
8,100.0	0.00	0.00	7,795.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
8,123.2	0.00	0.00	7,819.0	-75.7	-1,754.3	1,756.0	0.00	0.00	TD @ 8,123.2' MD
8,200.0	0.00	0.00	7,895.8	-75.7	-1,754.3	1,756.0	0.00	0.00	
8,223.2	0.00	0.00	7,919.0	-75.7	-1,754.3	1,756.0	0.00	0.00	Permit TD @ 8,223.2' MD

Cathedral Energy Services

Planning Report

Database:	USA EDM 5000 Multi Users DB	Local Co-ordinate Reference:	Well ALP FEDERAL 24-11B
Company:	EnCana Oil & Gas (USA) Inc	TVD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Project:	Mamm Creek	MD Reference:	KB=22' @ 5702.0ft (Original Well Elev)
Site:	J24 Pad	North Reference:	True
Well:	ALP FEDERAL 24-11B	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
- hit/miss target									
- Shape									
ALP FEDERAL 24-11B - plan hits target center - Point	0.00	0.00	5,731.0	-75.7	-1,754.3	1,618,822.19	2,371,457.62	39.511276	-107.728014
ALP FEDERAL 24-11B - plan hits target center - Circle (radius 25.0)	0.00	0.00	7,819.0	-75.7	-1,754.3	1,618,822.19	2,371,457.62	39.511276	-107.728014

Casing Points				
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)
1,100.0	1,074.6	Surface Casing		

Formations						
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,431.2	1,384.0	Molina				
2,120.5	2,028.0	Atwell Gulch				
4,213.1	3,983.0	Mesaverde				
4,869.2	4,596.0	Williams Fork				
6,035.2	5,731.0	TOG				
7,223.2	6,919.0	Coal Ridge				
7,973.2	7,669.0	Rollins				

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
250.0	250.0	0.0	0.0	KOP @ 250'
946.3	931.0	-5.4	-125.4	EOB @ Inc. = 20.89°
4,990.7	4,709.5	-67.6	-1,566.2	Start 2° Drop
6,035.2	5,731.0	-75.7	-1,754.3	EOD @ Inc. = 0°
8,123.2	7,819.0	-75.7	-1,754.3	TD @ 8,123.2' MD
8,223.2	7,919.0	-75.7	-1,754.3	Permit TD @ 8,223.2' MD