

**NOBLE ENERGY INC.**  
**HICKS 07-11J7**  
**NESW 7-3N-67W**  
**1986' FSL & 1894' FWL**  
**Weld County, Colorado**  
**Wattenberg**  
**CURRENT WELLBORE SCHEMATIC**  
**with PROPOSED P&A**  
**11/8/2012**

API: 05-123-17709  
 COGCC #


GL Elev: 4870  
 KB Elev: 4884

**Spud Date:** 1/23/1994

**Surface Casing :**  
 8 5/8" 23# @ 495'  
 Cement: 281 sx  
 TOC: surface

**TOC: Determine by CBL**

**Production Casing :**  
 3 1/2" 7.7# @ 7398'  
 Cement: 186 sx  
 TD: 2/7/1994

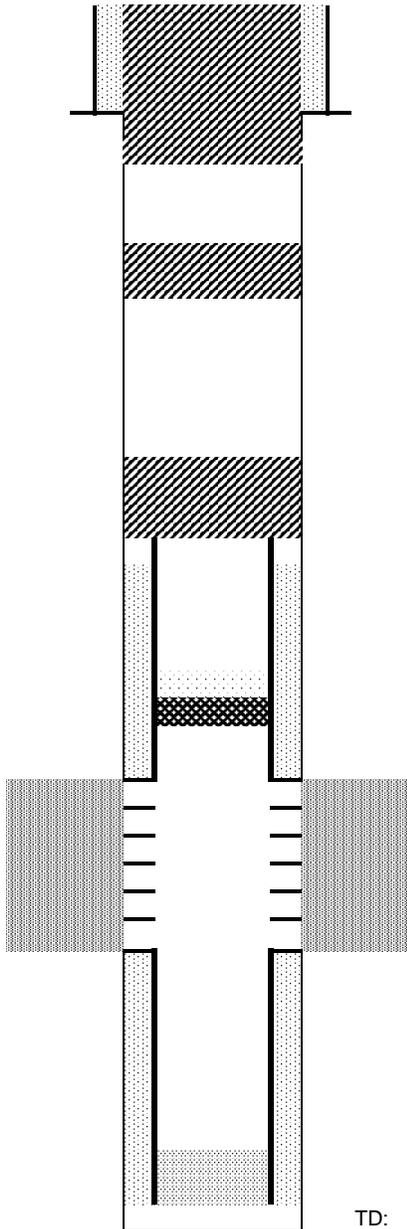

Cut surface casing off 6'-8' below surface.

Pump approx 250 sx shoe plug @ 595  
 Will bring cement to surface.

50 sx Plug @ 2500'

Stub Plug 100 sx  
 Cut and pull csg above TOC (Determine by CBL)

CIBP @ 7104' w/ 2 sx cement on top

Codell Perfs: 7204' - 7214'

TD: 7403