

Well

Operator

Location

County

State

Field

Footages

MAIER 4-4-28

EnCana Oil & Gas (USA) Inc.

SWNE SEC. 28-T2N-R66W

WELD

Colorado

Wattenberg

1789' FNL & 2190' FEL

Spud Date:

06-16-12

TD Date:

06-22-12

Log Tops

Sussex

4644'

Niobrara

7230'

Codell


7530'

J Sand

7971'

Production Tubing

2-3/8" tubing, set @7207'

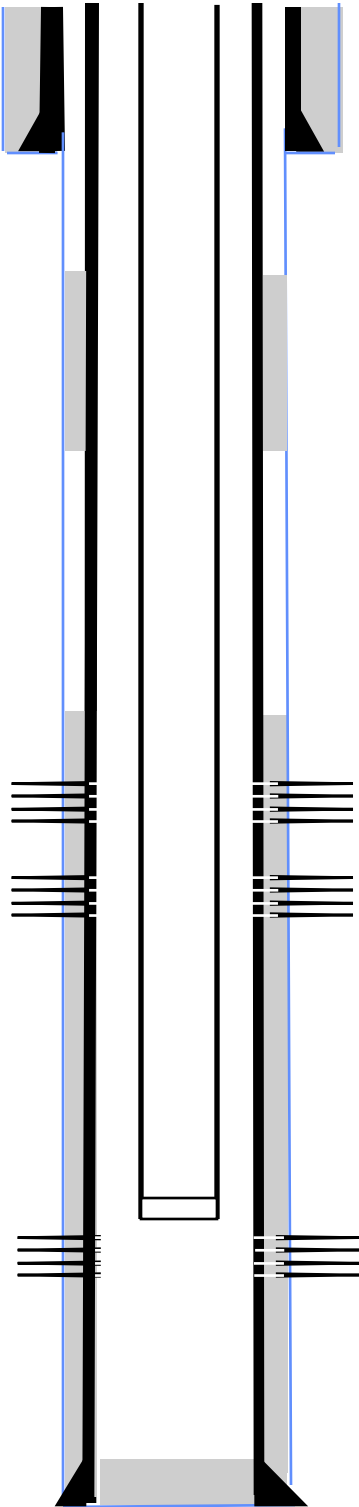

Surface Casing and Cement

8 5/8" , 24#, landed @ 920',cemented with 345 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2", 11.6#, landed @ 8099',cemented with 650 sxs

CBP

Set @ 7260'. 08-26-12

Drilled out on 08-28-12

Perf'd the Niobrara 7,303' – 7,315 @ 4 spf

Frac'd the Niobrara 7,303' – 7,315' (48 holes), w/ 97,482 gals 18 #

Vistar Hybrid cross linked gel containing 250,200 # 30/50 sand.

07-25-12

CFP

Set @ 7360'. 07-24-12

Drilled out on 08-28-12

Perf'd the Codell 7530' – 7544' @ 3 spf

Frac'd the Codell 7,530' – 7,544' (42 holes) w/ 85,596 gal 22#

Vistar Hybrid cross linked gel containing 250,220 # 30/50 sand.

07-24-12

CFP

Set @ 7594' 07-24-12

Drilled out on 08-28-12

Perf'd the J Sand 7,997' – 8,022 @ 2 spf

Frac'd the J-Sand 7,997' – 8,022', (50 holes)w/ 59,976 gal 18 #

Vistar Hybrid cross linked gel containing 250,060 # 20/40 Sand.

07-24-12

8110'

—

Driller's TD