

**WELLBORE DIAGRAM (Plugged & Abandoned on 4/19/2012)**

Pickard 44-11

SESE, Sec. 11-11S-46W 6PM

Mountain Petroleum Corp

API #: 05-063-06343

Kit Carson Cty, CO

Pump 5 sx @ surface, 10 sx  
in annulus


Perf @ 528'  
Squeeze 50 sx @ 528'

Lay 20 sx @ 2250'

Lay 20 sx @ 3050'

CIBP w 2 sx @ 4500'

Dump 2 sx on top of CIBP at 5430'

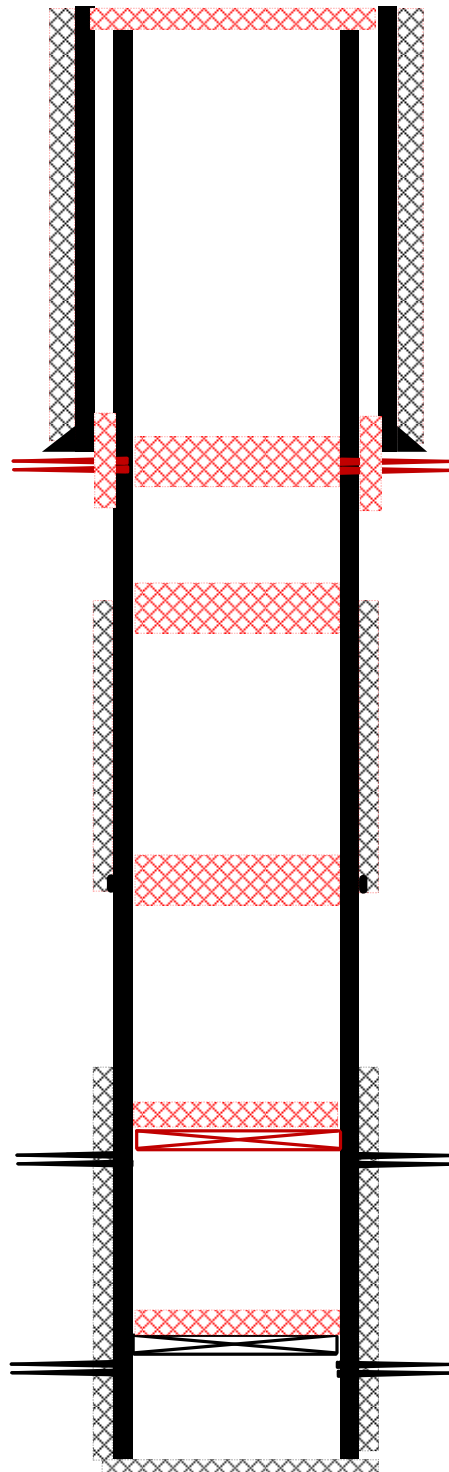

12.25" hole to 478'  
8 5/8" 24# csg to 478'  
Cement to surface w 300 sx

APD required cement coverage: 2250-3050'

Actual cement coverage: 3138' - 2000' (CBL)

Port Collar Depth 3138' (250 sx pumped 4/9/12)

TOC: 3590' (CBL run 4/10/12)

Shawnee Perfs: 4550'-4560'

CIBP set at 5430'

Morrow Perfs: 5460'-5464'

PBTD 5720'

4 1/2" 10.5# csg to 5763'  
(Cement w 325 sx OWC)

7.875" hole to 5807'