

Well

Operator

Location

County

State

Field

Footages

MAIER 4-2-28

EnCana Oil & Gas (USA) Inc.

SWNE SEC. 28-T2N-R66W

WELD

Colorado

Wattenberg

1769' FNL & 2190' FEL

Spud Date:

06-30-12


TD Date:

07-05-12

Log Tops

Sussex	4304'
Niobrara	7001'
Codell	7300'
J Sand	7770'

Production Tubing
2-3/8" tubing, set @7968'

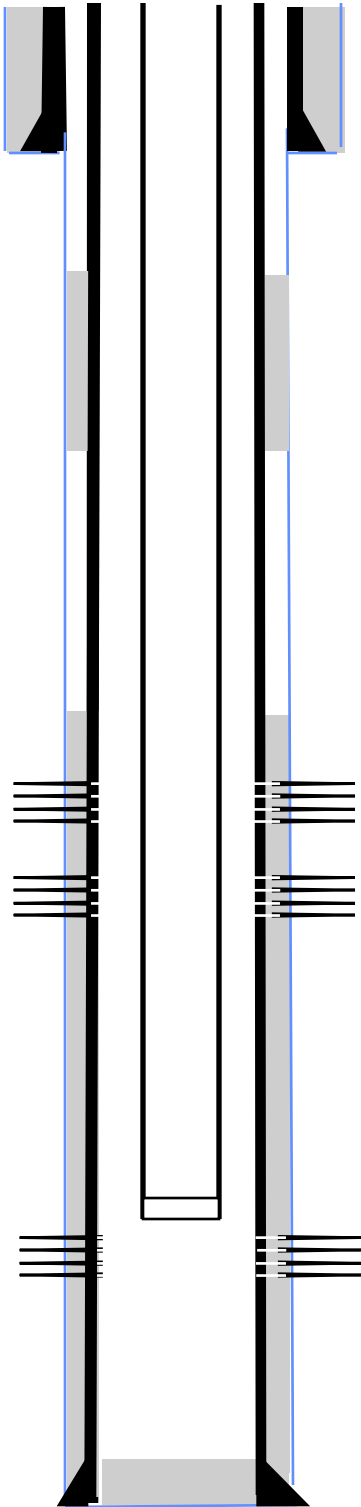

Surface Casing and Cement
8 5/8" , landed @ 921',cemented with 340 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2", landed @ 8087',cemented with 660 sxs

CBP
Set @ 7250' . 08-22-12
Drilled out on 08-23-12

Perf'd the Niobrara 7,292' – 7,304' @ 4 spf
Frac'd the Niobrara 7,292' – 7,304' (48 holes), w/ 99,582 gals 18 # Vistar Hybrid cross linked gel containing 251,120 # 30/50 sand. 07-27-12.

CFP
Set @ 7354 . 07-27-12
Drilled out on 08-23-12

Perf'd the Codell 7,525' – 7,539 @ 3 spf
Frac'd the Codell 7,525' – 7,539' (42 holes) w/ 88,578 gal 22# Vistar Hybrid cross linked gel containing 253,140 # 30/50 sand. 07-26-12

CFP
Set @7600'. 07-26-12
Drilled out on 08-23-12

Perf'd the J Sand 7,986' – 8,011' @ 2 spf
Frac'd the J-Sand 7,986' – 8,011', (50 holes)w/ 64,890 gal 18 # Vistar Hybrid cross linked gel containing 250,500 # 20/40 Sand. 07-26-12