

Well

Operator

Location

County

State

Field

CANYON CREEK 8-6-13X

EnCana Oil & Gas (USA) Inc.

NWSE Section 13-T1N-R69W

BOULDER

Colorado

Wattenberg

Spud Date:

07-04-12

TD Date:


07-07-12

Log Tops

Sussex	4850'
Niobrara	7805'
Codell	8211'
J Sand	8652'

Production Tubing

2-3/8" tubing, set 8635'

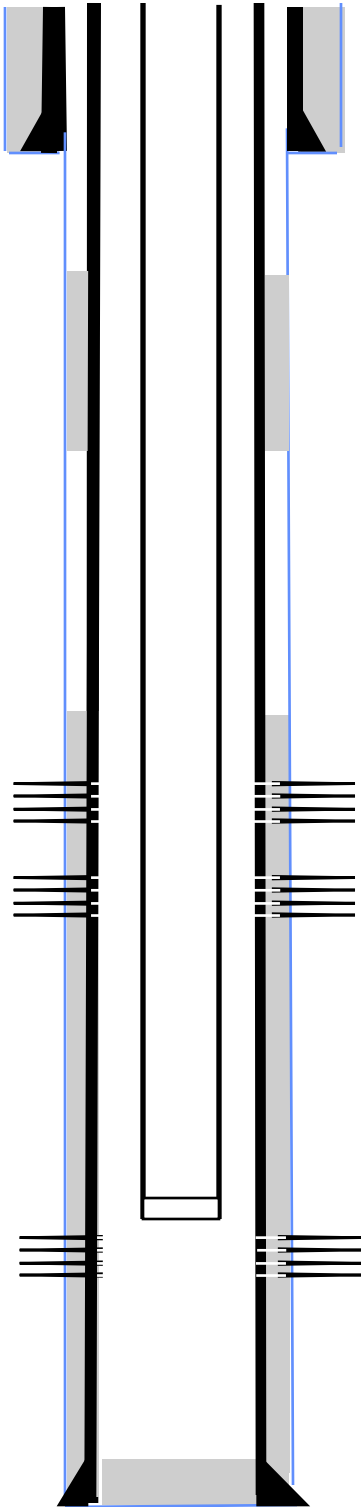

Conductor

Set @ 189'

Surface Casing and Cement

8 5/8" , landed @ 839', cemented with 400 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2" , landed @ 8829, cemented with 695 sxs

CBP

Set @ 7765'. 08-17-12

Drilled out on 08-18-12

Perf'd the Niobrara from 7,809-7,813'; 7,971-7,977'. @ 4 spf
Frac'd the Niobrara 7,809-7,813'; 7,971-7,977'. (40 holes), w/
98,041 gals 18 # pHaser Hybrid cross linked gel containing
249,600 # 30/50 sand. 08-05-12

CFP

Set @ 8040'. 08-05-12

Drilled out on 08-18-12

Perf'd the Codell 8,212' – 8,226' @ 3 spf
Frac'd the Codell 8,212' – 8,226' (42 holes) w/ 88,290 gal 22#
pHaser Hybrid cross linked gel containing 249,419 # 30/50 sand.
08-04-12

CFP

Set @ 8513'. 08-04-12

Drilled out on 08-18-12

Perf'd the J Sand @ 8,665' – 8,681' , @ 3 spf
Frac'd the J-Sand 8,665' – 8,681', (48 holes)w/ 65,167 gal 18 #
pHaser Hybrid cross linked gel containing 251,603 # 20/40 Sand.
08-04-12

8829'

—

Driller's TD