

Well

Operator

Location

County

State

Field

Footages

DEASON 2-4-36

EnCana Oil & Gas (USA) Inc.

NENW Section 36-T2N-R69W

BOULDER

Colorado

WATTENBERG

1024' FNL; 1928' FWL

Spud Date:

08-18-12

TD Date:

08-23-12

Log Tops


Sussex	4484'
Niobrara	7570'
Codell	7900'
J Sand	8327'

Production Tubing  
2-3/8" tubing, set @ 8308'

8467'

—

Driller's TD

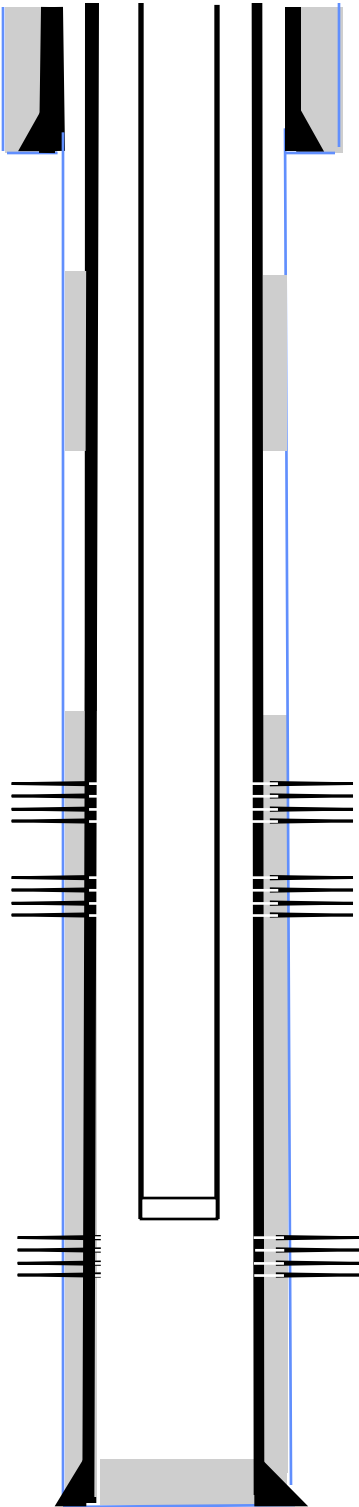

**Surface Casing and Cement**  
8 5/8" landed @ 797',cemented with 300 sxs

**Main Hole**  
7-7/8" to TD

**Production Casing and Cement**  
4-1/2", 11.6#, landed @ 8453',cemented with 710 sxs

**CBP**  
Set @ 7620'. 09-21-12  
Drilled out on 09-22-12

Perf'd the Niobrara from 7661-7673' @ 4 spf  
Frac'd the Niobrara 7661-7673, (48 holes), w/ 98,868 gals 18 # Vistar Hybrid cross linked gel containing 253,020 # 30/50 sand. 09-16-12

**CFP**  
Set @ 7725'. 09-16-12  
Drilled out on 09-22-12

Perf'd the Codell from 7901-7915' @ 3 spf  
Frac'd the Codell 7901-7915' (42 holes) w/ 87,948 gal 22# Vistar Hybrid cross linked gel containing 251,320 # 30/50 sand. 09-16-12

**CFP**  
Set @ 7970'. 09-15-12  
Drilled out on 09-22-12

Perf'd the J Sand from 8328-8333', 8339-8359 @ 2 spf  
Frac'd the J-Sand 8328-8333', 8339-8359', (50 holes)w/ 62,538 gal 18 # Vistar Hybrid cross linked gel containing 250,160 # 20/40 Sand. 09-14-12