

Well

Operator

Location

County

State

Field

Footages

DEASON 4-4-36

EnCana Oil & Gas (USA) Inc.

NENW Section 36-T2N-R69W

BOULDER

Colorado

WATTENBERG

1014' FNL; 1928' FWL

Spud Date:

08-24-12


TD Date:

08-27-12

Log Tops

Sussex	4537'
Niobrara	7678'
Codell	8015'
J Sand	8390'

Production Tubing
2-3/8" tubing, set @ 8378'

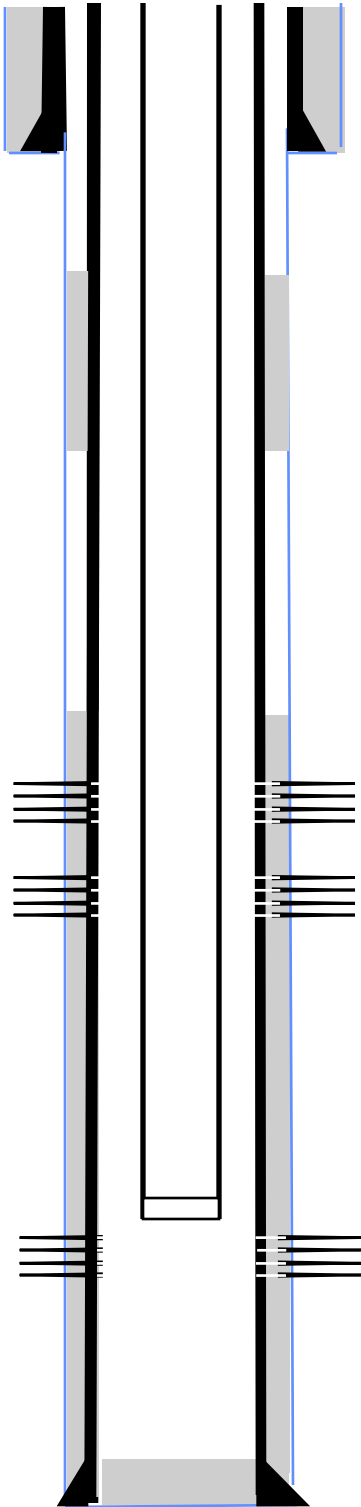

Surface Casing and Cement
8 5/8" landed @ 795',cemented with 300 sxs

Main Hole
7-7/8" to TD

Production Casing and Cement
4-1/2", 11.6#, landed @ 8505',cemented with 720 sxs

CBP
Set @ 7730'. 09-23-12
Drilled out on 09-25-12

Perf'd the Niobrara from 7766'-7778' @ 4 spf
Frac'd the Niobrara 7766'-7778', (48 holes), w/ 97,944 gals 18 # Vistar Hybrid cross linked gel containing 251,040 # 30/50 sand. 09-16-12

CFP
Set @ 7820'. 09-16-12
Drilled out on 09-24-12

Perf'd the Codell from 8015-8029' @ 3 spf
Frac'd the Codell 8015-8029' (42 holes) w/ 90,720 gal 22# Vistar Hybrid cross linked gelcontaining 251,500 # 30/50 sand. 09-16-12

CFP
Set @ 8080'. 09-15-12
Drilled out on 09-24-12

Perf'd the J Sand from 8391'-8396', 8400'-8429 @ 2 spf
Frac'd the J-Sand 8391'-8396', 8400'-8429', (50 holes)w/ 62,874 gal 18 # Vistar Hybrid cross linked gel containing 250,120 # 20/40 Sand. 09-15-12