

Well

Operator

Location

County

State

Field

Footages

DEASON 2-36

EnCana Oil & Gas (USA) Inc.

NENW Section 36-T2N-R69W

BOULDER

Colorado

WATTENBERG

994' FNL; 1929' FWL

Spud Date: 09-03-12

TD Date: 09-06-12

Log Tops

Sussex

4896'

Niobrara

7390'

Codell

7660'

J Sand

8098'


Production Tubing

2-3/8" tubing, set @ 8078'

8250'

—

Driller's TD

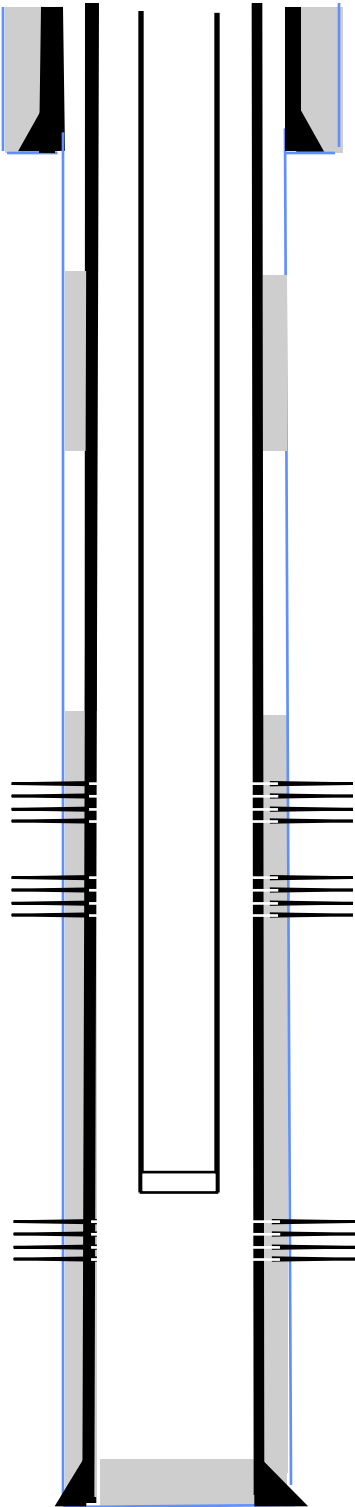

Surface Casing and Cement

8 5/8" landed @ 797',cemented with 290 sxs

Main Hole

7-7/8" to TD

Production Casing and Cement

4-1/2", landed @ 8233',cemented with 730 sxs

CBP

Set @ 7420'. 09-27-12

Drilled out on 09-28-12

Perf'd the Niobrara from 7454-7466', @ 4 spf

Frac'd the Niobrara 7454-7466', (48 holes), w/ 96,516 gals 18 # Vistar Hybrid cross linked gel containing 250,200 # 30/50 sand. 09-17-12

CFP

Set @ 7526'. 09-17-12

Drilled out on 09-28-12

Perf'd the Codell from 7662'-7676' @ 3 spf

Frac'd the Codell 7662'-7676' (42 holes) w/ 89,586 gal 22# Vistar Hybrid cross linked gel containing 250,100 # 30/50 sand. 09-17-12

Set CFP @ 7725'. 09-15-12

Drilled out on 09-28-12

Perf'd the J-Sand from 8100 '-8105', 8110'-8130' @ 2 spf

Frac'd the J-Sand 8100'-8105', 8110'-8130', (50 holes)w/ 65,898 gal 18 # Vistar Hybrid cross linked gel containing 250,440 # 20/40 Sand. 09-13-12