

NOBLE ENERGY INC.
 FEIT E23-03
 NENW 23-6N-65W
 675' FNL & 2003' FWL
 Weld County, Colorado
 Wattenberg
CURRENT WELLBORE SCHEMATIC
 with PROPOSED P&A
 1/21/2013

API: 05-123-17727
 COGCC #

GL Elev: 4704
 KB Elev: 4714

Spud Date:


Surface Casing :
 8 5/8" 24# @ 339'
 Cement: 240 sx
 TOC:

TOC @ 2870' (2870' - 3980') Verified by CBL

Cmt Squeeze 25 sx (estimated 5424'-6152')

TOC @ 6120' (Verified by CBL)

Production Casing :
 2 7/8" 6.5# @ 7153'
 Cement: 657 sx
 TD: 2/6/1994

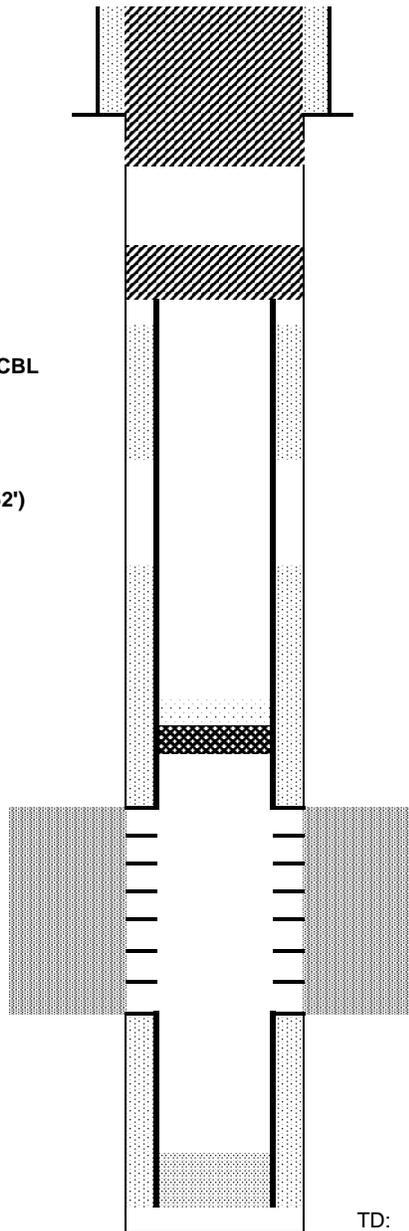

Cut surface casing off 6'-8' below surface.

Pump approx 200 sx shoe plug @ 440
 Will bring cement to surface.

100 sx stug plug
 Cut and pull csg ~2500'

CIBP @ 6950' w/ 2 sx cement on top

Codell Perfs: 7050' - 7065'

TD: 7181